



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

JOSH STEIN
GOVERNOR

J.R. "JOEY" HOPKINS
SECRETARY

March 13, 2025

Addendum No. 1

RE: Contract # C204933

WBS # 48548.3.3

STATE FUNDED

Chatham County (R-5930B)

CHATHAM PARKWAY FROM NORTH OF PROPOSED GRANT DRIVE TO
US-15/US-501.

March 18, 2025 Letting

To Whom It May Concern:

Reference is made to the plans and proposal furnished to you on this project.

The following revisions have been made to the Roadway plans.

Sheet No.	Revision
3D-5	Quantities updated to reflect pay item revisions below.
10	Labels switched to correctly identify structures 1021 and 1011.

Please void the above listed Sheets in your Plans and staple the revised Sheets thereto.

The following revisions have been made to the proposal.

Page No.	Revision
Proposal Cover	Note added that reads "Includes Addendum No. 1 Dated 03-13-2025".

Please void the above listed Page in your proposal and staple the revised Page thereto.

Mailing Address:
NC DEPARTMENT OF TRANSPORTATION
CONTRACT STANDARDS AND DEVELOPMENT
1591 MAIL SERVICE CENTER
RALEIGH, NC 27699-1591

Telephone: (919) 707-6900
Fax: (919) 250-4127
Customer Service: 1-877-368-4968

Website: www.ncdot.gov

Location:
1020 BIRCH RIDGE DR.
RALEIGH, NC 27610

On the item sheets the following pay item revisions have been made:

<u>Item</u>	<u>Description</u>	<u>Old Quantity</u>	<u>New Quantity</u>
0027- 0448200000-E 310	15" RC PIPE CULVERTS, CLASS IV	6,208 LF	6,232 LF
0062- 2286000000-N 840	MASONRY DRAINAGE STRUCTURES	112 EA	114 EA
0064-2366000000-N 840	FRAME WITH TWO GRATES, STD. 840.24	46 EA	47 EA
0068-2374000000-N 840	FRAME WITH GRATE & HOOD, STD. 840.03 TYPE G	26 EA	27 EA
0120-6000000000-E 1605	TEMPORARY SILT FENCE	245,640 LF	21,360 LF

The Contractor's bid must include these pay item revisions.

The electronic bidding file has been updated to reflect these revisions. Please download the Addendum File and follow the instructions for applying the addendum. Bid Express will not accept your bid unless the addendum has been applied.

The contract will be prepared accordingly.

Sincerely,

Signed by:

 52C46046381F443...

Ronald E. Davenport, Jr., PE
 State Contract Officer

RED/cms
 Attachments

cc: Mr. Wiley W. Jones III, PE
 Mr. Reuben Blakley, PE
 Mr. Ken Kennedy, PE
 Mr. Malcolm Bell

Mr. Forrest Dungan, PE
 Ms. Jaci Kincaid
 Mr. Jon Weathersbee, PE
 Project File (2)

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH, N.C.

PROPOSAL

INCLUDES ADDENDUM No. 1 DATED 03-13-2025

DATE AND TIME OF BID OPENING: **Mar 18, 2025 AT 02:00 PM**

CONTRACT ID C204933

WBS 48548.3.3

FEDERAL-AID NO. STATE FUNDED

COUNTY CHATHAM

T.I.P NO. R-5930B

MILES 1.483

ROUTE NO.

LOCATION CHATHAM PARKWAY FROM NORTH OF PROPOSED GRANT DRIVE TO US-15/US-501.

TYPE OF WORK GRADING, DRAINAGE, PAVING, AND STRUCTURES.

NOTICE:

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE N.C. LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$30,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA. NOTWITHSTANDING THESE LIMITATIONS ON BIDDING, THE BIDDER WHO IS AWARDED ANY FEDERAL - AID FUNDED PROJECT SHALL COMPLY WITH CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA FOR LICENSING REQUIREMENTS WITHIN 60 CALENDAR DAYS OF BID OPENING.

BIDS WILL BE RECEIVED AS SHOWN BELOW:

THIS IS A ROADWAY & STRUCTURE PROPOSAL

5% BID BOND OR BID DEPOSIT REQUIRED

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
ROADWAY ITEMS						
0001	0000100000-N	800	MOBILIZATION	Lump Sum	L.S.	
0002	0000400000-N	801	CONSTRUCTION SURVEYING	Lump Sum	L.S.	
0003	0001000000-E	200	CLEARING & GRUBBING .. ACRE(S)	Lump Sum	L.S.	
0004	0008000000-E	200	SUPPLEMENTARY CLEARING & GRUBBING	2 ACR		
0005	0022000000-E	225	UNCLASSIFIED EXCAVATION	112,000 CY		
0006	0036000000-E	225	UNDERCUT EXCAVATION	2,835 CY		
0007	0106000000-E	230	BORROW EXCAVATION	110,000 CY		
0008	0134000000-E	240	DRAINAGE DITCH EXCAVATION	1,400 CY		
0009	0141000000-E	240	BERM DITCH CONSTRUCTION	700 LF		
0010	0156000000-E	250	REMOVAL OF EXISTING ASPHALT PAVEMENT	1,300 SY		
0011	0192000000-N	260	PROOF ROLLING	30 HR		
0012	0195000000-E	265	SELECT GRANULAR MATERIAL	1,335 CY		
0013	0196000000-E	270	GEOTEXTILE FOR SOIL STABILIZATION	4,150 SY		
0014	0318000000-E	300	FOUNDATION CONDITIONING MATERIAL, MINOR STRUCTURES	1,219 TON		
0015	0320000000-E	300	FOUNDATION CONDITIONING GEOTEXTILE	3,803 SY		
0016	0335200000-E	305	15" DRAINAGE PIPE	224 LF		
0017	0335300000-E	305	18" DRAINAGE PIPE	132 LF		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0018	0335400000-E	305	24" DRAINAGE PIPE	140 LF		
0019	0335500000-E	305	30" DRAINAGE PIPE	96 LF		
0020	0335850000-E	305	*** DRAINAGE PIPE ELBOWS (15")	4 EA		
0021	0335850000-E	305	*** DRAINAGE PIPE ELBOWS (18")	4 EA		
0022	0335850000-E	305	*** DRAINAGE PIPE ELBOWS (24")	4 EA		
0023	0335850000-E	305	*** DRAINAGE PIPE ELBOWS (30")	2 EA		
0024	0354000000-E	310	**** RC PIPE CULVERTS, CLASS ***** (15", V)	268 LF		
0025	0354000000-E	310	**** RC PIPE CULVERTS, CLASS ***** (18", V)	892 LF		
0026	0448000000-E	310	***** RC PIPE CULVERTS, CLASS IV (54")	120 LF		
0027	0448200000-E	310	15" RC PIPE CULVERTS, CLASS IV	6,232 LF		
0028	0448300000-E	310	18" RC PIPE CULVERTS, CLASS IV	2,296 LF		
0029	0448400000-E	310	24" RC PIPE CULVERTS, CLASS IV	304 LF		
0030	0448500000-E	310	30" RC PIPE CULVERTS, CLASS IV	248 LF		
0031	0448600000-E	310	36" RC PIPE CULVERTS, CLASS IV	372 LF		
0032	0995000000-E	340	PIPE REMOVAL	243 LF		
0033	1004500000-E	505	GENERIC GRADING ITEM GEOTEXTILE FOR SUBGRADE STABILIZATION	10,350 SY		
0034	1011000000-N	500	FINE GRADING	Lump Sum	L.S.	

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0035	1044000000-E	501	LIME TREATED SOIL (SLURRY METHOD)	21,000 SY		
0036	1066000000-E	501	LIME FOR LIME TREATED SOIL	260 TON		
0037	1099500000-E	505	SHALLOW UNDERCUT	575 CY		
0038	1099700000-E	505	CLASS IV SUBGRADE STABILIZATION	1,150 TON		
0039	1110000000-E	510	STABILIZER AGGREGATE	300 TON		
0040	1121000000-E	520	AGGREGATE BASE COURSE	6,900 TON		
0041	1176000000-E	542	SOIL CEMENT BASE	21,000 SY		
0042	1187000000-E	542	PORTLAND CEMENT FOR SOIL CEMENT BASE	590 TON		
0043	1220000000-E	545	INCIDENTAL STONE BASE	500 TON		
0044	1330000000-E	607	INCIDENTAL MILLING	920 SY		
0045	1491000000-E	610	ASPHALT CONC BASE COURSE, TYPE B25.0C	7,540 TON		
0046	1503000000-E	610	ASPHALT CONC INTERMEDIATE COURSE, TYPE I19.0C	8,160 TON		
0047	1519000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5B	9,260 TON		
0048	1575000000-E	620	ASPHALT BINDER FOR PLANT MIX	1,335 TON		
0049	1693000000-E	654	ASPHALT PLANT MIX, PAVEMENT REPAIR	100 TON		
0050	2000000000-N	806	RIGHT-OF-WAY MARKERS	4 EA		
0051	2020000000-N	806	CONTROL-OF-ACCESS MARKERS	65 EA		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0052	2022000000-E	815	SUBDRAIN EXCAVATION	168 CY		
0053	2026000000-E	815	GEOTEXTILE FOR SUBSURFACE DRAINS	500 SY		
0054	2036000000-E	815	SUBDRAIN COARSE AGGREGATE	84 CY		
0055	2044000000-E	815	6" PERFORATED SUBDRAIN PIPE	500 LF		
0056	2070000000-N	815	SUBDRAIN PIPE OUTLET	1 EA		
0057	2077000000-E	815	6" OUTLET PIPE	6 LF		
0058	2143000000-E	818	BLOTTING SAND	10 TON		
0059	2209000000-E	838	ENDWALLS	6.8 CY		
0060	2220000000-E	838	REINFORCED ENDWALLS	5 CY		
0061	2253000000-E	840	PIPE COLLARS	0.656 CY		
0062	2286000000-N	840	MASONRY DRAINAGE STRUCTURES	114 EA		
0063	2308000000-E	840	MASONRY DRAINAGE STRUCTURES	100.1 LF		
0064	2366000000-N	840	FRAME WITH TWO GRATES, STD 840.24	47 EA		
0065	2367000000-N	840	FRAME WITH TWO GRATES, STD 840.29	1 EA		
0066	2374000000-N	840	FRAME WITH GRATE & HOOD, STD 840.03, TYPE ** (E)	3 EA		
0067	2374000000-N	840	FRAME WITH GRATE & HOOD, STD 840.03, TYPE ** (F)	18 EA		
0068	2374000000-N	840	FRAME WITH GRATE & HOOD, STD 840.03, TYPE ** (G)	27 EA		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0069	2396000000-N	840	FRAME WITH COVER, STD 840.54	1 EA		
0070	2407000000-N	840	STEEL FRAME WITH TWO GRATES, STD 840.37	17 EA		
0071	2440000000-N	852	CONCRETE TRANSITIONAL SECTION FOR CATCH BASIN	33 EA		
0072	2451000000-N	852	CONCRETE TRANSITIONAL SECTION FOR DROP INLET	17 EA		
0073	2542000000-E	846	1'-6" CONCRETE CURB & GUTTER	14,300 LF		
0074	2549000000-E	846	2'-6" CONCRETE CURB & GUTTER	3,800 LF		
0075	2605000000-N	848	CONCRETE CURB RAMPS	13 EA		
0076	2619000000-E	850	4" CONCRETE PAVED DITCH	220 SY		
0077	2655000000-E	852	5" MONOLITHIC CONCRETE ISLANDS (KEYED IN)	1,190 SY		
0078	2815000000-N	858	ADJUSTMENT OF DROP INLETS	1 EA		
0079	3030000000-E	862	STEEL BEAM GUARDRAIL	2,125 LF		
0080	3150000000-N	862	ADDITIONAL GUARDRAIL POSTS	5 EA		
0081	3210000000-N	862	GUARDRAIL END UNITS, TYPE CAT-1	6 EA		
0082	3287000000-N	SP	GUARDRAIL END UNITS, TYPE TL-3	6 EA		
0083	3628000000-E	876	RIP RAP, CLASS I	320 TON		
0084	3635000000-E	876	RIP RAP, CLASS II	190 TON		
0085	3649000000-E	876	RIP RAP, CLASS B	290 TON		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0086	3656000000-E	876	GEOTEXTILE FOR DRAINAGE	3,050 SY		
0087	4025000000-E	901	CONTRACTOR FURNISHED, TYPE *** SIGN (E)	140 SF		
0088	4025000000-E	901	CONTRACTOR FURNISHED, TYPE *** SIGN (F)	80 SF		
0089	4072000000-E	903	SUPPORTS, 3-LB STEEL U-CHANNEL	375 LF		
0090	4102000000-N	904	SIGN ERECTION, TYPE E	19 EA		
0091	4108000000-N	904	SIGN ERECTION, TYPE F	6 EA		
0092	4116100000-N	904	SIGN ERECTION, RELOCATE TYPE **** (GROUND MOUNTED) (E)	1 EA		
0093	4155000000-N	907	DISPOSAL OF SIGN SYSTEM, U- CHANNEL	7 EA		
0094	4400000000-E	1110	WORK ZONE SIGNS (STATIONARY)	80 SF		
0095	4410000000-E	1110	WORK ZONE SIGNS (BARRICADE MOUNTED)	40 SF		
0096	4430000000-N	1130	DRUMS	115 EA		
0097	4445000000-E	1145	BARRICADES (TYPE III)	80 LF		
0098	4685000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (4", 90 MILS)	28,217 LF		
0099	4695000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (8", 90 MILS)	3,311 LF		
0100	4700000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (12", 90 MILS)	560 LF		
0101	4709000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (24", 90 MILS)	373 LF		
0102	4725000000-E	1205	THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS)	41 EA		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0103	4810000000-E	1205	PAINT PAVEMENT MARKING LINES (4")	20,075 LF		
0104	4820000000-E	1205	PAINT PAVEMENT MARKING LINES (8")	1,598 LF		
0105	4825000000-E	1205	PAINT PAVEMENT MARKING LINES (12")	116 LF		
0106	4845000000-N	1205	PAINT PAVEMENT MARKING SYMBOL	6 EA		
0107	4900000000-N	1251	PERMANENT RAISED PAVEMENT MARKERS	241 EA		
0108	4915000000-E	1264	7' U-CHANNEL POSTS	5 EA		
0109	4955000000-N	1264	OBJECT MARKERS (END OF ROAD)	5 EA		
0110	5326200000-E	1510	12" WATER LINE	986 LF		
0111	5329000000-E	1510	DUCTILE IRON WATER PIPE FITTINGS	740 LB		
0112	5540000000-E	1515	6" VALVE	2 EA		
0113	5558000000-E	1515	12" VALVE	1 EA		
0114	5589200000-E	1515	2" AIR RELEASE VALVE	1 EA		
0115	5666000000-N	1515	FIRE HYDRANT	2 EA		
0116	5673000000-E	1515	FIRE HYDRANT LEG	27 LF		
0117	5888000000-E	SP	GENERIC UTILITY ITEM 2" PVC CASING	946 LF		
0118	5888000000-E	SP	GENERIC UTILITY ITEM 4" PVC CASING	3,730 LF		
0119	5888000000-E	SP	GENERIC UTILITY ITEM 6" PVC CASING	1,884 LF		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0120	6000000000-E	1605	TEMPORARY SILT FENCE	21,360 LF		
0121	6006000000-E	1610	STONE FOR EROSION CONTROL, CLASS A	1,350 TON		
0122	6009000000-E	1610	STONE FOR EROSION CONTROL, CLASS B	3,200 TON		
0123	6012000000-E	1610	SEDIMENT CONTROL STONE	2,940 TON		
0124	6015000000-E	1615	TEMPORARY MULCHING	20.5 ACR		
0125	6018000000-E	1620	SEED FOR TEMPORARY SEEDING	1,200 LB		
0126	6021000000-E	1620	FERTILIZER FOR TEMPORARY SEEDING	6.5 TON		
0127	6024000000-E	1622	TEMPORARY SLOPE DRAINS	1,350 LF		
0128	6029000000-E	SP	SAFETY FENCE	1,560 LF		
0129	6030000000-E	1630	SILT EXCAVATION	10,810 CY		
0130	6036000000-E	1631	MATTING FOR EROSION CONTROL	46,000 SY		
0131	6037000000-E	SP	COIR FIBER MAT	100 SY		
0132	6042000000-E	1632	1/4" HARDWARE CLOTH	3,940 LF		
0133	6045000000-E	SP	*** TEMPORARY PIPE (24")	270 LF		
0134	6045000000-E	SP	*** TEMPORARY PIPE (30")	430 LF		
0135	6045000000-E	SP	*** TEMPORARY PIPE (36")	370 LF		
0136	6046000000-E	1636	TEMPORARY PIPE FOR STREAM CROSSING	75 LF		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0137	6070000000-N	1639	SPECIAL STILLING BASINS	4 EA		
0138	6071012000-E	SP	COIR FIBER WATTLE	350 LF		
0139	6071020000-E	SP	POLYACRYLAMIDE (PAM)	170 LB		
0140	6071030000-E	1640	COIR FIBER BAFFLE	2,360 LF		
0141	6071050000-E	SP	*** SKIMMER (1-1/2")	7 EA		
0142	6071050000-E	SP	*** SKIMMER (2")	1 EA		
0143	6071050000-E	SP	*** SKIMMER (2-1/2")	1 EA		
0144	6084000000-E	1660	SEEDING & MULCHING	25 ACR		
0145	6087000000-E	1660	MOWING	18 ACR		
0146	6090000000-E	1661	SEED FOR REPAIR SEEDING	200 LB		
0147	6093000000-E	1661	FERTILIZER FOR REPAIR SEEDING	1 TON		
0148	6096000000-E	1662	SEED FOR SUPPLEMENTAL SEEDING	650 LB		
0149	6108000000-E	1665	FERTILIZER TOPDRESSING	18.25 TON		
0150	6111000000-E	SP	IMPERVIOUS DIKE	175 LF		
0151	6114500000-N	1667	SPECIALIZED HAND MOWING	10 MHR		
0152	6117000000-N	SP	RESPONSE FOR EROSION CONTROL	75 EA		
0153	6117500000-N	SP	CONCRETE WASHOUT STRUCTURE	6 EA		

County: CHATHAM

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0154	6120000000-E	SP	CULVERT DIVERSION CHANNEL	41 CY		
0155	6123000000-E	1670	REFORESTATION	0.1 ACR		
0156	7048500000-E	1705	PEDESTRIAN SIGNAL HEAD (16", 1 SECTION W/COUNTDOWN)	12 EA		
0157	7060000000-E	1705	SIGNAL CABLE	7,875 LF		
0158	7120000000-E	1705	VEHICLE SIGNAL HEAD (12", 3 SECTION)	24 EA		
0159	7132000000-E	1705	VEHICLE SIGNAL HEAD (12", 4 SECTION)	11 EA		
0160	7144000000-E	1705	VEHICLE SIGNAL HEAD (12", 5 SECTION)	1 EA		
0161	7288000000-E	1715	PAVED TRENCHING (***** (2, 2"))	175 LF		
0162	7300000000-E	1715	UNPAVED TRENCHING (***** (2, 2"))	3,150 LF		
0163	7301000000-E	1715	DIRECTIONAL DRILL (***** (2, 2"))	1,125 LF		
0164	7324000000-N	1716	JUNCTION BOX (STANDARD SIZE)	23 EA		
0165	7348000000-N	1716	JUNCTION BOX (OVER-SIZED, HEAVY DUTY)	11 EA		
0166	7444000000-E	1725	INDUCTIVE LOOP SAWCUT	2,100 LF		
0167	7575142010-N	1736	900MHZ SERIAL/ETHERNET SPREAD SPECTRUM RADIO	2 EA		
0168	7588000000-N	SP	METAL POLE WITH SINGLE MAST ARM	11 EA		
0169	7613000000-N	SP	SOIL TEST	11 EA		
0170	7614100000-E	SP	DRILLED PIER FOUNDATION	60.5 CY		

County: CHATHAM


Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0171	7631000000-N	SP	MAST ARM WITH METAL POLE DESIGN	11 EA		
0172	7636000000-N	1745	SIGN FOR SIGNALS	23 EA		
0173	7642200000-N	1743	TYPE II PEDESTAL WITH FOUNDATION	12 EA		
0174	7684000000-N	1750	SIGNAL CABINET FOUNDATION	4 EA		
0175	7696000000-N	1751	CONTROLLERS WITH CABINET (*****) (2070LX BASE MTD)	4 EA		
0176	7744000000-N	1751	DETECTOR CARD (TYPE 170)	25 EA		
0177	7901000000-N	1753	CABINET BASE EXTENDER	4 EA		
0178	7980000000-N	SP	GENERIC SIGNAL ITEM ETHERNET EDGE SWITCH	2 EA		
0179	7980000000-N	SP	GENERIC SIGNAL ITEM INSTALL CELLULAR MODEM AND ANTENNA	1 EA		
0180	7980000000-N	SP	GENERIC SIGNAL ITEM PROTECTIVE COATING FOR SINGLE MAST ARM POLE	11 EA		
0181	7980000000-N	SP	GENERIC SIGNAL ITEM PROTECTIVE COATING FOR TYPE II SIGNAL PEDESTAL	11 EA		
CULVERT ITEMS						
0182	8126000000-N	414	CULVERT EXCAVATION, STA ***** (108+98.22 -L-)	Lump Sum	L.S.	
0183	8126000000-N	414	CULVERT EXCAVATION, STA ***** (124+63.87 -L-)	Lump Sum	L.S.	
0184	8133000000-E	414	FOUNDATION CONDITIONING MATERIAL, BOX CULVERT	638 TON		
0185	8196000000-E	420	CLASS A CONCRETE (CULVERT)	1,202.8 CY		
0186	8245000000-E	425	REINFORCING STEEL (CULVERT)	177,098 LB		

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
WALL ITEMS						
0187	8802014000-E	SP	SOLDIER PILE RETAINING WALLS	3,818	SF	
0188	8847000000-E	SP	GENERIC RETAINING WALL ITEM SIMULATED STONE FORM LINER SYSTEM AND SURFACE FINISH	3,818	SF	
1627/Mar12/Q731747.406/D757109668010/E188						
			Total Amount Of Bid For Entire Project :			

[illegible]

K:\RAL_Roadway\01036532 - R-5930 North CPW_Roadway\ProJR-5930B_rdy_psh_10.dgn

REVISIONS
PLAN REV. - 3/12/25 - LABELS FOR BOXES 1011 AND 1021 WERE IN THE WRONG LOCATION AND HAVE BEEN CORRECTED TO BE CONSISTENT WITH THE DRAINAGE SUMMARY SHEET - TGS

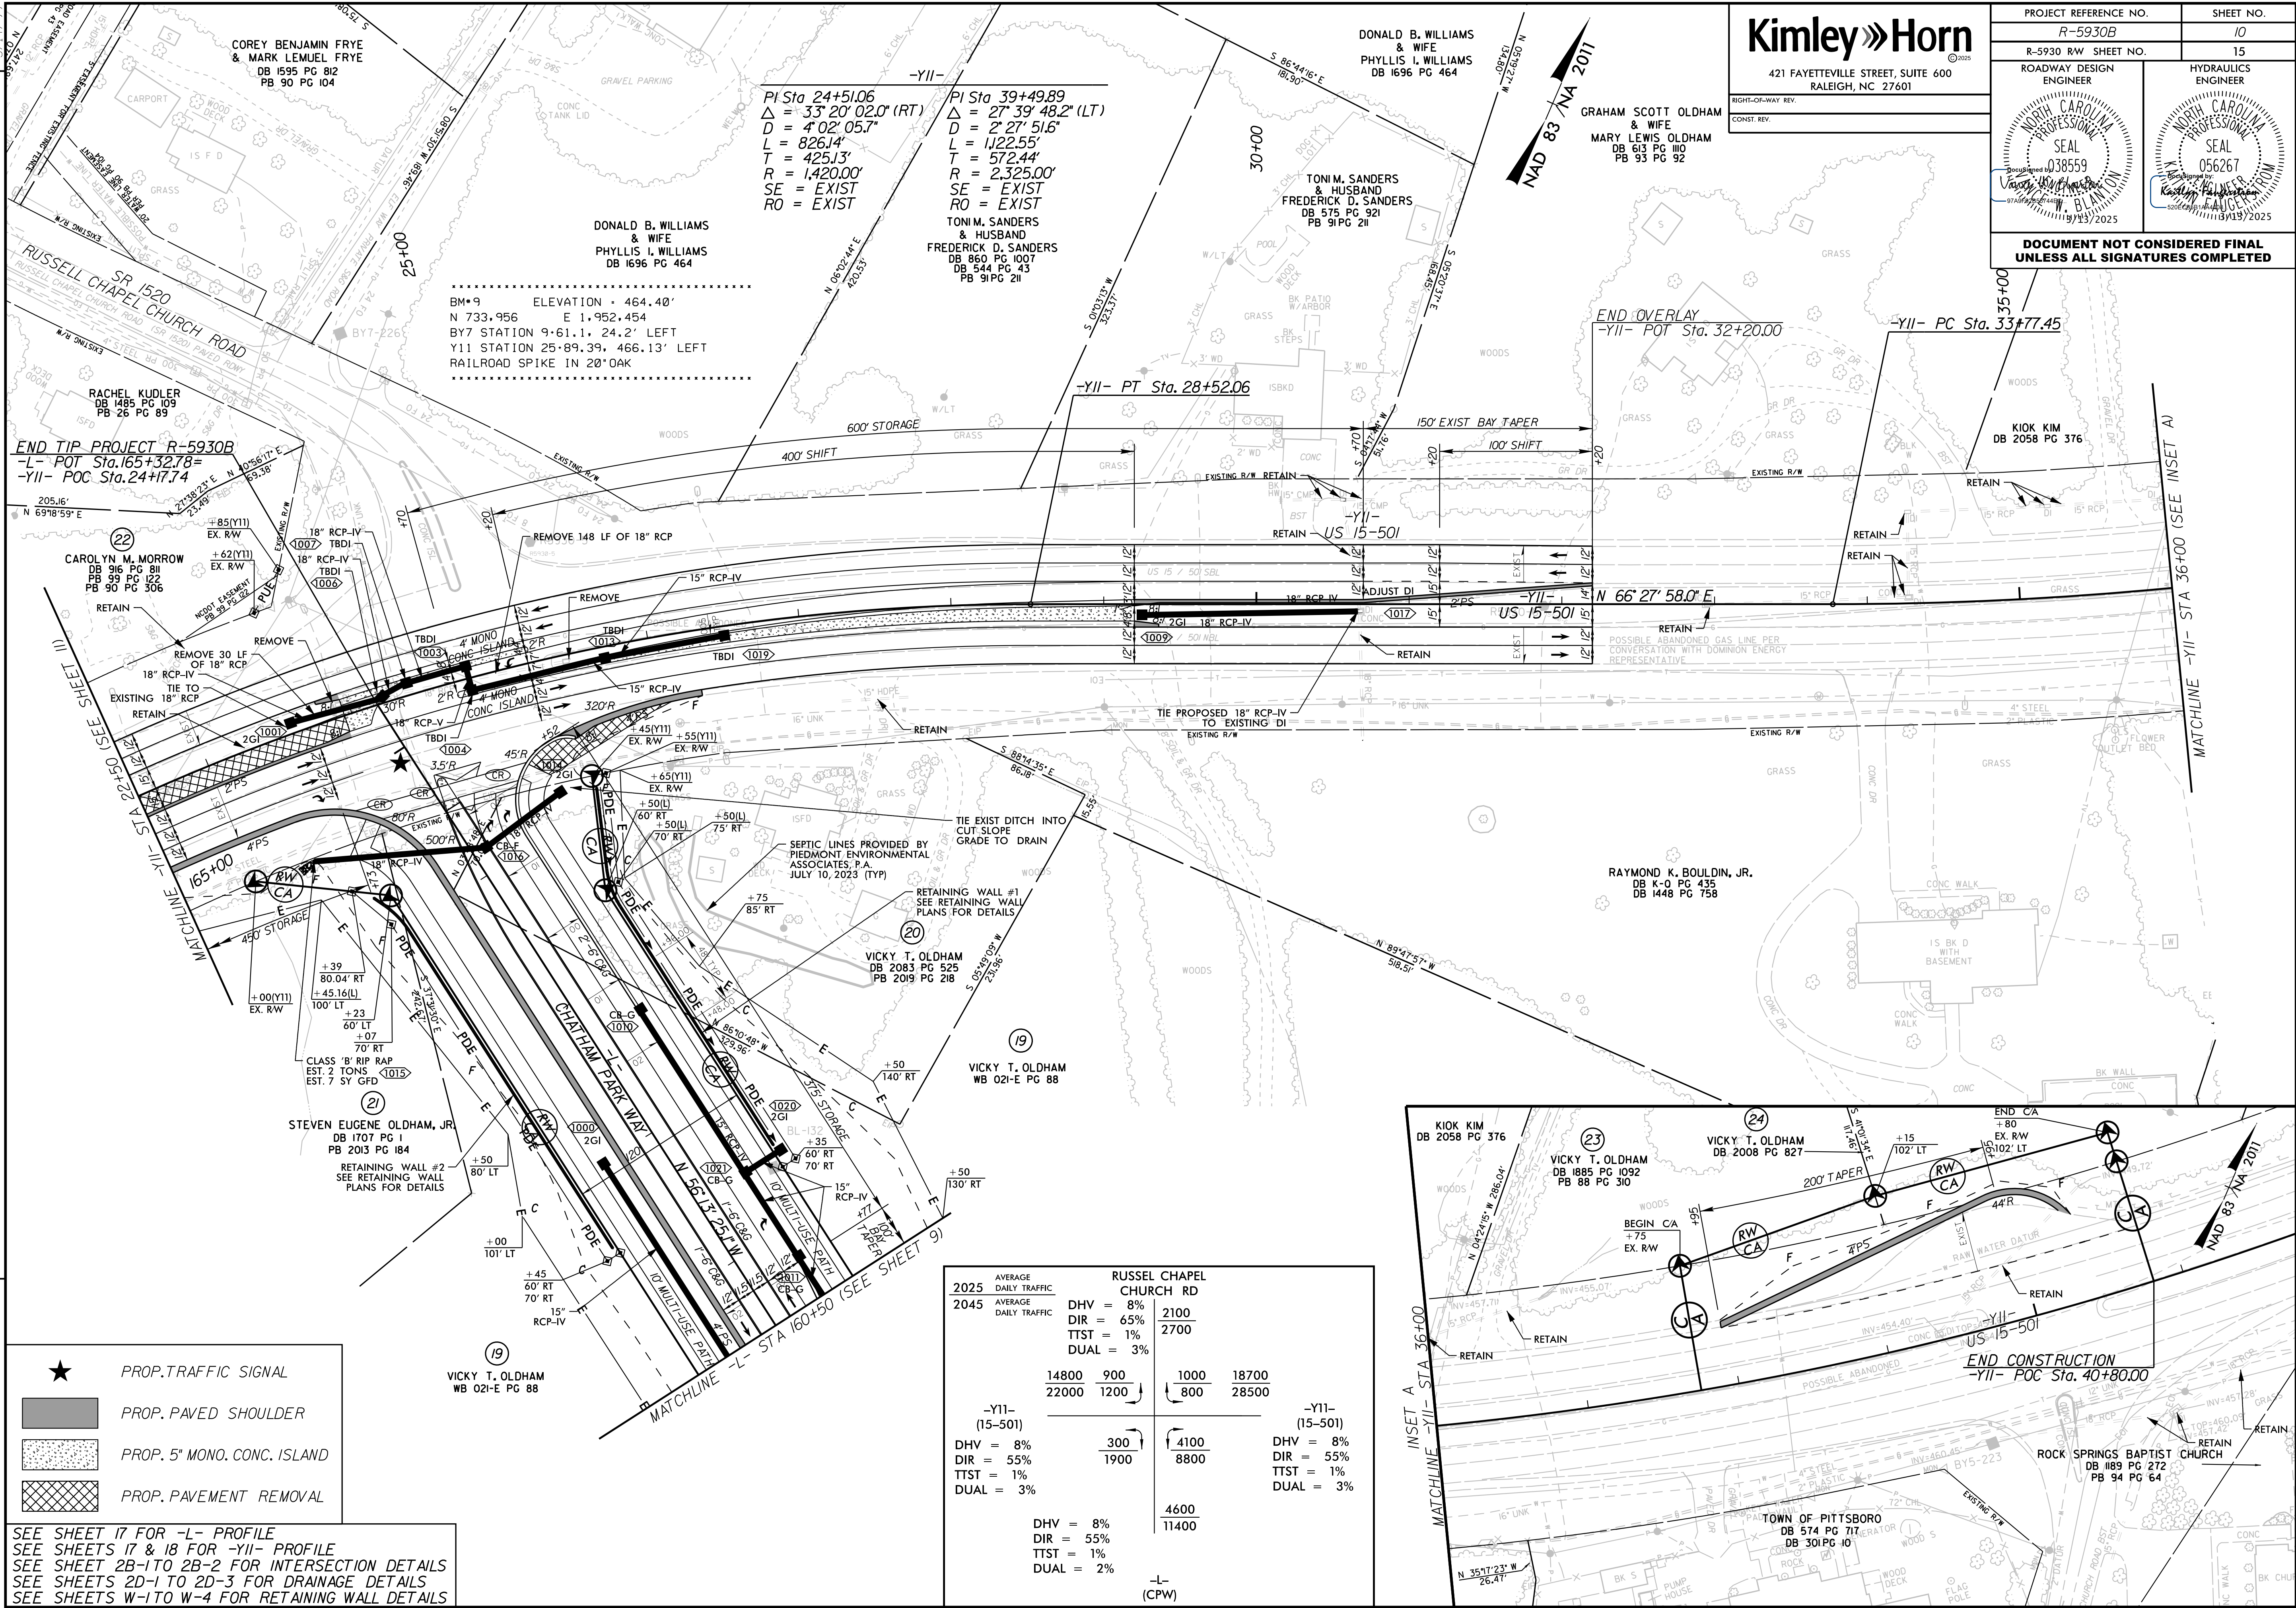

3/12/2025