

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH, N.C.

C205219

CONTRACT AND  
CONTRACT BONDS  
FOR CONTRACT NO. C205219

WBS 50685.3.1 5068501

T.I.P NO. HL-0065

COUNTY OF RUTHERFORD

THIS IS THE ROADWAY CONTRACT

ROUTE NUMBER US-221A LENGTH 1.907 MILES

LOCATION US-221A (S WASHINGTON ST/CHARLOTTE RD/MAIN ST) FROM NC-108  
(MAPLE ST) TO SR-2169 (OAKLAND RD).

CONTRACTOR WRIGHT BROTHERS CIVIL CONSTRUCTION LLC

ADDRESS P.O. BOX 437  
CHARLESTON, TN 37310

BIDS OPENED AUGUST 18, 2026

CONTRACT EXECUTION 09/22/2026

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH, N.C.

PROPOSAL

DATE AND TIME OF BID OPENING: **Aug 18, 2026 AT 02:00 PM**

CONTRACT ID C205219  
WBS 50685.3.1

FEDERAL-AID NO. 5068501  
COUNTY RUTHERFORD  
T.I.P NO. HL-0065  
MILES 1.907  
ROUTE NO. US-221A  
LOCATION US-221A (S WASHINGTON ST/CHARLOTTE RD/MAIN ST) FROM NC-108  
(MAPLE ST) TO SR-2169 (OAKLAND RD).

TYPE OF WORK GRADING, DRAINAGE, PAVING, AND SIGNALS.

**NOTICE:**

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE N.C. LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$40,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA. NOTWITHSTANDING THESE LIMITATIONS ON BIDDING, THE BIDDER WHO IS AWARDED ANY FEDERAL - AID FUNDED PROJECT SHALL COMPLY WITH CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA FOR LICENSING REQUIREMENTS WITHIN 60 CALENDAR DAYS OF BID OPENING.

**BIDS WILL BE RECEIVED AS SHOWN BELOW:**

**THIS IS A ROADWAY PROPOSAL**

**5% BID BOND OR BID DEPOSIT REQUIRED**

---

**PROPOSAL FOR THE CONSTRUCTION OF  
CONTRACT No. C205219 IN RUTHERFORD COUNTY, NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION,  
RALEIGH, NORTH CAROLINA**

The Bidder has carefully examined the location of the proposed work to be known as Contract No. **C205219** has carefully examined the plans and specifications, which are acknowledged to be part of the proposal, the special provisions, the proposal, the form of contract, and the forms of contract payment bond and contract performance bond; and thoroughly understands the stipulations, requirements and provisions. The undersigned bidder agrees to bound upon his execution of the bid and subsequent award to him by the Board of Transportation in accordance with this proposal to provide the necessary contract payment bond and contract performance bond within fourteen days after the written notice of award is received by him. The undersigned Bidder further agrees to provide all necessary machinery, tools, labor, and other means of construction; and to do all the work and to furnish all materials, except as otherwise noted, necessary to perform and complete the said contract in accordance with the *2024 Standard Specifications for Roads and Structures* by the dates(s) specified in the Project Special Provisions and in accordance with the requirements of the Engineer, and at the unit or lump sum prices, as the case may be, for the various items given on the sheets contained herein.

The Bidder shall provide and furnish all the materials, machinery, implements, appliances and tools, and perform the work and required labor to construct and complete Contract No. **C205219** in **Rutherford County**, for the unit or lump sum prices, as the case may be, bid by the Bidder in his bid and according to the proposal, plans, and specifications prepared by said Department, which proposal, plans, and specifications show the details covering this project, and hereby become a part of this contract.

The published volume entitled *North Carolina Department of Transportation, Raleigh, Standard Specifications for Roads and Structures, January 2024* with all amendments and supplements thereto, is by reference incorporated into and made a part of this contract; that, except as herein modified, all the construction and work included in this contract is to be done in accordance with the specifications contained in said volume, and amendments and supplements thereto, under the direction of the Engineer.

If the proposal is accepted and the award is made, the contract is valid only when signed either by the Contract Officer or such other person as may be designated by the Secretary to sign for the Department of Transportation. The conditions and provisions herein cannot be changed except over the signature of the said Contract Officer.

The quantities shown in the itemized proposal for the project are considered to be approximate only and are given as the basis for comparison of bids. The Department of Transportation may increase or decrease the quantity of any item or portion of the work as may be deemed necessary or expedient.

An increase or decrease in the quantity of an item will not be regarded as sufficient ground for an increase or decrease in the unit prices, nor in the time allowed for the completion of the work, except as provided for the contract.

Accompanying this bid is a bid bond secured by a corporate surety, or certified check payable to the order of the Department of Transportation, for five percent of the total bid price, which deposit is to be forfeited as liquidated damages in case this bid is accepted and the Bidder shall fail to provide the required payment and performance bonds with the Department of Transportation, under the condition of this proposal, within 14 calendar days after the written notice of award is received by him, as provided in the *Standard Specifications*; otherwise said deposit will be returned to the Bidder.



*State Contract Officer*

Signed by:

*Jonathan H. Weathersbee*

E45DA45396074A0...

07/16/2026

## **TABLE OF CONTENTS**

### **COVER SHEET PROPOSAL SHEET**

### **PROJECT SPECIAL PROVISIONS**

|                                                                   |         |
|-------------------------------------------------------------------|---------|
| HAUL ROADS:.....                                                  | G-1     |
| BUILD AMERICA, BUY AMERICA (BABA): .....                          | G-1     |
| CONTRACT TIME AND LIQUIDATED DAMAGES: .....                       | G-5     |
| INTERMEDIATE CONTRACT TIME NUMBER 1 AND LIQUIDATED DAMAGES: ..... | G-6     |
| INTERMEDIATE CONTRACT TIME NUMBER 2 AND LIQUIDATED DAMAGES: ..... | G-6     |
| PERMANENT VEGETATION ESTABLISHMENT:.....                          | G-8     |
| DELAY IN RIGHT OF ENTRY: .....                                    | G-9     |
| MAJOR CONTRACT ITEMS: .....                                       | G-10    |
| SPECIALTY ITEMS: .....                                            | G-11    |
| FUEL PRICE ADJUSTMENT: .....                                      | G-11    |
| STEEL PRICE ADJUSTMENT: .....                                     | G-13    |
| SCHEDULE OF ESTIMATED COMPLETION PROGRESS:.....                   | G-24    |
| DISADVANTAGED BUSINESS ENTERPRISE: .....                          | G-24    |
| CERTIFICATION FOR FEDERAL-AID CONTRACTS: .....                    | G-38    |
| RESTRICTIONS ON ITS EQUIPMENT AND SERVICES:.....                  | G-39    |
| USE OF UNMANNED AIRCRAFT SYSTEM (UAS): .....                      | G-39    |
| EQUIPMENT IDLING GUIDELINES: .....                                | G-39    |
| U.S. DEPARTMENT OF TRANSPORTATION HOTLINE: .....                  | G-40    |
| SUBSURFACE INFORMATION:.....                                      | G-40    |
| MAINTENANCE OF THE PROJECT: .....                                 | G-40    |
| COOPERATION BETWEEN CONTRACTORS:.....                             | G-41    |
| ELECTRONIC BIDDING:.....                                          | G-41    |
| TWELVE MONTH GUARANTEE: .....                                     | G-42    |
| EROSION AND SEDIMENT CONTROL/STORMWATER CERTIFICATION: .....      | G-42    |
| PROCEDURE FOR MONITORING BORROW PIT DISCHARGE: .....              | G-48    |
| <br>ROADWAY .....                                                 | <br>R-1 |

### **STANDARD SPECIAL PROVISIONS**

|                                                                 |        |
|-----------------------------------------------------------------|--------|
| AVAILABILITY OF FUNDS – TERMINATION OF CONTRACTS .....          | SSP-1  |
| NCDOT GENERAL SEED SPECIFICATION FOR SEED QUALITY .....         | SSP-2  |
| ERRATA.....                                                     | SSP-5  |
| PLANT AND PEST QUARANTINES .....                                | SSP-8  |
| TITLE VI AND NONDISCRIMINATION: .....                           | SSP-9  |
| MINORITY AND FEMALE EMPLOYMENT REQUIREMENTS .....               | SSP-18 |
| CONTRACT PROVISIONS FOR FEDERAL-AID CONSTRUCTION CONTRACTS .... | SSP-21 |
| ON-THE-JOB TRAINING .....                                       | SSP-33 |
| MINIMUM WAGES .....                                             | SSP-36 |



**UNIT PROJECT SPECIAL PROVISIONS**

|                              |       |
|------------------------------|-------|
| GEOENVIRONMENTAL.....        | GV-1  |
| SIGNING .....                | SN-1  |
| PAVEMENT MARKINGS .....      | PM-1  |
| TRAFFIC CONTROL .....        | TC-1  |
| UTILITY CONSTRUCTION.....    | UC-1  |
| UTILITY BY OTHERS.....       | UBO-1 |
| EROSION CONTROL .....        | EC-1  |
| PLANTING/REFORESTATION ..... | PL-1  |
| TRAFFIC SIGNALS .....        | TS-1  |

|                             |     |
|-----------------------------|-----|
| <b><u>PERMITS</u></b> ..... | P-1 |
|-----------------------------|-----|

**PROPOSAL ITEM SHEET**

ITEM SHEET(S)

**PROJECT SPECIAL PROVISIONS****GENERAL****HAUL ROADS:**

(7-16-24)

105

SP1 G04

Revise the *Standard Specifications* as follows:

**Page 1-45, Article 105-15 RESTRICTION OF LOAD LIMITS, line 31,** add the following after second sentence of the second paragraph:

At least 30 days prior to use, the Contractor shall notify the Engineer of any public road proposed for use as a haul road for the project.

**BUILD AMERICA, BUY AMERICA (BABA):**

(11-15-22)(Rev. 4-21-26)

106

SP1 G05 B

Revise the *Standard Specifications* as follows:

**Page 1-47 and 1-48, Article 106-1 GENERAL REQUIREMENTS, lines 30-47 and 1-49,** delete and replace Article 106-1 with the following:

**106-1 MATERIALS AND MANUFACTURING****(A) General Requirements**

The Contractor shall furnish materials that conform to all contract requirements, are suitable for their intended use, and are free from defects. All materials used in the work shall meet the requirements of the contract and shall be subject to inspection, test, or rejection by the Engineer. All materials permanently incorporated into the completed work shall be new, unless otherwise specified in the contract or as approved by the Engineer.

The Contractor is responsible for selecting, procuring, and delivering materials of the types and quantities necessary to perform the work and meet contract requirements. Delays in material delivery or quality control do not relieve the Contractor of obligations for schedule or quality.

All materials incorporated into the work shall be approved before use. Approval is based on testing, certification, or both, as required by the contract. Department review or acceptance does not relieve the Contractor of responsibility for material compliance. The Department may inspect, sample, and test materials at any time before, during, or after installation.

Materials shall be handled, stored, and protected to prevent damage, contamination, or deterioration. Materials determined to be defective, damaged, contaminated, or otherwise not in compliance shall be rejected and promptly removed from the project.

To facilitate inspection and testing, the Contractor shall furnish a complete statement of origin for all materials, including certifications or samples when requested. This information

shall be submitted to the Materials and Tests Unit when required by the contract or as directed by the Engineer, in advance of fabrication, shipment, or use to allow for appropriate inspection.

The Contractor shall furnish Safety Data Sheets (SDS) for all paints and hazardous chemicals proposed for use on the project, in accordance with the North Carolina Hazard Communication Standard, 29 CFR 1910.1200 and NCGS § 95-174.

The Contractor shall provide access, equipment, means and assistance for the verification and calibration of any devices used in testing, measurement, or documentation of materials.

If the Contractor proposes to use materials from local deposits not identified in the contract, the Contractor shall be responsible for preliminary sampling, source approval, and production of acceptable material. Preliminary samples shall be furnished at no cost to the Department. If requested in writing, the Department may perform sampling, with costs to be charged to the Contractor as determined by the Engineer.

Sampling or testing by the Department does not constitute pre-approval or acceptance of material. The Contractor remains responsible for ensuring quality and uniformity of all materials produced or delivered, including those from local deposits. The Contractor shall indemnify and hold harmless the Department from any claims, costs, or damages related to the development or use of such sources, including, but not limited to, failure to meet quantity or quality requirements.

Materials covered by Subarticles 106-1(B) and 106-1(C) shall comply with applicable domestic content requirements, including those for iron and steel, construction materials, and manufactured products.

## **(B) Domestic Material Requirements**

Domestic material requirements apply to iron and steel products permanently incorporated into any project in accordance with 23 U.S.C. § 313, 23 CFR 635.410, and NCGS § 136-28.7. Construction materials and manufactured products permanently incorporated into the work are subject to domestic-content requirements only on Federal-aid projects, in accordance with 23 U.S.C. § 313, Build America Buy America Act (IIJA § 70914), 2 CFR 184, and as implemented for the Federal-aid highway program through 23 CFR Part 635.410.

All iron or steel products, construction materials, and manufactured products subject to domestic content requirements shall be of domestic origin and meet the applicable requirements of the contract based on the project's funding source.

Before any materials are delivered to the project, the Contractor shall submit a notarized letter acknowledging their understanding of the domestic material requirements for the specific contract. This acknowledgment is a contract-level affirmation that the Contractor is responsible for ensuring that no iron or steel product, construction material, or manufactured product subject to domestic content requirements is permanently incorporated into the work without the required certification. This acknowledgment does not substitute for product-level certifications from the manufacturer or supplier. The Department reserves the right to deny or recover payment for any material incorporated into the work without valid documentation.

For iron and steel, all manufacturing processes must occur in the United States.

For construction materials, all manufacturing processes must occur in the United States.

For manufactured products, final assembly must occur in the United States.

Before any iron or steel product, construction material, or manufactured product subject to domestic content requirements is eligible for payment, the Contractor shall submit a certification from the manufacturer or supplier confirming compliance with the applicable regulations. A separate certification is required for each shipment or delivery and must clearly identify the items covered, linked to the associated bill of lading, invoice, or packing list.

The Contractor shall ensure that all required certifications from the manufacturer or supplier are obtained and submitted to the Engineer prior to payment for any iron or steel product, construction material, or manufactured product subject to domestic content requirements. The Engineer will retain documentation in accordance with Department procedures. Compliance with domestic material requirements is the responsibility of the Contractor, based on certifications and documentation provided by the manufacturer or supplier.

### **(C) Material Category Requirements**

#### **(1) Iron and Steel Products**

Items are considered iron or steel products if they consist wholly or predominantly of iron or steel. Predominantly means the cost of iron or steel components exceeds 50% of the total cost of all product components.

All steel and iron products that are permanently incorporated into the work shall be produced in the United States. This includes any such item that is melted, cast, rolled, formed, shaped, drawn, extruded, forged, fabricated, finished or otherwise processed in the manufacture of the product. Coatings applied to iron and steel products shall also be applied in the United States.

A minimal amount of foreign iron or steel products may be permitted provided the total value of such foreign material, as delivered to the project, does not exceed 0.1% of the total contract cost or \$2,500, whichever is greater. Documentation establishing the value of the foreign material shall be submitted when requested. This allowance is intended only for incidental quantities that may arise despite good-faith compliance efforts and may not be used to intentionally procure foreign iron or steel.

Domestically produced high-strength fasteners are required, and foreign-produced high-strength fasteners are not permitted under any circumstance.

Raw materials such as pig iron, processed pelletized iron ore, and reduced iron ore may be sourced internationally; however, all manufacturing processes to produce the final product, including coatings, must occur within the United States.

#### **(2) Construction Materials**

Construction materials shall consist of a single, listed material type permanently incorporated into the work as defined in 2 CFR 184.3. The following are classified as construction materials:

- (a) Non-ferrous metals (such as aluminum, copper, and zinc);
- (b) Plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables);
- (c) Glass (including optical glass);
- (d) Fiber optic cable (including drop cable);
- (e) Optical fiber;
- (f) Lumber;
- (g) Engineered wood;
- (h) Drywall

For construction materials, all manufacturing processes must occur in the United States. If a construction material is combined with other materials, components, or features to form a product with new properties or functions, it shall be classified as a manufactured product.

Minor additions such as binding agents, dyes, or adhesives that do not materially alter the item's properties do not affect classification.

### **(3) Manufactured Products**

Manufactured products are articles, materials, or supplies that are made by combining one or more materials to create a product with new or different properties, functions, or uses. This includes items that incorporate multiple components, materials, or assemblies and cannot be classified as a single listed construction material.

Final assembly of all manufactured products must occur in the United States. Certification must address the product as a whole, including all incorporated components.

Items that meet the definition of construction materials or iron and steel products shall not be reclassified as manufactured products.

### **(4) Materials Not Subject to Domestic Content Requirements**

The following materials are not subject to domestic content requirements and do not require certification, as identified below:

#### **(a) Materials Excluded by Federal Statute or Regulation**

The following materials are excluded from domestic content requirements under applicable Federal law or regulation:

- (i) Cement and cementitious materials
- (ii) Aggregates such as stone, sand, or gravel
- (iii) Aggregate binding agents or additives

(b) Materials Not Permanently Incorporated into the Work

Materials that are not permanently incorporated into the completed project are not subject to domestic content requirements. Materials are not permanently incorporated when they are used solely to facilitate construction activities and do not perform an ongoing structural, operational, or functional role after construction is complete. Determinations regarding whether a material is permanently incorporated will be made by the Engineer.

**(D) Classification and Clarification of Materials**

All items subject to domestic content requirements shall be classified as either an iron or steel product, construction material, manufactured product, or a material not subject to domestic content requirements based on their final form as delivered to the project site. Each item may be classified into only one category and shall not be reclassified to avoid more stringent requirements. Classification of a manufactured product does not relieve the Contractor of compliance with iron and steel domestic manufacturing requirements applicable to embedded iron or steel components when required by Federal law or regulation. When an item's classification is uncertain or does not clearly fall within the listed categories, the Contractor shall submit the item for review by the Engineer. Approval must be obtained prior to procurement or incorporation into the project.

**CONTRACT TIME AND LIQUIDATED DAMAGES:**

(8-15-00) (Rev. 5-16-23)

108

SP1 G08 A

The date of availability for this contract is **March 19, 2027, except -L3- from Sta. 14+00 (+/-) to Sta. 63+00 (+/-) and associated -Y- Lines is July 19, 2027, except -L3- from Sta. 63+00 (+/-) to the end of the project and associated -Y- Lines is October 19, 2027**, except that work in jurisdictional waters and wetlands shall not begin until a meeting between the DOT, Regulatory Agencies, and the Contractor is held as stipulated in the permits contained elsewhere in this proposal. This delay in availability has been considered in determining the contract time for this project.

The completion date for this contract is **February 11, 2030**.

Except where otherwise provided by the contract, observation periods required by the contract will not be a part of the work to be completed by the completion date and/or intermediate contract times stated in the contract. The acceptable completion of the observation periods that extend beyond the final completion date shall be a part of the work covered by the performance and payment bonds.

The liquidated damages for this contract are **Two Hundred Dollars (\$200.00)** per calendar day. These liquidated damages will not be cumulative with any liquidated damages which may become chargeable under Intermediate Contract Time Number 1.

**INTERMEDIATE CONTRACT TIME NUMBER 1 AND LIQUIDATED DAMAGES:**

(7-1-95) (Rev. 2-21-12)

108

SP1 G13 A

Except for that work required under the Project Special Provisions entitled *Planting, Reforestation* and/or *Permanent Vegetation Establishment*, included elsewhere in this proposal, the Contractor will be required to complete all work included in this contract and shall place and maintain traffic on same.

The date of availability for this intermediate contract time is **March 19, 2027, except -L3- from Sta. 14+00 (+/-) to Sta. 63+00 (+/-) and associated -Y- Lines is July 19, 2027, except -L3- from Sta. 63+00 (+/-) to the end of the project and associated -Y- Lines is October 19, 2027.**

The completion date for this intermediate contract time is **August 15, 2029.**

The liquidated damages for this intermediate contract time are **Two Thousand Four Hundred Dollars (\$2,400)** per calendar day.

Upon apparent completion of all the work required to be completed by this intermediate date, a final inspection will be held in accordance with Article 105-17 and upon acceptance, the Department will assume responsibility for the maintenance of all work except *Planting, Reforestation* and/or *Permanent Vegetation Establishment*. The Contractor will be responsible for and shall make corrections of all damages to the completed roadway caused by his planting operations, whether occurring prior to or after placing traffic through the project.

**INTERMEDIATE CONTRACT TIME NUMBER 2 AND LIQUIDATED DAMAGES:**

(2-20-07)

108

SP1 G14 A

The Contractor shall complete the required work of installing, maintaining, and removing the traffic control devices for lane closures and restoring traffic to the existing traffic pattern. The Contractor shall not close or narrow a lane of traffic on **-L1- (S. Washington Street), -L2- (Charlotte Road / W. Main Street), -L3-, -Y7- (Railroad Avenue), -Y8- (College Avenue), or Any Other Road** during the following time restrictions:

**DAY AND TIME RESTRICTIONS**

**-L1- (S. Washington St.), -L2- (Charlotte Rd. / W. Main St.) located West of R-2233BB, or -L3- located East of -Y9-**

Monday thru Friday, 6:00 AM to 9:00 AM and 4:00 PM to 6:00 PM

**-L2- (Charlotte Rd. / W. Main St.) located East of R-2233BB, -L3- (W. Main St.) located West of -Y9-, or -Y7-/-Y8- (Railroad Ave. / College Ave.)**

Monday thru Friday, 7:00 AM to 6:30 PM

**Any Other Road**

Monday thru Friday, 6:00 AM to 9:00 AM and 4:00 PM to 6:00 PM

In addition, the Contractor shall not close or narrow a lane of traffic on **Any Road**, detain and/or alter the traffic flow on or during holidays, holiday weekends, special events, or any other time when traffic is unusually heavy, including the following schedules:

HOLIDAY AND HOLIDAY WEEKEND LANE CLOSURE RESTRICTIONS

1. For **unexpected occurrence** that creates unusually high traffic volumes, as directed by the Engineer.
2. For **New Year's Day**, between the hours of **6:00 A.M.** December 31<sup>st</sup> and **6:00 P.M.** January 2<sup>nd</sup>. If New Year's Day is on a Friday, Saturday, Sunday or Monday, then until **6:00 P.M.** the following Tuesday.
3. For **Easter**, between the hours of **6:00 A.M.** Thursday and **6:00 P.M.** Monday.
4. For **Memorial Day**, between the hours of **6:00 A.M.** Friday and **6:00 P.M.** Tuesday.
5. For **Independence Day**, between the hours of **6:00 A.M.** the day before Independence Day and **6:00 P.M.** the day after Independence Day.

If **Independence Day** is on a Friday, Saturday, Sunday or Monday, then between the hours of **6:00 A.M.** the Thursday before Independence Day and **6:00 P.M.** the Tuesday after Independence Day.

6. For **Labor Day**, between the hours of **6:00 A.M.** Friday and **6:00 P.M.** Tuesday.
7. For **Thanksgiving**, between the hours of **6:00 A.M.** Tuesday and **6:00 P.M.** Monday.
8. For **Christmas**, between the hours of **6:00 A.M.** the Friday before the week of Christmas Day and **6:00 P.M.** the following Tuesday after the week of Christmas Day.
9. For **Mayfest Spring Festival event**, between the hours of **6:00 A.M.** the **Friday** before the event and **6:00 A.M.** the following **Monday** after the event.
10. For **Cherry Bounce Festival event**, between the hours of **6:00 P.M.** the **Thursday** before the event and **6:00 A.M.** the following **Monday** after the event.
11. For **Hot Nights Cool Rides Car Show event**, between the hours of **6:00 A.M.** the **Friday** before the event and **6:00 A.M.** the following **Monday** after the event.
12. For **Hilltop Fall Festival event**, between the hours of **6:00 A.M.** the **Friday** before the event and **6:00 A.M.** the following **Monday** after the event.
13. For **Rutherford Food Art and Brew (FAB) events**, between the hours of **6:00 P.M.** the night of the event and **6:00 A.M.** the following **Saturday** after the event.

Holidays and holiday weekends shall include New Year's, Easter, Memorial Day, Independence Day, Labor Day, Thanksgiving, and Christmas. The Contractor shall schedule his work so that



lane closures will not be required during these periods, unless otherwise directed by the Engineer.

The time of availability for this intermediate contract work shall be the time the Contractor begins to install all traffic control devices for lane closures according to the time restrictions listed herein.

The completion time for this intermediate contract work shall be the time the Contractor is required to complete the removal of all traffic control devices for lane closures according to the time restrictions stated above and place traffic in the existing traffic pattern.

The liquidated damages are **Two Hundred Fifty Dollars (\$ 250.00)** per hour.

**PERMANENT VEGETATION ESTABLISHMENT:**

(2-16-12)(Rev. 1-16-24)

104

SP1 G16

Establish a permanent stand of the vegetation mixture shown in the contract. During the period between initial vegetation planting and final project acceptance, perform all work necessary to establish permanent vegetation on all erodible areas within the project limits, as well as, in borrow and waste pits. This work shall include erosion control device maintenance and installation, repair seeding and mulching, supplemental seeding and mulching, mowing, and fertilizer topdressing, as directed. All work shall be performed in accordance with the applicable section of the *Standard Specifications*. All work required for initial vegetation planting shall be performed as a part of the work necessary for the completion and acceptance of the Intermediate Contract Time (ICT). Between the time of ICT and Final Project acceptance, or otherwise referred to as the vegetation establishment period, the Department will be responsible for preparing the required National Pollutant Discharge Elimination System (NPDES) inspection records.

Once the Engineer has determined that the permanent vegetation establishment requirement has been achieved at an 80% vegetation density (the amount of established vegetation per given area to stabilize the soil) and no erodible areas exist within the project limits, the Contractor will be notified to remove the remaining erosion control devices that are no longer needed. The Contractor will be responsible for, and shall correct any areas disturbed by operations performed in permanent vegetation establishment and the removal of temporary erosion control measures, whether occurring prior to or after placing traffic on the project.

Payment for *Response for Erosion Control, Seeding and Mulching, Repair Seeding, Supplemental Seeding, Mowing, Fertilizer Topdressing, Silt Excavation, and Stone for Erosion Control* will be made at contract unit prices for the affected items. Work required that is not represented by contract line items will be paid in accordance with Articles 104-7 or 104-3 of the *Standard Specifications*. No additional compensation will be made for maintenance and removal of temporary erosion control items.

**DELAY IN RIGHT OF ENTRY:**

(7-1-95) (Rev. 7-15-14)

108

SP1 G22

The Contractor will not be allowed right of entry to the following parcel(s) prior to the listed date(s) unless otherwise permitted by the Engineer.

| <b><u>Parcel No.</u></b> | <b><u>Property Owner</u></b>                | <b><u>Date</u></b> |
|--------------------------|---------------------------------------------|--------------------|
| 002                      | Justin G. Zizes, Jr.                        | 10/31/2026         |
| 004                      | Juniper Properties, LLC                     | 9/30/2026          |
| 008                      | NNN Reit, LP of North Carolina              | 8/31/2026          |
| 012                      | Gaylord H. Cowan & Dagmara P. Cowan         | 10/31/2026         |
| 014                      | Branch Banking & Trust Company              | 10/31/2026         |
| 015                      | Lonestar Equities, Inc.                     | 8/31/2026          |
| 017                      | Robert F. Gray, et al                       | 10/31/2026         |
| 020                      | Haywood Equity Group Limited Partnership    | 8/31/2026          |
| 022                      | Abounding Grace Ministry, Inc.              | 10/31/2026         |
| 024                      | CSC NC LLC                                  | 8/31/2026          |
| 025                      | Joseph L. Lattimore                         | 8/31/2026          |
| 027                      | Arnie Twitty                                | 9/30/2026          |
| 028                      | Bertha C. Miller & Jerry D. Miller          | 10/31/2026         |
| 029                      | Lena E. Ellenburg                           | 8/31/2026          |
| 035                      | NCDOT                                       | 10/31/2026         |
| 036                      | US Precision Cabinetry, LLC                 | 8/31/2026          |
| 037                      | Cranford Management, LLC                    | 8/31/2026          |
| 038                      | Vista Santa Fe Re, LLC                      | 8/31/2026          |
| 039                      | Wee One Properties, LLC                     | 10/31/2026         |
| 040                      | NNN Reit, LP of North Carolina              | 10/31/2026         |
| 041                      | McDonald's Corporation                      | 10/31/2026         |
| 043                      | Debra Lunardini                             | 10/31/2026         |
| 044                      | Pro Enterprises, LLC                        | 8/31/2026          |
| 046                      | Gail P. Thompson, et al                     | 8/31/2026          |
| 047                      | Kings Associates, LLP                       | 8/31/2026          |
| 048                      | Rutherford County                           | 8/31/2026          |
| 049                      | Ezra Menasche                               | 8/31/2026          |
| 054                      | Unlimited Product Sourcing Corporation      | 8/31/2026          |
| 064                      | WS Properties, LLC                          | 8/31/2026          |
| 065                      | Spindale Emergency Support                  | 9/30/2026          |
| 066                      | NXT Properties, LLC                         | 8/31/2026          |
| 067                      | Danny L. Bailey & Phyllis E. Bailey         | 8/31/2026          |
| 068                      | Tang and To, LLC                            | 9/30/2026          |
| 069                      | Webb McBrayer Hunt, JR Revocable Trust      | 10/31/2026         |
| 070                      | Town of Spindale                            | 9/30/2026          |
| 072                      | Spindale Mills, LLC                         | 10/31/2026         |
| 073                      | Rutherford Railroad Development Corporation | 10/31/2026         |
| 074                      | Dwayne A. Hunt & Starlyn Hunt               | 8/31/2026          |
| 075                      | John W. Jones, Jr.                          | 8/31/2026          |
|                          |                                             |                    |

| <b><u>Parcel No.</u></b> | <b><u>Property Owner</u></b>                | <b><u>Date</u></b> |
|--------------------------|---------------------------------------------|--------------------|
| 077                      | Danny L. Bailey, Et ux                      | 8/31/2026          |
| 078                      | TRT, LLC                                    | 8/31/2026          |
| 081                      | American Dairy Goat Association             | 8/31/2026          |
| 082                      | Sama Group NC, LLC                          | 8/31/2026          |
| 090                      | Rutherford Railroad Development Corporation | 10/31/2026         |
| 091                      | Advent Evangelical Lutheran Church          | 8/31/2026          |
| 092                      | Ben Castlesky Holdings, LLC                 | 8/31/2026          |
| 093                      | Town of Spindale                            | 8/31/2026          |
| 094                      | Spindale United Methodist Church            | 9/30/2026          |
| 095                      | Spindale United Methodist Church            | 9/30/2026          |
| 096                      | Java E. Nealey & Alicia B. Nealey           | 8/31/2026          |
| 097                      | Anthony S. Hamrick & Maria Hamrick          | 8/31/2026          |
| 098                      | Rutherford Railroad Development Corporation | 10/31/2026         |
| 100                      | Amy Cowan                                   | 10/31/2026         |
| 101                      | Burgess Land Holdings                       | 8/31/2026          |
| 102                      | A Blossom By Lee, Inc.                      | 10/31/2026         |
| 103                      | Scott R. Dwyer & Lisette Dwyer              | 8/31/2026          |
| 104                      | Warren B. Hamrick & Diane S. Hamrick        | 8/31/2026          |
| 105                      | Monty Monteith & Teresa B. Monteith         | 8/31/2026          |
| 106                      | Myra M. Geer & Jason L. Geer                | 8/31/2026          |
| 107                      | Timothy E. Smith                            | 8/31/2026          |
| 108                      | Spindale Sewing Machine Company             | 10/31/2026         |
| 109                      | Dwayne A. Hunt & Starlyn D. Hunt            | 10/31/2026         |
| 110                      | William R. Smith                            | 10/31/2026         |
| 111                      | Sterling Abrams & Santina Abrams            | 8/31/2026          |
| 112                      | Main Street Baptist Church                  | 8/31/2026          |
| 121                      | John W. Yelton & Virginia L. Yelton         | 8/31/2026          |
| 122                      | Brenda D. Yelton                            | 8/31/2026          |
| 123                      | Pilgrims Pathway House of Refuge, Inc.      | 10/31/2026         |
| 124                      | Rarb Properties, LLC                        | 10/31/2026         |
| 125                      | Maverick Asset Management, LLC              | 10/31/2026         |
| 126                      | Rutherford Railroad Development Corporation | 10/31/2026         |

**MAJOR CONTRACT ITEMS:**

(2-19-02)(Rev. 1-16-24)

104

SP1 G28

The following listed items are the major contract items for this contract (see Article 104-5 of the *Standard Specifications*):

| <b>Line #</b> | <b>Description</b>        |
|---------------|---------------------------|
| 142           | 8" Water Line             |
| 156           | 8" Sanitary Gravity Sewer |

**SPECIALTY ITEMS:**

(7-1-95)(Rev. 1-16-24)

108-6

SP1 G37

Items listed below will be the specialty items for this contract (see Article 108-6 of the *Standard Specifications*).

| <b>Line #</b> | <b>Description</b>          |
|---------------|-----------------------------|
| 72-79         | Guardrail                   |
| 80-84         | Fencing                     |
| 87-102        | Signing                     |
| 121-126, 138  | Long-Life Pavement Markings |
| 127           | Removable Tape              |
| 139           | Permanent Pavement Markers  |
| 140-163       | Utility Construction        |
| 164-193       | Erosion Control             |
| 194-210       | Planting                    |
| 211-245       | Signals/ITS System          |

**FUEL PRICE ADJUSTMENT:**

(11-15-05)(Rev. 1-16-24)

109-8

SP1 G43

**Page 1-82, Article 109-8, FUEL PRICE ADJUSTMENTS**, add the following:

The base index price for DIESEL #2 FUEL is \$ **3.3565** per gallon. Where any of the following are included as pay items in the contract, they will be eligible for fuel price adjustment.

The pay items and the fuel factor used in calculating adjustments to be made will be as follows:

| Description                                       | Units   | Fuel Usage Factor Diesel |
|---------------------------------------------------|---------|--------------------------|
| Unclassified Excavation                           | Gal/CY  | 0.29                     |
| Borrow Excavation                                 | Gal/CY  | 0.29                     |
| Class IV Subgrade Stabilization                   | Gal/Ton | 0.55                     |
| Aggregate Base Course                             | Gal/Ton | 0.55                     |
| Sub-Ballast                                       | Gal/Ton | 0.55                     |
| Erosion Control Stone                             | Gal/Ton | 0.55                     |
| Rip Rap, Class _____                              | Gal/Ton | 0.55                     |
| Asphalt Concrete Base Course, Type _____          | Gal/Ton | 0.90 or 2.90             |
| Asphalt Concrete Intermediate Course, Type _____  | Gal/Ton | 0.90 or 2.90             |
| Asphalt Concrete Surface Course, Type _____       | Gal/Ton | 0.90 or 2.90             |
| Open-Graded Asphalt Friction Course               | Gal/Ton | 0.90 or 2.90             |
| Permeable Asphalt Drainage Course, Type _____     | Gal/Ton | 0.90 or 2.90             |
| Sand Asphalt Surface Course, Type _____           | Gal/Ton | 0.90 or 2.90             |
| Ultra-thin Bonded Wearing Course                  | Gal/Ton | 0.90 or 2.90             |
| Aggregate for Cement Treated Base Course          | Gal/Ton | 0.55                     |
| Portland Cement for Cement Treated Base Course    | Gal/Ton | 0.55                     |
| > 11" Portland Cement Concrete Pavement           | Gal/SY  | 0.327                    |
| Concrete Shoulders Adjacent to > 11" Pavement     | Gal/SY  | 0.327                    |
| 9" to 11" Portland Cement Concrete Pavement       | Gal/SY  | 0.272                    |
| Concrete Shoulders Adjacent to 9" to 11" Pavement | Gal/SY  | 0.272                    |
| < 9" Portland Cement Concrete Pavement            | Gal/SY  | 0.245                    |
| Concrete Shoulders Adjacent to < 9" Pavement      | Gal/SY  | 0.245                    |

For the asphalt items noted in the chart as eligible for fuel adjustments, the bidder may include the *Fuel Usage Factor Adjustment Form* with their bid submission if they elect to use the fuel usage factor. The *Fuel Usage Factor Adjustment Form* is found at the following link:

<https://connect.ncdot.gov/letting/LetCentral/Fuel%20Usage%20Factor%20Adjustment%20Form%20-%20Starting%20Nov%202022%20Lettings.pdf>

Select either 2.90 Gal/Ton fuel factor or 0.90 Gal/Ton fuel factor for each asphalt line item on the *Fuel Usage Factor Adjustment Form*. The selected fuel factor for each asphalt item will remain in effect for the duration of the contract.

Failure to complete the *Fuel Usage Factor Adjustment Form* will result in using 2.90 gallons per ton as the Fuel Usage Factor for Diesel for the asphalt items noted above. The contractor will not be permitted to change the Fuel Usage Factor after the bids are submitted.

**STEEL PRICE ADJUSTMENT:**

(4-19-22)(Rev. 12-20-22)

SP1 G47

**Description and Purpose**

Steel price adjustments will be made to the payments due the Contractor for items as defined herein that are permanently incorporated into the work, when the price of raw steel mill products utilized on the contract have fluctuated. The Department will adjust monthly progress payments up or down as appropriate for cost changes in steel according to this provision.

**Eligible Items**

The list of eligible bid items for steel price adjustment can be found on the Departments website at the following address:

<https://connect.ncdot.gov/letting/LetCentral/Eligible%20Bid%20Items%20for%20Steel%20Price%20Adjustment.xlsx>

Nuts, bolts, anchor bolts, rebar chairs, connecting bands and other miscellaneous hardware associated with these items shall not be included in the price adjustment.

Adjustments will only be made for fluctuations in the material cost of the steel used in the above products as specified in the Product Relationship Table below. The producing mill is defined as the source of steel product before any fabrication has occurred (e.g., coil, plate, rebar, hot rolled shapes, etc.). No adjustment will be made for changes in the cost of fabrication, coating, shipping, storage, etc.

No steel price adjustments will be made for any products manufactured from steel having an adjustment date, as defined by the Product Relationship Table below, prior to the letting date.

**Bid Submittal Requirements**

The successful bidder, within 14 calendar days after the notice of award is received by him, shall provide the completed Form SPA-1 to the Department (State Contract Officer or Division Contract Engineer) along with the payment bonds, performance bonds and contract execution signature sheets in a single submittal. If Form SPA-1 is not included in the same submittal as the payment bonds, performance bonds and contract execution signature sheets, the Contractor will not be eligible for any steel price adjustment for any item in the contract for the life of the contract. Form SPA-1 can be found on the Department's website at the following address:

<https://connect.ncdot.gov/letting/LetCentral/Form%20SPA-1.xlsm>

The Contractor shall provide Form SPA-1 listing the Contract Line Number, (with corresponding Item Number, Item Description, and Category) for the steel products they wish to have an adjustment calculated. Only the contract items corresponding to the list of eligible item numbers for steel price adjustment may be entered on Form SPA-1. The Contractor may choose to have steel price adjustment applied to any, all, or none of the eligible items. However, the Contractor's selection of items for steel price adjustment or non-selection (non-participation) may not be changed once Form SPA-1 has been received by the Department. Items the Bidder

chooses for steel price adjustment must be designated by writing the word “Yes” in the column titled “Option” by each Pay Item chosen for adjustment. Should the bidder elect an eligible steel price item, the entire quantity of the line item will be subject to the price adjustment for the duration of the Contract. The Bidder’s designations on Form SPA-1 must be written in ink or typed and signed by the Bidder (Prime Contractor) to be considered complete. Items not properly designated, designated with “No”, or left blank on the Bidder’s Form SPA-1 will automatically be removed from consideration for adjustment. No steel items will be eligible for steel price adjustment on this Project if the Bidder fails to return Form SPA-1 in accordance with this provision.

### **Establishing the Base Price**

The Department will use a blend of monthly average prices as reported from the Fastmarkets platform to calculate the monthly adjustment indices (BI and MI). This data is typically available on the first day of the month for the preceding month. The indices will be calculated by the Department for the different categories found on the Product Relationship Table below. For item numbers that include multiple types of steel products, the category listed for that item number will be used for adjusting each steel component.

The bidding index for Category 1 Steel items is **\$ 47.50** per hundredweight.  
The bidding index for Category 2 Steel items is **\$ 66.80** per hundredweight.  
The bidding index for Category 3 Steel items is **\$ 79.00** per hundredweight.  
The bidding index for Category 4 Steel items is **\$ 57.21** per hundredweight.  
The bidding index for Category 5 Steel items is **\$ 60.81** per hundredweight.  
The bidding index for Category 6 Steel items is **\$ 77.84** per hundredweight.  
The bidding index for Category 7 Steel items is **\$ 50.20** per hundredweight.

The bidding index represents a selling price of steel based on Fastmarkets data for the month of **June 2026**.

- MI = Monthly Index. – in Dollars (\$) per hundredweight (CWT). Use the adjustment indices from the month the steel was shipped from the producing mill, received on the project, or member cast as defined in the Product Relationship Table.
- BI = Bidding Index. - in Dollars (\$) per hundredweight (CWT). Use the adjustment indices as listed in the proposal.

*Product Relationship Table*

| <i>Steel Product (Title)</i>                               | BI, MI*                                  | Adjustment Date for MI            | Category |
|------------------------------------------------------------|------------------------------------------|-----------------------------------|----------|
| Reinforcing Steel, Bridge Deck, and SIP Forms              | Based on one or more Fastmarkets indices | Delivery Date from Producing Mill | 1        |
| Structural Steel and Encasement Pipe                       | Based on one or more Fastmarkets indices | Delivery Date from Producing Mill | 2        |
| Steel H-Piles, Soldier Pile Walls                          | Based on one or more Fastmarkets indices | Delivery Date from Producing Mill | 3        |
| Guardrail Items and Pipe Piles                             | Based on one or more Fastmarkets indices | Material Received Date**          | 4        |
| Fence Items                                                | Based on one or more Fastmarkets indices | Material Received Date**          | 5        |
| Overhead Sign Assembly, Signal Poles, High Mount Standards | Based on one or more Fastmarkets indices | Material Received Date**          | 6        |
| Prestressed Concrete Members                               | Based on one or more Fastmarkets indices | Cast Date of Member               | 7        |

\* BI and MI are in converted units of Dollars per Hundredweight (\$/CWT)

\*\* Material Received Date is defined as the date the materials are received on the project site. If a material prepayment is made for a Category 4-6 item, the Adjustment Date to be used will be the date of the prepayment request instead of the Materials Received Date.

Submit documentation to the Engineer for all items listed in the Contract for which the Contractor is requesting a steel price adjustment.

### **Submittal Requirements**

The items in categories 1,2, and 3, shall be specifically stored, labeled, or tagged, recognizable by color marking, and identifiable by Project for inspection and audit verification immediately upon arrival at the fabricator.

Furnish the following documentation for all steel products to be incorporated into the work and documented on Form SPA-2, found on the Departments website at the following address:

<https://connect.ncdot.gov/projects/construction/Construction%20Forms/Form%20SPA-2.xlsx>

Submit all documentation to the Engineer prior to incorporation of the steel into the completed work. The Department will withhold progress payments for the affected contract line item if the documentation is not provided and at the discretion of the Engineer the work is allowed to proceed. Progress payments will be made upon receipt of the delinquent documentation.

### **Step 1 (Form SPA -2)**

Utilizing Form SPA-2, submit separate documentation packages for each line item from Form SPA-1 for which the Contractor opted for a steel price adjustment. For line items with multiple components of steel, each component should be listed separately. Label each SPA-2 documentation package with a unique number as described below.



- a. Documentation package number: (Insert the contract line-item) - (Insert sequential package number beginning with "1").  
Example: 412 - 1,  
              412 - 2,  
              424 - 1,  
              424 - 2,  
              424 - 3, etc.
- b. The steel product quantity in pounds
  - i. The following sources should be used, in declining order of precedence, to determine the weight of steel/iron, based on the Engineers decision:
    1. Department established weights of steel/iron by contract pay item per pay unit;
    2. Approved Shop Drawings;
    3. Verified Shipping Documents;
    4. Contract Plans;
    5. Standard Drawing Sheets;
    6. Industry Standards (i.e., AISC Manual of Steel Construction, AWWA Standards, etc.); and
    7. Manufacture's data.
  - ii. Any item requiring approved shop drawings shall have the weights of steel calculated and shown on the shop drawings or submitted and certified separately by the fabricator.
- c. The date the steel product, subject to adjustment, was shipped from the producing mill (Categories 1-3), received on the project (Categories 4-6), or casting date (Category 7).

#### Step 2 (Monthly Calculator Spreadsheet)

For each month, upon the incorporation of the steel product into the work, provide the Engineer the following:

- 1) Completed NCDOT Steel Price Adjustment Calculator Spreadsheet, summarizing all the steel submittal packages (Form SPA-2) actually incorporated into the completed work in the given month.
  - a. Contract Number
  - b. Bidding Index Reference Month
  - c. Contract Completion Date or Revised Completion Date
  - d. County, Route, and Project TIP information
  - e. Item Number
  - f. Line-Item Description
  - g. Submittal Number from Form SPA-2
  - h. Adjustment date
  - i. Pounds of Steel

- 2) An affidavit signed by the Contractor stating the documentation provided in the NCDOT Steel Price Adjustment Calculator Spreadsheet is true and accurate.

### **Price Adjustment Conditions**

Download the Monthly Steel Adjustment Spreadsheet with the most current reference data from the Department's website each month at the following address:

<https://connect.ncdot.gov/projects/construction/Construction%20Forms/Form%20SPA-3%20NCDOT%20Steel%20Price%20Adjustment%20Calculator.xlsx>

If the monthly Fastmarkets data is not available, the data for the most recent immediately preceding month will be used as the basis for adjustment.

### **Price Adjustment Calculations**

The price adjustment will be determined by comparing the percentage of change in index value listed in the proposal (BI) to the monthly index value (MI). (See included sample examples). Weights and date of shipment must be documented as required herein. The final price adjustment dollar value will be determined by multiplying this percentage increase or decrease in the index by the represented quantity of steel incorporated into the work, and the established bidding index (BI) subject to the limitations herein.

**Price increase/decrease will be computed as follows:**

$$\text{SPA} = ((\text{MI} / \text{BI}) - 1) * \text{BI} * (\text{Q} / 100)$$

Where;

SPA = Steel price adjustment in dollars

MI = Monthly Shipping Index. – in Dollars (\$) per hundredweight (CWT). Use the adjustment indices from the month the steel was shipped from the producing mill, received on the project, or member cast as defined in the Product Relationship Table.

BI = Bidding Index. - in Dollars (\$) per hundredweight (CWT). Use the adjustment indices as listed in the proposal.

Q = Quantity of steel, product, pounds actually incorporated into the work as documented by the Contractor, or Design Build Team and verified by the Engineer.

Calculations for price adjustment shall be shown separate from the monthly progress estimate and will not be included in the total cost of work for determination of progress or for extension of Contract time in accordance with Subarticle 108-10(B)(1).

Any apparent attempt to unbalance bids in favor of items subject to price adjustment may result in rejection of the bid proposal.

Adjustments will be paid or charged to the Contractor only. Any Contractor receiving an adjustment under this provision shall distribute the proper proportional part of such adjustments to the subcontractor who performed the applicable work.

Delays to the work caused by steel shortages may be justification for a Contract time extension but will not constitute grounds for claims for standby equipment, extended office overhead, or other costs associated with such delays.

If an increase in the steel material price is anticipated to exceed 50% of the original quoted price, the contractor must notify the Department within 7 days prior to purchasing the material. Upon receipt of such notification, the Department will direct the Contractor to either (1) proceed with the work or (2) suspend the work and explore the use of alternate options.

If the decrease in the steel material exceeds 50% of the original quoted price, the contractor may submit to the Department additional market index information specific to the item in question to dispute the decrease. The Department will review this information and determine if the decrease is warranted.

When the steel product adjustment date, as defined in the Product Relationship Table, is after the approved contract completion date, the steel price adjustments will be based on the lesser value of either the MI for the month of the approved contract completion date or the MI for the actual adjustment date.

If the price adjustment is based on estimated material quantities for that time, and a revision to the total material quantity is made in a subsequent or final estimate, an appropriate adjustment will be made to the price adjustment previously calculated. The adjustment will be based on the same indices used to calculate the price adjustment which is being revised. If the adjustment date of the revised material quantity cannot be determined, the adjustment for the quantity in question, will be based on the indices utilized to calculate the steel price adjustment for the last initial documentation package submission, for the steel product subject to adjustment, that was incorporated into the particular item of work, for which quantities are being finalized.

Example: Structural steel for a particular bridge was provided for in three different shipments with each having a different mill shipping date. The quantity of structural steel actually used for the bridge was calculated and a steel price adjustment was made in a progress payment. At the conclusion of the work an error was found in the plans of the final quantity of structural steel used for the bridge. The quantity to be adjusted cannot be directly related to any one of the three mill shipping dates. The steel price adjustment for the quantity in question would be calculated using the indices that were utilized to calculate the steel price adjustment for the quantity of structural steel represented by the last initial structural steel documentation package submission. The package used will be the one with the greatest sequential number.

**Extra Work/Force Account:**

When steel products, as specified herein, are added to the contract as extra work, in accordance with the provisions of Article 104-7 or 104-3, the Engineer will determine and specify in the supplemental agreement, the need for application of steel price adjustments on a case-by-case basis. No steel price adjustments will be made for any products manufactured from steel having an adjustment date prior to the supplemental agreement execution date. Price adjustments will be made as provided herein, except the Bidding Index will be based on the month in which the supplemental agreement pricing was executed.

For work performed on force account basis, reimbursement of actual material costs, along with the specified overhead and profit markup, will be considered to include full compensation for the current cost of steel and no steel price adjustments will be made.

**Examples Form SPA-2****Steel Price Adjustment Submission Form**Contract Number C203394 Bid Reference Month January 2019Submittal Date 8/31/2019Contract Line Item 237Line Item Description APPROX....LBS Structural SteelSequential Submittal  
Number 2

---

| Supplier            | Description of material           | Location information   | Quantity<br>in lbs. | Adjustment<br>Date |
|---------------------|-----------------------------------|------------------------|---------------------|--------------------|
| XYZ mill            | Structural Steel                  | Structure 3, Spans A-C | 1,200,000           | May 4, 2020        |
| ABC<br>distributing | Various channel & angle<br>shapes | Structure 3 Spans A-C  | 35,000              | July 14, 2020      |
|                     |                                   | Total Pounds of Steel  | 1,235,000           |                    |

Note: Attach the following supporting documentation to this form.

- Bill of Lading to support the shipping dates
- Supporting information for weight documentation (e.g., Pay item reference, Shop drawings, shipping documents, Standards Sheets, industry standards, or manufacturer's data)

By providing this data under my signature, I attest to the accuracy of and validity of the data on this form and certify that no deliberate misrepresentation in any manner has occurred.

Printed Name

Signature

---

---

**Examples Form SPA-2****Steel Price Adjustment Submission Form**Contract Number C203394 Bid Reference Month January 2019Submittal Date August 31, 2019Contract Line Item 237Line Item Description SUPPORT, OVRHD SIGN STR -DFEB – STA 36+00Sequential Submittal  
Number 2

| Supplier         | Description of material                    | Location information     | Quantity in lbs. | Adjustment Date   |
|------------------|--------------------------------------------|--------------------------|------------------|-------------------|
| XYZ mill         | Tubular Steel (Vertical legs)              | <u>-DFEB – STA 36+00</u> | 12000            | December 11, 2021 |
| PDQ Mill         | 4" Tubular steel (Horizontal legs)         | <u>-DFEB – STA 36+00</u> | 5900             | December 11, 2021 |
| ABC distributing | Various channel & angle shapes (see quote) | <u>-DFEB – STA 36+00</u> | 1300             | December 11, 2021 |
|                  | Catwalk assembly                           | <u>-DFEB – STA 36+00</u> | 2000             | December 11, 2021 |
| Nucor            | Flat plate                                 | <u>-DFEB – STA 36+00</u> | 650              | December 11, 2021 |
|                  |                                            | Total Pounds of Steel    | 21,850           |                   |

Note: Attach the following supporting documentation to this form.

- Bill of Lading to support the shipping dates
- Supporting information for weight documentation (e.g., Pay item reference, Shop drawings, shipping documents, Standards Sheets, industry standards, or manufacturer's data)

By providing this data under my signature, I attest to the accuracy of and validity of the data on this form and certify that no deliberate misrepresentation in any manner has occurred.

Printed Name

Signature

**Price Adjustment Sample Calculation (increase)**

---

Project bid on September 17, 2019

Line Item 635 “Structural Steel” has a plan quantity of 2,717,000 lbs.

Bidding Index for Structural Steel (Category 2) in the proposal was \$36.12/CWT = BI

450,000 lbs. of Structural Steel for Structure 2 at Station 44+08.60 were shipped to fabricator from the producing mill in same month, May 2021.

Monthly Index for Structural Steel (Category 2) for May 2021 was \$64.89/CWT = MI

The Steel Price Adjustment formula is as follows:

$$\text{SPA} = ((\text{MI} / \text{BI}) - 1) * \text{BI} * (\text{Q} / 100)$$

Where; SPA = Steel price adjustment in dollars

BI = Bidding Index – in dollars (\$) per hundredweight (CWT). Use the adjustment indices as listed in the proposal.

MI = Mill Shipping Index – in dollars (\$) per hundredweight (CWT). Use the adjustment indices from the month the steel was shipped from the producing mill, received on the project, or member cast as defined in the Product Relationship Table.

Q = Quantity of steel product, in pounds (lbs.) actually incorporated into the work as documented by the Contractor, or Design Build Team and verified by the Engineer.

$$\text{BI} = \$36.12 / \text{CWT}$$

$$\text{MI} = \$64.89 / \text{CWT}$$

$$\% \text{ change} = ((\text{MI} / \text{BI}) - 1) = (\$64.89 / \$36.12 - 1) = (1.79651 - 1) = 0.79651162791$$

$$\text{Q} = 450,000 \text{ lbs.}$$

$$\text{SPA} = 0.79651162791 \times \$36.12 \times (450,000 / 100)$$

$$\text{SPA} = 0.79651162791 * \$36.12 * 4,500$$

$$\text{SPA} = \$129,465 \text{ pay adjustment to Contractor for Structural Steel (Structure 2 at Station 44+08.60)}$$

**Price Adjustment Sample Calculation (decrease)**

---

Project bid on December 18, 2018

Line Item 635 Structural Steel has a plan quantity of 2,717,000 lbs.

Bidding Index for Structural Steel (Category 2) in the proposal was \$46.72/CWT = BI

600,000 lbs. of Structural Steel for Structure 1 at Station 22+57.68 were shipped to fabricator from the producing mill in same month, August 2020.

Monthly Index for Structural Steel (Category 2) for August 2020 was \$27.03/CWT = MI

The Steel Price Adjustment formula is as follows:

$$\text{SPA} = ((\text{MI} / \text{BI}) - 1) * \text{BI} * (\text{Q} / 100)$$

Where; SPA = Steel price adjustment in dollars

BI = Bidding Index – in dollars (\$) per hundredweight (CWT). Use the adjustment indices as listed in the proposal.

MI = Mill Shipping Index – in dollars (\$) per hundredweight (CWT). Use the adjustment indices from the month the steel was shipped from the producing mill, received on the project, or member cast as defined in the Product Relationship Table.

Q = Quantity of steel product, in pounds (lbs.) actually incorporated into the work as documented by the Contractor, or Design Build Team and verified by the Engineer.

$$\text{BI} = \$46.72 / \text{CWT}$$

$$\text{MI} = \$27.03 / \text{CWT}$$

$$\% \text{ change} = ((\text{MI} / \text{BI}) - 1) = (\$27.03 / \$46.72 - 1) = (0.57855 - 1) = -0.421446917808$$

$$\text{Q} = 600,000 \text{ lbs.}$$

$$\text{SPA} = -0.421446917808 * \$46.72 * (600,000 / 100)$$

$$\text{SPA} = -0.421446917808 * \$46.72 * 6,000$$

$$\text{SPA} = \$ 118,140.00 \text{ Credit to the Department for Structural Steel (Structure 1 at Station 22+57.68)}$$

**Price Adjustment Sample Calculation (increase)**

---

Project bid on July 16, 2020

Line Item 614 Reinforced Concrete Deck Slab has a plan quantity of 241974 lbs.

Bidding Index Reference Month was May 2020. Bidding Index for Reinforced Concrete Deck Slab (Category 1) in the proposal was \$29.21/CWT = BI

51,621 lbs. of reinforcing steel and 52,311 lbs. of epoxy coated reinforcing steel for Structure 2 at Station 107+45.55 -L- was shipped to fabricator from the producing mill in same month, May 2021.

Monthly Index for Reinforced Concrete Deck Slab (Category 1) for May 2021 was \$43.13/CWT = MI

The Steel Price Adjustment formula is as follows:

$$\text{SPA} = ((\text{MI} / \text{BI}) - 1) * \text{BI} * (\text{Q} / 100)$$

Where; SPA = Steel price adjustment in dollars

BI = Bidding Index – in dollars (\$) per hundredweight (CWT). Use the adjustment indices as listed in the proposal.

MI = Mill Shipping Index – in dollars (\$) per hundredweight (CWT). Use the adjustment indices from the month the steel was shipped from the producing mill, received on the project, or member cast as defined in the Product Relationship Table.

Q = Quantity of steel product, in pounds (lbs.) actually incorporated into the work as documented by the Contractor, or Design Build Team and verified by the Engineer.

$$\text{BI} = \$29.21 / \text{CWT}$$

$$\text{MI} = \$43.13 / \text{CWT}$$

$$\% \text{ change} = ((\text{MI} / \text{BI}) - 1) = (\$43.13 / \$29.21 - 1) = (1.47655 - 1) = 0.47654912701$$

$$\text{Q} = 103932 \text{ lbs.}$$

$$\text{SPA} = 0.47654912701 * \$29.21 * (103,932 / 100)$$

$$\text{SPA} = 0.47654912701 * \$29.21 * 1,039.32$$

SPA = \$14,467.33 Pay Adjustment to Contractor for Reinforced Concrete Deck Slab (Category 1) at Station 107+45.55 -L-



**SCHEDULE OF ESTIMATED COMPLETION PROGRESS:**

(7-15-08)(Rev. 6-16-26)

108-2

SP1 G58

The Contractor's attention is directed to the Standard Special Provision entitled *Availability of Funds Termination of Contracts* included elsewhere in this proposal. The Department of Transportation's schedule of estimated completion progress for this project as required by that Standard Special Provision is as follows:

| <b><u>Fiscal Year</u></b> | <b><u>Progress (% of Dollar Value)</u></b> |
|---------------------------|--------------------------------------------|
| 2027 (7/01/26 - 6/30/27)  | <b>16%</b> of Total Amount Bid             |
| 2028 (7/01/27 - 6/30/28)  | <b>47%</b> of Total Amount Bid             |
| 2029 (7/01/28 - 6/30/29)  | <b>34%</b> of Total Amount Bid             |
| 2030 (7/01/29 - 6/30/30)  | <b>3%</b> of Total Amount Bid              |

The Contractor shall also furnish his own progress schedule in accordance with Article 108-2 of the *Standard Specifications*. Any acceleration of the progress as shown by the Contractor's progress schedule over the progress as shown above shall be subject to the approval of the Engineer.

**DISADVANTAGED BUSINESS ENTERPRISE:**

(10-16-07)(Rev. 10-21-25)

102-15(J)

SP1 G61

**Description**

The purpose of this Special Provision is to carry out the U.S. Department of Transportation's policy of ensuring nondiscrimination in the award and administration of contracts financed in whole or in part with Federal funds. This provision is guided by 49 CFR Part 26.

**Definitions**

*Additional DBE Subcontractors* - Any DBE submitted at the time of bid that will not be used to meet the DBE goal. No submittal of a Letter of Intent is required.

*Committed DBE Subcontractor* - Any DBE submitted at the time of bid that is being used to meet the DBE goal by submission of a Letter of Intent. Or any DBE used as a replacement for a previously committed DBE firm.

*Contract Goal Requirement* - The approved DBE participation at time of award, but not greater than the advertised contract goal.

*DBE Goal* - A portion of the total contract, expressed as a percentage, that is to be performed by committed DBE subcontractor(s).

*Disadvantaged Business Enterprise (DBE)* - A firm certified as a Disadvantaged Business Enterprise through the North Carolina Unified Certification Program.

*Goal Confirmation Letter* - Written documentation from the Department to the bidder confirming the Contractor's approved, committed DBE participation along with a listing of the committed DBE firms.

*Manufacturer* - A firm that owns (or leases) and operates or maintains a factory or establishment that produces on the premises, the materials or supplies obtained by the Contractor. A firm that makes minor modifications to the materials, supplies, articles, or equipment is not a manufacturer.

*Regular Dealer* - A firm that owns (or leases), and operates a store, warehouse, or other establishment in which the materials or supplies required for the performance of the contract are bought, kept in sufficient quantities, and regularly sold to the public in the usual course of business. A regular dealer engages in, as its principal business and in its own name, the purchase and sale or lease of the products in question. A regular dealer in such bulk items as steel, concrete or concrete products, gravel, stone, asphalt and petroleum products need not keep such products in stock, if it owns and operates distribution equipment for the products. Any supplement of regular dealers' own distribution equipment shall be by a long-term operating lease and not on an ad hoc or contract-by-contract basis.

*Distributor* - A firm that engages in the regular sale or lease of the items specified by the contract. A distributor assumes responsibility for the items it purchases once they leave the point of origin (e.g., a manufacturer's facility), making it liable for any loss or damage not covered by the carrier's insurance.

*Replacement / Substitution* - A full or partial reduction in the amount of work subcontracted to a committed (or an approved substitute) DBE firm.

*North Carolina Unified Certification Program (NCUCP)* - A program that provides comprehensive services and information to applicants for DBE certification, such that an applicant is required to apply only once for a DBE certification that will be honored by all recipients of USDOT funds in the state and not limited to the Department of Transportation only. The Certification Program is in accordance with 49 CFR Part 26.

*United States Department of Transportation (USDOT)* - Federal agency responsible for issuing regulations (49 CFR Part 26) and official guidance for the DBE program.

### **Forms and Websites Referenced in this Provision**

*DBE Payment Tracking System* - On-line system in which the Contractor enters the payments made to DBE subcontractors who have performed work on the project.  
<https://apps.dot.state.nc.us/Vendor/PaymentTracking/>

*DBE-IS Subcontractor Payment Information* - Form for reporting the payments made to all DBE firms working on the project. This form is for paper bid projects only.  
<https://connect.ncdot.gov/business/Turnpike/Documents/Form%20DBE-IS%20Subcontractor%20Payment%20Information.pdf>

*RF-1 DBE Replacement Request Form* - Form for replacing a committed DBE.  
<https://connect.ncdot.gov/projects/construction/Construction%20Forms/DBE%20MBE%20WBE%20Replacement%20Form%20and%20Instructions.pdf>

*SAF Subcontract Approval Form* - Form required for approval to sublet the contract.

<https://connect.ncdot.gov/projects/construction/Construction%20Forms/SAF%20Form%20-%20Subcontract%20Approval%20Form%20Revised%2004-19.xlsm>

*JC-1 Joint Check Notification Form* - Form and procedures for joint check notification. The form acts as a written joint check agreement among the parties providing full and prompt disclosure of the expected use of joint checks.

<http://connect.ncdot.gov/projects/construction/Construction%20Forms/Joint%20Check%20Notification%20Form.pdf>

*Letter of Intent* - Form signed by the Contractor and the DBE subcontractor, manufacturer or regular dealer that affirms that a portion of said contract is going to be performed by the signed DBE for the estimated amount (based on quantities and unit prices) listed at the time of bid.

<http://connect.ncdot.gov/letting/LetCentral/Letter%20of%20Intent%20to%20Perform%20as%20a%20Subcontractor.pdf>

*Listing of DBE Subcontractors Form* - Form for entering DBE subcontractors on a project that will meet this DBE goal. This form is for paper bids only.

[http://connect.ncdot.gov/municipalities/Bid%20Proposals%20for%20LGA%20Content/08%20DBE%20Subcontractors%20\(Federal\).docx](http://connect.ncdot.gov/municipalities/Bid%20Proposals%20for%20LGA%20Content/08%20DBE%20Subcontractors%20(Federal).docx)

*Subcontractor Quote Comparison Sheet* - Spreadsheet for showing all subcontractor quotes in the work areas where DBEs quoted on the project. This sheet is submitted with good faith effort packages.

<http://connect.ncdot.gov/business/SmallBusiness/Documents/DBE%20Subcontractor%20Quote%20Comparison%20Example.xls>

*DBE Regular Dealer/Distributor Affirmation Form* – Form is used to make a preliminary counting determination for each DBE listed as a regular dealer or distributor to assess its eligibility for 60 or 40 percent credit, respectively of the cost of materials or supplies based on its demonstrated capacity and intent to perform as a regular dealer or distributor, as defined in section 49 CFR 26.55 under the contract at issue. A Contractor will submit the completed form with the Letter of Intent.

<https://connect.ncdot.gov/projects/construction/Construction%20Forms/DBE%20Regular%20Dealer-Distributor%20Affirmation%20Form%20-%20USDOT%202024.pdf>

## **DBE Goal**

**There is NO goal for participation by Disadvantaged Business Enterprises for this contract.**

## **Directory of Transportation Firms (Directory)**

Real-time information is available about firms doing business with the Department and firms that are certified through NCUCP in the Directory of Transportation Firms. Only firms identified in the Directory as DBE certified shall be used to meet the DBE goal. The Directory can be found at the following link.

<https://www.ebs.nc.gov/VendorDirectory/default.html>

The listing of an individual firm in the directory shall not be construed as an endorsement of the firm's capability to perform certain work.

### **Listing of DBE Subcontractors**

At the time of bid, bidders shall submit all DBE participation that they anticipate to use during the life of the contract. Only those identified to meet the DBE goal will be considered committed, even though the listing shall include both committed DBE subcontractors and additional DBE subcontractors. Additional DBE subcontractor participation submitted at the time of bid will be used toward the Department's overall race-neutral goal. Only those firms with current DBE certification at the time of bid opening will be acceptable for listing in the bidder's submittal of DBE participation. The Contractor shall indicate the following required information:

#### **(A) Electronic Bids**

Bidders shall submit a listing of DBE participation in the appropriate section of the electronic submittal file.

- (1) Submit the names and addresses of DBE firms identified to participate in the contract. If the bidder uses the updated listing of DBE firms shown in the electronic submittal file, the bidder may use the dropdown menu to access the name and address of the DBE firm.
- (2) Submit the contract line numbers of work to be performed by each DBE firm. When no figures or firms are entered, the bidder will be considered to have no DBE participation.
- (3) The bidder shall be responsible for ensuring that the DBE is certified at the time of bid by checking the Directory of Transportation Firms. If the firm is not certified at the time of the bid-letting, that DBE's participation will not count towards achieving the DBE goal.

#### **(B) Paper Bids**

- (1) *If the DBE goal is more than zero,*
  - (a) Bidders, at the time the bid proposal is submitted, shall submit a listing of DBE participation, including the names and addresses on *Listing of DBE Subcontractors* contained elsewhere in the contract documents in order for the bid to be considered responsive. Bidders shall indicate the total dollar value of the DBE participation for the contract.
  - (b) If bidders have no DBE participation, they shall indicate this on the *Listing of DBE Subcontractors* by entering the word "None" or the number "0." This form shall be completed in its entirety. **Blank forms will not be deemed to represent zero participation.** Bids submitted that do not have DBE participation indicated on the appropriate form will not

be read publicly during the opening of bids. The Department will not consider these bids for award and the proposal will be rejected.

- (c) The bidder shall be responsible for ensuring that the DBE is certified at the time of bid by checking the Directory of Transportation Firms. If the firm is not certified at the time of the bid-letting, that DBE's participation will not count towards achieving the corresponding goal.
- (2) *If the DBE goal is zero, entries on the Listing of DBE Subcontractors are not required for the zero goal, however any DBE participation that is achieved during the project shall be reported in accordance with requirements contained elsewhere in the special provision.*

### **DBE Prime Contractor**

When a certified DBE firm bids on a contract that contains a DBE goal, the DBE firm is responsible for meeting the goal or making good faith efforts to meet the goal, just like any other bidder. In most cases, a DBE bidder on a contract will meet the DBE goal by virtue of the work it performs on the contract with its own forces. However, all the work that is performed by the DBE bidder and any other DBE subcontractors will count toward the DBE goal. The DBE bidder shall list itself along with any DBE subcontractors, if any, in order to receive credit toward the DBE goal.

For example, if the DBE goal is 45% and the DBE bidder will only perform 40% of the contract work, the prime will list itself at 40%, and the additional 5% shall be obtained through additional DBE participation with DBE subcontractors or documented through a good faith effort.

DBE prime contractors shall also follow Sections A and B listed under *Listing of DBE Subcontractor* just as a non-DBE bidder would.

### **Written Documentation – Letter of Intent**

The bidder shall submit written documentation for each DBE that will be used to meet the DBE goal of the contract, indicating the bidder's commitment to use the DBE in the contract. This documentation shall be submitted on the Department's form titled *Letter of Intent*.

The documentation shall be received in the office of the State Contractor Utilization Engineer or at DBE@ncdot.gov no later than 10:00 a.m. of the sixth calendar day following opening of bids, unless the sixth day falls on an official state holiday. In that situation, it is due in the office of the State Contractor Utilization Engineer no later than 10:00 a.m. on the next official state business day.

If the bidder fails to submit the Letter of Intent from each committed DBE to be used toward the DBE goal, or if the form is incomplete (i.e. both signatures are not present), the DBE participation will not count toward meeting the DBE goal. If the lack of this participation drops the commitment below the DBE goal, the Contractor shall submit evidence of good faith efforts, completed in its entirety, to the State Contractor Utilization Engineer or DBE@ncdot.gov no later than 10:00 a.m. on the eighth calendar day following opening of bids, unless the eighth

day falls on an official state holiday. In that situation, it is due in the office of the State Contractor Utilization Engineer no later than 10:00 a.m. on the next official state business day.

### **Submission of Good Faith Effort**

If the bidder fails to meet or exceed the DBE goal, the apparent lowest responsive bidder shall submit to the Department documentation of adequate good faith efforts made to reach the DBE goal.

A hard copy and an electronic copy of this information shall be received in the office of the State Contractor Utilization Engineer or at DBE@ncdot.gov no later than 10:00 a.m. on the sixth calendar day following opening of bids unless the sixth day falls on an official state holiday. In that situation, it is due in the office of the State Contractor Utilization Engineer no later than 10:00 a.m. on the next official state business day. If the contractor cannot send the information electronically, then one complete set and 5 copies of this information shall be received under the same time constraints above.

Note: Where the information submitted includes repetitious solicitation letters, it will be acceptable to submit a representative letter along with a distribution list of the firms that were solicited. Documentation of DBE quotations shall be a part of the good faith effort submittal. This documentation may include written subcontractor quotations, telephone log notations of verbal quotations, or other types of quotation documentation.

### **Consideration of Good Faith Effort for Projects with DBE Goals More Than Zero**

Adequate good faith efforts mean that the bidder took all necessary and reasonable steps to achieve the goal which, by their scope, intensity, and appropriateness, could reasonably be expected to obtain sufficient DBE participation. Adequate good faith efforts also mean that the bidder actively and aggressively sought DBE participation. Mere *pro forma* efforts are not considered good faith efforts.

The Department will consider the quality, quantity, and intensity of the different kinds of efforts a bidder has made. Listed below are examples of the types of actions a bidder will take in making a good faith effort to meet the goal and are not intended to be exclusive or exhaustive, nor is it intended to be a mandatory checklist.

- (A) Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising, written notices, use of verifiable electronic means through the use of the NCDOT Directory of Transportation Firms) the interest of all certified DBEs who have the capability to perform the work of the contract. The bidder must solicit this interest within at least 10 days prior to bid opening to allow the DBEs to respond to the solicitation. Solicitation shall provide the opportunity to DBEs within the Division and surrounding Divisions where the project is located. The bidder must determine with certainty if the DBEs are interested by taking appropriate steps to follow up initial solicitations.

- (B) Selecting portions of the work to be performed by DBEs in order to increase the likelihood that the DBE goals will be achieved.
  - (1) Where appropriate, break out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise prefer to perform these work items with its own forces.
  - (2) Negotiate with subcontractors to assume part of the responsibility to meet the contract DBE goal when the work to be sublet includes potential for DBE participation (2<sup>nd</sup> and 3<sup>rd</sup> tier subcontractors).
- (C) Providing interested DBEs with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.
- (D)
  - (1) Negotiating in good faith with interested DBEs. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBEs that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBEs to perform the work.
  - (2) A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBEs is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a prime contractor to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Bidding contractors are not, however, required to accept higher quotes from DBEs if the price difference is excessive or unreasonable.
- (E) Not rejecting DBEs as being unqualified without sound reasons based on a thorough investigation of their capabilities. The bidder's standing within its industry, membership in specific groups, organizations, or associates and political or social affiliations (for example, union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the bidder's efforts to meet the project goal.
- (F) Making efforts to assist interested DBEs in obtaining bonding, lines of credit, or insurance as required by the recipient or bidder.
- (G) Making efforts to assist interested DBEs in obtaining necessary equipment, supplies, materials, or related assistance or services.

- (H) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; Federal, State, and local minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBEs. Contact within 7 days from the bid opening the Business Opportunity and Work Force Development Unit at BOWD@ncdot.gov to give notification of the bidder's inability to get DBE quotes.
- (I) Any other evidence that the bidder submits which shows that the bidder has made reasonable good faith efforts to meet the DBE goal.

In addition, the Department may take into account the following:

- (1) Whether the bidder's documentation reflects a clear and realistic plan for achieving the DBE goal.
- (2) The bidders' past performance in meeting the DBE goals.
- (3) The performance of other bidders in meeting the DBE goal. For example, when the apparent successful bidder fails to meet the DBE goal, but others meet it, you may reasonably raise the question of whether, with additional reasonable efforts the apparent successful bidder could have met the goal. If the apparent successful bidder fails to meet the DBE goal, but meets or exceeds the average DBE participation obtained by other bidders, the Department may view this, in conjunction with other factors, as evidence of the apparent successful bidder having made a good faith effort.

If the Department does not award the contract to the apparent lowest responsive bidder, the Department reserves the right to award the contract to the next lowest responsive bidder that can satisfy to the Department that the DBE goal can be met or that an adequate good faith effort has been made to meet the DBE goal.

### **Non-Good Faith Appeal**

The State Prequalification Engineer will notify the Contractor verbally and in writing of non-good faith. A Contractor may appeal a determination of non-good faith made by the Goal Compliance Committee. If a Contractor wishes to appeal the determination made by the Committee, they shall provide written notification to the State Prequalification Engineer. The appeal shall be made within 2 business days of notification of the determination of non-good faith.

### **Counting DBE Participation Toward Meeting DBE Goal**

#### **(A) Participation**

The total dollar value of the participation by a committed DBE will be counted toward the contract goal requirement. The total dollar value of participation by a committed DBE will be based upon the value of work performed by the DBE and the actual payments to DBE firms by the Contractor.



## (B) Joint Checks

Prior notification of joint check use shall be required when counting DBE participation for services or purchases that involves the use of a joint check. Notification shall be through submission of Form JC-1 (*Joint Check Notification Form*) and the use of joint checks shall be in accordance with the Department's Joint Check Procedures.

## (C) Subcontracts (Non-Trucking)

A DBE may enter into subcontracts. Work that a DBE subcontracts to another DBE firm may be counted toward the contract goal requirement. Work that a DBE subcontracts to a non-DBE firm does not count toward the contract goal requirement. If a DBE contractor or subcontractor subcontracts a significantly greater portion of the work of the contract than would be expected on the basis of standard industry practices, it shall be presumed that the DBE is not performing a commercially useful function. The DBE may present evidence to rebut this presumption to the Department. The Department's decision on the rebuttal of this presumption is subject to review by the Federal Highway Administration but is not administratively appealable to USDOT.

## (D) Joint Venture

When a DBE performs as a participant in a joint venture, the Contractor may count toward its contract goal requirement a portion of the total value of participation with the DBE in the joint venture, that portion of the total dollar value being a distinct clearly defined portion of work that the DBE performs with its forces.

## (E) Manufacturer, Regular Dealer, Distributor

A Contractor may count toward its DBE requirement 40 percent of its expenditures for materials or supplies (including transportation costs) from a DBE distributor, 60 percent of its expenditures for materials or supplies (including transportation costs) from a DBE regular dealer and 100 percent of such expenditures obtained from a DBE manufacturer.

A Contractor may count toward its DBE requirement the following expenditures to DBE firms that are not manufacturers, regular dealers or distributors:

- (1) The fees or commissions charged by a DBE firm for providing a *bona fide* service, such as professional, technical, consultant, or managerial services, or for providing bonds or insurance specifically required for the performance of a DOT-assisted contract, provided the fees or commissions are determined to be reasonable and not excessive as compared with fees and commissions customarily allowed for similar services.
- (2) With respect to materials or supplies purchased from a DBE, which is neither a manufacturer, regular dealer, nor a distributor count the entire amount of fees or commissions charged that the Department deems to be reasonable, including transportation charges for the delivery of materials or supplies. Do not count any portion of the cost of the materials and supplies themselves.

A Contractor will submit a completed *DBE Regular Dealer/Distributor Affirmation Form* with the Letter of Intent to the State Contractor Utilization Engineer or DBE@ncdot.gov. The State Contractor Utilization Engineer will make a preliminary assessment as to whether a DBE supplier has the demonstrated capacity to perform a commercially useful function (CUF) on a contract-by-contract basis *prior* to its participation.

### **Commercially Useful Function**

#### **(A) DBE Utilization**

The Contractor may count toward its contract goal requirement only expenditures to DBEs that perform a commercially useful function in the work of a contract. A DBE performs a commercially useful function when it is responsible for execution of the work of the contract and is carrying out its responsibilities by performing, managing, and supervising the work involved. To perform a commercially useful function, the DBE shall also be responsible with respect to materials and supplies used on the contract, for negotiating price, determining quality and quantity, ordering the material and installing (where applicable) and paying for the material itself. To determine whether a DBE is performing a commercially useful function, the Department will evaluate the amount of work subcontracted, industry practices, whether the amount the firm is to be paid under the contract is commensurate with the work it is performing and the DBE credit claimed for its performance of the work, and any other relevant factors.

#### **(B) DBE Utilization in Trucking**

The following factors will be used to determine if a DBE trucking firm is performing a commercially useful function:

- (1) The DBE shall be responsible for the management and supervision of the entire trucking operation for which it is responsible on a particular contract, and there shall not be a contrived arrangement for the purpose of meeting DBE goals.
- (2) The DBE shall itself own and operate at least one fully licensed, insured, and operational truck used on the contract.
- (3) The DBE receives credit for the total value of the transportation services it provides on the contract using trucks it owns, insures, and operates using drivers it employs.
- (4) The DBE may subcontract the work to another DBE firm, including an owner-operator who is certified as a DBE. The DBE who subcontracts work to another DBE receives credit for the total value of the transportation services the subcontracted DBE provides on the contract.
- (5) The DBE may also subcontract the work to a non-DBE firm, including from an owner-operator. The DBE who subcontracts the work to a non-DBE is entitled to credit for the total value of transportation services provided by the non-DBE subcontractor not to exceed the value of transportation services

provided by DBE-owned trucks on the contract. Additional participation by non-DBE subcontractors receives credit only for the fee or commission it receives as a result of the subcontract arrangement. The value of services performed under subcontract agreements between the DBE and the Contractor will not count towards the DBE contract requirement.

- (6) A DBE may lease truck(s) from an established equipment leasing business open to the general public. The lease must indicate that the DBE has exclusive use of and control over the truck. This requirement does not preclude the leased truck from working for others during the term of the lease with the consent of the DBE, so long as the lease gives the DBE absolute priority for use of the leased truck. This type of lease may count toward the DBE's credit as long as the driver is under the DBE's payroll.
- (7) Subcontracted/leased trucks shall display clearly on the dashboard the name of the DBE that they are subcontracted/leased to and their own company name if it is not identified on the truck itself. Magnetic door signs are not permitted.

### **DBE Replacement**

When a Contractor has relied on a commitment to a DBE subcontractor (or an approved substitute DBE subcontractor) to meet all or part of a contract goal requirement, the contractor shall not terminate the DBE subcontractor or any portion of its work for convenience. This includes, but is not limited to, instances in which the Contractor seeks to perform the work of the terminated subcontractor with another DBE subcontractor, a non-DBE subcontractor, or with the Contractor's own forces or those of an affiliate.

The Contractor must give notice in writing both by certified mail and email to the DBE subcontractor, with a copy to the Engineer of its intent to request to terminate a DBE subcontractor or any portion of its work, and the reason for the request. The Contractor must give the DBE subcontractor five (5) business days to respond to the Contractor's Notice of Intent to Request Termination and/or Substitution. If the DBE subcontractor objects to the intended termination/substitution, the DBE, within five (5) business days must advise the Contractor and the Department of the reasons why the action should not be approved. The five-day notice period shall begin on the next business day after written notice is provided to the DBE subcontractor.

A committed DBE subcontractor may only be terminated or any portion of its work after receiving the Department's written approval based upon a finding of good cause for the proposed termination and/or substitution. Good cause does not exist if the Contractor seeks to terminate a DBE or any portion of its work that it relied upon to obtain the contract so that the Contractor can self-perform the work for which the DBE was engaged, or so that the Contractor can substitute another DBE or non-DBE contractor after contract award. For purposes of this section, good cause shall include the following circumstances:

- (a) The listed DBE subcontractor fails or refuses to execute a written contract;
- (b) The listed DBE subcontractor fails or refuses to perform the work of its subcontract in a way consistent with normal industry standards. Provided, however, that good cause does

- not exist if the failure or refusal of the DBE subcontractor to perform its work on the subcontract results from the bad faith or discriminatory action of the prime contractor;
- (c) The listed DBE subcontractor fails or refuses to meet the prime contractor's reasonable, nondiscriminatory bond requirements;
  - (d) The listed DBE subcontractor becomes bankrupt, insolvent, or exhibits credit unworthiness;
  - (e) The listed DBE subcontractor is ineligible to work on public works projects because of suspension and debarment proceedings pursuant to 2 CFR parts 180, 215 and 1200 or applicable State law;
  - (f) The listed DBE subcontractor is not a responsible contractor;
  - (g) The listed DBE voluntarily withdraws from the project and provides written notice of withdrawal;
  - (h) The listed DBE is ineligible to receive DBE credit for the type of work required;
  - (i) A DBE owner dies or becomes disabled with the result that the listed DBE contractor is unable to complete its work on the contract; and
  - (j) Other documented good cause that compels the termination of the DBE subcontractor.

The Contractor shall comply with the following for replacement of a committed DBE:

(A) Performance Related Replacement

When a committed DBE is terminated for good cause as stated above, an additional DBE that was submitted at the time of bid may be used to fulfill the DBE commitment. A good faith effort will only be required for removing a committed DBE if there were no additional DBEs submitted at the time of bid to cover the same amount of work as the DBE that was terminated.

If a replacement DBE is not found that can perform at least the same amount of work as the terminated DBE, the Contractor shall submit a good faith effort documenting the steps taken. Such documentation shall include, but not be limited to, the following:

- (1) Copies of written notification to DBEs that their interest is solicited in contracting the work defaulted by the previous DBE or in subcontracting other items of work in the contract.
- (2) Efforts to negotiate with DBEs for specific subbids including, at a minimum:
  - (a) The names, addresses, and telephone numbers of DBEs who were contacted.
  - (b) A description of the information provided to DBEs regarding the plans and specifications for portions of the work to be performed.
- (3) A list of reasons why DBE quotes were not accepted.
- (4) Efforts made to assist the DBEs contacted, if needed, in obtaining bonding or insurance required by the Contractor.

**(B) Decertification Replacement**

- (1) When a committed DBE is decertified by the Department after the SAF (*Subcontract Approval Form*) has been received by the Department, the Department will not require the Contractor to solicit replacement DBE participation equal to the remaining work to be performed by the decertified firm. The participation equal to the remaining work performed by the decertified firm will count toward the contract goal requirement but not the overall goal.
  - (i) If the DBE's ineligibility is caused solely by its having exceeded the size standard during the performance of the contract. The Department may continue to count participation equal to the remaining work performed by the decertified firm which will count toward the contract goal requirement and overall goal.
  - (ii) If the DBE's ineligibility is caused solely by its acquisition by or merger with a non-DBE during the performance of the contract. The Department may not continue to count the portion of the decertified firm's performance on the contract remaining toward either the contract goal or the overall goal, even if the Contractor has executed a subcontract with the firm or the Department has executed a prime contract with the DBE that was later decertified.
- (2) When a committed DBE is decertified prior to the Department receiving the SAF (*Subcontract Approval Form*) for the named DBE firm, the Contractor shall take all necessary and reasonable steps to replace the DBE subcontractor with another DBE subcontractor to perform at least the same amount of work to meet the DBE goal requirement. If a DBE firm is not found to do the same amount of work, a good faith effort must be submitted to NCDOT (see A herein for required documentation).

All requests for replacement of a committed DBE firm shall be submitted to the Engineer for approval on Form RF-1 (*DBE Replacement Request*). If the Contractor fails to follow this procedure, the Contractor may be disqualified from further bidding for a period of up to 6 months.

**Changes in the Work**

When the Engineer makes changes that result in the reduction or elimination of work to be performed by a committed DBE, the Contractor will not be required to seek additional participation. When the Engineer makes changes that result in additional work to be performed by a DBE based upon the Contractor's commitment, the DBE shall participate in additional work to the same extent as the DBE participated in the original contract work.

When the Engineer makes changes that result in extra work, which has more than a minimal impact on the contract amount, the Contractor shall seek additional participation by DBEs unless otherwise approved by the Engineer.

When the Engineer makes changes that result in an alteration of plans or details of construction, and a portion or all of the work had been expected to be performed by a committed DBE, the Contractor shall seek participation by DBEs unless otherwise approved by the Engineer.

When the Contractor requests changes in the work that result in the reduction or elimination of work that the Contractor committed to be performed by a DBE, the Contractor shall seek additional participation by DBEs equal to the reduced DBE participation caused by the changes.

### **Reports and Documentation**

A SAF (*Subcontract Approval Form*) shall be submitted for all work which is to be performed by a DBE subcontractor. The Department reserves the right to require copies of actual subcontract agreements involving DBE subcontractors.

When using transportation services to meet the contract commitment, the Contractor shall submit a proposed trucking plan in addition to the SAF. The plan shall be submitted prior to beginning construction on the project. The plan shall include the names of all trucking firms proposed for use, their certification type(s), the number of trucks owned by the firm, as well as the individual truck identification numbers, and the line item(s) being performed.

Within 30 calendar days of entering into an agreement with a DBE for materials, supplies or services, not otherwise documented by the SAF as specified above, the Contractor shall furnish the Engineer a copy of the agreement. The documentation shall also indicate the percentage (60% or 100%) of expenditures claimed for DBE credit.

### **Reporting Disadvantaged Business Enterprise Participation**

The Contractor shall provide the Engineer with an accounting of payments made to all DBE firms, including material suppliers and contractors at all levels (prime, subcontractor, or second tier subcontractor). This accounting shall be furnished to the Engineer for any given month by the end of the following month. Failure to submit this information accordingly may result in the following action:

- (A) Withholding of money due in the next partial pay estimate; or
- (B) Removal of an approved contractor from the prequalified bidders' list or the removal of other entities from the approved subcontractors list.

While each contractor (prime, subcontractor, 2nd tier subcontractor) is responsible for accurate accounting of payments to DBEs, it shall be the prime contractor's responsibility to report all monthly and final payment information in the correct reporting manner.

Failure on the part of the Contractor to submit the required information in the time frame specified may result in the disqualification of that contractor and any affiliate companies from further bidding until the required information is submitted.

Failure on the part of any subcontractor to submit the required information in the time frame specified may result in the disqualification of that contractor and any affiliate companies from being approved for work on future DOT projects until the required information is submitted.

Contractors reporting transportation services provided by non-DBE lessees shall evaluate the value of services provided during the month of the reporting period only.

At any time, the Engineer can request written verification of subcontractor payments.

The Contractor shall report the accounting of payments through the Department's DBE Payment Tracking System.

### **Failure to Meet Contract Requirements**

Failure to meet contract requirements in accordance with Subarticle 102-15(J) of the *Standard Specifications* may be cause to disqualify the Contractor.

### **CERTIFICATION FOR FEDERAL-AID CONTRACTS:**

(3-21-90)

SP1 G85

The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

- (A) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
- (B) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, *Disclosure Form to Report Lobbying*, in accordance with its instructions.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by *Section 1352, Title 31, U.S. Code*. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such subrecipients shall certify and disclose accordingly.

**RESTRICTIONS ON ITS EQUIPMENT AND SERVICES:**

(11-17-20)

SP01 G090

All telecommunications, video or other ITS equipment or services installed or utilized on this project must be in conformance with UNIFORM ADMINISTRATIVE REQUIREMENTS, COST PRINCIPLES, AND AUDIT REQUIREMENTS FOR FEDERAL AWARDS **2 CFR, § 200.216 Prohibition on certain telecommunications and video surveillance services or equipment.**

**USE OF UNMANNED AIRCRAFT SYSTEM (UAS):**

(8-20-19)(Rev. 3-17-26)

SP1 G092

The Contractor shall adhere to all Federal, State and Local regulations and guidelines for the use of Unmanned Aircraft Systems (UAS). This includes but is not limited to US 14 CFR Part 107, NC GS 15A-300, American Security Drone Act of 2023 (ASDA), Office of Management and Budget (OMB) Memorandum M-26-02, all FAA rules, regulations and policies and all NCDOT UAS Policies. The required operator certifications include possessing a current Federal Aviation Administration (FAA) Remote Pilot Certificate, as well as operating a UAS registered with the FAA.

All UAS operations shall be approved by the Engineer prior to beginning the operations.

All contractors or subcontractors operating UAS shall have UAS specific general liability insurance to cover all operations under this contract.

The use of UAS is at the Contractor's discretion. No measurement or payment will be made for the use of UAS. In the event that the Department directs the Contractor to utilize UAS, payment will be in accordance with Article 104-7 Extra Work.

**EQUIPMENT IDLING GUIDELINES:**

(1-19-21)

107

SP1 G096

Exercise reduced fuel consumption and reduced equipment emissions during the construction of all work associated with this contract. Employees engaged in the construction of this project should turn off vehicles when stopped for more than thirty (30) minutes and off-highway equipment should idle no longer than fifteen (15) consecutive minutes.

These guidelines for turning off vehicles and equipment when idling do not apply to:

1. Idling when queuing.
2. Idling to verify the vehicle is in safe operating condition.
3. Idling for testing, servicing, repairing or diagnostic purposes.
4. Idling necessary to accomplish work for which the vehicle was designed (such as operating a crane, mixing concrete, etc.).
5. Idling required to bring the machine system to operating temperature.
6. Emergency vehicles, utility company, construction, and maintenance vehicles where the engines must run to perform needed work.
7. Idling to ensure safe operation of the vehicle.



8. Idling when the propulsion engine is providing auxiliary power for other than heating or air conditioning. (such as hydraulic systems for pavers)
9. When specific traffic, safety, or emergency situations arise.
10. If the ambient temperature is less than 32 degrees Fahrenheit. Limited idling to provide for the safety of vehicle occupants (e.g. to run the heater).
11. If the ambient temperature is greater than 90 degrees Fahrenheit. Limited idling to provide for the safety of vehicle occupants of off-highway equipment (e.g. to run the air conditioning) no more than 30 minutes.
12. Diesel powered vehicles may idle for up to 30 minutes to minimize restart problems.

Any vehicle, truck, or equipment in which the primary source of fuel is natural gas or electricity is exempt from the idling limitations set forth in this special provision.

**U.S. DEPARTMENT OF TRANSPORTATION HOTLINE:**

(11-22-94)

108-5

SP1 G100

To report bid rigging activities call: **1-800-424-9071**

The U.S. Department of Transportation (DOT) operates the above toll-free hotline Monday through Friday, 8:00 a.m. to 5:00 p.m. eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the hotline to report such activities.

The hotline is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

**SUBSURFACE INFORMATION:**

(7-1-95)(Rev. 8-16-22)

450

SP1 G112 A

Subsurface information is available on the roadway portion of this project.

**MAINTENANCE OF THE PROJECT:**

(11-20-07)(Rev. 1-16-24)

104-10

SP1 G125

Revise the *Standard Specifications* as follows:

**Page 1-35, Article 104-10 Maintenance of the Project, line 3,** add the following after the first sentence of the first paragraph:

All guardrail/guiderail within the project limits shall be included in this maintenance.

**Page 1-35, Article 104-10 MAINTENANCE OF THE PROJECT, line 8,** add the following as the last sentence of the first paragraph:

The Contractor shall perform weekly inspections of guardrail and guiderail and shall report damages to the Engineer on the same day of the weekly inspection. *Where damaged guardrail or guiderail is repaired or replaced as a result of maintaining the project in accordance with this article, such repair or replacement shall be performed within 7 consecutive calendar days of such inspection report.*

**Page 1-35, Article 104-10 MAINTENANCE OF THE PROJECT, lines 20-22,** replace the last sentence of the last paragraph with the following:

The Contractor will not be directly compensated for any maintenance operations necessary, except for maintenance of guardrail/guiderail, as this work will be considered incidental to the work covered by the various contract items. The provisions of Article 104-7, Extra Work, and Article 104-8, Compensation and Record Keeping will apply to authorized maintenance of guardrail/guiderail. Performance of weekly inspections of guardrail/guiderail, and the damage reports required as described above, will be considered to be an incidental part of the work being paid for by the various contract items.

**COOPERATION BETWEEN CONTRACTORS:**

(7-1-95)(Rev. 1-16-24)

105-7

SP1 G133

The Contractor's attention is directed to Article 105-7 of the *Standard Specifications*.

EB-5966 is located adjacent to this project and is anticipated for a September 15, 2027 Non-DOT Letting (LAP).

R-2233BA is located adjacent to this project and is anticipated for an April 18, 2028 Letting.

R-2233BB (C204397) is located in the vicinity of this project. C204397 is currently under construction and not anticipated to be completed prior to the letting of this project.

The Contractor on this project shall cooperate with the Contractor working within or adjacent to the limits of this project to the extent that the work can be carried out to the best advantage of all concerned.

**ELECTRONIC BIDDING:**

(8-18-26)

101, 102, 103

SP1 G140

Revise the *Standard Specifications* as follows:

**Page 1-4, Article 101-3, DEFINITIONS, BID (OR PROPOSAL) *Electronic Bid*, line 3,** replace “electronic bidding software” with “electronic bidding website”.

**Page 1-16, Subarticle 102-8(B), Electronic Bids, lines 13-14,** replace “electronic bidding software” with “electronic bidding website”.

**Page 1-18, Article 102-10, BID BOND OR BID DEPOSIT, line 43,** replace “electronic bidding software” with “electronic bidding website”.

**Page 1-18, Article 102-11, DELIVERY OF BIDS, line 47,** replace “electronic bidding software” with “electronic bidding website”.

**Page 1-25, Subarticle 103-4(B)(2), Electronic Bids, line 20,** replace the first paragraph with the following:

This form is located on the electronic submittal website. The bidder shall click on yes or no to indicate whether or not the bidder desires to limit the award, provide the award limit if desiring to limit the award, and provide the project number and county of the projects associated with the award limit.

**TWELVE MONTH GUARANTEE:**

(7-15-03)

108

SP1 G145

- (A) The Contractor shall guarantee materials and workmanship against latent and patent defects arising from faulty materials, faulty workmanship or negligence for a period of twelve months following the date of final acceptance of the work for maintenance and shall replace such defective materials and workmanship without cost to the Department. The Contractor will not be responsible for damage due to faulty design, normal wear and tear, for negligence on the part of the Department, and/or for use in excess of the design.
- (B) Where items of equipment or material carry a manufacturer's guarantee for any period in excess of twelve months, then the manufacturer's guarantee shall apply for that particular piece of equipment or material. The Department's first remedy shall be through the manufacturer although the Contractor is responsible for invoking the warranted repair work with the manufacturer. The Contractor's responsibility shall be limited to the term of the manufacturer's guarantee. NCDOT would be afforded the same warranty as provided by the Manufacturer.

This guarantee provision shall be invoked only for major components of work in which the Contractor would be wholly responsible for under the terms of the contract. Examples would include pavement structures, bridge components, and sign structures. This provision will not be used as a mechanism to force the Contractor to return to the project to make repairs or perform additional work that the Department would normally compensate the Contractor for. In addition, routine maintenance activities (i.e. mowing grass, debris removal, ruts in earth shoulders,) are not parts of this guarantee.

Appropriate provisions of the payment and/or performance bonds shall cover this guarantee for the project.

To ensure uniform application statewide the Division Engineer will forward details regarding the circumstances surrounding any proposed guarantee repairs to the Chief Engineer for review and approval prior to the work being performed.

**EROSION AND SEDIMENT CONTROL/STORMWATER CERTIFICATION:**

(1-16-07) (Rev. 10-15-24)

105-16, 225-2, 16

SP1 G180

**General**

Schedule and conduct construction activities in a manner that will minimize soil erosion and the resulting sedimentation and turbidity of surface waters. Comply with the requirements herein regardless of whether or not a National Pollution discharge Elimination System (NPDES) permit for the work is required.

Establish a chain of responsibility for operations and subcontractors' operations to ensure that the *Erosion and Sediment Control/Stormwater Pollution Prevention Plan* is implemented and maintained over the life of the contract.

- (A) *Certified Supervisor* - Provide a certified Erosion and Sediment Control/Stormwater Supervisor to manage the Contractor and subcontractor operations, insure compliance with Federal, State and Local ordinances and regulations, and manage the Quality Control Program.
- (B) *Certified Foreman* - Provide a certified, trained foreman for each construction operation that increases the potential for soil erosion or the possible sedimentation and turbidity of surface waters.
- (C) *Certified Installer* - Provide a certified installer to install or direct the installation for erosion or sediment/stormwater control practices.
- (D) *Certified Designer* - Provide a certified designer for the design of the erosion and sediment control/stormwater component of reclamation plans and, if applicable, for the design of the project erosion and sediment control/stormwater plan.

### **Roles and Responsibilities**

- (A) *Certified Erosion and Sediment Control/Stormwater Supervisor* - The Certified Supervisor shall be Level II and responsible for ensuring the erosion and sediment control/stormwater plan is adequately implemented and maintained on the project and for conducting the quality control program. The Certified Supervisor shall be on the project within 24 hours notice from initial exposure of an erodible surface to the project's final acceptance. Perform the following duties:
  - (1) *Manage Operations* - Coordinate and schedule the work of subcontractors so that erosion and sediment control/stormwater measures are fully executed for each operation and in a timely manner over the duration of the contract.
    - (a) Oversee the work of subcontractors so that appropriate erosion and sediment control/stormwater preventive measures are conformed to at each stage of the work.
    - (b) Prepare the required National Pollutant Discharge Elimination System (NPDES) Inspection Record and submit to the Engineer.
    - (c) Attend all weekly or monthly construction meetings to discuss the findings of the NPDES inspection and other related issues.
    - (d) Implement the erosion and sediment control/stormwater site plans requested.
    - (e) Provide any needed erosion and sediment control/stormwater practices for the Contractor's temporary work not shown on the plans, such as, but not limited to work platforms, temporary construction, pumping operations, plant and storage yards, and cofferdams.

- (f) Acquire applicable permits and comply with requirements for borrow pits, dewatering, and any temporary work conducted by the Contractor in jurisdictional areas.
  - (g) Conduct all erosion and sediment control/stormwater work in a timely and workmanlike manner.
  - (h) Fully perform and install erosion and sediment control/stormwater work prior to any suspension of the work.
  - (i) Coordinate with Department, Federal, State and Local Regulatory agencies on resolution of erosion and sediment control/stormwater issues due to the Contractor's operations.
  - (j) Ensure that proper cleanup occurs from vehicle tracking on paved surfaces or any location where sediment leaves the Right-of-Way.
  - (k) Have available a set of erosion and sediment control/stormwater plans that are initialed and include the installation date of Best Management Practices. These practices shall include temporary and permanent groundcover and be properly updated to reflect necessary plan and field changes for use and review by Department personnel as well as regulatory agencies.
- (2) Requirements set forth under the NPDES Permit - The Department's NPDES Stormwater permit (NCS000250) outlines certain objectives and management measures pertaining to construction activities. The permit references *NCG010000, General Permit to Discharge Stormwater* under the NPDES, and states that the Department shall incorporate the applicable requirements into its delegated Erosion and Sediment Control Program for construction activities disturbing one or more acres of land. The Department further incorporates these requirements on all contracted bridge and culvert work at jurisdictional waters, regardless of size. Some of the requirements are, but are not limited to:
- (a) Control project site waste to prevent contamination of surface or ground waters of the state, i.e. from equipment operation/maintenance, construction materials, concrete washout, chemicals, litter, fuels, lubricants, coolants, hydraulic fluids, any other petroleum products, and sanitary waste.
  - (b) Inspect erosion and sediment control/stormwater devices and stormwater discharge outfalls at least once every 7 calendar days and within 24 hours after a rainfall event equal to or greater than 1.0 inch that occurs within a 24 hour period. Additional monitoring may be required at the discretion of Division of Water Resources personnel if the receiving stream is 303(d) listed for turbidity and the project has had documented problems managing turbidity.
  - (c) Maintain an onsite rain gauge or use the Department's Multi-Sensor Precipitation Estimate website to maintain a daily record of rainfall amounts and dates.
  - (d) Maintain erosion and sediment control/stormwater inspection records for review by Department and Regulatory personnel upon request.
  - (e) Implement approved reclamation plans on all borrow pits, waste sites and staging areas.

- (f) Maintain a log of turbidity test results as outlined in the Department's Procedure for Monitoring Borrow Pit Discharge.
  - (g) Provide secondary containment for bulk storage of liquid materials.
  - (h) Provide training for employees concerning general erosion and sediment control/stormwater awareness, the Department's NPDES Stormwater Permit NCS000250 requirements, and the applicable requirements of the *General Permit, NCG010000*.
  - (i) Report violations of the NPDES permit to the Engineer immediately who will notify the Division of Water Quality Regional Office within 24 hours of becoming aware of the violation.
- (3) Quality Control Program - Maintain a quality control program to control erosion, prevent sedimentation and follow provisions/conditions of permits. The quality control program shall:
  - (a) Follow permit requirements related to the Contractor and subcontractors' construction activities.
  - (b) Ensure that all operators and subcontractors on site have the proper erosion and sediment control/stormwater certification.
  - (c) Notify the Engineer when the required certified erosion and sediment control/stormwater personnel are not available on the job site when needed.
  - (d) Conduct the inspections required by the NPDES permit.
  - (e) Take corrective actions in the proper timeframe as required by the NPDES permit for problem areas identified during the NPDES inspections.
  - (f) Incorporate erosion control into the work in a timely manner and stabilize disturbed areas with mulch/seed or vegetative cover on a section-by-section basis.
  - (g) Use flocculants approved by state regulatory authorities where appropriate and where required for turbidity and sedimentation reduction.
  - (h) Ensure proper installation and maintenance of temporary erosion and sediment control devices.
  - (i) Remove temporary erosion or sediment control devices when they are no longer necessary as agreed upon by the Engineer.
  - (j) The Contractor's quality control and inspection procedures shall be subject to review by the Engineer. Maintain NPDES inspection records and make records available at all times for verification by the Engineer.
- (B) *Certified Foreman* - At least one Certified Foreman shall be onsite for each type of work listed herein during the respective construction activities to control erosion, prevent sedimentation and follow permit provisions:
  - (1) Foreman in charge of grading activities
  - (2) Foreman in charge of bridge or culvert construction over jurisdictional areas
  - (3) Foreman in charge of utility activities

The Contractor may request to use the same person as the Level II Supervisor and Level II Foreman. This person shall be onsite whenever construction activities as

described above are taking place. This request shall be approved by the Engineer prior to work beginning.

The Contractor may request to name a single Level II Foreman to oversee multiple construction activities on small bridge or culvert replacement projects. This request shall be approved by the Engineer prior to work beginning.

- (C) *Certified Installers* - Provide at least one onsite, Level I Certified Installer for each of the following erosion and sediment control/stormwater crew:

- (1) Seeding and Mulching
- (2) Temporary Seeding
- (3) Temporary Mulching
- (4) Sodding
- (5) Silt fence or other perimeter erosion/sediment control device installations
- (6) Erosion control blanket installation
- (7) Hydraulic tackifier installation
- (8) Turbidity curtain installation
- (9) Rock ditch check/sediment dam installation
- (10) Ditch liner/matting installation
- (11) Inlet protection
- (12) Riprap placement
- (13) Stormwater BMP installations (such as but not limited to level spreaders, retention/detention devices)
- (14) Pipe installations within jurisdictional areas

If a Level I *Certified Installer* is not onsite, the Contractor may substitute a Level II Foreman for a Level I Installer, provided the Level II Foreman is not tasked to another crew requiring Level II Foreman oversight.

- (D) *Certified Designer* - Include the certification number of the Level III Certified Designer on the erosion and sediment control/stormwater component of all reclamation plans and if applicable, the certification number of the Level III Certified Designer on the design of the project erosion and sediment control/stormwater plan.

### **Preconstruction Meeting**

Furnish the names of the *Certified Erosion and Sediment Control/Stormwater Supervisor*, *Certified Foremen*, *Certified Installers* and *Certified Designer* and notify the Engineer of changes in certified personnel over the life of the contract within 2 days of change.

### **Ethical Responsibility**

Any company performing work for the North Carolina Department of Transportation has the ethical responsibility to fully disclose any reprimand or dismissal of an employee resulting from improper testing or falsification of records.

**Revocation or Suspension of Certification**

Upon recommendation of the Chief Engineer to the certification entity, certification for *Supervisor, Certified Foremen, Certified Installers* and *Certified Designer* may be revoked or suspended with the issuance of an *Immediate Corrective Action (ICA)*, *Notice of Violation (NOV)*, or *Cease and Desist Order* for erosion and sediment control/stormwater related issues.

The Chief Engineer may recommend suspension or permanent revocation of certification due to the following:

- (A) Failure to adequately perform the duties as defined within this certification provision.
- (B) Issuance of an ICA, NOV, or Cease and Desist Order.
- (C) Failure to fully perform environmental commitments as detailed within the permit conditions and specifications.
- (D) Demonstration of erroneous documentation or reporting techniques.
- (E) Cheating or copying another candidate's work on an examination.
- (F) Intentional falsification of records.
- (G) Directing a subordinate under direct or indirect supervision to perform any of the above actions.
- (H) Dismissal from a company for any of the above reasons.
- (I) Suspension or revocation of one's certification by another entity.

Suspension or revocation of a certification will be sent by certified mail to the certificant and the Corporate Head of the company that employs the certificant.

A certificant has the right to appeal any adverse action which results in suspension or permanent revocation of certification by responding, in writing, to the Chief Engineer within 10 calendar days after receiving notice of the proposed adverse action.

Chief Engineer  
1536 Mail Service Center  
Raleigh, NC 27699-1536

Failure to appeal within 10 calendar days will result in the proposed adverse action becoming effective on the date specified on the certified notice. Failure to appeal within the time specified will result in a waiver of all future appeal rights regarding the adverse action taken. The certificant will not be allowed to perform duties associated with the certification during the appeal process.

The Chief Engineer will hear the appeal and make a decision within 7 days of hearing the appeal. Decision of the Chief Engineer will be final and will be made in writing to the certificant.

If a certification is temporarily suspended, the certificant shall pass any applicable written examination and any proficiency examination, at the conclusion of the specified suspension period, prior to having the certification reinstated.



**Measurement and Payment**

All work described within this provision and the role of Certified Erosion and Sediment Control/Stormwater Supervisor, Certified Foremen, Certified Installers and Certified Designer will be incidental to the project for which no direct compensation will be made.

**PROCEDURE FOR MONITORING BORROW PIT DISCHARGE:**

(2-20-07) (Rev. 1-16-24)

105-16, 230, 801

SP1 G181

Water discharge from borrow pit sites shall not cause surface waters to exceed 50 NTUs (nephelometric turbidity unit) in streams not designated as trout waters and 10 NTUs in streams, lakes or reservoirs designated as trout waters. For lakes and reservoirs not designated as trout waters, the turbidity shall not exceed 25 NTUs. If the turbidity exceeds these levels due to natural background conditions, the existing turbidity level shall not be increased.

If during any operating day, the downstream water quality exceeds the standard, the Contractor shall do all of the following:

- (A) Either cease discharge or modify the discharge volume or turbidity levels to bring the downstream turbidity levels into compliance, or
- (B) Evaluate the upstream conditions to determine if the exceedance of the standard is due to natural background conditions. If the background turbidity measurements exceed the standard, operation of the pit and discharge can continue as long as the stream turbidity levels are not increased due to the discharge.
- (C) Measure and record the turbidity test results (time, date and sampler) at all defined sampling locations 30 minutes after startup and at a minimum, one additional sampling of all sampling locations during that 24-hour period in which the borrow pit is discharging.
- (D) Notify DWQ within 24 hours of any stream turbidity standard exceedances that are not brought into compliance.

During the Environmental Assessment required by Article 230-4 of the *Standard Specifications*, the Contractor shall define the point at which the discharge enters into the State's surface waters and the appropriate sampling locations. Sampling locations shall include points upstream and downstream from the point at which the discharge enters these waters. Upstream sampling location shall be located so that it is not influenced by backwater conditions and represents natural background conditions. Downstream sampling location shall be located at the point where complete mixing of the discharge and receiving water has occurred.

The discharge shall be closely monitored when water from the dewatering activities is introduced into jurisdictional wetlands. Any time visible sedimentation (deposition of sediment) on the wetland surface is observed, the dewatering activity will be suspended until turbidity levels in the stilling basin can be reduced to a level where sediment deposition does not occur. Staining of wetland surfaces from suspended clay particles, occurring after evaporation or infiltration, does not constitute sedimentation. No activities shall occur in wetlands that adversely affect the functioning of a wetland. Visible sedimentation will be considered an indication of possible adverse impacts on wetland use.

The Engineer will perform independent turbidity tests on a random basis. These results will be maintained in a log within the project records. Records will include, at a minimum, turbidity test results, time, date and name of sampler. Should the Department's test results exceed those of the Contractor's test results, an immediate test shall be performed jointly with the results superseding the previous test results of both the Department and the Contractor.

The Contractor shall use the *NCDOT Turbidity Reduction Options for Borrow Pits Matrix*, available at <https://connect.ncdot.gov/resources/roadside/FieldOperationsDocuments/TurbidityReductionOptionSheet.pdf> to plan, design, construct, and maintain BMPs to address water quality standards. Tier I Methods include stilling basins which are standard compensatory BMPs. Other Tier I methods are noncompensatory and shall be used when needed to meet the stream turbidity standards. Tier II Methods are also noncompensatory and are options that may be needed for protection of rare or unique resources or where special environmental conditions exist at the site which have led to additional requirements being placed in the DWQ's 401 Certifications and approval letters, Isolated Wetland Permits, Riparian Buffer Authorization or a DOT Reclamation Plan's Environmental Assessment for the specific site. Should the Contractor exhaust all Tier I Methods on a site exclusive of rare or unique resources or special environmental conditions, Tier II Methods may be required by regulators on a case by case basis per supplemental agreement.

The Contractor may use cation exchange capacity (CEC) values from proposed site borings to plan and develop the bid for the project. CEC values exceeding 15 milliequivalents per 100 grams of soil may indicate a high potential for turbidity and should be avoided when dewatering into surface water is proposed.

No additional compensation for monitoring borrow pit discharge will be paid.

**PROJECT SPECIAL PROVISIONS****ROADWAY****CLEARING AND GRUBBING - METHOD II:**

(9-17-02)(Rev. 3-19-24)

200

SP2 R02A

Perform clearing on this project to the limits established by Method - II shown on Standard Drawing No. 200.02 of the *Roadway Standard Drawings*. Conventional clearing methods may be used except where permit drawings or conditions have been included in the proposal which require certain areas to be cleared by hand methods.

**BUILDING REMOVAL:**

(1-1-02) (Rev. 1-16-24)

215

SP2 R15 A

Remove the buildings, underground storage tanks and appurtenances listed below in accordance with Section 215 of the *Standard Specifications*:

| Item # | Parcel # | Item Removal             | Location                   |
|--------|----------|--------------------------|----------------------------|
| 029    | 057      | Abandoned Train Building | SS 27+30.00, LT of SL -L3- |

**SHOULDER AND FILL SLOPE MATERIAL:**

(5-21-02)(Rev. 1-16-24)

235, 560

SP2 R45 A

**Description**

Perform the required shoulder and slope construction for this project in accordance with the applicable requirements of Section 560 and Section 235 of the *Standard Specifications*.

**Measurement and Payment**

Where the material has been obtained from an authorized stockpile or from a borrow source and *Borrow Excavation* is not included in the contract, no direct payment will be made for this work, as the cost of this work will be part of the work being paid at the contract lump sum price for *Grading*. If *Borrow Excavation* is included in this contract and the material has been obtained from an authorized stockpile or from a borrow source, measurement and payment will be as provided in Section 230 of the *Standard Specifications* for *Borrow Excavation*.

**FLOWABLE FILL:**

(9-17-02) (Rev. 1-16-24)

300, 340, 1000, 1530, 1540, 1550

SP3 R30

**Description**

This work consists of all work necessary to place flowable fill in accordance with these provisions, the plans, and as directed.

**Materials**

Refer to Division 10 of the *Standard Specifications*.

**Item**

Flowable Fill

**Section**

1000-7

**Construction Methods**

Discharge flowable fill material directly from the truck into the space to be filled, or by other approved methods. The mix may be placed full depth or in lifts as site conditions dictate. The Contractor shall provide a method to plug the ends of the existing pipe in order to contain the flowable fill.

**Measurement and Payment**

At locations where flowable fill is called for on the plans and a pay item for flowable fill is included in the contract, *Flowable Fill* will be measured in cubic yards and paid as the actual number of cubic yards that have been satisfactorily placed and accepted. Such price and payment will be full compensation for all work covered by this provision including, but not limited to, the mix design, furnishing, hauling, placing and containing the flowable fill.

Payment will be made under:

**Pay Item**

Flowable Fill

**Pay Unit**

Cubic Yard

**CORRUGATED ALUMINUM ALLOY CULVERT PIPE:**

(9-21-21)(Rev. 1-16-24)

305, 310

SP3 R34

Revise the *Standard Specifications* as follows:

**Page 3-5, Article 305-2, MATERIALS**, add the following after line 16:

**Item**

Waterborne Paint

Hot Bitumen

**Section**

1080-9

1081-3

**Page 3-5, Article 305-3, CONSTRUCTION METHODS**, add the following after line 26:

Coating must be applied to the aluminum when in contact with concrete. Immediately prior to coating, aluminum surfaces to be coated shall be cleaned by a method that will remove all dirt, oil, grease, chips, and other foreign substances. Aluminum to be coated shall be given one coat of suitable quality coating such as:

Approved waterborne paint (Section 1080-9)

Approved Hot Bitumen (Section 1081-3)

Other coating materials may be submitted to the Engineer for approval.

**Page 3-7, Article 310-6, MEASUREMENT AND PAYMENT, lines 10-11,** delete the fourth sentence and replace with the following:

Select bedding and backfill material and coating will be included in the cost of the installed pipe.

**PRICE ADJUSTMENT - ASPHALT BINDER FOR PLANT MIX:**

(11-21-00)(Rev. 1-16-24)

620

SP6 R25

Price adjustments for asphalt binder for plant mix will be made in accordance with Section 620 of the *Standard Specifications*.

The base price index for asphalt binder for plant mix is **\$ 765.63** per ton.

This base price index represents an average of F.O.B. selling prices of asphalt binder at supplier's terminals on **July 1, 2026**.

**DELETION OF FINAL SURFACE TESTING REQUIREMENTS:**

(1-20-25)

610

SP6 R045A

Revise the *Standard Specifications* as follows:

**Pages 6-24 to 6-30, Article 610-13 FINAL SURFACE TESTING AND ACCEPTANCE,** delete Article 610-13 in its entirety.

**CONCRETE TRUCK APRON AND CURB AND GUTTER:**

**Description**

Construct concrete curb and gutter in accordance with Section 846 of the *Standard Specifications*, the *Roadway Standard Drawings* No. 846.01 as modified by the typical section in the plans and this special provision.

Construct the concrete truck apron in accordance with the applicable requirements of Division 7 of the *Standard Specifications*, the plans and this special provision.

**Materials**

Use materials meeting the applicable requirements of Article 846-2, Article 710-2 and Section 700 of the *Standard Specifications* except all 1'-6" concrete curb and gutter in the roundabout and 12" concrete truck apron respectively shall be Class AA as shown in the plans.

Portland cement concrete, Class AA shall meet the requirements of Section 1000 of the *Standard Specifications*.

Welded wire reinforcement shall meet the requirements of Section 1070 of the *Standard Specifications*.

**Construction Methods**

Construct concrete curb and gutter in accordance with Article 846-3 of the *Standard Specifications*, the plans and as directed by the Engineer.

Construct concrete truck apron in accordance with the applicable requirements of Article 710-3 and Section 700 of the *Standard Specifications*, the plans and as directed by the Engineer. Final surface testing is not required.

Construct concrete truck apron consisting of 12 inches of Portland cement concrete pavement reinforced with steel welded wire reinforcement, size 4x4 W5.5XW5.5 or 6x6 W8.5X8.5. A heavier wire reinforcement, approved by the Engineer, may be used at no additional cost to the Department. Position the steel welded wire reinforcement at mid-depth of the slab. Joints for the 12 inch concrete truck apron shall be radial. Expansion joint spacing shall not exceed 60 feet and contraction joint spacing shall be 1/8 inches wide and 4 inches deep not exceeding 15 feet on centers, measured at the outside edge of the apron, or as directed by the Engineer.

**Measurement and Payment**

*1'-6" Concrete Curb and Gutter, Class AA Concrete* will be measured and paid for per linear foot, accepted in place, along the surface of the top of the curb. Work includes providing all materials, placing all concrete, excavating and backfilling, forming, finishing, constructing and sealing joints, and all incidentals necessary to complete the work.

*12" Concrete Truck Apron, Class AA Concrete* will be measured and paid for in square yards, measured along the surface of the completed and accepted work. Such price and payment will be full compensation for all work of constructing the truck apron, including but not limited to excavating and backfilling, furnishing and placing concrete, and constructing and sealing joints.

Payment will be made under:

| <b>Pay Item</b>                                   | <b>Pay Unit</b> |
|---------------------------------------------------|-----------------|
| 1'-6" Concrete Curb and Gutter, Class AA Concrete | Linear Foot     |
| 12" Concrete Truck Apron, Class AA Concrete       | Square Yard     |

**4" CONCRETE SIDE PATH****Description**

The Contractor shall construct 4" Concrete Side Path with wire mesh as shown in the plans, in accordance with the applicable requirements of Section 848 of the *Standard Specifications*, and as directed by the Engineer.

**Materials**

Concrete shall be Class AA Concrete meeting the requirements of Section 1000 of the *Standard Specifications*.

Wire mesh reinforcement shall be 4x4-W3.5xW3.5 welded wire fabric meeting the requirements of Section 1070 of the *Standard Specifications*.

### **Construction Methods**

Construct concrete path in accordance with Section 848 of the *Standard Specifications*.

### **Measurement and Payment**

*4" Concrete Side Path* will be measured and paid for in square yards measured along the surface of the completed and accepted work. Such price and payment will include all materials, tools, labor, equipment and incidentals necessary to satisfactorily complete the work.

Payment will be made under:

| <b>Pay Item</b>       | <b>Pay Unit</b> |
|-----------------------|-----------------|
| 4" Concrete Side Path | SY              |

### **FRAME WITH GRATE (Driveway Drop Inlet):**

(3-21-00)(Rev. 1-16-24)

SPI 8-35

### **Description**

Provide grates for driveway drop inlets that are fabricated steel or cast iron. Provide grates that are of a design and weight that is recommended by the manufacturer as being adequate for HS-20 loadings. Furnish a manufacturer's certification stating that the grates and frame furnished on the project have been designed and manufactured to be adequate for an HS-20 loading. Provide grates with a minimum clear waterway opening of 50 in<sup>2</sup> per 1'-0" length of grate.

If the frame and grate is made from fabricated steel, the requirements of Article 1074-9 of the *Standard Specifications* will be applicable. If the grate and frame is made from iron castings, the requirements of Article 1074-7 of the *Standard Specifications* will be applicable.

### **Measurement and Payment**

*Frame with Grates, Driveway Drop Inlet* will be measured and paid for as the actual number of linear feet that have been incorporated into the completed and accepted work. Such price and payment will be full compensation for furnishing the grates and frame, and all labor and incidentals necessary to complete the work.

Payment will be made under:

| <b>Pay Item</b>                        | <b>Pay Unit</b> |
|----------------------------------------|-----------------|
| Frame with Grates, Driveway Drop Inlet | Linear Foot     |

**DETECTABLE WARNING SURFACE AT CURB RAMPS:**

(8-19-25)

848

SP8 R52A

**Description**

Install detectable warning surface at curb ramps as shown in the plans or as directed by the Engineer, in accordance with Section 848 of the *Standard Specifications* and this special provision.

**Materials**

Detectable warning surface materials shall consist of raised truncated domes found on the NCDOT APL, meet the requirements of Article 848-2 of the *Standard Specifications* and be capable of being affixed to or anchored in the concrete sidewalk, including green concrete defined as concrete that has set but not appreciably hardened, cured concrete, or asphalt pavement. Surface applied such as glued or stick down applications are prohibited for permanent installations unless approved by the Engineer.

The detectable warning surface shall be uniform in color and texture, be free of cracks or other defects. The color shall be an approximate visual match to the color specified in the contract or as approved by the Engineer.

**Construction Methods**

Install all detectable warning surface in accordance with the manufacturer's recommendations, Article 848-3 of the *Standard Specifications* and as approved by the Engineer. Ensure the surface is free of debris and irregularities prior to placing the detectable warning on the surface. Place in fresh concrete, before the concrete has reached initial set, or on a hardened cement concrete surface or asphalt pavement surface. Secure permanent installations with mechanical fasteners. No cutting of the coated colored truncated domes is allowed. Embossing or stamping the wet concrete to achieve the truncated dome pattern or using a mold into which a catalyst-hardened material is applied is not allowed. Detectable warning surfaces shall be 24 inches in the direction of travel and extend the full width of the flush surface. The detectable warning surface shall show no appreciable fading, lifting or shrinkage and fit contours, breaks and faults of concrete and asphalt surfaces and show no significant tearing, rollback, lifting or other signs of poor adhesion.

Remove and replace any damaged or misaligned detectable warning surfaces and repair any damage to adjacent facilities prior to final acceptance at no cost to the Department. The finished installation shall meet all applicable ADA and Public Right-of-Way Accessibility Guidelines (PROWAG) requirements for placement, orientation, surface condition, and visual contrast.

**Measurement and Payment**

The detectable warning surface at curb ramps are incidental to *Concrete Curb Ramps, Retrofit Existing Curb Ramps*, and/or *Remove and Replace Curb Ramps* in accordance with Article 848-4 of the *Standard Specifications*.



**BICYCLE/PEDESTRIAN SAFETY RAIL:**

(7-18-23)(Rev. 10-15-24)

SPI 8-52

Furnish and install steel pipe handrail at locations as shown in the plans, in accordance with the detail in the plans and as directed by the Engineer.

**Measurement and Payment**

*Bicycle/Pedestrian Safety Rail* will be measured and paid as the actual number of linear feet of steel pipe handrail measured along the top of the handrail to the nearest 0.1 of a foot. Such price and payment shall be full compensation for fabricating, furnishing, installing, painting, anchoring and all incidentals necessary to satisfactorily install the handrail.

Payment will be made under:

**Pay Item**

Bicycle/Pedestrian Safety Rail

**Pay Unit**

Linear Foot

**HIGH STRENGTH CONCRETE FOR DRIVEWAYS:**

(11-21-00)(Rev. 1-16-24)

848

SP10 R02

Use high early strength concrete for all driveways shown in the plans and as directed by the Engineer. Provide high early strength concrete that meets the requirements of Article 1000-6 of the *Standard Specifications*.

Measurement and payment will be in accordance with Section 848 of the *Standard Specifications*.

**ELECTRONIC TICKETING SYSTEM:**

(7-16-24)(Rev. 12-17-24)

1020

SP10 R20

**Description**

At the contractor's option, the use of an electronic ticketing system for reporting individual and cumulative asphalt material deliveries may be utilized on this project. At the preconstruction conference, the contractor shall notify the Engineer if they intend to utilize an electronic ticketing system for reporting individual and cumulative asphalt material deliveries to the project.

**Electronic Ticketing Requirements**

- a. The electronic ticketing system must be fully integrated with the load read-out system at the plant. The system shall be designed so data inputs from scales cannot be altered by either the Contractor or the Department.
- b. Material supplier must test to confirm that ticketing data can be shared from the originating system no less than 30 days prior to project start.

- c. After each truck is loaded, ticket data must be electronically captured, and ticket information uploaded via Application Programming Interface (API) to the Department.
- d. Obtain security token from NCDOT for access to E-Ticketing portal (to send tickets). To request a Security Key, fill out the below E-Ticketing Security Request Form: <https://forms.office.com/g/XnT7QeRtgt>
- e. Obtain API from NCDOT containing the required e-ticketing data fields and format. Download the API from the NCDOT E-ticketing Webpage: <https://connect.ncdot.gov/projects/construction/E-Ticketing/Pages/default.aspx>
- f. Provide all ticket information in real time and daily summaries to the Department's designated web portal. If the project contains locations with limited cellular service, an alternative course of action must be agreed upon.
- g. Electronic ticketing submissions must be sent between the Material Supplier and the Department.
- h. The electronic ticket shall contain the following information:

Date  
Contract Number  
Supplier Name  
Contractor Name  
Material  
JMF  
Gross Weight  
Tare Weight  
Net Weight  
Load Number  
Cumulative Weight  
Truck Number  
Weighmaster Certification  
Weighmaster Expiration  
Weighmaster Name  
Facility Name  
Plant Certification Number  
Ticket Number  
Hauling Firm (optional)  
Voided Ticket Number (if necessary)  
Original Ticket Number (if necessary)  
Supplier Revision (If necessary)

The Contractor/supplier can use the electronic ticketing system of their choice to meet the requirements of this provision.

**Measurement and Payment**

No measurement or payment will be made for utilizing an electronic ticketing system as the cost of such shall be included in the contract price bid for the material being provided.

**TIMBER AND LUMBER:**

(4-21-26)

235, 866, 1046, 1050, 1082, 1084, 1089, 1540

SP10 R82

Revise the *Standard Specifications* as follows:

**Page 2-23, Article 235-2 MATERIALS, line 26**, add the following as the third sentence of the fourth paragraph.

Use pressure treated wood bases meeting the requirements of Section 1082.

**Page 8-45, Article 866-2 MATERIALS, line 26**, replace “1076-7” with “1050-8”.

**Page 10-73, Subarticle 1046-3(C) Treated Timber Posts, line 8**, replace “treated southern pine” with “pressure treated southern pine”.

**Page 10-76, Subarticle 1050-2(A) General, line 3**, replace “Use treated southern pine meeting Articles 1082-2 and 1082-3” with “Use pressure treated southern pine meeting Articles 1082-2 and 1082-3”.

**Page 10-76, Subarticle 1050-2(A) General, lines 15-16**, replace “All round posts” with “All round wood posts and braces”.

**Page 10-76, Subarticle 1050-2(A) General, lines 19-20**, delete the last sentence of the third paragraph and replace with the following:

The pieces shall show at least 3 annual rings per inch and shall be at least 30% summerwood. All timber and lumber shall conform to the material characteristics detailed in the Southern Pine Inspection Bureau (SPIB) grading rules for the designated grade and may bear the mark of an American Lumber Standards Committee (ALSC) accredited agency.

**Page 10-177, Article 1082-1 GENERAL, lines 32-33**, delete the first sentence of the first paragraph and replace with the following:

Use southern pine timber and lumber graded in accordance with the current grading rules of the SPIB and manufactured by a Department pre-approved producer/supplier. All timber and lumber shall conform to the material characteristics detailed in the SPIB grading rules for No. 1 Dense or Select Structural (Sel Str.) and bear the mark of an ALSC-accredited agency.

**Page 10-177 and 10-178, Article 1082-1 GENERAL, lines 38-42 and line 1**, delete the second through fourth sentence of the second paragraph and replace with the following:

Use approved inspection companies listed on the Department’s pre-approved producer/suppliers list. The inspection agency must perform inspections of preservative treated materials in

accordance with AWWA Standard M2. Each item shall bear the brand, hammer mark, ink stamp or tag of the inspection agency to indicate it has been inspected. In lieu of commercial inspection, materials in Section 1082 manufactured by a facility that is audited by an ALSC-accredited agency and bearing the quality mark of that agency shall be acceptable for use. In addition, the Supplier must furnish Type 4 – Certified Test Reports and Type 6 – Supplier’s Certifications in accordance with Article 106-3. Type 6 – Supplier’s Certifications are required for each producer/supplier to include any chain of custody changes from the mill to the Department.

**Page 10-178, Article 1082-2 UNTREATED TIMBER AND LUMBER, line 7,** replace “Dense” with “Grade No. 1 Dense MC19”.

**Page 10-178, Subarticle 1082-3(A) General, line 13,** replace “lumber” with “timber and lumber” and replace “will not” with “with”.

**Page 10-178, Subarticle 1082-3(B) Bridges, Fender Systems and Piles, lines 22 and 24,** replace “Grade No. 1 Dense” with “Grade No. 1 Dense or Select Structural (Sel Str.)”.

**Page 10-178, Subarticle 1082-3(B) Bridges, Fender Systems and Piles, lines 24-27,** delete the third and fourth sentence of the first paragraph and replace with the following:

Timbers for bridges or fender systems that are 5 inches and thicker along the least dimension shall conform to Grade No. 1 Dense or Select Structural (Sel Str.).

**Page 10-178, Subarticle 1082-3(B) Bridges, Fender Systems and Piles, line 28,** delete and replace the second paragraph with the following:

Timber for piles shall be southern pine and meet the requirements of ASTM D25.

**Page 10-178, Subarticle 1082-3(C) Guardrail Posts, Blockouts and related components, lines 33-34,** replace “Southern Pine, conforming to Grade No. 1. Rough lumber will be acceptable.” with “southern pine, conforming to Grade No. 1 Dense.”.

**Page 10-178, Subarticle 1082-3(D) Fence Posts and Braces, lines 37-39,** delete the first paragraph and replace with the following:

Sawn fence posts and braces shall be southern pine, S4S, and conform to Grade No. 1 Dense.

**Page 10-178, Subarticle 1082-3(E) Sign Posts and Battens, lines 42-44,** delete the first and second sentence of the first paragraph and replace with the following:

Lumber or timbers for sign posts shall conform to Structural Light Framing, Grade No. 1 Dense.

**Page 10-178, Subarticle 1082-3(E) Sign Posts and Battens, line 46,** delete the first sentence of the second paragraph.

**Page 10-179, Subarticle 1082-3(F) Poles, lines 2-3,** delete the first sentence of the first paragraph and replace with the following:

Timber for poles shall be either treated southern pine or coastal douglas-fir and meet the requirements of ANSI O5.1.

**Page 10-179, Subarticle 1082-4(A) General, line 8,** replace “AASHTO M 133 or AWP Standards” with “AASHTO M 133 and AWP Standards”.

**Page 10-179, Subarticle 1082-4(A) General, lines 14-15,** delete the third paragraph.

**Page 10-179, Subarticle 1082-4(A) General, line 19,** replace “”areas include” with “areas including, but not limited to,”.

**Page 10-179, Subarticle 1082-4(B) Timber Preservatives, line 24,** replace “AASHTO M 133 or AWP Standards U1” with “AASHTO M 133 and AWP Standards U1”.

**Page 10-179, Subarticle 1082-4(C) Bridges, Fender Systems and Piles, lines 27-28,** replace “AASHTO M-133 or AWP Standard U1” with “AASHTO M 133 and AWP Standard U1”.

**Page 10-179, Subarticle 1082-4(D) Guardrail Posts, Blockouts and Related Components, lines 32-33,** replace “AASHTO M-133 or AWP Standard U1” with “AASHTO M 133 and AWP Standard U1”.

**Page 10-179, Subarticle 1082-4(E) Fence Posts and Braces, lines 36 and 38,** replace “AASHTO M-133 or AWP Standard U1” with “AASHTO M 133 and AWP Standard U1”.

**Page 10-179, Subarticle 1082-4(E) Fence Posts and Braces, line 39,** replace “except require retention of preservative as below” with “Commodity Specification B. Posts, UC4A”.

**Page 10-180, Subarticle 1082-4(F) Sign Posts and Battens, line 2,** replace “AASHTO M-133 or AWP Standard U1” with “AASHTO M 133 and AWP Standard U1”.

**Page 10-180, Subarticle 1082-4(G) Poles, line 9,** replace “AASHTO M-133 or AWP Standard U1” with “AASHTO M 133 and AWP Standard U1”.

**Page 10-180, Subarticle 1084-1(A) Treated Timber Pile, line 16-17,** delete and replace the first paragraph with the following:

Treated timber piles shall meet the requirements of Section 1082.

**Page 10-195, Subarticle 1089-2(A)(1) Work Zone Signs (Stationary), line 44,** add the following sentence to the second paragraph:

Pressure treat wood posts in accordance with Section 1082.

**Page 15-18, Article 1540-2 MATERIALS, line 8,** replace “1082-3” with “1082”.

**WORK ZONE INSTALLER:**

(7-20-21)(Rev. 4-21-26)

1101

SP11 R04

Revise the *Standard Specifications* as follows:

**Page 11-4, Article 1101-14 WORK ZONE INSTALLER, lines 25-26,** delete the first sentence of the first paragraph and replace with the following:

When temporary traffic control consists of more than flagging operations, the Contractor shall provide the service of at least one qualified work zone installer during the setup, installation, and removal of temporary traffic control within the highway right of way.

**CONES:**

(3-19-24)

1135

SP11 R35

Revise the *Standard Specifications* as follows:

**Page 11-11, Article 1135-3 CONSTRUCTION METHODS, lines 19-20,** delete the third sentence of the first paragraph, "Do not use cones in the upstream taper of lane or shoulder closures for multi-lane roadways."

**FLAGGERS:**

(12-17-24)(Rev. 12-23-25)

1150

SP11 R50

Revise Section 1150 of the *Standard Specification* as follows:

**Page 11-13, Article 1150-1, DESCRIPTION,** add the following after line 31:

Alternatively, at the discretion of the Contractor, the Contractor may furnish, install, place in operation, repair, maintain, relocate, and remove remotely controlled Automated Flagging Assistance Devices (AFAD) or Temporary Portable Traffic Signal units (PTS units) to assist, supplement, or replace human flaggers for one-lane, two-way traffic maintenance during construction in accordance with this provision and the *Standard Specifications*.

For the purpose of this provision, an "approach" refers to a single lane of traffic moving in one direction toward a point of control or work zone. Flaggers, AFAD and PTS units are only used to control one lane of approaching traffic in a specific direction.

**Page 11-13, Article 1150-2, MATERIALS,** add the following after line 34:

Provide documentation to the Engineer that the AFAD or PTS units meets or exceeds the requirements of this special provision and is on the NCDOT APL or ITS and Signals QPL.

**(A) Automated Flagging Assistance Devices (AFAD)**

**(1) AFAD General**

Cover the automated gate arm with Department approved Type VII, VIII or IX retroreflective sheeting of vertical alternating red and white stripes at 16 inch intervals measured horizontally. When the gate arm is in the down position the minimum vertical

aspect of the arm and sheeting shall be 4 inches. The retroreflectorized sheeting shall be on both sides of the gate arm. With the AFAD parked or positioned 2 feet outside or in a location deemed acceptable for the lane being controlled, the gate arm shall reach at least to the center of the lane but shall not exceed the width of the lane being controlled.

Design the system to be fail-safe. Provide a conflict monitor, malfunction monitoring unit, or similar device that monitors for malfunctions and prevents the display of conflicting indications. This system shall be electronic and operated by remote control.

## **(2) AFAD Type I System: RED/YELLOW**

Provide a Red/Yellow AFAD with at least one set of CIRCULAR RED and CIRCULAR YELLOW lenses in a vertical configuration that are 12 inches in diameter. The bottom of the housing (including brackets) shall be at least 7 feet (2.1 meters) above the pavement.

This system is required to have yellow 12 inch aluminum or polycarbonate vehicle signal heads with 10 inch tunnel visors, backplates, and Light Emitting Diode (LED) modules. Provide signal heads, backplates, and LED modules listed on the ITS and Signals QPL available on the Department's website.

Provide an automated gate arm on the AFAD that descends to a down position across the approaching lane of traffic when the steady CIRCULAR RED lens is illuminated and then ascends to an upright position when the flashing CIRCULAR YELLOW lens is illuminated. The automated gate arm is to be designed such that if a motorist pulls underneath the gate arm while lowering, no damage to the vehicle occurs.

A STOP HERE ON RED (R10-6 or R10-6a) sign shall be installed on the right-hand side of the approach at the point at which drivers are expected to stop when the steady CIRCULAR RED lens is illuminated.

**To stop traffic, the AFAD shall transition from the flashing CIRCULAR YELLOW lens by initiating a minimum 5 second steadily illuminated CIRCULAR YELLOW lens followed by the CIRCULAR RED lens.**

**Once the CIRCULAR RED lens is displayed, the system is to have a minimum 2 second delay between the time the steady CIRCULAR RED is displayed and the time the gate arm begins to lower. The maximum delay between CIRCULAR RED and the time the gate arm lowers is 4 seconds. To permit stopped road users to proceed, the AFAD shall display the flashing CIRCULAR YELLOW lens and the gate arm shall be placed in the upright position.**

Ensure the system monitors for a lack of yellow or red signal voltage, total loss of indication in any direction, presence of multiple indications on any approach and low power conditions.

Additional sets of CIRCULAR RED and CIRCULAR YELLOW lenses located over the roadway or on the left side of the approach and operated in unison with the primary set,

may be used to improve visibility of the AFAD. If the set of lenses is located over any portion of the roadway that can be used by motor vehicles, the bottom of the housing (including brackets) shall be at least 15 feet (4.6 meters) above the pavement.

### **(3) AFAD Type II System: STOP/SLOW**

Provide STOP/SLOW signs that are octagonal in shape, made of rigid material, and at least 36 inch x 36 inch in size. Letters shall be a minimum of 8 inches high. The STOP face shall have a red background with white letters and border.

The SLOW face shall be diamond shaped, orange, or yellow background with black letters and border. Cover both faces in a Department approved Type VII, VIII or IX retroreflective sheeting. The minimum mounting height for the sign faces shall be 7 feet above the pavement to the bottom of the sign.

The AFAD's STOP/SLOW signs shall be supplemented with active conspicuity devices by incorporating a stop beacon (red lens) and a warning beacon (yellow lens). The stop beacon shall be no more than 24 inches above the STOP face. Mount the warning beacon no more than 24 inches above or beside of the SLOW face. Except for the mounting locations, the beacons shall conform to the provisions of Chapter 4L of the MUTCD and have 12 inch signal lenses.

Strobe/flashing lights are an acceptable alternative to flashing beacons. If utilized, they shall be either white or red flashing lights located within the STOP face and white or yellow flashing lights within the SLOW face and conform to the provisions of Chapter 6D of the MUTCD. If used, the lens diameter shall be a minimum of 5 inches with a minimum height of 6 inches. Equip strobes/flashing lights for both dual and quad flash patterns.

Type B warning lights shall not be used in lieu of the beacons or the strobe lights.

The faces of the AFADs STOP/SLOW sign may include louvers. If louvers are used, design the louvers such that the aspect of the sign face to approaching traffic is a full sign face at a distance of 50 feet or greater.

A WAIT ON STOP (R1-7) sign and a GO ON SLOW (R1-8) sign shall be displayed to traffic approaching the AFAD. Position signs on the same support structure as the AFAD. Both signs shall have black legends and borders on white Type III sheeting backgrounds. Each of these signs shall be rectangular in shape and be at least 24 inch x 30 inch size with letters at least 6 inches high.

Provide an automated gate arm on the AFAD that descends to a down position across the approaching lane of traffic when the STOP face is displayed and then ascends to an upright position when the SLOW face is displayed.

The automated gate arm is to be designed such that if a motorist pulls underneath the gate arm while lowering, no damage to the vehicle occurs.



A STOP HERE ON RED (R10-6 or R10-6a) sign shall be installed on the right-hand side of the approach at the point at which drivers are expected to stop when the STOP face is displayed.

When approaching motorists are to proceed, display the SLOW face and the warning beacon or strobes are to flash on the AFAD. When approaching motorists are will be stopped, display the STOP face and the stop beacon or strobes are to flash on the AFAD.

**To stop traffic, the AFAD will transition from the SLOW face to the STOP face by initiating a minimum 5 second change cycle. First, the warning beacon is to be steadily illuminated for the change cycle. If strobes are used in lieu of a warning beacon, they are to be placed in the quad flash pattern. At the end of the change cycle, the STOP face is to be displayed with the stop beacon flashing and the warning beacon or strobes are to stop flashing. Once the STOP face is displayed, the system is to have a minimum 2 second delay between the time the STOP face is displayed and the time the gate arm begins to lower. The maximum delay between the time the STOP face is displayed and the time the gate arm lowers is 4 seconds.**

**To permit stopped road users to proceed, the gate arm shall be placed in the upright position and the AFAD shall display the SLOW face and the warning beacon or strobes are to flash in the dual flash pattern.**

Do not flash the stop beacon when the SLOW face is displayed, and do not flash the warning beacon when the STOP face is displayed.

#### **(B) Portable Traffic Signals (PTS) Units**

Provide PTS units with at least one set of CIRCULAR RED, CIRCULAR YELLOW, and CIRCULAR GREEN lenses in a vertical configuration that are 12 inch diameter aluminum or polycarbonate vehicle signal heads with 10 inch tunnel visors, backplates, and Light Emitting Diode (LED) modules. All signal heads, tunnel visors, and backplates shall be yellow in color.

The bottom of the housing (including brackets) shall be at least 7 feet above the pavement for single set units. Additional signal heads on units with more than one signal head shall be capable of extending over the travel lane.

#### **Communication Requirements**

All PTS units within the signal set up systems shall maintain communication at all times by either hardwire cable or wireless radio link communication. If the hardwire cable communication is utilized the communication cable shall be deployed in a manner that will not intrude in the direct work area of the project or obstruct vehicular and pedestrian traffic. Utilize radio communication with 900MHz frequency band and frequency hopping capability. The radio link communication system shall have a minimum range of 1 mile.

**Fault Mode Requirements**

Revert PTS units to a flashing red mode upon system default unless otherwise specified by the Engineer. Equip the PTS units with a remote monitoring system. Where cell communication availability exists, the remote monitoring system shall adhere to the remote monitoring system section of this provision.

**Remote Monitoring System**

The remote monitoring system (RMS) shall be capable of reporting signal location, battery voltage / battery history and system default. Provide a password protected website viewable from any computer with internet capability for the RMS. In the event of a system default, the RMS shall provide specific information concerning the cause of the system default (i.e. red lamp on signal number 1). Equip the RMS with a mechanism capable of immediately contacting a minimum of three previously designated individuals via text messaging and/or email upon a default.

The running program operating the PTS units shall be always available and viewable through the RMS website. Maintain a history of the RMS operating system in each signal including operating hours and events and the location of the PTS units.

**Trailer / Cart**

The AFAD and PTS units may be mounted on either a trailer or a moveable cart system.

Finish all exterior metal surfaces with Federal orange enamel per AMS-STD-595, color chip ID# 13538 or 12473 respectively with a minimum paint thickness of 2.5 mils (64 microns).

Design and test the AFAD or PTS units trailer / cart to withstand an 80 MPH wind load while in the operational position. Provide independent certification that the assembly meets the design wind load.

Equip the AFAD or PTS units with leveling jacks capable of stabilizing the unit in a horizontal position when located on slopes 6:1 or flatter.

Equip trailers in compliance with North Carolina Law governing motor vehicles and include a 12-volt trailer lighting system complying with *Federal Motor Carrier Safety Regulations 393*, safety chains and a minimum 2 inch ball hitch.

Provide a minimum 4 inch wide strip of fluorescent conspicuity sheeting retroreflective sheeting to the frame of the trailer. Apply the sheeting to all sides of the trailer. The sheeting shall meet the ASTM requirements of Type VII, VIII or IX.

**Power System**

Design the systems to operate both with and without an external power source. Furnish transmitters, generators, batteries, controls and all other components necessary to operate the device.

Provide equipment that is solar powered and supplemented with a battery backup system that includes a minimum 110/120 VAC powered on-board charging system capable of powering the unit for 7 continuous days with no solar power. Each unit shall also be capable of being powered by standard 110/120 VAC power sources, if applicable.

Locate batteries and electronic controls in a locked, weather and vandal resistant housings.

**Page 11-14, Article 1150-3, CONSTRUCTION METHODS**, add the following after line 11:

Flaggers shall have a path to escape an errant approaching vehicle at all times, unimpeded by barrier, guardrail, guiderail, parked vehicles, construction materials, slopes steeper than 2:1, or any other obstruction at all times. If an unimpeded path cannot be maintained, the Contractor shall use AFAD or PTS units in lieu of a flagger.

Provide documentation to the Engineer prior to deploying the device that the AFAD or PTS units operator(s) are qualified flagger(s) that have been properly trained through an NCDOT approved training agency or other NCDOT approved training provider and that the qualified flagger(s) have received manufacturer training to operate that specific device. This training shall include proper installation, remote control operation, central control systems and maintenance of the AFAD or PTS units. The training shall take place off the project site where training conditions are removed from live traffic. The documentation shall include the names of the authorized trainer, the trainees, the device on which they have been trained and the date of the training. Provide updated documentation to the Engineer prior to deploying any additional operators.

Install advance warning signs and operate AFADs in accordance with the attached detail drawings in this provision.

Install advance warning signs and operate PTS units in accordance with *NCDOT Roadway Standard Drawings* No. 1101.02, Sheet 17.

AFAD and PTS units shall only be used in situations where there is only one lane of approaching traffic in the direction to be controlled. **At no time shall an AFAD unit controlling traffic through the work area be placed in an autonomous mode and/or left unattended.**

Signal timing and operation of PTS units shall be field verified and accepted by the Engineer before use.

Do not use AFAD or PTS units in locations where queueing from the AFAD or PTS units will extend to within 150 feet of a signalized intersection or railroad crossing. Do not use AFAD and PTS units as a substitute for or a replacement for a continuously operating temporary traffic control signal as described in Section 6F.84 of the MUTCD.

If used at night, illuminate each AFAD or PTS units as described in Section 6D of the MUTCD.

Provide a complete AFAD or PTS units that is capable of being relocated as traffic conditions demand.

If AFADs or PTS units become inoperative, be prepared at all times to replace the unit with the same type and model of AFAD or PTS units, revert to human flagging operations or terminate all construction activities requiring the use of the AFAD or PTS units until the AFAD or PTS units become operative or qualified human flaggers are available.

When the work requiring the AFAD or PTS units is not pursued for 30 minutes or longer, power off each AFAD or PTS units. Removed the AFAD or PTS units from the travel lane and relocated to a minimum of 5 feet from the edge line. AFAD gate arms shall be in the upright position. Remove all traffic control devices from the road, place two cones by each AFAD or PTS units and all signs associated with the lane closure operation shall be removed or laid down. At the end of each workday, remove all AFADs or PTS units from the roadway and shoulder areas.

Ensure the system's wireless communication links continuously monitor and verify proper transmission and reception of data used to monitor and control each AFAD or PTS units. Ensure ambient mobile or other radio transmissions or adverse weather conditions do not affect the system.

In the event of a loss of communications, immediately display the flashing RED or STOP indication on all AFAD or PTS units.

### **AFAD Specific Construction Methods**

The flagger/operator controlling the AFAD units shall be on the project site at all times. If multiple AFAD units are used, one AFAD unit shall be the Main AFAD unit and all other units shall be remote AFAD units. Ensure that each device meets the physical display and operational characteristics as specified in the MUTCD.

Multiple AFAD units may be controlled with **one** flagger/operator when the AFAD units meet each of the following requirements:

- (1) AFAD units are spaced no greater than the manufacturer's recommendations.
- (2) Both AFAD units can be seen at the same time from the flagger/operator's position, or the AFAD is operating on its own secure network with malfunction detection and notification to the flagger/operator.
- (3) The flagger/operator has an unobstructed view of approaching traffic in both directions from the flagger/operator position or the AFAD is operating on its own secure network, with cameras that provide the flagger/operator an unobstructed view of approaching traffic from both directions. The flagger/operator may control the AFAD units from a pilot vehicle.

If any of the above requirements are not met, flagger/operator control each AFAD unit.


AFAD operators may either control traffic at side streets or driveways between the AFAD units or operate the pilot car while operating the AFAD system if approved by the Engineer. AFAD units must continue to be within clear sight of the operator during these work activities.


**Page 11-14, Article 1150-4, MEASUREMENT AND PAYMENT**, add the following after line 24:

Each AFAD or PTS unit will be measured and paid for as *Flaggers* paid by day in accordance with Article 1150-4 of the *Standard Specifications*. Where the pay item for *Flaggers* is not included in the original contract then no separate payment will be made for this item and payment will be included in the lump sum price bid for *Temporary Traffic Control* found elsewhere in this contract. Each approach controlled by AFAD or PTS units will be measured and paid as one flagger, irrespective of the number of devices used. If multiple PTS units are required to control a single approach, these units will collectively be considered as replacing one flagger.

No separate measurement or payment will be made for AFAD or PTS unit operators, as the cost of such including their training and operational costs shall be included in the unit or lump sum price for *Flaggers* or *Temporary Traffic Control*. Such price and payment also includes the relocation, maintenance, and removal during repair periods of AFAD or PTS units as well as the signal controller, communication, vehicle detection system, traffic signal software of PTS units and any other incidentals necessary to complete the work.

# Red/Yellow Lens AFAD (TYPE I)

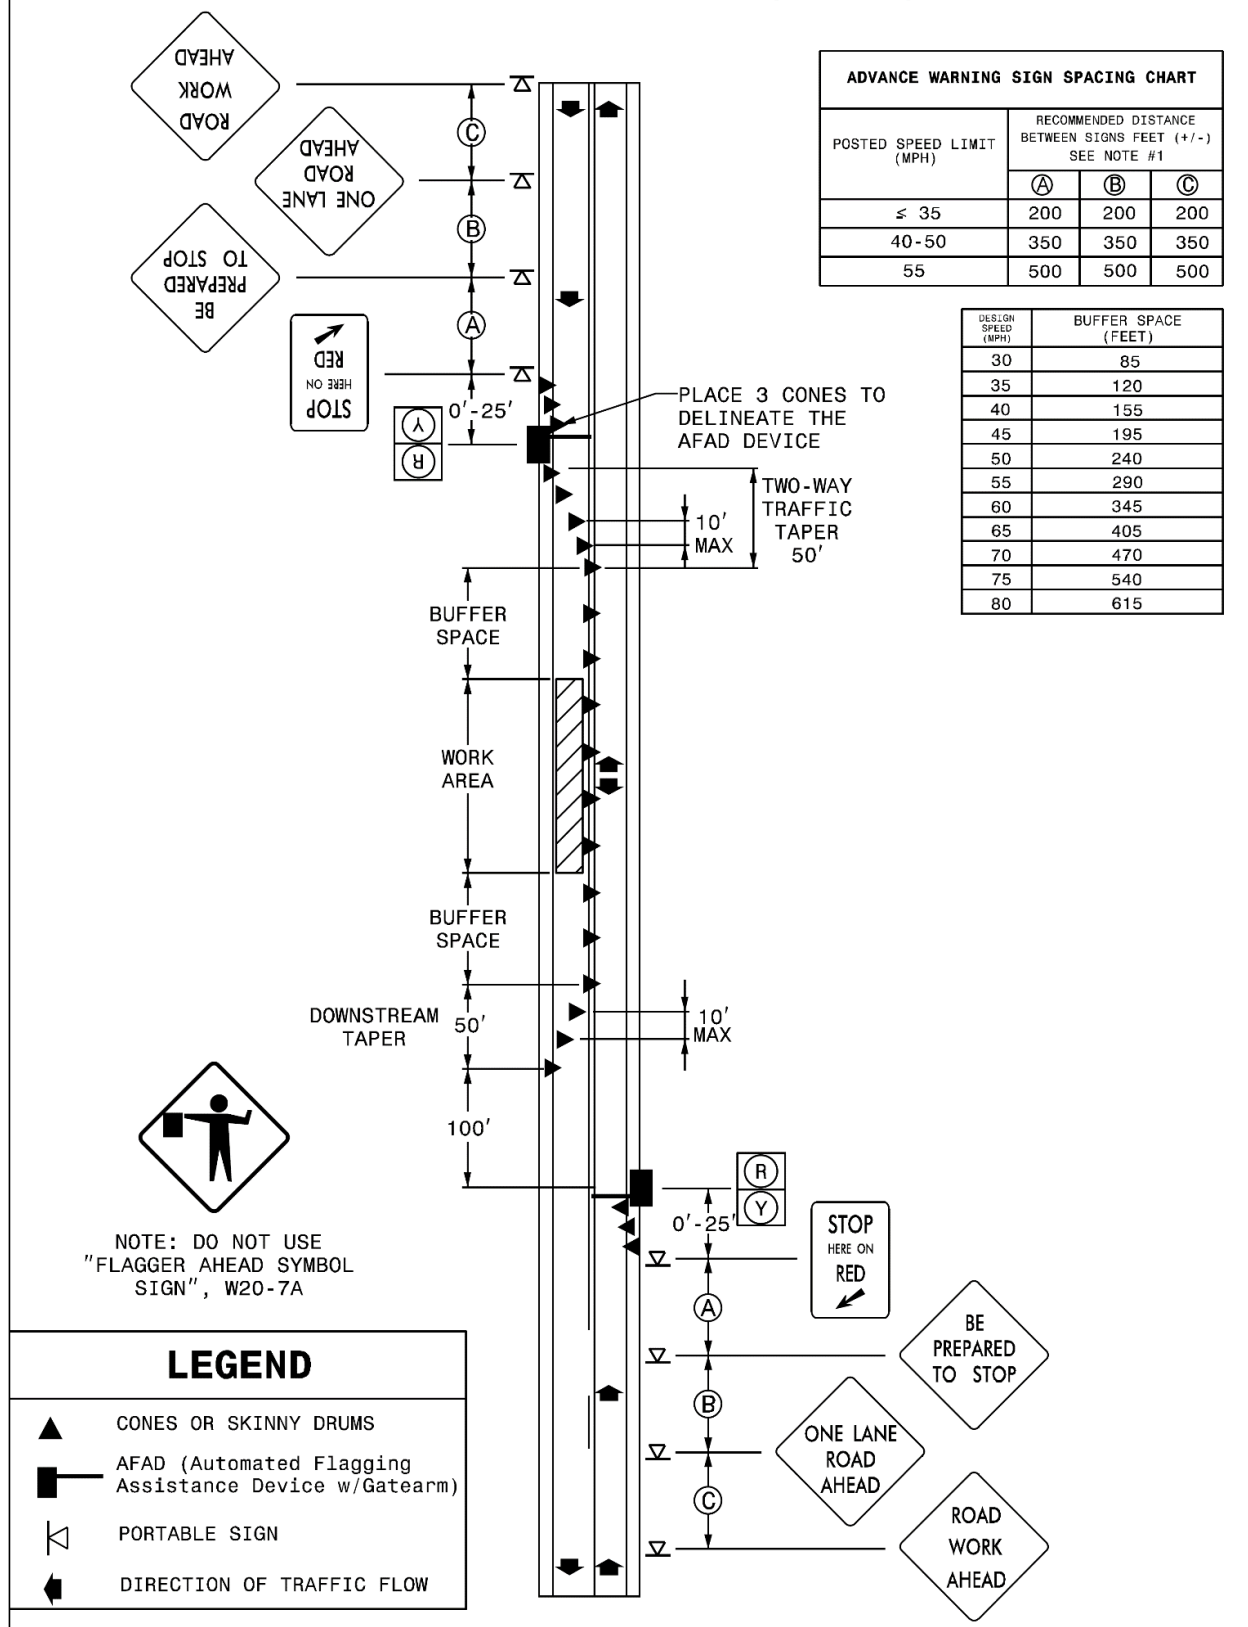

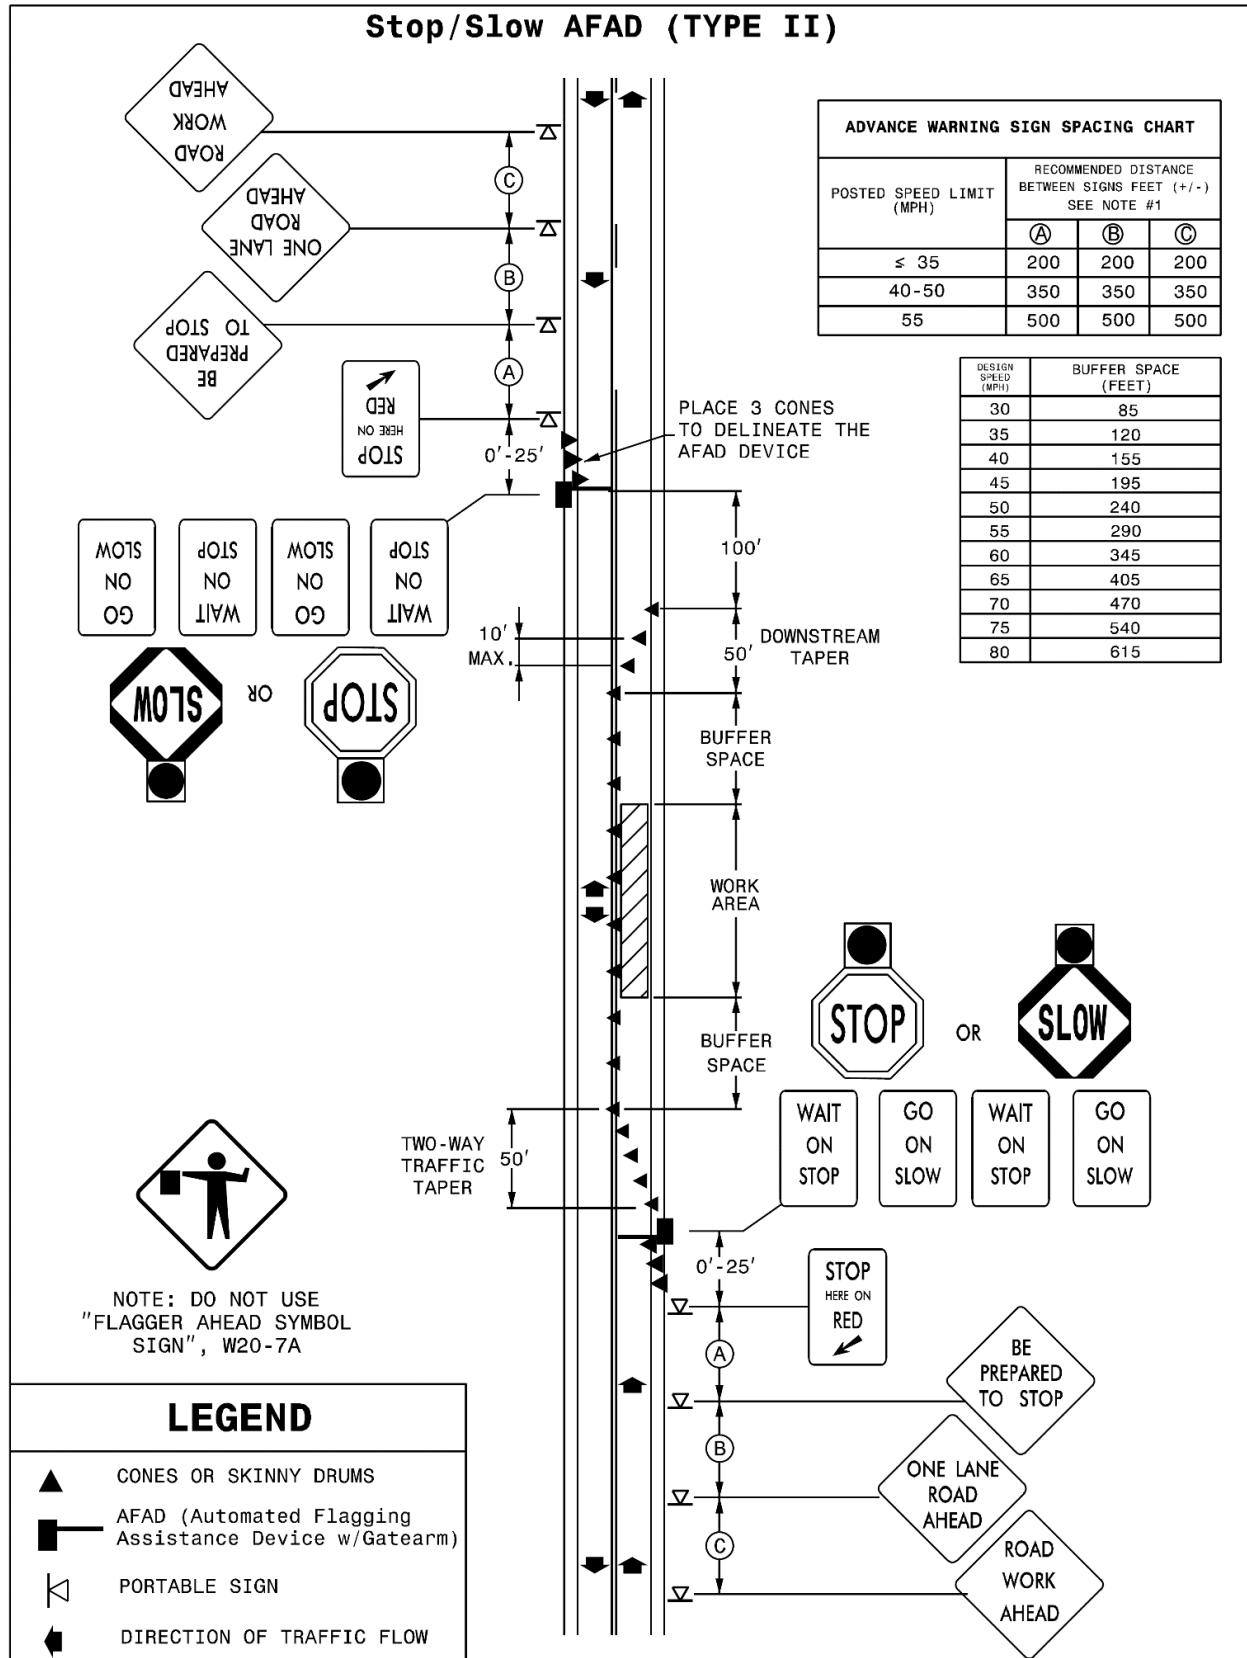**PAVEMENT MARKINGS:**

(5-19-26)(Rev. 6-16-26)

1087, 1205

SP12 R04

Revise the *Standard Specifications* as follows:

**Page 10-185, Subarticle 1087-2(A) Paint Composition, line 15,** replace “TT--P-1952” with “TT--P-1952, Type III”.

**Page 10-185, Subarticle 1087-2(C) Thermoplastic Composition, lines 28-33,** replace the first through third paragraph and the table with the following:

**(C) Thermoplastic and Integrated Multipolymer (IMP) Composition**

Use thermoplastic alkyd/maleic pavement markings composed of the materials in Table 1087-1A and integrated multipolymer markings composed of the materials in Table 1087-1B.

| <b>TABLE 1087-1A<br/>PHYSICAL PROPERTIES<br/>OF THERMOPLASTIC PAVEMENT MARKINGS</b> |                                          |
|-------------------------------------------------------------------------------------|------------------------------------------|
| <b>Component</b>                                                                    | <b>By Weight</b>                         |
| Alkyd/Maleic Binder                                                                 | 18.0% Min                                |
| Premixed Glass Beads (AASHTO M 247 – Type 3)                                        | 40.0% Min                                |
| Titanium Dioxide Pigment (ASTM D476 Type 2)                                         | 10.0% Min. (white)<br>1.5% Min. (yellow) |

| <b>TABLE 1087-1B<br/>PHYSICAL PROPERTIES<br/>OF INTEGRATED MULTIPOLYMER (IMP) PAVEMENT MARKINGS</b> |                                |
|-----------------------------------------------------------------------------------------------------|--------------------------------|
| <b>Component</b>                                                                                    | <b>By Weight</b>               |
| Binder                                                                                              | 21.0% Min                      |
| Premixed Glass Beads (AASHTO M 247 – Type 3)                                                        | 40.0% Min                      |
| Titanium Dioxide Pigment (ASTM D476 Type 2)                                                         | 10.0% Min. (white only)        |
| Inert Filler                                                                                        | 15% Max white / 24% Max Yellow |

Use white material that does not contain anatase titanium dioxide pigment. Use yellow material that does not contain any intentionally added lead chromate.

Calcium carbonate and inert fillers may be used by the manufacturer, providing all other qualifications are met.

**Page 10-185, Subarticle 1087-2(C) Thermoplastic Composition, line 34,** replace “thermoplastic” with “material”.

**Page 10-185, Subarticle 1087-2(C) Thermoplastic Composition, line 36,** replace “alkyd/maleic binder” with “binder”.

**Page 10-185, Subarticle 1087-2(C) Thermoplastic Composition, line 38,** replace “maleic-modified glycerol of resin” with “rosin ester”.



**Page 10-186, Subarticle 1087-2(C) Thermoplastic Composition**, insert the following paragraph after line 2:

The integrated multipolymer binder shall consist of a mixture of modified rosin ester, polyamide and a copolymer (e.g. EVA) with waxes and/or plasticizers. At least 3% of the total formulation weight shall be 100% polyamide. The binder shall contain no petroleum hydrocarbon resins.

**Page 10-186, Subarticle 1087-2(C) Thermoplastic Composition, lines 3, 6, 9 and 11**, replace “thermoplastic material” with “material”.

**Page 10-186, Article 1087-3 COLOR, after line 27**, replace “Crystal: Color No. 17886 (White)” with “White: Color No. 17925”.

**Page 10-186, Subarticle 1087-4(A) Composition, lines 31-34**, replace the second paragraph with the following:

Manufacture the beads from 100% recycled or virgin non-pigmented glass from a composition designed to be highly resistant to traffic wear and to the effects of weathering. All intermix and drop-on glass beads shall be manufactured using 100% North American recycled glass cullet, virgin North American glass or a combination of the two.

**Page 10-187, Subarticle 1087-4(C) Gradation & Roundness, lines 4-6**, replace the first paragraph and table with the following:

Use drop-on and intermixed glass beads in all pavement markings with at least 80% true spheres when tested in accordance with ASTM D1155. Drop-on glass beads for permanent pavement markings shall be high performance glass beads listed on the NCDOT APL. If otherwise specified, or at the direction of the Engineer, other drop-on reflective media may be used on permanent markings. Drop-on glass beads used on any interim or temporary pavement markings shall meet Table 1087-2.

| <b>TABLE 1087-2<br/>GLASS BEAD GRADATION REQUIREMENTS</b> |                               |                |
|-----------------------------------------------------------|-------------------------------|----------------|
| <b>Sieve Size</b>                                         | <b>Gradation Requirements</b> |                |
|                                                           | <b>Minimum</b>                | <b>Maximum</b> |
| Passing #20                                               | 95%                           | 100%           |
| Retained on #30                                           | 5%                            | 20%            |
| Retained on #50                                           | 40%                           | 80%            |
| Retained on #80                                           | 15%                           | 50%            |
| Passing #80                                               | 0%                            | 10%            |
| Retained on #200                                          | 0%                            | 5%             |

**Page 10-187, Article 1087-5 PACKAGING FOR SHIPMENT, line 31**, replace “Thermoplastic pavement marking materials” with “Thermoplastic and integrated multipolymer pavement marking materials”.

**Page 10-188, Subarticle 1087-7(B) Thermoplastic Pavement Marking Material Composition, line 17**, replace “(B) Thermoplastic Pavement Marking Material

**Composition” with  
“(B) Thermoplastic and Integrated Multipolymer Pavement Marking Material Composition”.**

**Page 10-188, Subarticle 1087-7(C) Flash Point, line 22,** replace “thermoplastic” with “thermoplastic and integrated multipolymer material”.

**Page 10-188, Subarticle 1087-7(D) Requirements, line 25,** replace “thermoplastic material” with “thermoplastic and integrated multipolymer material”.

**Page 10-189, Subarticle 1087-7(D), after line 15,** add the following:

**(9) Tensile Elongation**

The integrated multipolymer material shall have an elongation of at least 10% when tested in accordance with ASTM D638 (1"x 6", 0.25"/min).

**(10) Abrasion Resistance**

The integrated multipolymer material shall have no more than 0.40 g weight loss following taber abrasion with CS17 wheels for 1000 cycles with 1 kg weight per ASTM D4060.

**Page 10-189, Article 1087-8 MATERIAL CERTIFICATION, lines 22-23,** replace the third paragraph with the following:

Reflective media not covered in this, or other specifications must meet AASHTO M 247 Type 3 or 4 and a NCDOT Type 2 Material Certification must be provided.

**Page 10-189, Article 1087-8 MATERIAL CERTIFICATION, after line 23,** add the following to the table:

|                         |                                                                 |
|-------------------------|-----------------------------------------------------------------|
| Integrated Multipolymer | Type 2 Material Certification and Type 3 Material Certification |
|-------------------------|-----------------------------------------------------------------|

**Page 12-3, Subarticle 1205-3(F) Surface Preparation and Curing Compound Removal, line 8,** add the following as a second sentence of the first paragraph:

Only apply markings to dry clean surfaces.

**Page 12-4, Subarticle 1205-3(G)(1) General for all types of Pavement Markings, line 16,** replace the first sentence of the eighth paragraph with the following:

Protect the pavement markings until they are track free before exposing them to traffic.

**Page 12-4, Subarticle 1205-3(G)(1) General for all types of Pavement Markings, lines 22-24,** delete the second sentence of the tenth paragraph.

**Page 12-4, Subarticle 1205-3(G)(1) General for all types of Pavement Markings, after line 24,** replace “White: Color No. 17886” with “White: Color No. 17295”.

**Page 12-5, Subarticle 1205-3(I) Removal of Pavement Markings, line 32,** add the following as the third sentence of the seventh paragraph:

Before applying integrated multipolymer (IMP) pavement markings over existing thermoplastic pavement markings, remove at least 85% of the oxidized existing thermoplastic.

**Page 12-5, Subarticle 1205-3(I) Removal of Pavement Markings, line 35,** replace “thermoplastic” with “thermoplastic or IMP”.

**Page 12-6, Article 1205-4 THERMOPLASTIC, line 3,** replace “1205-4 THERMOPLASTIC” with “1205-4 THERMOPLASTIC AND INTEGRATED MULTIPOLYMER (IMP)”.

**Page 12-6, Subarticle 1205-4(A) Application Equipment, lines 7, 16, 20, 24, 25, 27 and 29,** delete “thermoplastic”

**Page 12-6, Subarticle 1205-4(B) Weather Limitations and Seasonal Limitations, line 38,** replace “thermoplastic pavement markings” with “thermoplastic or integrated multipolymer pavement markings”.

**Page 12-6, Subarticle 1205-4(B) Weather Limitations and Seasonal Limitations, line 42,** delete “thermoplastic”.

**Page 12-7, Subarticle 1205-4(C) Application, lines 2, 3, 10, 21 and 31,** delete “thermoplastic”.

**Page 12-7, Subarticle 1205-4(C) Application, after line 17,** in Table 1205-2 MINIMUM REFLECTOMETER REQUIREMENTS FOR THERMOPLASTIC replace “Standard Glass Beads” with “High Performance Glass Beads” and for the Reflectivity of White replace “375 mcd/lux/m<sup>2</sup>” with “425 mcd/lux/m<sup>2</sup>” and Yellow replace “250 mcd/lux/m<sup>2</sup>” with “325 mcd/lux/m<sup>2</sup>”

**Page 12-7, Subarticle 1205-4(C) Application, line 23,** replace “thermoplastic pavement marking” with “final pavement marking”.

**Page 12-7, Subarticle 1205-4(C) Application, after line 32,** replace “TABLE 1205-3 THICKNESS REQUIREMENTS FOR THERMOPLASTIC” with “TABLE 1205-3 THICKNESS REQUIREMENTS FOR THERMOPLASTIC AND INTEGRATED MULTIPOLYMER”.

**Page 12-9, Subarticle 1205-5(C) Observation Period, before line 1,** replace “375 mcd/lux/m<sup>2</sup>” with “425 mcd/lux/m<sup>2</sup>” and replace “250 mcd/lux/m<sup>2</sup>” with “325 mcd/lux/m<sup>2</sup>”.

**Page 12-11, Subarticle 1205-8(C) Application, lines 17-20,** replace the first paragraph with the following:

Final pavement marking application of paint shall be placed in 1 application of 30 mils wet each and consist of reflective media applied at a rate to immediately obtain the minimum retroreflective values.

**Page 12-11, Subarticle 1205-8(C) Application, line 26,** delete “15 mil”.

**Page 12-11, Subarticle 1205-8(C) Application, after line 31,** replace Table 1205-6 with the following:

| TABLE 1205-6<br>REFLECTOMETER REQUIREMENTS<br>FOR PAINT |        |                            |
|---------------------------------------------------------|--------|----------------------------|
| Item                                                    | Color  | Reflectivity               |
| Standard Glass Beads                                    | White  | 225 mcd/lux/m <sup>2</sup> |
|                                                         | Yellow | 200 mcd/lux/m <sup>2</sup> |
| High Performance Glass Beads                            | White  | 425 mcd/lux/m <sup>2</sup> |
|                                                         | Yellow | 325 mcd/lux/m <sup>2</sup> |

**Page 12-12, Article 1205-10 MEASUREMENT AND PAYMENT, lines 5-7,** delete and replace the second sentence of the first paragraph with the following:

In addition, *Paint Pavement Marking Lines* will be paid per linear foot for each 15 mil application placed in accordance with Subarticle 1205-8(C) for temporary pavement markings during temporary traffic patterns.

**Page 12-12, Article 1205-10 MEASUREMENT AND PAYMENT, lines 12-14,** delete and replace the second sentence of the second paragraph with the following:

In addition, *Paint Pavement Marking Symbols* will be paid for each 15 mil application placed in accordance with Subarticle 1205-8(C) for temporary pavement markings during temporary traffic patterns.

**Page 12-12, Article 1205-10 MEASUREMENT AND PAYMENT, lines 17-19,** delete and replace the third sentence of the third paragraph with the following:

In addition, *Paint Pavement Marking Characters* will be paid for each 15 mil application placed in accordance with Subarticle 1205-8(C) for temporary pavement markings during temporary traffic patterns.

**Page 12-12, Article 1205-10 MEASUREMENT AND PAYMENT, lines 17-19,** replace the second sentence of the ninth paragraph with the following:

No direct payment will be made for the work involved in applying the lines, including but not limited to surface preparation, reapplication of molten pavement marking crossed by a vehicle, removal of all pavement marking materials spilled on the roadway surface, and repair of markings tracked by a vehicle.

**Page 12-13, Article 1205-10 MEASUREMENT AND PAYMENT, after line 12,** add the following to the pay item and pay unit list:

**Pay Item**

Integrated Multipolymer Pavement Marking Lines, \_\_", \_\_ mils  
 Integrated Multipolymer Pavement Marking Symbols, \_\_ mils  
 Integrated Multipolymer Pavement Marking Characters, \_\_ mils

**Pay Unit**

Linear Foot  
 Each  
 Each

**SNOWPLOWABLE DELINEATION:**

(10-15-24)

1253

SP12 R53

**Description**

Furnish, install and maintain snowplowable delineation.

There are five snowplowable delineation alternate options approved for use in North Carolina. They include the following markers and markings options:

- (1) Polycarbonate H-shaped Markers
- (2) Inlaid Raised Pavement Markers
- (3) 10' Rumble Skips
- (4) Inlaid Cradle Markers
- (5) 10' Inlaid Pavement Markings

Only one type of snowplowable delineation will be allowed on a single project.

**Materials**

Refer to Division 10 of the *Standard Specifications*.

**Item****Section**

Epoxy

1081

Pavement Markings

1087

Snowplowable Pavement Markers

1086-3

Any snowplowable pavement delineation shall conform to the applicable requirements of Sections 1086, 1087, and 1081 of the *Standards and Specifications*. Use snowplowable delineation markers and markings listed on the NCDOT APL. Any treatment that requires pavement cutting or milling shall be installed within 7 calendar days of the pavement cutting or milling operation.

**Construction Methods****(A) General**

For any snowplowable delineation, prior to installation, by brushing, blow cleaning, vacuuming or other suitable means, ensure that all materials and the pavement surface are free of dirt, grease, dust, oil, moisture, mud, grass, or any other material that would prevent adhesion to the pavement by brushing blow cleaning, or vacuuming. If required, apply a primer per manufactures recommendations to pavement surfaces before applying pavement marking material.

Install snowplowable delineation per manufacturers specifications every 80 feet. Make sure pavement markers are oriented to traffic correctly and pavement markings are applied in a uniform thickness. Do not apply markings over longitudinal joints. Protect the pavement markings until they are tack free. Apply applicable Sections 1205 and 1250 of the *Standards Specifications*.

If damage occurs during installation the effected treatments shall be corrected or replaced. This work shall be considered incidental to the installation of the marking or marker.

### **(B) Polycarbonate H-shaped Markers and Inlaid Cradle Markers**

Bond marker housings to the pavement with epoxy adhesive. Mechanically mix and dispense epoxy adhesives as required by the manufacturer's specifications. Place the markers immediately after the adhesive has been mixed and dispensed.

Install polycarbonate H-shaped markers and inlaid cradle markers castings into slots sawcut into the pavement. Make slots in the pavement to exactly duplicate the shape of the casting of the polycarbonate H-shaped markers and inlaid cradle markers.

If saw cutting, milling, or grooving operations are used, promptly remove all resulting debris from the pavement surface. Install the marker housings within 7 calendar days after saw cutting , milling, or grooving the pavement. Remove and dispose of loose material from the slots by brushing, blow cleaning or vacuuming. Dry the slots before applying the epoxy adhesive. Install polycarbonate H-shaped markers and inlaid cradle markers according to the manufacturer's recommendations.

Protect the polycarbonate H-shaped markers or inlaid cradle markers until the epoxy has initially cured and is track free.

Construct inlaid cradle markers in accordance with the details in the plans and as directed by the Engineer.

### **(C) Reflector Replacement**

The following requirements only apply to polycarbonate H-shaped markers and inlaid cradle markers.

In the event that a reflector is damaged, replace the damaged reflector by using adhesives and methods recommended by the manufacturer of the markers and approved by the Engineer. This work is considered incidental if damage occurs during the initial installation of the marker housings and maintenance of initial polycarbonate H-shaped markers or inlaid cradle markers specified in this section.

If during reflector replacement it is discovered that the housing is missing or broken this will be paid as *Polycarbonate H-shaped Markers* or *Inlaid Cradle Markers*. Missing housings shall be replaced. Broken housings shall be removed and replaced. In both cases the slot for the housings shall be properly prepared prior to installing the new housing; patch the existing marker slots as directed by the Engineer and install the new marker approximately one foot

before or after the patch. Removal of broken housings and preparation of slots will be considered incidental to the work of replacing housings.

**(D) Inlaid Raised Pavement Markers**

Cut groove in accordance with the details in the plans and as directed by the Engineer.

Use adhesive recommended by the manufacturer to install markers into the groove in accordance with Section 1251. The raised pavement markers are incidental to inlaid raised pavement markers.

**(E) 10' Rumble Skips**

Construct 10' rumble skips on asphalt concrete in accordance with Section 665 for all centerline and shoulder rumble skips, details in the plans and as directed by the Engineer. Construct 10' rumble skips on Portland cement concrete in accordance with Section 730 for all centerline and shoulder rumble skips, details in the plans and as directed by the Engineer. The milled rumble strips are incidental to the rumble skips. Using polyurea or extruded 90 mil thermoplastic construct pavement markings in accordance with Section 1205.

**(F) 10' Inlaid Pavement Markings**

The groove in which the marking is to be placed shall be one inch wider than the marking to be placed and 10 mils deeper than the thickness of the marking.

When using this method, use enhanced reflective media. The following retroreflectivity values shall be met.

| MINIMUM INITIAL REFLECTOMETER READINGS |        |                            |
|----------------------------------------|--------|----------------------------|
| Item                                   | Color  | Reflectivity               |
| Enhanced Reflectivity Media            | White  | 450 mcd/lux/m <sup>2</sup> |
|                                        | Yellow | 350 mcd/lux/m <sup>2</sup> |

Using polyurea, extruded 90 mil thermoplastic or cold applied plastic construct pavement markings in accordance with Section 1205.

**Maintenance**

Maintain all installed snowplowable delineation before acceptance by the Engineer.

**Measurement and Payment**

*Polycarbonate H-shaped Markers* will be measured and paid as the actual number of polycarbonate H-shaped markers satisfactorily placed and accepted by the Engineer.

*Inlaid Raised Pavement Markers* will be measured and paid as the actual number of inlaid raised pavement markers satisfactorily placed and accepted by the Engineer.

*10' Rumble Skips* will be measured and paid as the actual number of rumble skips satisfactorily placed and accepted by the Engineer.

*Inlaid Cradle Markers* will be measured and paid as the actual number of pavement markers satisfactorily placed and accepted by the Engineer.

*10' Inlaid Pavement Markings* will be measured and paid as the actual number of 10' inlaid pavement markings satisfactorily placed and accepted by the Engineer.

*Replace Snowplowable Pavement Marker Reflector* will be measured and paid in accordance with Article 1253-5.

Payment will be made under:

| <b>Pay Item</b>                | <b>Pay Unit</b> |
|--------------------------------|-----------------|
| Polycarbonate H-shaped Markers | Each            |
| Inlaid Raised Pavement Markers | Each            |
| 10' Rumble Skips               | Each            |
| Inlaid Cradle Markers          | Each            |
| 10' Inlaid Pavement Markings   | Each            |

**PERMANENT SEEDING AND MULCHING:**

(7-1-95)(Rev. 1-16-24)

1660

SP16 R02

The Department desires that permanent seeding and mulching be established on this project as soon as practical after slopes or portions of slopes have been graded. As an incentive to obtain an early stand of vegetation on this project, the Contractor's attention is called to the following:

For all permanent seeding and mulching that is satisfactorily completed in accordance with the requirements of Section 1660 in the *Standard Specifications* and within the following percentages of elapsed contract times, an additional payment will be made to the Contractor as an incentive additive. The incentive additive will be determined by multiplying the number of acres of seeding and mulching satisfactorily completed times the contract unit bid price per acre for Seeding and Mulching times the appropriate percentage additive.

| <b>Percentage of Elapsed Contract Time</b> | <b>Percentage Additive</b> |
|--------------------------------------------|----------------------------|
| 0% - 30%                                   | 30%                        |
| 30.01% - 50%                               | 15%                        |

Percentage of elapsed contract time is defined as the number of calendar days from the date of availability of the contract to the date the permanent seeding and mulching is acceptably completed divided by the total original contract time.



**COIR FIBER MAT:**

(9-16-25)

1629

SP16 R05

Revise the *Standard Specifications* as follows:

**Page 16-9, Article 1629-2 MATERIALS, lines 22-24,** delete and replace the last paragraph with the following:

Provide #3 or #4 uncoated reinforcing steel anchors, 24 inches in length, bent into a U-shape with a 4-inch diameter bend and a 4-inch straight leg extending from the bend to catch and secure the coir fiber mat.

**WATTLE DEVICES:**

(1-1-24)(Rev. 9-16-25)

1642

SP16 R10

Revise the *Standard Specifications* as follows:

**Page 16-23, Subarticle 1642-2(B) Wattle, lines 10-12,** delete and replace with the following:

**(B) Wattle and Wattle Barrier**

Wattles shall meet Table 1642-1.

| <b>TABLE 1642-1</b>                                 |                                  |
|-----------------------------------------------------|----------------------------------|
| <b>100% CURLED WOOD (EXCELSIOR) FIBERS - WATTLE</b> |                                  |
| <b>Property</b>                                     | <b>Property Value</b>            |
| Minimum Diameter                                    | 12 inches                        |
| Minimum Density                                     | 2.5 pcf +/- 10%                  |
| Net Material                                        | Synthetic                        |
| Net Openings                                        | 1 inch x 1 inch                  |
| Net Configuration                                   | Totally Encased                  |
| Minimum Weight                                      | 20 lb +/- 10% per 10 foot length |

Coir Fiber Wattles shall meet Table 1642-2.

| <b>TABLE 1642-2<br/>100% COIR (COCONUT) FIBERS WATTLE</b> |                       |
|-----------------------------------------------------------|-----------------------|
| <b>Property</b>                                           | <b>Property Value</b> |
| Minimum Diameter                                          | 12 inches             |
| Minimum Density                                           | 3.5 pcf +/- 10%       |
| Net Material                                              | Coir Fiber            |
| Net Openings                                              | 2 inch x 2 inch       |
| Net Strength                                              | 90 lb                 |
| Minimum Weight                                            | 2.6 pcf +/- 10%       |

Wattle Barriers shall meet Table 1642-3.

| <b>TABLE 1642-3<br/>100% CURLED WOOD (EXCELSIOR) FIBERS – WATTLE BARRIER</b> |                       |
|------------------------------------------------------------------------------|-----------------------|
| <b>Property</b>                                                              | <b>Property Value</b> |
| Minimum Diameter                                                             | 18 inches             |
| Minimum Density                                                              | 2.9 pcf +/- 10%       |
| Net Material                                                                 | Synthetic             |
| Net Openings                                                                 | 1 inch x 1 inch       |
| Net Configuration                                                            | Totally Encased       |
| Minimum Weight                                                               | 5 pcf +/- 10%         |

Coir Fiber Wattle Barriers shall meet Table 1642-4.

| <b>TABLE 1642-4<br/>100% COIR (COCONUT) FIBERS WATTLE BARRIER</b> |                       |
|-------------------------------------------------------------------|-----------------------|
| <b>Property</b>                                                   | <b>Property Value</b> |
| Minimum Diameter                                                  | 18 inches             |
| Minimum Density                                                   | 5 pcf +/- 10%         |
| Net Material                                                      | Coir Fiber            |
| Net Openings                                                      | 2 inch x 2 inch       |
| Net Strength                                                      | 90 lb                 |
| Minimum Weight                                                    | 10 pcf +/- 10%        |

**Pages 16-24 & 16-25, Article 1642-5 MEASUREMENT AND PAYMENT, lines 42-47 & lines 1-2, delete and replace with the following:**

*Wattle* will be measured and paid for by the actual number of linear feet of wattles which are installed and accepted. Such price and payment will be full compensation for all work covered by this section, including, but not limited to, furnishing all materials, labor, equipment and incidentals necessary to install the *Wattle*.

*Coir Fiber Wattles* will be measured and paid for by the actual number of linear feet of coir fiber wattles which are installed and accepted. Such price and payment will be full compensation for all work covered by this section, including, but not limited to, furnishing all materials, labor, equipment and incidentals necessary to install the *Coir Fiber Wattles*.

*Wattle Barrier* will be measured and paid as the actual number of linear feet of wattle barrier installed and accepted. Such price and payment will be full compensation for all work covered by this provision, including, but not limited to, furnishing all materials, labor, equipment and incidentals necessary to install the *Wattle Barrier*.

*Coir Fiber Wattle Barrier* will be measured and paid as the actual number of linear feet of coir fiber wattle barrier installed and accepted. Such price and payment will be full compensation for all work covered by this provision, including, but not limited to, furnishing all materials, labor, equipment and incidentals necessary to install the *Coir Fiber Wattle Barrier*.

**Page 16-25, Article 1642-5 MEASUREMENT AND PAYMENT, after line 9,** delete and replace “\_\_\_ Wattle Check” with “Wattle”.

**Page 16-25, Article 1642-5 MEASUREMENT AND PAYMENT, after line 9,** delete and replace “\_\_\_ Wattle Barrier” with “Wattle Barrier”.

**Page 16-25, Article 1642-5 MEASUREMENT AND PAYMENT, after line 9,** add the following:

| <b>Pay Item</b>           | <b>Pay Unit</b> |
|---------------------------|-----------------|
| Coir Fiber Wattle         | Linear Foot     |
| Coir Fiber Wattle Barrier | Linear Foot     |

**STANDARD SPECIAL PROVISION**  
**AVAILABILITY OF FUNDS – TERMINATION OF CONTRACTS**

(5-20-08)(Rev. 1-16-24)

Z-2

*General Statute 143C-6-11. (h) Highway Appropriation* is hereby incorporated verbatim in this contract as follows:

(h) Amounts Encumbered. – Transportation project appropriations may be encumbered in the amount of allotments made to the Department of Transportation by the Director for the estimated payments for transportation project contract work to be performed in the appropriation fiscal year. The allotments shall be multiyear allotments and shall be based on estimated revenues and shall be subject to the maximum contract authority contained in *General Statute 143C-6-11(c)*. Payment for transportation project work performed pursuant to contract in any fiscal year other than the current fiscal year is subject to appropriations by the General Assembly. Transportation project contracts shall contain a schedule of estimated completion progress, and any acceleration of this progress shall be subject to the approval of the Department of Transportation provided funds are available. The State reserves the right to terminate or suspend any transportation project contract, and any transportation project contract shall be so terminated or suspended if funds will not be available for payment of the work to be performed during that fiscal year pursuant to the contract. In the event of termination of any contract, the contractor shall be given a written notice of termination at least 60 days before completion of scheduled work for which funds are available. In the event of termination, the contractor shall be paid for the work already performed in accordance with the contract specifications.

Payment will be made on any contract terminated pursuant to the special provision in accordance with Subarticle 108-13(D) of the *Standard Specifications*.

**STANDARD SPECIAL PROVISION**  
**NCDOT GENERAL SEED SPECIFICATION FOR SEED QUALITY**

(5-17-11)

Z-3

Seed shall be sampled and tested by the North Carolina Department of Agriculture and Consumer Services, Seed Testing Laboratory. When said samples are collected, the vendor shall supply an independent laboratory report for each lot to be tested. Results from seed so sampled shall be final. Seed not meeting the specifications shall be rejected by the Department of Transportation and shall not be delivered to North Carolina Department of Transportation warehouses. If seed has been delivered it shall be available for pickup and replacement at the supplier's expense.

Any re-labeling required by the North Carolina Department of Agriculture and Consumer Services, Seed Testing Laboratory, that would cause the label to reflect as otherwise specified herein shall be rejected by the North Carolina Department of Transportation.

Seed shall be free from seeds of the noxious weeds Johnsongrass, Balloonvine, Jimsonweed, Witchweed, Itchgrass, Serrated Tussock, Showy Crotalaria, Smooth Crotalaria, Sicklepod, Sandbur, Wild Onion, and Wild Garlic. Seed shall not be labeled with the above weed species on the seed analysis label. Tolerances as applied by the Association of Official Seed Analysts will NOT be allowed for the above noxious weeds except for Wild Onion and Wild Garlic.

Tolerances established by the Association of Official Seed Analysts will generally be recognized. However, for the purpose of figuring pure live seed, the found pure seed and found germination percentages as reported by the North Carolina Department of Agriculture and Consumer Services, Seed Testing Laboratory will be used. Allowances, as established by the NCDOT, will be recognized for minimum pure live seed as listed on the following pages.

The specifications for restricted noxious weed seed refers to the number per pound as follows:

| <b><u>Restricted Noxious<br/>Weed</u></b> | <b><u>Limitations per<br/>Lb. Of Seed</u></b> | <b><u>Restricted Noxious<br/>Weed</u></b> | <b><u>Limitations per<br/>Lb. of Seed</u></b> |
|-------------------------------------------|-----------------------------------------------|-------------------------------------------|-----------------------------------------------|
| Blessed Thistle                           | 4 seeds                                       | Cornflower (Ragged Robin)                 | 27 seeds                                      |
| Cocklebur                                 | 4 seeds                                       | Texas Panicum                             | 27 seeds                                      |
| Spurred Anoda                             | 4 seeds                                       | Bracted Plantain                          | 54 seeds                                      |
| Velvetleaf                                | 4 seeds                                       | Buckhorn Plantain                         | 54 seeds                                      |
| Morning-glory                             | 8 seeds                                       | Broadleaf Dock                            | 54 seeds                                      |
| Corn Cockle                               | 10 seeds                                      | Curly Dock                                | 54 seeds                                      |
| Wild Radish                               | 12 seeds                                      | Dodder                                    | 54 seeds                                      |
| Purple Nutsedge                           | 27 seeds                                      | Giant Foxtail                             | 54 seeds                                      |
| Yellow Nutsedge                           | 27 seeds                                      | Horsenettle                               | 54 seeds                                      |
| Canada Thistle                            | 27 seeds                                      | Quackgrass                                | 54 seeds                                      |
| Field Bindweed                            | 27 seeds                                      | Wild Mustard                              | 54 seeds                                      |
| Hedge Bindweed                            | 27 seeds                                      |                                           |                                               |

Seed of Pensacola Bahiagrass shall not contain more than 7% inert matter, Kentucky Bluegrass, Centipede and Fine or Hard Fescue shall not contain more than 5% inert matter whereas a maximum of 2% inert matter will be allowed on all other kinds of seed. In addition, all seed

shall not contain more than 2% other crop seed nor more than 1% total weed seed. The germination rate as tested by the North Carolina Department of Agriculture shall not fall below 70%, which includes both dormant and hard seed. Seed shall be labeled with not more than 7%, 5% or 2% inert matter (according to above specifications), 2% other crop seed and 1% total weed seed.

Exceptions may be made for minimum pure live seed allowances when cases of seed variety shortages are verified. Pure live seed percentages will be applied in a verified shortage situation. Those purchase orders of deficient seed lots will be credited with the percentage that the seed is deficient.

FURTHER SPECIFICATIONS FOR EACH SEED GROUP ARE GIVEN BELOW:

Minimum 85% pure live seed; maximum 1% total weed seed; maximum 2% total other crop seed; maximum 144 restricted noxious weed seed per pound. Seed less than 83% pure live seed will not be approved.

Sericea Lespedeza  
Oats (seeds)

Minimum 80% pure live seed; maximum 1% total weed seed; maximum 2% total other crop; maximum 144 restricted noxious weed seed per pound. Seed less than 78% pure live seed will not be approved.

|                                      |                            |
|--------------------------------------|----------------------------|
| Tall Fescue (all approved varieties) | Bermudagrass               |
| Kobe Lespedeza                       | Browntop Millet            |
| Korean Lespedeza                     | German Millet – Strain R   |
| Weeping Lovegrass                    | Clover – Red/White/Crimson |
| Carpetgrass                          |                            |

Minimum 78% pure live seed; maximum 1% total weed seed; maximum 2% total other crop seed; maximum 144 restricted noxious weed seed per pound. Seed less than 76% pure live seed will not be approved.

Common or Sweet Sundangrass

Minimum 76% pure live seed; maximum 1% total weed seed; maximum 2% total other crop seed; maximum 144 restricted noxious weed seed per pound. Seed less than 74% pure live seed will not be approved.

Rye (grain; all varieties)  
Kentucky Bluegrass (all approved varieties)  
Hard Fescue (all approved varieties)  
Shrub (bicolor) Lespedeza

Minimum 70% pure live seed; maximum 1% total weed seed; maximum 2% total other crop seed; maximum 144 noxious weed seed per pound. Seed less than 70% pure live seed will not be approved.

Centipedegrass

Crownvetch

Pensacola Bahiagrass

Creeping Red Fescue

Japanese Millet

Reed Canary Grass

Zoysia

Minimum 70% pure live seed; maximum 1% total weed seed; maximum 2% total other crop seed; maximum 5% inert matter; maximum 144 restricted noxious weed seed per pound.

Barnyard Grass

Big Bluestem

Little Bluestem

Bristly Locust

Birdsfoot Trefoil

Indiangrass

Orchardgrass

Switchgrass

Yellow Blossom Sweet Clover

**STANDARD SPECIAL PROVISION**  
**ERRATA**

(1-16-24)(Rev. 6-16-26)

Z-4

Revise the *2024 Standard Specifications* as follows:

**Division 1**

**Page 1-1, Article 101-2 ABBREVIATIONS, line 25,** replace "American Wood-Preservers' Association" with "American Wood Protection Association".

**Page 1-18, Article 102-10 BID BOND OR BID DEPOSIT, line 26,** replace " Subarticle 102-8(A)(8)(b)" with "Subarticle 102-8(A)(12)(b)".

**Page 1-20, Subarticle 102-14(A) State Funded Projects, line 3,** replace "\$30,000" with "\$40,000".

**Page 1-20, Subarticle 102-14(B) Federal Aid Projects, line 7,** replace "\$30,000" with "\$40,000".

**Page 1-36, Subarticle 104-12(B) Evaluation of Proposals, line 21,** replace "Design-Build Unit" with "Alternative Delivery Unit".

**Page 1-36, Subarticle 104-12(D) Preliminary Review, line 37,** replace "Design-Build Unit" with "Alternative Delivery Unit".

**Page 1-37, Subarticle 104-12(E) Final Proposal, line 3,** replace "Design-Build Unit" with "Alternative Delivery Unit".

**Page 1-37, Subarticle 104-12(F) Design-Build VEPs, line 36,** replace "Design-Build Unit" with "Alternative Delivery Unit".

**Page 1-38, Subarticle 104-12(G) Modifications, line 1,** replace "Design-Build Unit" with "Alternative Delivery Unit".

**Division 3**

**Page 3-5, Article 305-2 MATERIALS, after line 16,** replace " 1032-3(A)(7)" with "1032-3" and add the item "Galvanized Corrugated Steel Pipe" with Section "1032-3".

**Page 3-6, Article 310-2 MATERIALS, after line 9,** add the item "Galvanized Corrugated Steel Pipe" with Section "1032-3".

**Division 6**

**Page 6-15, Article 610-1 DESCRIPTION, line 20,** replace "The work includes" with "The work includes, but is not limited to,".



**Page 6-15, Article 610-1 DESCRIPTION, line 22,** replace “applying the tack coat as specified.” with “applying the tack coat in accordance with Section 605.”.

**Page 6-30, Article 610-14 DENSITY ACCEPTANCE, line 39,** replace “QC process.” with “QC process in accordance with Section 609.”.

**Page 6-31, Article 610-16 MEASUREMENT AND PAYMENT, line 13,** replace "*Hot Mix Asphalt Pavement*" with "*Asphalt Concrete \_\_\_\_\_ Course, Type \_\_\_\_\_*".

**Page 6-50, Subarticle 661-4(A) Equipment, lines 4-7,** replace the first two sentences of the seventh paragraph with the following:

When an erected fixed stringline is utilized for longitudinal profile and cross slope control furnish and erect the necessary guide line for the equipment.

#### **Division 7**

**Page 7-18, Subarticle 710-10(A) General, lines 7-8,** delete “for *Surface Testing Concrete Pavement*” from the last paragraph.

#### **Division 8**

**Page 8-27, Article 846-1 DESCRIPTION, line 8,** delete “4 inch” from the first paragraph.

#### **Division 9**

**Page 9-17, Article 904-4 MEASUREMENT AND PAYMENT, prior to line 1,** replace " Sign Erection, Relocate Type (Ground Mounted)" with “Sign Erection, Relocate Type \_\_\_\_ (Ground Mounted)”.

#### **Division 10**

**Page 10-51, Article 1024-4 WATER, prior to line 1,** delete the “unpopulated blank row” in Table 1024-2 between “Time of set, deviation from control” and “Chloride Ion Content, Max.”.

**Page 10-170, Subarticle 1081-1(C) Requirements, line 4,** replace "maximum" with “minimum”.

#### **Division 11**

**Page 11-15, Article 1160-4 MEASUREMENT AND PAYMENT, line 24,** replace “Where barrier units are moved more than one” with “Where barrier units are moved more than once”.

#### **Division 15**

**Page 15-10, Article 1515-4 MEASUREMENT AND PAYMENT, lines 11,** replace " All piping" with “All labor, the manhole, other materials, excavation, backfilling, piping”.

**Division 16**

**Page 16-14, Article 1633-5 MEASUREMENT AND PAYMENT, line 20-24 and prior to line 25**, delete and replace with the following " *Flocculant* will be measured and paid in accordance with Article 1642-5 applied to the temporary rock silt checks."

**Page 16-3, Article 1609-2 MATERIALS, after line 26**, replace "Type 4" with "Type 4a".

**Page 16-25, Article 1644-2 MATERIALS, after line 22**, replace "Type 4" with "Type 4a".

**Page 16-27, Article 1644-5 MEASUREMENT AND PAYMENT, line 31**, replace "Article 1630-4" with "Article 1630-3".

**Division 17**

**Page 17-15, Article 1715-4 MEASUREMENT AND PAYMENT, line 23**, delete and replace "1.25" with "1-1/4".

**Page 17-15, Article 1715-4 MEASUREMENT AND PAYMENT, line 24**, delete and replace "(1.25" with " , 1-1/4".

**STANDARD SPECIAL PROVISION****PLANT AND PEST QUARANTINES**

**(Imported Fire Ant, Guava Root Knot Nematode, Spongy Moth (formerly known as gypsy moth), Witchweed, Cogon Grass, And Any Other Regulated Noxious Weed or Plant Pest)**

(3-18-03)(Rev. 3-18-25)

Z-04a

**Within Quarantined Area**

This project may be within a county regulated for plant and/or pests. If the project or any part of the Contractor's operations is located within a quarantined area, thoroughly clean all equipment prior to moving out of the quarantined area. Comply with federal/state regulations by obtaining a certificate or limited permit for any regulated article moving from the quarantined area.

**Originating in a Quarantined County**

Obtain a certificate or limited permit issued by the N.C. Department of Agriculture/United States Department of Agriculture. Have the certificate or limited permit accompany the article when it arrives at the project site.

**Contact**

Contact the N.C. Department of Agriculture/United States Department of Agriculture at 1-800-206-9333, 919-707-3730, or <https://www.ncagr.gov/divisions/plant-industry/plant-protection/plant-industry-plant-pest-quarantines> to determine those specific project sites located in the quarantined area or for any regulated article used on this project originating in a quarantined county.

**Regulated Articles Include**

1. Soil, sand, gravel, compost, peat, humus, muck, and decomposed manure, separately or with other articles. This includes movement of articles listed above that may be associated with cut/waste, ditch pulling, and shoulder cutting.
2. Plants with roots including grass sod.
3. Plant crowns and roots.
4. Bulbs, corms, rhizomes, and tubers of ornamental plants.
5. Hay, straw, fodder, and plant litter of any kind.
6. Clearing and grubbing debris.
7. Used agricultural cultivating and harvesting equipment.
8. Used earth-moving equipment.
9. Any other products, articles, or means of conveyance of any character, if determined by an inspector present a hazard of spreading imported fire ant, guava root knot nematode, spongy moth (formerly known as gypsy moth), witchweed, cogon grass, or other regulated noxious weed or plant pest.

**STANDARD SPECIAL PROVISION****TITLE VI AND NONDISCRIMINATION:**

(6-28-77)(Rev 1/16/2024)

Z-6

The North Carolina Department of Transportation is committed to carrying out the U.S. Department of Transportation's policy of ensuring nondiscrimination in the award and administration of contracts.

The provisions of this section related to United States Department of Transportation (US DOT) Order 1050.2A, Title 49 Code of Federal Regulations (CFR) part 21, 23 United States Code (U.S.C.) 140 and 23 CFR part 200 (or 49 CFR 303, 49 U.S.C. 5332 or 49 U.S.C. 47123) are applicable to all North Carolina Department of Transportation (NCDOT) contracts and to all related subcontracts, material supply, engineering, architectural and other service contracts, regardless of dollar amount. Any Federal provision that is specifically required not specifically set forth is hereby incorporated by reference.

**(1) Title VI Assurances (USDOT Order 1050.2A, Appendix A)**

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

**(a) Compliance with Regulations**

The contractor (hereinafter includes consultants) shall comply with the Acts and the Regulations relative to Nondiscrimination in Federally-assisted programs of the U.S. Department of Transportation, Federal Highway Administration (FHWA), as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

**(b) Nondiscrimination**

The contractor, with regard to the work performed by it during the contract, shall not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor shall not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.

**(c) Solicitations for Subcontractors, Including Procurements of Materials and Equipment**

In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier shall be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Nondiscrimination on the grounds of race, color, or national origin.

**(d) Information and Reports**

The contractor shall provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and shall permit access to its books, records, accounts, other sources of information, and its facilities as may be

determined by the Recipient or the FHWA to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor shall so certify to the Recipient or the FHWA, as appropriate, and shall set forth what efforts it has made to obtain the information.

(e) Sanctions for Noncompliance:

In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it and/or the FHWA may determine to be appropriate, including, but not limited to:

- (i) Withholding payments to the contractor under the contract until the contractor complies; and/or
- (ii) Cancelling, terminating, or suspending a contract, in whole or in part.

(f) Incorporation of Provisions

The contractor shall include the provisions of paragraphs (a) through (f) in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor shall take action with respect to any subcontract or procurement as the Recipient or the FHWA may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

**(2) Title VI Nondiscrimination Program (23 CFR 200.5(p))**

The North Carolina Department of Transportation (NCDOT) has assured the USDOT that, as a condition to receiving federal financial assistance, NCDOT will comply with Title VI of the Civil Rights Act of 1964 and all requirements imposed by Title 49 CFR part 21 and related nondiscrimination authorities to ensure that no person shall, on the ground of race, color, national origin, limited English proficiency, sex, age, or disability (including religion/creed or income-level, where applicable), be excluded from participation in, be denied the benefits of, or be subjected to discrimination under any programs, activities, or services conducted or funded by NCDOT. Contractors and other organizations under contract or agreement with NCDOT must also comply with Title VI and related authorities, therefore:

- (a) During the performance of this contract or agreement, contractors (e.g., subcontractors, consultants, vendors, prime contractors) are responsible for complying with NCDOT's Title VI Program. Contractors are not required to prepare or submit Title VI Programs. To comply with this section, the prime contractor shall:
  - 1. Post NCDOT's Notice of Nondiscrimination and the Contractor's own Equal Employment Opportunity (EEO) Policy in conspicuous locations accessible to all employees, applicants and subcontractors on the jobsite.

2. Physically incorporate the required Title VI clauses into all subcontracts on federally-assisted and state-funded NCDOT projects, and ensure inclusion by subcontractors into all lower-tier subcontracts.
  3. Required Solicitation Language. The Contractor shall include the following notification in all solicitations for bids and requests for work or material, regardless of funding source:

“The North Carolina Department of Transportation, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252, 42 U.S.C. §§ 2000d to 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively ensure that any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full and fair opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award. In accordance with other related nondiscrimination authorities, bidders and contractors will also not be discriminated against on the grounds of sex, age, disability, low-income level, creed/religion, or limited English proficiency in consideration for an award.”
  4. Physically incorporate the FHWA-1273, in its entirety, into all subcontracts and subsequent lower tier subcontracts on Federal-aid highway construction contracts only.
  5. Provide language assistance services (i.e., written translation and oral interpretation), free of charge, to LEP employees and applicants. Contact NCDOT OCR for further assistance, if needed.
  6. For assistance with these Title VI requirements, contact the NCDOT Title VI Nondiscrimination Program at 1-800-522-0453.
- (b) Subrecipients (e.g. cities, counties, LGAs, planning organizations) may be required to prepare and submit a Title VI Plan to NCDOT, including Title VI Assurances and/or agreements. Subrecipients must also ensure compliance by their contractors and subrecipients with Title VI. (23 CFR 200.9(b)(7))
- (c) If reviewed or investigated by NCDOT, the contractor or subrecipient agrees to take affirmative action to correct any deficiencies found within a reasonable time period, not to exceed 90 calendar days, unless additional time is granted by NCDOT. (23 CFR 200.9(b)(15))
- (d) The Contractor is responsible for notifying subcontractors of NCDOT’s External Discrimination Complaints Process.
1. Applicability

Title VI and related laws protect participants and beneficiaries (e.g., members of the public and contractors) from discrimination by NCDOT employees, subrecipients and contractors, regardless of funding source.

## 2. Eligibility

Any person—or class of persons—who believes he/she has been subjected to discrimination based on race, color, national origin, Limited English Proficiency (LEP), sex, age, or disability (and religion in the context of employment, aviation, or transit) may file a written complaint. The law also prohibits intimidation or retaliation of any sort.

## 3. Time Limits and Filing Options

Complaints may be filed by the affected individual(s) or a representative and must be filed no later than 180 calendar days after the following:

- (i) The date of the alleged act of discrimination; or
- (ii) The date when the person(s) became aware of the alleged discrimination; or
- (iii) Where there has been a continuing course of conduct, the date on which that conduct was discontinued or the latest instance of the conduct.

Title VI and related discrimination complaints may be submitted to the following entities:

- North Carolina Department of Transportation, Office of Civil Rights, Title VI Program, 1511 Mail Service Center, Raleigh, NC 27699-1511; toll free 1-800-522-0453
- Federal Highway Administration, North Carolina Division Office, 310 New Bern Avenue, Suite 410, Raleigh, NC 27601, 919-747-7010
- US Department of Transportation, Departmental Office of Civil Rights, External Civil Rights Programs Division, 1200 New Jersey Avenue, SE, Washington, DC 20590; 202-366-4070

## 4. Format for Complaints

Complaints must be in writing and signed by the complainant(s) or a representative, and include the complainant's name, address, and telephone number. Complaints received by fax or e-mail will be acknowledged and processed. Allegations received by telephone will be reduced to writing and provided to the complainant for confirmation or revision before processing. Complaints will be accepted in other languages, including Braille.

## 5. Discrimination Complaint Form

Contact NCDOT Civil Rights to receive a full copy of the Discrimination Complaint Form and procedures.

## 6. Complaint Basis

Allegations must be based on issues involving race, color, national origin (LEP), sex, age, disability, or religion (in the context of employment, aviation or transit). "Basis" refers to the complainant's membership in a protected group category.

**TABLE 103-1  
COMPLAINT BASIS**

| Protected Categories                                                                                                               | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Examples                                                                                                               | Applicable Nondiscrimination Authorities                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Race and Ethnicity                                                                                                                 | An individual belonging to one of the accepted racial groups; or the perception, based usually on physical characteristics that a person is a member of a racial group                                                                                                                                                                                                                                                                                                                                                     | Black/African American, Hispanic/Latino, Asian, American Indian/Alaska Native, Native Hawaiian/Pacific Islander, White | Title VI of the Civil Rights Act of 1964; 49 CFR Part 21; 23 CFR 200; 49 U.S.C. 5332(b); 49 U.S.C. 47123. <i>(Executive Order 13166)</i>   |
| Color                                                                                                                              | Color of skin, including shade of skin within a racial group                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Black, White, brown, yellow, etc.                                                                                      |                                                                                                                                            |
| National Origin <i>(Limited English Proficiency)</i>                                                                               | Place of birth. Citizenship is not a factor. <i>(Discrimination based on language or a person's accent is also covered)</i>                                                                                                                                                                                                                                                                                                                                                                                                | Mexican, Cuban, Japanese, Vietnamese, Chinese                                                                          |                                                                                                                                            |
| Sex                                                                                                                                | Gender. The sex of an individual.<br><i>Note:</i> Sex under this program does not include sexual orientation.                                                                                                                                                                                                                                                                                                                                                                                                              | Women and Men                                                                                                          | 1973 Federal-Aid Highway Act; 49 U.S.C. 5332(b); 49 U.S.C. 47123.                                                                          |
| Age                                                                                                                                | Persons of any age                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 21-year-old person                                                                                                     | Age Discrimination Act of 1975 49 U.S.C. 5332(b); 49 U.S.C. 47123.                                                                         |
| Disability                                                                                                                         | Physical or mental impairment, permanent or temporary, or perceived.                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Blind, alcoholic, para-amputee, epileptic, diabetic, arthritic                                                         | Section 504 of the Rehabilitation Act of 1973; Americans with Disabilities Act of 1990                                                     |
| Religion (in the context of employment)<br><i>(Religion/ Creed in all aspects of any aviation or transit-related construction)</i> | An individual belonging to a religious group; or the perception, based on distinguishable characteristics that a person is a member of a religious group. In practice, actions taken as a result of the moral and ethical beliefs as to what is right and wrong, which are sincerely held with the strength of traditional religious views. <i>Note:</i> Does not have to be associated with a recognized religious group or church; if an individual sincerely holds to the belief, it is a protected religious practice. | Muslim, Christian, Sikh, Hindu, etc.                                                                                   | Title VII of the Civil Rights Act of 1964; 23 CFR 230; FHWA-1273 Required Contract Provisions. <i>(49 U.S.C. 5332(b); 49 U.S.C. 47123)</i> |

### (3) Pertinent Nondiscrimination Authorities

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest agrees to comply with the following non-discrimination statutes and authorities, including, but not limited to:

- (a) Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq., 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.



- (b) The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- (c) Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 et seq.), (prohibits discrimination on the basis of sex);
- (d) Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 et seq.), as amended, (prohibits discrimination on the basis of disability) and 49 CFR Part 27;
- (e) The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 et seq.), (prohibits discrimination on the basis of age);
- (f) Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- (g) The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- (h) Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- (i) The Federal Aviation Administration's Nondiscrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- (j) Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures Nondiscrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- (k) Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- (l) Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 et seq).
- (m) Title VII of the Civil Rights Act of 1964 (42 U.S.C. § 2000e et seq., Pub. L. 88-352), (prohibits employment discrimination on the basis of race, color, religion, sex, or national origin).

**(4) Additional Title VI Assurances**

*\*\*The following Title VI Assurances (Appendices B, C and D) shall apply, as applicable*

- (a) Clauses for Deeds Transferring United States Property (1050.2A, Appendix B)

The following clauses will be included in deeds effecting or recording the transfer of real property, structures, or improvements thereon, or granting interest therein from the United States pursuant to the provisions of Assurance 4.

NOW, THEREFORE, the U.S. Department of Transportation as authorized by law and upon the condition that the North Carolina Department of Transportation (NCDOT) will accept title to the lands and maintain the project constructed thereon in accordance with the North Carolina General Assembly, the Regulations for the Administration of the Federal-Aid Highway Program, and the policies and procedures prescribed by the Federal Highway Administration of the U.S. Department of Transportation in accordance and in compliance with all requirements imposed by Title 49, Code of Federal Regulations, U.S. Department of Transportation, Subtitle A, Office of the Secretary, Part 21, Nondiscrimination in Federally-assisted programs of the U.S. Department of Transportation pertaining to and effectuating the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252; 42 U.S.C. § 2000d to 2000d-4), does hereby remise, release, quitclaim and convey unto the NCDOT all the right, title and interest of the U.S. Department of Transportation in and to said lands described in Exhibit A attached hereto and made a part hereof.

(HABENDUM CLAUSE)

TO HAVE AND TO HOLD said lands and interests therein unto the North Carolina Department of Transportation (NCDOT) and its successors forever, subject, however, to the covenants, conditions, restrictions and reservations herein contained as follows, which will remain in effect for the period during which the real property or structures are used for a purpose for which Federal financial assistance is extended or for another purpose involving the provision of similar services or benefits and will be binding on the NCDOT, its successors and assigns.

The NCDOT, in consideration of the conveyance of said lands and interests in lands, does hereby covenant and agree as a covenant running with the land for itself, its successors and assigns, that (1) no person will on the grounds of race, color, or national origin, be excluded from participation in, be denied the benefits of, or be otherwise subjected to discrimination with regard to any facility located wholly or in part on, over, or under such lands hereby conveyed [,] [and]\* (2) that the NCDOT will use the lands and interests in lands and interests in lands so conveyed, in compliance with all requirements imposed by or pursuant to Title 49, Code of Federal Regulations, U.S. Department of Transportation, Subtitle A, Office of the Secretary, Part 21, Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, Effectuation of Title VI of the Civil Rights Act of 1964, and as said Regulations and Acts may be amended [, and (3) that in the event of breach of any of the above-mentioned nondiscrimination conditions, the Department will have a right to enter or re-enter said lands and facilities on said land, and that above described land and facilities will thereon revert to and vest in and become the absolute property of the U.S. Department of Transportation and its assigns as such interest existed prior to this instruction].\*

(\*Reverter clause and related language to be used only when it is determined that such a clause is necessary in order to make clear the purpose of Title VI.)

(b) Clauses for Transfer of Real Property Acquired or Improved Under the Activity, Facility, or Program (1050.2A, Appendix C)

The following clauses will be included in deeds, licenses, leases, permits, or similar instruments entered into by the North Carolina Department of Transportation (NCDOT) pursuant to the provisions of Assurance 7(a):

1. The (grantee, lessee, permittee, etc. as appropriate) for himself/herself, his/her heirs, personal representatives, successors in interest, and assigns, as a part of the consideration hereof, does hereby covenant and agree [in the case of deeds and leases add "as a covenant running with the land"] that:
  - (i.) In the event facilities are constructed, maintained, or otherwise operated on the property described in this (deed, license, lease, permit, etc.) for a purpose for which a U.S. Department of Transportation activity, facility, or program is extended or for another purpose involving the provision of similar services or benefits, the (grantee, licensee, lessee, permittee, etc.) will maintain and operate such facilities and services in compliance with all requirements imposed by the Acts and Regulations (as may be amended) such that no person on the grounds of race, color, or national origin, will be excluded from participation in, denied the benefits of, or be otherwise subjected to discrimination in the use of said facilities.
2. With respect to licenses, leases, permits, etc., in the event of breach of any of the above Nondiscrimination covenants, the NCDOT will have the right to terminate the (lease, license, permit, etc.) and to enter, re-enter, and repossess said lands and facilities thereon, and hold the same as if the (lease, license, permit, etc.) had never been made or issued. \*
3. With respect to a deed, in the event of breach of any of the above Nondiscrimination covenants, the NCDOT will have the right to enter or re-enter the lands and facilities thereon, and the above described lands and facilities will there upon revert to and vest in and become the absolute property of the NCDOT and its assigns. \*

(\*Reverter clause and related language to be used only when it is determined that such a clause is necessary to make clear the purpose of Title VI.)

(c) Clauses for Construction/Use/Access to Real Property Acquired Under the Activity, Facility or Program (1050.2A, Appendix D)

The following clauses will be included in deeds, licenses, permits, or similar instruments/ agreements entered into by the North Carolina Department of Transportation (NCDOT) pursuant to the provisions of Assurance 7(b):

1. The (grantee, licensee, permittee, etc., as appropriate) for himself/herself, his/her heirs, personal representatives, successors in interest, and assigns, as a part of the consideration hereof, does hereby covenant and agree (in the case of deeds and leases add, "as a covenant running with the land") that (1) no person on the ground of race, color, or national origin, will be excluded from participation in, denied the benefits of, or be otherwise subjected to discrimination in the use of said facilities, (2) that in the construction of any improvements on, over, or under such land, and the furnishing of services thereon, no person on the ground of race, color, or national origin, will be excluded from participation in, denied the benefits of, or otherwise be subjected to discrimination, (3) that the (grantee, licensee, lessee, permittee, etc.) will use the premises in compliance with all other requirements imposed by or pursuant to the Acts and Regulations, as amended, set forth in this Assurance.
2. With respect to (licenses, leases, permits, etc.), in the event of breach of any of the above Non- discrimination covenants, the NCDOT will have the right to terminate the (license, permit, etc., as appropriate) and to enter or re-enter and repossess said land and the facilities thereon, and hold the same as if said (license, permit, etc., as appropriate) had never been made or issued. \*
3. With respect to deeds, in the event of breach of any of the above Nondiscrimination covenants, the NCDOT will there upon revert to and vest in and become the absolute property of the NCDOT and its assigns. \*

(\*Reverter clause and related language to be used only when it is determined that such a clause is necessary to make clear the purpose of Title VI.)

**STANDARD SPECIAL PROVISION****MINORITY AND FEMALE EMPLOYMENT REQUIREMENTS**

Z-7

**NOTICE OF REQUIREMENTS FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (*EXECUTIVE NUMBER 11246*)**

1. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, see as shown on the attached sheet entitled "Employment Goals for Minority and Female participation".

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the Contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in *41 CFR Part 60-4* shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in *41 CFR 60-4.3(a)*, and its effort to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the executive Order and the regulations in *41 CFR Part 60-4*. Compliance with the goals will be measured against the total work hours performed.

2. As used in this Notice and in the contract resulting from this solicitation, the "covered area" is the county or counties shown on the cover sheet of the proposal form and contract.

**EMPLOYMENT GOALS FOR MINORITY  
AND FEMALE PARTICIPATION**

Economic Areas

**Area 023 29.7%**

Bertie County  
Camden County  
Chowan County  
Gates County  
Hertford County  
Pasquotank County  
Perquimans County

**Area 024 31.7%**

Beaufort County  
Carteret County  
Craven County  
Dare County  
Edgecombe County  
Green County  
Halifax County  
Hyde County  
Jones County  
Lenoir County  
Martin County  
Nash County  
Northampton County  
Pamlico County  
Pitt County  
Tyrrell County  
Washington County  
Wayne County  
Wilson County

**Area 025 23.5%**

Columbus County  
Duplin County  
Onslow County  
Pender County

**Area 026 33.5%**

Bladen County  
Hoke County  
Richmond County  
Robeson County  
Sampson County  
Scotland County

**Area 027 24.7%**

Chatham County  
Franklin County  
Granville County  
Harnett County  
Johnston County  
Lee County  
Person County  
Vance County  
Warren County

**Area 028 15.5%**

Alleghany County  
Ashe County  
Caswell County  
Davie County  
Montgomery County  
Moore County  
Rockingham County  
Surry County  
Watauga County  
Wilkes County

**Area 029 15.7%**

Alexander County  
Anson County  
Burke County  
Cabarrus County  
Caldwell County  
Catawba County  
Cleveland County  
Iredell County  
Lincoln County  
Polk County  
Rowan County  
Rutherford County  
Stanly County

**Area 0480 8.5%**

Buncombe County  
Madison County

**Area 030 6.3%**

Avery County  
Cherokee County  
Clay County  
Graham County  
Haywood County  
Henderson County  
Jackson County  
McDowell County  
Macon County  
Mitchell County  
Swain County  
Transylvania County  
Yancey County

---

SMSA AreasArea 5720 26.6%

Currituck County

Area 9200 20.7%

Brunswick County

New Hanover County

Area 2560 24.2%

Cumberland County

Area 6640 22.8%

Durham County

Orange County

Wake County

Area 1300 16.2%

Alamance County

Area 3120 16.4%

Davidson County

Forsyth County

Guilford County

Randolph County

Stokes County

Yadkin County

Area 1520 18.3%

Gaston County

Mecklenburg County

Union County

---

Goals for FemaleParticipation in Each Trade

(Statewide) 6.9%

FHWA-1273 -- Revised June 25, 2026

### CONTRACT PROVISIONS FOR FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Davis-Bacon and Related Act Provisions
- IV. Contract Work Hours and Safety Standards Act Provisions
- V. Subletting or Assigning the Contract
- VI. Safety: Accident Prevention
- VII. False Statements Concerning Highway Projects
- VIII. Implementation of Clean Air Act and Federal Water Pollution Control Act
- IX. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion
- X. Certification Regarding Use of Contract Funds for Lobbying
- XI. Use of United States-Flag Vessels:

#### ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only).

#### I. GENERAL

1. Historically, contracting agencies using Federal-aid highway funds were required to ensure Form FHWA-1273 was physically incorporated into all contracts and subcontracts. Effective June 10, 2026, this requirement was eliminated [91 FR 25492]. Future use of Form FHWA-1273 is now optional on the part of the contracting agency using Federal-aid highway funds. FHWA continues to make Form FHWA-1273 available as a convenience to contracting agencies. Contracting agencies must continue to ensure compliance with the provisions cited in Form FHWA-1273 in accordance with the provisions regardless of the use of Form FHWA-1273. Accordingly, the contracting agency retains the authority to determine whether the contractor must use Form FHWA-1273 to physically incorporate required contract provisions in each subcontract and in lower tier contracts. Where permitted by the contracting agency, the contractor may choose other ways to include required contract provisions in each subcontract, besides incorporating Form FHWA-1273. Contract provisions in Form FHWA-1273 are not required to be physically included in subcontracts for design services on Federal-aid design-build contracts, or in purchase orders, rental agreements and other agreements for supplies or services.

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor or design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in solicitation-for-bids or request-for-proposals documents.

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's

immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. 23 U.S.C. 114(b). The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors. 23 U.S.C. 101(a).

#### II. NONDISCRIMINATION

The contractor and all subcontractors must comply with the following policies: 29 CFR Parts 1625-1627, 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with 29 CFR Parts 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), and Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR Part 35 and 29 CFR Part 1630 are incorporated by reference in this contract.

#### 1. Assurances Required:

a. The requirements of 49 CFR Part 26, including any amendments thereto, and the State DOT's FHWA-approved Disadvantaged Business Enterprise (DBE) program are incorporated by reference.

b. The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26, including any amendments thereto, in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:



- (1) Withholding monthly progress payments;
- (2) Assessing sanctions;
- (3) Liquidated damages; and/or
- (4) Disqualifying the contractor from future bidding as non-responsible.

c. The Title VI and nondiscrimination provisions of U.S. DOT Order 1050.2A at Appendixes A and E, including any amendments thereto, are incorporated by reference. 49 CFR Part 21.

### III. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size), in accordance with 29 CFR 5.5. The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. 23 U.S.C. 113. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. 23 U.S.C. 101. Where applicable law requires that projects be treated as a project on a Federal-aid highway, the provisions of this subpart will apply regardless of the location of the project. Examples include: Surface Transportation Block Grant Program projects funded under 23 U.S.C. 133 [excluding recreational trails projects], the Nationally Significant Freight and Highway Projects funded under 23 U.S.C. 117, and National Highway Freight Program projects funded under 23 U.S.C. 167.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

#### 1. Minimum wages (29 CFR 5.5)

a. *Wage rates and fringe benefits.* All laborers and mechanics employed or working upon the site of the work (or otherwise working in construction or development of the project under a development statute), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of basic hourly wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics. As provided in paragraphs (d) and (e) of 29 CFR 5.5, the appropriate wage determinations are effective by operation of law even if they have not been attached to the contract. Contributions made or costs reasonably anticipated for bona fide fringe benefits under the Davis-Bacon Act (40 U.S.C. 3141(2)(B)) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.e. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics must be paid the appropriate wage rate and fringe benefits on the wage determination for the classification(s) of work actually performed, without regard to skill, except as provided in

paragraph 4. of this section. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided*, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph 1.c. of this section) and the Davis-Bacon poster (WH-1321) must be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. *Frequently recurring classifications.* (1) In addition to wage and fringe benefit rates that have been determined to be prevailing under the procedures set forth in [29 CFR part 1](#), a wage determination may contain, pursuant to § 1.3(f), wage and fringe benefit rates for classifications of laborers and mechanics for which conformance requests are regularly submitted pursuant to paragraph 1.c. of this section, provided that:

(i) The work performed by the classification is not performed by a classification in the wage determination for which a prevailing wage rate has been determined;

(ii) The classification is used in the area by the construction industry; and

(iii) The wage rate for the classification bears a reasonable relationship to the prevailing wage rates contained in the wage determination.

(2) The Administrator will establish wage rates for such classifications in accordance with paragraph 1.c.(1)(iii) of this section. Work performed in such a classification must be paid at no less than the wage and fringe benefit rate listed on the wage determination for such classification.

c. *Conformance.* (1) The contracting officer must require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract be classified in conformance with the wage determination. Conformance of an additional classification and wage rate and fringe benefits is appropriate only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is used in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) The conformance process may not be used to split, subdivide, or otherwise avoid application of classifications listed in the wage determination.

(3) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the

classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken will be sent by the contracting officer by email to [DBAconformance@dol.gov](mailto:DBAconformance@dol.gov). The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer will, by email to [DBAconformance@dol.gov](mailto:DBAconformance@dol.gov), refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(5) The contracting officer must promptly notify the contractor of the action taken by the Wage and Hour Division under paragraphs 1.c.(3) and (4) of this section. The contractor must furnish a written copy of such determination to each affected worker or it must be posted as a part of the wage determination. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 1.c.(3) or (4) of this section must be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

*d. Fringe benefits not expressed as an hourly rate.*

Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor may either pay the benefit as stated in the wage determination or may pay another bona fide fringe benefit or an hourly cash equivalent thereof.

*e. Unfunded plans.* If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided*, That the Secretary of Labor has found, upon the written request of the contractor, in accordance with the criteria set forth in § 5.28, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

*f. Interest.* In the event of a failure to pay all or part of the wages required by the contract, the contractor will be required to pay interest on any underpayment of wages.

## 2. Withholding (29 CFR 5.5)

*a. Withholding requirements.* The contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered

necessary to satisfy the liabilities of the prime contractor or any subcontractor for the full amount of wages and monetary relief, including interest, required by the clauses set forth in this section for violations of this contract, or to satisfy any such liabilities required by any other Federal contract, or federally assisted contract subject to Davis-Bacon labor standards, that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to Davis-Bacon labor standards requirements and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld. In the event of a contractor's failure to pay any laborer or mechanic, including any apprentice or helper working on the site of the work all or part of the wages required by the contract, or upon the contractor's failure to submit the required records as discussed in paragraph 3.d. of this section, the contracting agency may on its own initiative and after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

*b. Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with paragraph 2.a. of this section or Section IV, paragraph 3.a., or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprourement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, [31 U.S.C. 3901-3907](#).

## 3. Records and certified payrolls (29 CFR 5.5)

*a. Basic record requirements (1) Length of record retention.* All regular payrolls and other basic records must be maintained by the contractor and any subcontractor during the course of the work and preserved for all laborers and mechanics working at the site of the work (or otherwise working in construction or development of the project under a development statute) for a period of at least 3 years after all the work on the prime contract is completed.

(2) *Information required.* Such records must contain the name; Social Security number; last known address, telephone number, and email address of each such worker; each worker's correct classification(s) of work actually performed; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in [40 U.S.C. 3141\(2\)\(B\)](#) of the Davis-Bacon Act); daily and weekly number

of hours actually worked in total and on each covered contract; deductions made; and actual wages paid.

(3) *Additional records relating to fringe benefits.* Whenever the Secretary of Labor has found under paragraph 1.e. of this section that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act, the contractor must maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits.

(4) *Additional records relating to apprenticeship.* Contractors with apprentices working under approved programs must maintain written evidence of the registration of apprenticeship programs, the registration of the apprentices, and the ratios and wage rates prescribed in the applicable programs.

b. *Certified payroll requirements* (1) *Frequency and method of submission.* The contractor or subcontractor must submit weekly, for each week in which any DBA- or Related Acts-covered work is performed, certified payrolls to the contracting agency. The prime contractor is responsible for the submission of all certified payrolls by all subcontractors. A contracting agency or prime contractor may permit or require contractors to submit certified payrolls through an electronic system, as long as the electronic system requires a legally valid electronic signature; the system allows the contractor, the contracting agency, and the Department of Labor to access the certified payrolls upon request for at least 3 years after the work on the prime contract has been completed; and the contracting agency or prime contractor permits other methods of submission in situations where the contractor is unable or limited in its ability to use or access the electronic system.

(2) *Information required.* The certified payrolls submitted must set out accurately and completely all of the information required to be maintained under paragraph 3.a.(2) of this section, except that full Social Security numbers and last known addresses, telephone numbers, and email addresses must not be included on weekly transmittals. Instead, the certified payrolls need only include an individually identifying number for each worker ( e.g., the last four digits of the worker's Social Security number). The required weekly certified payroll information may be submitted using Optional Form WH-347 or in any other format desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division website at <https://www.dol.gov/sites/dolgov/files/WHDLegacy/files/wh347.pdf> or its successor website. It is not a violation of this section for a prime contractor to require a subcontractor to provide full Social Security numbers and last known addresses, telephone numbers, and email addresses to the prime contractor for its own records, without weekly submission by the subcontractor to the contracting agency.

(3) *Statement of Compliance.* Each certified payroll submitted must be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor, or the contractor's or subcontractor's agent who pays or supervises the payment of the persons working on the contract, and must certify the following:

(i) That the certified payroll for the payroll period contains the information required to be provided under paragraph 3.b. of this section, the appropriate information and basic records are being maintained under paragraph 3.a. of this section, and such information and records are correct and complete;

(ii) That each laborer or mechanic (including each helper and apprentice) working on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in 29 CFR part 3; and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification(s) of work actually performed, as specified in the applicable wage determination incorporated into the contract.

(4) *Use of Optional Form WH-347.* The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 will satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(3) of this section.

(5) *Signature.* The signature by the contractor, subcontractor, or the contractor's or subcontractor's agent must be an original handwritten signature or a legally valid electronic signature.

(6) *Falsification.* The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 3729.

(7) *Length of certified payroll retention.* The contractor or subcontractor must preserve all certified payrolls during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

c. *Contracts, subcontracts, and related documents.* The contractor or subcontractor must maintain this contract or subcontract and related documents including, without limitation, bids, proposals, amendments, modifications, and extensions. The contractor or subcontractor must preserve these contracts, subcontracts, and related documents during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

d. *Required disclosures and access* (1) *Required record disclosures and access to workers.* The contractor or subcontractor must make the records required under paragraphs 3.a. through 3.c. of this section, and any other documents that the contracting agency, the State DOT, the FHWA, or the Department of Labor deems necessary to determine compliance with the labor standards provisions of any of the applicable statutes referenced by § 5.1, available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and must permit such representatives to interview workers during working hours on the job.

(2) *Sanctions for non-compliance with records and worker access requirements.* If the contractor or subcontractor fails to submit the required records or to make them available, or refuses to permit worker interviews during working hours on the job, the Federal agency may, after written notice to the contractor, sponsor, applicant, owner, or other entity, as the case may be, that maintains such records or that employs such workers, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available, or to permit worker interviews during working hours on the job, may be grounds for debarment action pursuant to § 5.12. In addition, any contractor or other person that fails to submit the required records or make those records available to WHD within the time WHD requests that the records be produced will be precluded from introducing as evidence in an administrative proceeding under 29 CFR part 6 any of the required records that were not provided or made available to WHD. WHD will take into consideration a reasonable request from the contractor or person for an extension of the time for submission of records. WHD will determine the reasonableness of the request and may consider, among other things, the location of the records and the volume of production.

(3) *Required information disclosures.* Contractors and subcontractors must maintain the full Social Security number and last known address, telephone number, and email address of each covered worker, and must provide them upon request to the contracting agency, the State DOT, the FHWA, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or other compliance action.

#### **4. Apprentices and equal employment opportunity (29 CFR 5.5)**

a. *Apprentices (1) Rate of pay.* Apprentices will be permitted to work at less than the predetermined rate for the work they perform when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship (OA), or with a State Apprenticeship Agency recognized by the OA. A person who is not individually registered in the program, but who has been certified by the OA or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice, will be permitted to work at less than the predetermined rate for the work they perform in the first 90 days of probationary employment as an apprentice in such a program. In the event the OA or a State Apprenticeship Agency recognized by the OA withdraws approval of an apprenticeship program, the contractor will no longer be permitted to use apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(2) *Fringe benefits.* Apprentices must be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe benefits must be paid in accordance with that determination.

(3) *Apprenticeship ratio.* The allowable ratio of apprentices to journeymen on the job site in any craft classification must not be greater than the ratio permitted to the contractor as to the entire work force under the registered program or the ratio applicable to the locality of the project pursuant to paragraph 4.a.(4) of this section. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in paragraph 4.a.(1) of this section, must be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under this section must be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(4) *Reciprocity of ratios and wage rates.* Where a contractor is performing construction on a project in a locality other than the locality in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyworker's hourly rate) applicable within the locality in which the construction is being performed must be observed. If there is no applicable ratio or wage rate for the locality of the project, the ratio and wage rate specified in the contractor's registered program must be observed.

b. *Equal employment opportunity.* The use of apprentices and journeymen under this part must be in conformity with 29 CFR part 30, including any amendments thereto.

c. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section III. 23 CFR 230.111(e)(2). The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

**5. Compliance with Copeland Act requirements.** The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract as provided in 29 CFR 5.5.

**6. Subcontracts.** The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs (1) through (11) of this section, along with the applicable wage determination(s) and such other clauses or contract modifications as the contracting agency may by appropriate instructions require, and a clause requiring the subcontractors to include these clauses and wage determination(s) in any lower tier subcontracts. The prime contractor is responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in this section. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and may be subject to debarment, as appropriate. 29 CFR 5.5.

**7. Contract termination: debarment.** A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the



contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

**8. Compliance with Davis-Bacon and Related Act requirements.** All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract as provided in 29 CFR 5.5.

**9. Disputes concerning labor standards.** As provided in 29 CFR 5.5, disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

**10. Certification of eligibility.** a. By entering into this contract, the contractor certifies that neither it nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of [40 U.S.C. 3144\(b\)](#) or § 5.12(a).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of [40 U.S.C. 3144\(b\)](#) or § 5.12(a).

c. The penalty for making false statements is prescribed in the U.S. Code, Title 18 Crimes and Criminal Procedure, [18 U.S.C. 1001](#).

**11. Anti-retaliation.** It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#);

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#);

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#); or

d. Informing any other person about their rights under the DBA, Related Acts, this part, or [29 CFR part 1](#) or [3](#).

#### IV. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

Pursuant to 29 CFR 5.5(b), the following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the

Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchpersons and guards.

**1. Overtime requirements.** No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek. 29 CFR 5.5.

**2. Violation; liability for unpaid wages; liquidated damages.** In the event of any violation of the clause set forth in paragraph 1. of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages and interest from the date of the underpayment. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchpersons and guards, employed in violation of the clause set forth in paragraph 1. of this section, in the sum currently provided in 29 CFR 5.5(b)(2)\* for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1. of this section.

\* \$33 as of January 15, 2025 (See 90 FR 1859) as may be adjusted annually by the Department of Labor, pursuant to the Federal Civil Penalties Inflation Adjustment Act of 1990.

#### 3. Withholding for unpaid wages and liquidated damages

a. *Withholding process.* The FHWA or the contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for any unpaid wages; monetary relief, including interest; and liquidated damages required by the clauses set forth in this section on this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to the Contract Work Hours and Safety Standards Act and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with Section III paragraph 2.a. or paragraph 3.a. of this section, or both, over claims to those funds by:

- (1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;
- (2) A contracting agency for its procurement costs;
- (3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;
- (4) A contractor's assignee(s);
- (5) A contractor's successor(s); or
- (6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901-3907.

**4. Subcontracts.** The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs 1. through 5. of this section and a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor is responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1. through 5. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and associated liquidated damages and may be subject to debarment, as appropriate.

**5. Anti-retaliation.** It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

- a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the Contract Work Hours and Safety Standards Act (CWHSSA) or its implementing regulations in this part;
- b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under CWHSSA or this part;
- c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under CWHSSA or this part; or
- d. Informing any other person about their rights under CWHSSA or this part.

## V. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System pursuant to 23 CFR 635.116.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of

the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" in paragraph 1 of Section VI refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions: (based on longstanding interpretation)

- (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
- (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract. 23 CFR 635.102.

2. Pursuant to 23 CFR 635.116(a), the contract amount upon which the requirements set forth in paragraph 1. of this section is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. Pursuant to 23 CFR 635.116(c), the contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract. (based on longstanding interpretation of 23 CFR 635.116).

5. The 30-percent self-performance requirement of paragraph (1) is not applicable to design-build contracts; however,

contracting agencies may establish their own self-performance requirements. 23 CFR 635.116(d).

## VI. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR Part 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract. 23 CFR 635.108.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR Part 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704). 29 CFR 1926.10.

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

## VII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR Part 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the

character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 11, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

## VIII. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT (42 U.S.C. 7606; 2 CFR 200.88; EO 11738)

This provision is applicable to all Federal-aid construction contracts in excess of \$150,000 and to all related subcontracts. 48 CFR 2.101; 2 CFR 200.327.

By submission of this bid/proposal or the execution of this contract or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, subcontractor, supplier, or vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251-1387). Violations must be reported to the Federal Highway Administration and the Regional Office of the Environmental Protection Agency. 2 CFR Part 200, Appendix II.

The contractor agrees to include or cause to be included the requirements of this Section in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements. 2 CFR 200.327.

## IX. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200. 2 CFR 180.220 and 1200.220.

### 1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction. 2 CFR 180.320.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default. 2 CFR 180.325.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances. 2 CFR 180.345 and 180.350.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900-180.1020, and 1200. "First Tier Covered Transactions" refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contractor). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction. 2 CFR 180.330.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold. 2 CFR 180.220 and 180.300.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. 2 CFR 180.300; 180.320, and 180.325. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. 2 CFR 180.335. To verify the eligibility of its principals, as well as the

eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (<https://www.sam.gov/>). 2 CFR 180.300, 180.320, and 180.325.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default. 2 CFR 180.325.

\* \* \* \* \*

## **2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:**

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.335;.

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State, or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property, 2 CFR 180.800;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification, 2 CFR 180.700 and 180.800; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default. 2 CFR 180.355(d).

(5) Are not a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(6) Are not a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability (USDOT Order 4200.6 implementing appropriations act requirements).



b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal. 2 CFR 180.335 and 180.340.

\* \* \* \* \*

### 3. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders, and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200). 2 CFR 180.220 and 1200.220.

a. By signing and submitting this proposal, the prospective lower tier participant is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances. 2 CFR 180.365.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900 – 180.1020, and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated. 2 CFR 1200.220 and 1200.332.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold. 2 CFR 180.220 and 1200.220.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered

transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (<https://www.sam.gov/>), which is compiled by the General Services Administration. 2 CFR 180.300, 180.320, 180.330, and 180.335.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment. 2 CFR 180.325.

\* \* \* \* \*

### 4. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals:

(1) is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.355;

(2) is a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(3) is a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability. (USDOT Order 4200.6 implementing appropriations act requirements)

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal.

\* \* \* \* \*

**X. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING**

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000. 49 CFR Part 20, App. A.

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**XI. USE OF UNITED STATES-FLAG VESSELS:**

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, or any other covered transaction. 46 CFR Part 381.

This requirement applies to material or equipment that is acquired for a specific Federal-aid highway project. 46 CFR 381.7. It is not applicable to goods or materials that come into inventories independent of an FHWA funded-contract.

When oceanic shipments (or shipments across the Great Lakes) are necessary for materials or equipment acquired for a specific Federal-aid construction project, the bidder, proposer, contractor, subcontractor, or vendor agrees:

1. To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the

extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. 46 CFR 381.7.

2. To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b)(1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Office of Cargo and Commercial Sealift (MAR-620), Maritime Administration, Washington, DC 20590. (MARAD requires copies of the ocean carrier's (master) bills of lading, certified onboard, dated, with rates and charges. These bills of lading may contain business sensitive information and therefore may be submitted directly to MARAD by the Ocean Transportation Intermediary on behalf of the contractor). 46 CFR 381.7.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS** (40 U.S.C. sections 14501(d) and 14701) and the Appalachian Regional Commission Code as authorized under 40 U.S.C. section 14302)  
This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 40 U.S.C. 14501 allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

**STANDARD SPECIAL PROVISION****ON-THE-JOB TRAINING**

(10-16-07) (Rev. 6-16-26)

Z-10

**Description**

The North Carolina Department of Transportation administers a custom version of the Federal On-the-Job Training (OJT) Program, commonly referred to as the Alternative OJT Program. All Contractors will be automatically placed in the Alternative OJT Program.

The Alternate OJT Program will allow a Contractor to train employees on Federal, State and privately funded projects located in North Carolina. However, priority shall be given to training employees on NCDOT Federal-Aid funded projects.

On the Job Training shall meet the requirements of 23 CFR 230.107 (b), 23 USC – Section 140, this special provision and the NCDOT On-the-Job Training Program Manual.

**Minorities and Women**

Developing, training and upgrading of minorities and women toward journeyman level status is a primary objective of this special provision. Accordingly, the Contractor shall make every effort to enroll minority and women as trainees to the extent that such persons are available within a reasonable area of recruitment. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

**Assigning Training Goals**

The Department, through the OJT Program Unit, will assign annual training goals based on the Contractor's activity over the past three years' on federal projects with the Department. At the beginning of each year, all eligible Contractors will be contacted by the Department to determine the number of trainees that will be assigned for the upcoming calendar year. At that time, the Contractor shall enter into an agreement with the Department to implement a self-imposed on-the-job training program for the calendar year. This agreement will specify the annual training goals agreed upon by both parties. The number of training assignments may range from 1 to 15 per Contractor per calendar year, unless a higher number is agreed to by the Contractor. The Contractor shall sign an agreement committing to fulfill their annual goal for the year.

**Training Classifications**

The Contractor shall provide on-the-job training aimed at developing full journeyman level workers in the construction craft/operator positions.

The Department has established common training classifications and their respective training requirements that may be used by the Contractors. However, the classifications established are not all-inclusive. Where the training is oriented toward construction applications, training will be allowed in lower-level management positions such as office engineers and estimators. Contractors shall submit new classifications for specific job functions that their employees are performing. The Department will review and recommend for acceptance to FHWA the new

classifications proposed by contractors, if applicable. New classifications shall meet the following requirements:

Proposed training classifications are reasonable and realistic based on the job skill classification needs, and

The number of training hours specified in the training classification is consistent with common practices and provides enough time for the trainee to obtain journeyman level status.

The Contractor may allow trainees to be trained by a subcontractor provided that the Contractor retains primary responsibility for meeting the training and this special provision is made applicable to the subcontract. However, only the Contractor will receive credit towards the annual goal for the trainee.

Where feasible, 25 percent of trainees in each occupation shall be in their first year of training. The number of trainees shall be distributed among the work classifications on the basis of the Contractor's needs and the availability of journeymen in the various classifications within a reasonable area of recruitment.

No employee shall be employed as a trainee in any classification in which they have successfully completed a training course leading to journeyman level status or in which they have been employed as a journeyman.

### **Records and Reports**

The Contractor shall maintain enrollment, monthly and completion reports documenting company compliance under these contract documents. These documents and any other information as requested shall be submitted to the OJT Program Manager.

Upon completion and graduation of the program, the Contractor shall provide each trainee with a certification Certificate showing the type and length of training satisfactorily completed.

### **Trainee Interviews**

All trainees enrolled in the program will receive at minimum an initial and Trainee/Post graduate interview conducted by the OJT program staff.

### **Trainee Wages**

Contractors shall compensate trainees on a graduating pay scale based upon a percentage of the prevailing minimum journeyman wages (Davis-Bacon Act). Minimum pay shall be as follows:

|            |                                                                     |
|------------|---------------------------------------------------------------------|
| 60 percent | of the journeyman wage for the first half of the training period    |
| 75 percent | of the journeyman wage for the third quarter of the training period |
| 90 percent | of the journeyman wage for the last quarter of the training period  |

In no instance shall a trainee be paid less than the local minimum wage. The Contractor shall adhere to the minimum hourly wage rate that will satisfy both the NC Department of Labor (NCDOL) and the Department.

**Achieving or Failing to Meet Training Goals**

The Contractor will be credited for each trainee currently enrolled or becomes enrolled in an approved program and who receives training for at least 50 percent of the specific program requirement. Trainees will be allowed to be transferred between projects if required by the Contractor's scheduled workload to meet training goals.

If a Contractor fails to attain their training assignments for the calendar year, they may be taken off the NCDOT's Bidders List.

**Measurement and Payment**

No compensation will be made for providing required training in accordance with these contract documents.

**STANDARD SPECIAL PROVISION**  
**MINIMUM WAGES**  
**GENERAL DECISION NC20260086 05/18/2026 NC86**

Z-086

Date: May 18, 2026

General Decision Number: NC20260086 05/18/2026 NC86

Superseded General Decision Numbers: NC20250086

State: North Carolina

Construction Type: HIGHWAY

**COUNTIES:**

|           |            |              |
|-----------|------------|--------------|
| Alleghany | Jackson    | Surry        |
| Ashe      | Lincoln    | Swain        |
| Avery     | Macon      | Transylvania |
| Cherokee  | McDowell   | Watauga      |
| Clay      | Mitchell   | Wilkes       |
| Cleveland | Polk       | Yancey       |
| Graham    | Rutherford |              |

HIGHWAY CONSTRUCTION PROJECTS (excluding tunnels, building structures in rest area projects & railroad construction; bascule, suspension & spandrel arch bridges designed for commercial navigation, bridges involving marine construction; and other major bridges).

Modification Number

0

Publication Date

01/02/2026

1

05/18/2026

SUNC2014-001 11/13/2014

|                                                                       | Rates | Fringes |
|-----------------------------------------------------------------------|-------|---------|
| TRUCK DRIVER (GVWR of 26,001 Lbs or Greater)                          | 13.50 |         |
| TRUCK DRIVER (GVWR of 26,000 Lbs or Less)                             | 11.72 |         |
| POWER EQUIPMENT OPERATORS (Milling Machine)                           | 13.88 |         |
| POWER EQUIPMENT OPERATORS (Mechanic)                                  | 18.51 |         |
| POWER EQUIPMENT OPERATORS (Tack Truck/Distributor Operator)           | 14.67 | .06     |
| POWER EQUIPMENT OPERATORS (Slip Form Machine)                         | 20.79 |         |
| POWER EQUIPMENT OPERATORS (Scraper Rough)                             | 11.53 |         |
| POWER EQUIPMENT OPERATORS (Scraper Finish)                            | 13.87 |         |
| POWER EQUIPMENT OPERATORS (Roller Other)                              | 11.75 |         |
| POWER EQUIPMENT OPERATORS (Roller Asphalt Finish)                     | 14.98 | .04     |
| POWER EQUIPMENT OPERATORS (Roller Asphalt Breakdown)                  | 14.05 | .06     |
| POWER EQUIPMENT OPERATORS (Paver Asphalt)                             | 15.68 | .05     |
| POWER EQUIPMENT OPERATORS (Pavement Marking Equipment)                | 13.33 |         |
| POWER EQUIPMENT OPERATORS (Oiler/Greaser)                             | 14.98 |         |
| POWER EQUIPMENT OPERATORS (Off-Road Hauler/Water Tanker)              | 13.87 |         |
| POWER EQUIPMENT OPERATORS (Material Transfer Vehicle (Shuttle Buggy)) | 17.39 |         |
| POWER EQUIPMENT OPERATORS (Loader Greater Than 2 Cubic Yards)         | 16.01 |         |
| POWER EQUIPMENT OPERATORS (Loader 2 Cubic Yards or Less)              | 13.38 |         |
| POWER EQUIPMENT OPERATORS (Grader/Blade Rough)                        | 13.07 |         |

|                                                      | Rates | Fringes |
|------------------------------------------------------|-------|---------|
| POWER EQUIPMENT OPERATORS (Grader/Blade Fine)        | 19.24 |         |
| POWER EQUIPMENT OPERATORS (Excavator Rough)          | 13.10 |         |
| POWER EQUIPMENT OPERATORS (Excavator Fine)           | 16.11 |         |
| POWER EQUIPMENT OPERATORS (Drill Operator Structure) | 20.92 |         |
| POWER EQUIPMENT OPERATORS (Drill Operator Rock)      | 15.25 |         |
| POWER EQUIPMENT OPERATORS (Crane Rough/All-Terrain)  | 21.25 |         |
| POWER EQUIPMENT OPERATORS (Crane Other)              | 19.59 |         |
| POWER EQUIPMENT OPERATORS (Crane Boom Trucks)        | 14.44 | .53     |
| POWER EQUIPMENT OPERATORS (Concrete Grinder/Groover) | 24.66 |         |
| POWER EQUIPMENT OPERATORS (Bulldozer Rough)          | 13.89 |         |
| POWER EQUIPMENT OPERATORS (Bulldozer Fine)           | 16.20 |         |
| POWER EQUIPMENT OPERATORS (Asphalt Broom Tractor)    | 11.00 |         |
| PAINTER (Bridge)                                     | 19.62 |         |
| LABORER (Traffic Signal/Lighting Installer)          | 15.85 |         |
| LABORER (Pipelayer)                                  | 12.22 |         |
| LABORER (Guardrail/Fence Installer)                  | 13.43 |         |
| LABORER (Common or General)                          | 10.68 |         |
| LABORER (Cement Mason/Concrete Finisher Tender)      | 12.26 |         |
| LABORER (Carpenter Tender)                           | 10.00 |         |
| LABORER (Asphalt Screed/Jackman)                     | 15.22 |         |
| LABORER (Asphalt Raker and Spreader)                 | 12.23 |         |
| IRONWORKER                                           | 14.53 |         |
| ELECTRICIAN (Telecommunications Technician)          | 15.13 |         |
| ELECTRICIAN (Electrician)                            | 19.19 | 2.39    |
| CEMENT MASON/CONCRETE FINISHER                       | 14.10 |         |
| CARPENTER                                            | 12.54 |         |
| BLASTER                                              | 21.83 |         |

Welders – Receive rate prescribed for craft performing operation to which welding is incidental.

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at <http://www.dol.gov/agencies/whd/government-contracts>.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least \$13.65 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract from May 11, 2026, through December 31, 2026. The applicable Executive Order minimum wage rate will be adjusted annually.



Additional information on contractor requirements and worker protections under Executive Order 13658 is available at [www.dol.gov/whd/govcontracts](http://www.dol.gov/whd/govcontracts).

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29 CFR 5.5(a)(1)(iii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

#### Union Rate Identifiers

A four-letter identifier beginning with characters other than "SU", "UAVG", "SA", or "SC" denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing this classification.

#### Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

#### Survey Rate Identifiers

The "SU" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

"SU" wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has discretion to update such rates under 29 CFR 1.6(c)(1).

#### State Adopted Rate Identifiers

The "SA" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the "SA" identifier took effect under state law in the state from which the rates were adopted.

#### WAGE DETERMINATION APPEALS PROCESS

- 1) Has there been an initial decision in the matter? This can be:
  - a) a survey underlying a wage determination
  - b) an existing published wage determination
  - c) an initial WHD letter setting forth a position on a wage determination matter
  - d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to [davisbaconinfo@dol.gov](mailto:davisbaconinfo@dol.gov) or by mail to:

Branch of Wage Surveys  
Wage and Hour Division  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, D.C. 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to [BCWD-Office@dol.gov](mailto:BCWD-Office@dol.gov) or by mail to:

Branch of Construction Wage Determinations  
Wage and Hour Division  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, D.C. 20210

- 2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to [dba.reconsideration@dol.gov](mailto:dba.reconsideration@dol.gov) or by mail to:

Wage and Hour Administrator  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, D.C. 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

- 3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board  
U.S. Department of Labor  
200 Constitution Avenue, N.W.  
Washington, D.C. 20210

END OF GENERAL DECISION

**PROJECT SPECIAL PROVISIONS  
GEOENVIRONMENTAL**

**CONTAMINATED SOIL (6/24/2026)**

The Contractor's attention is directed to the fact that soil contaminated with petroleum hydrocarbon compounds may exist within the project area. The potential areas of contamination are indicated on corresponding plans sheets. Information relating to these contaminated areas, sample locations, and investigation reports will be available at the following web address by navigating to the correct letting year and month then selecting, "Plans and Proposals", "HL-0065", "Individual Sheets/520 GeoEnvironmental":

<http://dotw-xfer01.dot.state.nc.us/dsplan/>

Petroleum contaminated soil may be encountered during any earthwork activities on the project. The Contractor shall only excavate those soils that the Engineer designates necessary to complete a particular task. The Engineer shall determine if soil is contaminated based on areas shown on the plans, petroleum odors, and unusual soil staining. Contaminated soil not required to be excavated is to remain in place and undisturbed. Undisturbed soil shall remain in place, whether contaminated or not. The Contractor shall transport all contaminated soil excavated from the project to a facility licensed to accept contaminated soil.

In the event that a stockpile is needed, the stockpile shall be created within the property boundaries of the source material and in accordance with the Diagram for Temporary Containment and Treatment of Petroleum-Contaminated Soil per North Carolina Department of Environmental Quality's (NCDEQ) Division of Waste Management UST Section GUIDELINES FOR EX SITU PETROLEUM CONTAMINATED SOIL REMEDIATION. If the volume of contaminated material exceeds available space on site, the Contractor shall obtain a permit from the NCDEQ UST Section's Regional Office for off-site temporary storage. The Contractor shall provide copies of disposal manifests completed per the disposal facilities requirements and weigh tickets to the Engineer.

**Measurement and Payment:**

The quantity of contaminated soil hauled and disposed of shall be the actual number of tons of material, which has been acceptably transported and weighed with certified scales as documented by disposal manifests and weigh tickets. The quantity of contaminated soil, measured as provided above, shall be paid for at the contract unit price per ton for "Hauling and Disposal of Petroleum Contaminated Soil".


The above price and payment shall be full compensation for all work covered by this section, including, but not limited to stockpiling, loading, transportation, weighing, laboratory testing, disposal, equipment, decontamination of equipment, labor, and personal protective equipment.

Payment shall be made under:

**Pay Item**

Hauling and Disposal of Petroleum Contaminated Soil

**Pay Unit**  
Ton

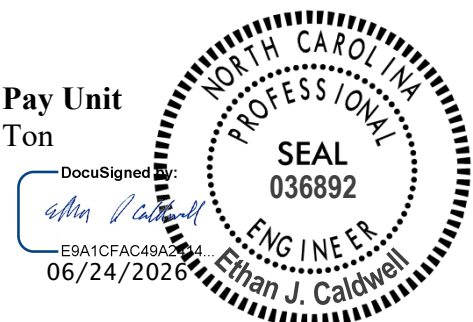

TIP # HL-0065

**SN-1**

Rutherford County

**RELOCATE WAYFINDING ASSEMBLY:****(A) DESCRIPTION**

Remove and reinstall wayfinding assemblies in locations shown on the signing plans and in accordance with the contract.

**(B) MATERIALS**

Furnish and install attachment hardware and foundation (if applicable) per manufacturer specifications. Original manufacturer to be provided by the Engineer if available.

**(C) CONSTRUCTION METHODS**

For a wayfinding assembly noted on the signing plans for relocation, notify the Engineer in writing two (2) weeks prior to commencement of construction activities in the block in which the wayfinding sign assembly is located.

Prior to removal of the wayfinding assembly, document the sign condition using photography or video. Remove the wayfinding assembly and transport to a location specified by the Engineer for temporary stockpiling. Upon stockpiling the wayfinding sign, document the condition of the sign. Dispose of any non-reusable hardware and footing(s) per NCDOT Standard Specification 907 (if applicable). Provide all sign condition documentation to the Engineer.

Reinstall the wayfinding assembly in its final location as noted on the proposed signing plans, obtaining approval to reinstall from the Engineer prior to reinstallation. Furnish and install attachment hardware and foundation (if applicable) per manufacturer specifications. After the wayfinding sign has been reinstalled, document the condition of the wayfinding sign using photography or video and provide that documentation to the Engineer.

Repair any areas or materials within the project limits disturbed or damaged in the performance of the work required under this section as directed by the Engineer.

**(D) MEASUREMENT AND PAYMENT**

*Relocate Wayfinding Assembly* will be measured and paid as the actual number of wayfinding assemblies satisfactorily removed, temporarily stockpiled, reinstalled and accepted by the Engineer.

The Engineer shall not be liable for any damage in the removal, transit, or reinstallation of relocated wayfinding signs.

Replacement of existing supports, regardless of type, and any required footings is incidental to the work performed for *Relocate Wayfinding Assembly*.


Payment will be made under:

**Pay Item**

Relocate Wayfinding Assembly

**Pay Unit**

Each

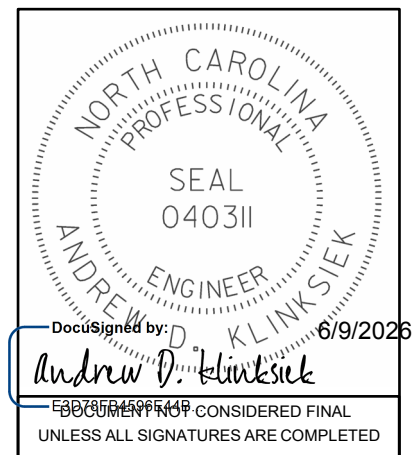



Signed by:

Matthew V. Springer

BC60F6E8B584403...

06/17/2025

**YIELD LINES PAVEMENT MARKING:**

(1-15-24)(Rev. 6-17-25)

**Description**

Install yield lines in accordance with this special provision, Section 1205 of the *Standard Specifications* and as directed by the Engineer.

**Materials**

Refer to Division 10 of the *Standard Specifications*.

**Item**

Pavement Markings

**Section**

1087

The material for yield line pavement markings shall be thermoplastic, integrated multipolymer, polyurea, type III cold applied plastic, or heated-in-place thermoplastic. Paint may be used for temporary yield line pavement markings.

**Application**

Refer to Section 1205 of the *Standard Specifications* and refer to Division 12 of the *Roadway Standard Drawings* on application of products used for yield lines. Refer to the integrated multipolymer (IMP) pavement marking special provision found elsewhere in this contract as applicable. Yield lines shall be a row of solid white isosceles triangles with 3 to 12 inches between each one, 12 to 24 inches in width, with a height 1.5 times the width. Yield lines shall point towards traffic, and they shall be placed at least 4 feet before the nearest controlled crosswalk. For unsignalized midblock crosswalks, yield lines shall be placed with the Yield Here to Pedestrians sign located 20 to 50 feet in advance of the crosswalk. Yield lines are not symbols or characters.

**Measurement and Payment**

*Yield Line \_\_\_\_\_ Pavement Marking, \_\_", \_\_mils* (for thermoplastic, integrated multipolymer, polyurea and heated-in-place thermoplastic material), *Yield Line Pavement Marking, Type III (\_\_\_")* (for Type 3 cold applied plastic material), or *Yield Line Pavement Marking, \_\_"* (for paint material) will be measured and paid as the actual number of linear feet of pavement marking lines satisfactorily placed and accepted by the Engineer. The quantity of lines will be the summation of the linear feet of solid line measured end-to-end of the line.

Payment will be made under:

**Pay Item**

Yield Line \_\_\_\_\_ Pavement Marking, \_\_", \_\_mils

Yield Line Cold Applied Plastic Pavement Marking, Type III (\_\_\_")

Yield Line Paint Pavement Marking, \_\_"

**Pay Unit**

Linear Feet

Linear Feet

Linear Feet


TC-1

HL-0065

Rutherford County

WORK ZONE TRAFFIC CONTROL  
Project Special Provisions  
Table of Contents

| Special Provision                                | Page |
|--------------------------------------------------|------|
| ADA Compliant Pedestrian Traffic Control Devices | TC-2 |
| Pedestrian Transport Service                     | TC-3 |

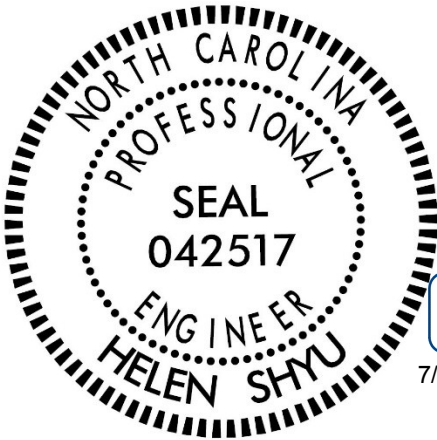

DocuSigned by:  
*Helen Shyu*  
0F15975A95E44EF...  
7/6/2026



## TC-2

HL-0065

Rutherford County

### **ADA COMPLIANT PEDESTRIAN TRAFFIC CONTROL DEVICES**

(10/31/2017) (Rev. 6/3/2022)

#### **Description**

Furnish, install, and maintain all ADA compliant pedestrian traffic control devices for existing pedestrian facilities that are disrupted, closed, or relocated by planned work activities.

The ADA compliant pedestrian traffic control devices used to either close, redirect, divert or detour pedestrian traffic are Pedestrian Channelizing Devices, Audible Warning Devices and Temporary Curb Ramps.

#### **Construction Methods**

The ADA compliant pedestrian traffic control devices involved in the closing or redirecting of pedestrians as designated on the Transportation Management Plan (TMP) shall be manufactured and assembled in accordance with the requirements of the Americans with Disabilities Act (ADA) and be on the NCDOT approved products list.

Pedestrian Channelizing Devices shall be manufactured and assembled to be connected as to eliminate any gaps that allow pedestrians to stray from the channelizing path. Pedestrian channelizing devices shall have continuous detection plates and hand-trailing edges, per MUTCD. Any Pedestrian Channelizing Devices used to close or block a pedestrian facility shall have a "SIDEWALK CLOSED" sign affixed to it and any audible warning devices, if designated on the TMP.

Audible Warning Devices shall be manufactured to include a locator tone activated by a motion sensor and have the ability to program a message for a duration of at least 1 minute. The motion sensor shall have the ability to detect pedestrians a minimum of 10 feet away. The voice module may be automatic or it may be push button activated. If push button activated, it shall be mounted at a height of approximately 3.5 feet, but no more than 4 feet, above the pedestrian facility.

Temporary Curb Ramps shall be manufactured and assembled to meet all of the requirements for persons with walking disabilities, including wheelchair confinement, according to the ADA regulations. All detectable warning features are to be included with these installations.

#### **Measurement and Payment**

*Pedestrian Channelizing Devices* will be measured and paid as the maximum number of linear feet of *Pedestrian Channelizing Devices* furnished, acceptably placed, and in use at any one time during the life of the project.

TC-3

HL-0065

Rutherford County

No direct payment will be made for any sign affixed to a pedestrian channelizing device. Signs mounted to pedestrian channelizing devices will be considered incidental to the device.

*Audible Warning Devices* will be measured and paid as the maximum number of *Audible Warning Devices* furnished, acceptably installed, and in use at any one time during the life of the project.

Relocation, replacement, repair, maintenance, or disposal of *Pedestrian Channelizing Devices* and *Audible Warning Devices* will be incidental to the pay item.

*Temporary Curb Ramps* will be measured and paid as the actual number of *Temporary Curb Ramps* furnished, acceptably installed, and in use. *Temporary Curb Ramps* will be paid for each time a curb ramp is moved from one location on the project to another location on the project.

Payment will be made under:

| Pay Item                        | Pay Unit    |
|---------------------------------|-------------|
| Pedestrian Channelizing Devices | Linear Foot |
| Audible Warning Devices         | Each        |
| Temporary Curb Ramps            | Each        |

**PEDESTRIAN TRANSPORT SERVICE**  
(09/07/2018) (Rev. 5/19/2026)

**Description**

The Contractor shall provide a Pedestrian Transport Service through and/or around the project when a traversable, firm, stable, and slip-resistant path for pedestrians cannot be maintained through the work area. At minimum, the Pedestrian Transport Service shall be on-call and operate at no-cost to the users.

**Construction Methods**

The Contractor shall enlist the services of a registered, licensed, and insured transportation service (which may include ride-sharing or taxi services) during the times listed above.

The Pedestrian Transport Service shall operate on an on-call basis with wait times not exceeding 15 minutes. Pedestrians shall be able to request a ride by calling or text messaging a conspicuously posted number using standard cellular phone. The posted number shall either automatically dispatch a transport vehicle to the pedestrian’s location or shall connect to a responsible individual

## TC-4

HL-0065

Rutherford County

who can manually dispatch a transport vehicle to the pedestrian's location. Transport vehicle and driver identifying information shall be provided to the pedestrian.

Solely requiring pedestrians to use a third-party cellular phone application (smart phone app) to dispatch the transport vehicle shall be considered non-compliant with this section, but offering a smart phone app to directly dispatch the service is encouraged as a supplement to the posted number.

Pedestrians shall not be required to present any form of payment for the service and shall not be required to provide any form of identification other than their name.

The Contractor shall install notification signage and Audible Warning Devices on appropriate ADA compliant pedestrian channelizing devices at pedestrian path closure points to notify pedestrians of the Pedestrian Transport Service, instruct them how to dispatch the service (by either texting or calling the posted number), and where to wait. Both the Audible Warning Devices and notification signage shall convey the same message and be approved by the Engineer.

The Pedestrian Transport Service shall operate at a prudent speed and have designated, safe, accessible, and traversable areas for pedestrians to wait for the pedestrian transport vehicle. There shall be a location for the Pedestrian Transport Service to safely pull the transport vehicle off the roadway traffic lane or into a closed traffic lane to load or unload passengers. Pedestrians with ADA needs shall not be unloaded in a location where the surface or facility is not accessible or traversable.

### Measurement and Payment

*Pedestrian Transport Service* will be measured and paid as the actual number of completed trips provided to pedestrians. Multiple pedestrians transported using a single trip will be paid as a single trip. No direct payment will be made for the individual responsible dispatching the vehicle the smart phone app, pedestrian loading and unloading areas, or notification signage as these items will be considered incidental to the Pedestrian Transport Service.

*Audible Warning Devices* and *Pedestrian Channelizing Devices* will be measured and paid in accordance with *ADA Compliant Pedestrian Traffic Control Devices* special provision found elsewhere in this contract.

Payment will be made under:

**Pay Item:**

Pedestrian Transport Service

**Pay Unit**

Each

Project: HL-0065


UC-1

County: Rutherford

PROJECT SPECIAL PROVISIONS  
Utility Construction



169 Oak Street • Forest City, NC 28043  
office 828.247.4495 • fax 828.247.4498

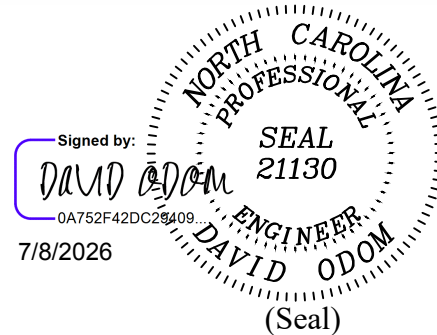

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

Where brand names and model numbers are specified in these Special Provisions or in the plans, the cited examples are used only to denote the quality standard of product desired and do not restrict bidders to a specific brand, make, or manufacturer. They are provided to set forth the general style, type, character, and quality of the product desired. Equivalent products will be acceptable.

The utility owner for water facilities is the Broad River Water Authority. The contact person is Maria Hunnicutt and she can be reached by phone at 828-286-0640.

The utility owner for sewer facilities within the Town of Rutherfordton is the Town of Rutherfordton. The contact person is Doug Barrick and he can be reached by phone at 828-287-3520.

The utility owner for sewer facilities within the Town of Spindale is the Town of Spindale. The contact person is Jon Hoyle and he can be reached by phone at 828-286-2206.

The provisions contained within these Utilities Construction Project Special Provisions modify the *Standard Specifications* only for materials used and work performed constructing water facilities owned by Broad River Water Authority, sewer facilities owned by the Town of Rutherfordton, or sewer facilities owned by the Town of Spindale.

**RELATION OF WATER MAINS TO NON POTABLE WATER LINES AND OTHER UTILITIES:**  
**(3-18-25)**

Revise the 2024 *Standard Specifications* as follows:

Project: HL-0065

**UC-2**

County: Rutherford

**Page 15-1 and 15-2, Article 1500-5 RELATION OF WATER MAINS TO NON-POTABLE WATER LINES AND OTHER UTILITIES**

Lay water mains at least 10 feet laterally from existing or proposed sanitary sewers or reclaimed water distribution lines. If local conditions or barriers prevent a 10-foot separation, lay the water main with at least 18 inches vertical separation above the top of the sanitary sewer or reclaimed water distribution pipe either in a separate trench or in the same trench on a bench of undisturbed earth.

For storm drainpipes or other utilities, lay the water main with at least 12 inches separation from the outside of the water main and the outside of the other facility.

One full length of water pipe at the point of crossing shall be located so that both joints will be as far from the sanitary sewer or reclaimed water distribution pipe as possible. If practicable, the water main shall be located above the sewer or reclaimed water distribution line.

**SUBMITTALS AND RECORDS (9-5-23)**

Revise the 2024 *Standard Specifications* as follows:

**Page 15-2, Paragraph 3 of Article 1500-7**

Deliver only approved materials to the project. Provide sufficient information as required under Sections 105 and 106 to demonstrate the materials meet the specifications and intended use. Provide 2 hard copies to the utility owner and an electronic (.pdf) copy to the Engineer and utility owner. Identify each item's intended use. As a minimum, the submitted information shall show the material description, brand name, stock number, size, rating and manufacturing specification.

Provide working drawings of thrust restraint designs and connection details along with schedules for performing the work.

Provide as-built plans of the installed utility. The plans shall include notations of the size and type material installed, coordinates of utility controls and horizontal and vertical locations of the piping sealed by a North Carolina Professional Land Surveyor (PLS). As-built plans provided as PDF formatted files shall be generated from the source electronic files, not scanned facsimiles of paper plan sheets. Provide as-builts as PDF files to the Engineer. Provide 2 hard copies in full-size sheets and PDF formatted files to the utility.

Division 10 of the Standard Specifications is revised as follows:

**Page 10-65, Paragraph 1 of Article 1034-2 Plastic Pipe, (A) PVC Gravity Flow Sewer Pipe**

Use PVC pipe that conforms to ASTM D3034 with a minimum SDR of 35. Use pipe with push-on type joints having bells made as an integral part of the pipe conforming to ASTM D3212.

**Page 10-66, Article 1036-3 Plastic Pipe, (A) PVC Pipe**

Project: HL-0065

**UC-3**

County: Rutherford

**(1) Pressure Rated Pipe**

Use PVC pipe conforming to ASTM D2241 or to AWWA C905 with a minimum SDR of 21 and minimum pressure rating of 200 psi. Use pipe with push-on type joints having bells made as an integral part of the pipe conforming to ASTM D3139 or pipe with butt fused joints made from ASTM D1784 Class 12454B plastic formulated for fusing.

Use PVCO pipe conforming to ASTM F1483 or to AWWA C909 for molecularly oriented pipe with a minimum pressure rating of 200 psi. Use pipe with push-on type joints having bells made as an integral part of the pipe conforming to ASTM D3139.

Contractor shall use PVC pipe with a minimum SDR of 21 for all water line owned by Broad River Water Authority

**(2) Pressure Class Pipe**

Use PVC pipe conforming to AWWA C900 with a minimum DR of 18 and a minimum pressure class of 235 psi. Use pipe with push-on type joints having bells made as an integral part of the pipe conforming to ASTM D3139 or pipe with butt-fused joints made from ASTM D1784 Class 12454B plastic formulated for fusing.

Contractor shall use DIP CL 350 pipe with a minimum DR of 18 for all water line owned by the Broad River Water Authority.

**Page 10-58, Article 1036-5 Ductile Iron Pipe and Fittings**

Contractor shall use Ductile Iron Pipe with an integrated restrained joint system for all water line to be installed within steel encasement pipe that is owned by the Broad River Water Authority and for sewer line that is owned by Town of Rutherfordton & Town of Spindale.

**Page 15-6, 15-7 1510-3 Construction Methods****(A) General**

Meet the installation standards of AWWA or ASTM for water line construction.

Apply Section 1505 for excavation, trenching, pipe laying and backfill to water line installation.

Install small diameter pipe (4 inches or less) under existing pavement by a trenchless method at no additional cost to the Department.

Connect the ends of the water service piping using AWWA C800 type couplings or fittings. Make NPT screw joints with a double wrap of a polytetrafluoroethylene (PTFE) tape and torque as required by the manufacturer.

Store plastic pipe out of direct sunlight until burying. All plastic pipe showing discoloration or deterioration will be rejected for use and replaced with suitable pipe as specified under Article 106-9.

Project: HL-0065

**UC-4**

County: Rutherford

Install water lines with 36 inches to 42 inches of cover to finished grade unless otherwise directed or approved by the Engineer. Install water lines with greater cover for short distances to accommodate utility controls, to make tie-ins to existing facilities, to eliminate high points in the pipeline or to provide clearance between existing and proposed utilities, drainage, other obstacles or actual field conditions.

**(B) Testing and Sterilization**

Perform pressure and leakage tests and sterilization on newly installed water mains and altered water mains prior to placing such pipelines into service. Provide all equipment, piping, controls, pumps, water and safety devices necessary for performing the tests and sterilization.

Obtain clean water for cleaning, testing and sterilization from approved sources. Provide connections to potable water sources with approved backflow preventors until acceptance of all test results.

Perform tests using clean water and provide certified results demonstrating leakage less than the following amount when pressurized at  $200 \pm 5$  psi for 2 hours.

$$W = LD\sqrt{P} \div 148,000$$

Where:

- W** = allowable leakage in gallons per hour  
**L** = length of pipeline tested, in feet  
**D** = nominal diameter of the pipe, in inches  
**P** = average test pressure during the leakage test, in lb/sq.in.

Repair using approved methods or replace pipe, controls or appurtenances as necessary to reduce leakage below acceptable levels. Additionally, repair any leaks that are visible after 2 hours duration.

Clean water lines by flushing with water at least 2.5 feet per second velocity. Remove all debris and dirt from water mains larger than 4 inches by passing a medium density foam pig with abrasive strips through the lines.

Sterilize water lines in accordance with Section 1003 of the Rules Governing Public Water supply and AWWA C651 Section 4.4, the Continuous Feed Method. Provide a chlorine solution with between 50 parts per million and 100 parts per million in the initial feed. If the chlorine level drops below 10 parts per million during a 24 hour period, then flush, refill with fresh chlorine solution, and repeat for 24 hours. Provide certified bacteriological and contaminant test results from a state-approved or state-certified laboratory. Operate all valves and controls to assure thorough sterilization. Testing, cleaning and sterilization shall be performed consecutively.

Dispose of waste water in accordance with all environmental regulations.

Project: HL-0065

**UC-5**

County: Rutherford

For short sections (less than 100 feet) and tie-in sections of water lines perform visual tests for leakage after installation instead of separate pressure and leakage tests. Sterilize according to AWWA C651 Sections 4.6 and 4.7.

Provide an electronic copy of the test results to the Engineer and to the water line owner. Provide a hard copy to the water line owner as requested.

Flush with clean water until the residual chlorine is reduced to the same level as in the existing water mains.

Place new water lines into service after approval of all testing and flushing and authorization by the Engineer.

**Materials:**

When brand names of materials have been determined, the Contractor shall obtain approval, through the engineer and the owner prior to their use and/or installation.

Then Contractor shall furnish, but is not limited to furnishing, catalog cuts and/or shop drawings of the materials. Thirty days shall be allowed for the Engineer's review of each submittal. Eight copies of each catalog cut and/or shop drawing (signed and sealed) shall be submitted.

**Open Cut Installation:**

All water line or sewer line construction performed using open cut installation within or adjacent to traffic shall have the final approved traffic control measures in place prior to beginning any open cut installation.

**Relocation of Water Meter:**

Construction shall relocate the existing water meter by cutting and plugging the existing line and relocating the water meter by tapping and connecting to new line.

**REMOVE AND STOCKPILE FIRE HYDRANT****Construction Methods:**

The existing fire hydrants to be removed and stockpiled will be separated at the hydrant base from the existing pipe and stockpiled in an area accessible by truck or as directed by the Engineer.

After the fire hydrants are stockpiled, the Contractor shall contact the utility and arrange for the utility to receive and remove the fire hydrants.

**Measurement and Payment:**



Project: HL-0065

UC-6

County: Rutherford

The quantity of fire hydrants removed, stockpiled, and accepted, will be measured and paid for at the contract unit price per each for *Remove and Stockpile Fire Hydrant*. All labor, excavation, removal, stockpiling, and incidentals necessary to complete the work as required are incidental to *Remove and Stockpile Fire Hydrant*.

| <b><u>Pay Item:</u></b>           | <b><u>Pay Unit</u></b> |
|-----------------------------------|------------------------|
| Remove and Stockpile Fire Hydrant | Each                   |

PROJECT SPECIAL PROVISIONS

Utilities by Others



**General:**

The following utility companies have facilities that will be in conflict with the construction of this project:

- A) Duke Energy – Power Distribution
- B) Vyve Broadband - Communications
- C) Fiberlight – Communication
- D) MCNC – Communications
- E) Pangea - Communications
- F) AT&T - Communications
- G) Enbridge - Gas

The conflicting facilities of these concerns will be adjusted prior to the date of availability, unless otherwise noted and are therefore listed in these special provisions for the benefit of the Contractor. All utility work listed herein will be done by the utility owners. All utilities are shown on the plans from the best available information.

The Contractor's attention is directed to Article 105-8 of the *Standard Specifications*.

**Utilities Requiring Adjustment:**

Utility relocations are shown on the Utilities by Others Plans.

A) Duke Energy

- 1) See Utility by Others plan for utility conflicts / relocations
- 2) The contact person for Duke Energy is Andy Benton and he can be reached at 864.399.0986 or email [abenton@pike.com](mailto:abenton@pike.com)

B) Vyve Broadband

- 1) See Utility by Others plan for utility conflicts / relocations
- 2) The contact person for Vyve Broadband is Marvin (Marty) Mashburn, and he can be reached at 828.413.0749 or email [marvin.mashburn@vyvebb.com](mailto:marvin.mashburn@vyvebb.com)

PROJECT SPECIAL PROVISIONS

Utilities by Others

C) Fiberlight

- 1) See Utility by Others plan for utility conflicts / relocations
- 2) The contact person for Fiberlight is Alex Gandara and he can be reached at 915.422.5565 or email [agandara@lja.com](mailto:agandara@lja.com)

D) MCNC

- 1) See Utility by Others plan for utility conflicts / relocations
- 3) The contact person for MCNC is Daniel Honeycutt and he can be reached at 704.301.9421 or email [dhoneycutt@mcnc.org](mailto:dhoneycutt@mcnc.org)

E) Pangea

- 1) See Utility by Others plan for utility conflicts / relocations
- 4) The contact person for Pangea is Dana Conner and can be reached at 828.859.3072 or email [dana@e-polk.org](mailto:dana@e-polk.org)

F) AT&T

- 1) See Utility by Others plan for utility conflicts / relocations
- 5) The contact person for AT&T is Janson Casell and he can be reached at 828.275.6513 or [jc6701@att.com](mailto:jc6701@att.com)

G) Enbridge - Gas

- 1) See Utility by Others plan for utility conflicts / relocations
- 2) The contact person for Enbridge Gas is Tanner Sheppard and he can be reached at 828.230.0119 or email [tanner.sheppard@enbridge.com](mailto:tanner.sheppard@enbridge.com).

**Project Special Provisions  
Erosion Control**

**STABILIZATION REQUIREMENTS:**

(4-30-2019)(Rev. 1-21-2025)

Stabilization for this project shall comply with the time frame guidelines as specified by the NCG-010000 general construction permit issued by the North Carolina Department of Environmental Quality Division of Energy, Mineral, and Land Resources. Temporary or permanent ground cover stabilization shall occur within the following time frames from the last land-disturbing activity:

- Stabilize perimeter dikes, swales, ditches, and perimeter slopes within 7 calendar days.
- Stabilize high quality water (HQW) zones within 7 calendar days.
- Stabilize slopes steeper than 3:1 within 7 calendar days.
  - If slopes are 10 feet or less in length and are not steeper than 2:1, 14 calendar days are allowed.
- Stabilize slopes 3:1 to 4:1 within 14 calendar days.
  - 7 calendar days for slopes greater than 50 feet in length and with slopes steeper than 4:1.
  - 7 calendar days for perimeter dikes, swales, ditches, perimeter slopes, and HQW Zones.
- Stabilize areas with slopes flatter than 4:1 within 14 calendar days.
  - 7 calendar days for perimeter dikes, swales, ditches, perimeter slopes, and HQW Zones.

The stabilization timeframe for High Quality Water (HQW) Zones shall be 7 calendar days with no exceptions for slope grades or lengths. High Quality Water Zones (HQW) Zones are defined by North Carolina Administrative Code 15A NCAC 04A.0105 (25). Temporary and permanent ground cover stabilization shall be achieved in accordance with the provisions in this contract and as directed.

**SEEDING AND MULCHING:**

**(WestEd)**

The kinds of seed and fertilizer, and the rates of application of seed, fertilizer, and limestone, shall be as stated below. During periods of overlapping dates, the kind of seed to be used shall be determined. All rates are in pounds per acre.

Shoulder and Median Areas

**August 1 - June 1**

|       |                    |
|-------|--------------------|
| 20#   | Kentucky Bluegrass |
| 75#   | Hard Fescue        |
| 25#   | Rye Grain          |
| 500#  | Fertilizer         |
| 4000# | Limestone          |

**May 1 - September 1**

|       |                           |
|-------|---------------------------|
| 20#   | Kentucky Bluegrass        |
| 75#   | Hard Fescue               |
| 10#   | German or Browntop Millet |
| 500#  | Fertilizer                |
| 4000# | Limestone                 |

## Areas Beyond the Mowing Pattern, Waste and Borrow Areas:

**August 1 - June 1**

|       |                    |
|-------|--------------------|
| 100#  | Tall Fescue        |
| 15#   | Kentucky Bluegrass |
| 30#   | Hard Fescue        |
| 25#   | Rye Grain          |
| 500#  | Fertilizer         |
| 4000# | Limestone          |

**May 1 - September 1**

|       |                           |
|-------|---------------------------|
| 100#  | Tall Fescue               |
| 15#   | Kentucky Bluegrass        |
| 30#   | Hard Fescue               |
| 10#   | German or Browntop Millet |
| 500#  | Fertilizer                |
| 4000# | Limestone                 |

## Approved Tall Fescue Cultivars:

|                            |                 |                 |                    |
|----------------------------|-----------------|-----------------|--------------------|
| 06 Dust                    | Escalade        | Kalahari        | Serengeti          |
| 2 <sup>nd</sup> Millennium | Essential       | Kitty Hawk 2000 | Shelby             |
| 3 <sup>rd</sup> Millennium | Evergreen 2     | Legitimate      | Shenandoah III     |
| Avenger                    | Faith           | Lexington       | Shenandoah Elite   |
| Bar Fa                     | Falcon IV       | LifeGuard       | Sheridan           |
| Barlexas                   | Falson NG       | LSD             | Sidewinder         |
| Barlexas II                | Falcon V        | Magellan        | Signia             |
| Barrera                    | Fat Cat         | Masterpiece     | Silver Hawk        |
| Barrington                 | Fesnova         | Millennium SRP  | Skyline            |
| Barrobusto                 | Fidelity        | Monet           | Solara             |
| Barvado                    | Finelawn Elite  | Mustang 4       | Southern Choice II |
| Biltmore                   | Finelawn Xpress | Naturally Green | Speedway           |
| Bingo                      | Finesse II      | Ninja 2         | Spyder LS          |
| Bizem                      | Firebird        | Ol' Glory       | Sunset Gold        |
| Black Tail                 | Firecracker LS  | Padre           | Taccoa             |
| Blackwatch                 | Firenza         | Patagonia       | Tahoe II           |
| Blade Runner II            | Five Point      | Pedigree        | Talladega          |
| Bonsai                     | Focus           | Picasso         | Tanzania           |
| Braveheart                 | Forte           | Piedmont        | Temple             |
| Bravo                      | Garrison        | Plantation      | Terrano            |
| Bullseye                   | Gazelle II      | Proseeds 5301   | Thor               |
| Cannavaro                  | GLX Aced        | Prospect        | Thunderstruck      |
| Catalyst                   | Gold Medallion  | Quest           | Titanium LS        |
| Cayenne                    | Grande 3        | RainDance       | Titan LTD          |
| Cezanne RZ                 | Greenbrooks     | Raptor II       | Tracer             |
| Chipper                    | Greenkeeper     | Rebel IV        | Traverse SRP       |
| Cochise IV                 | Gremlin         | Rebel Exeda     | Trio               |
| Constitution               | Greystone       | Rebel Sentry    | Tulsa Time         |
| Corgi                      | Guardian 21     | Regenerate      | Turbo              |
| Corona                     | Guardian 41     | Regiment II     | Turbo RZ           |
| Coyote                     | Hemi            | Rembrandt       | Tuxedo             |
| Cumberland                 | Honky Tonk      | Rendition       | Ultimate           |
| Darlington                 | Hot Rod         | Reunion         | Umbrella           |
| DaVinci                    | Hunter          | Rhambler 2 SRP  | Van Gogh           |

|          |           |           |             |
|----------|-----------|-----------|-------------|
| Desire   | Inferno   | Riverside | Venture     |
| Diablo   | Integrity | RNP       | Watchdog    |
| Dominion | Jaguar 3  | Rocket    | Wolfpack II |
| Dynamic  | Jamboree  | Saltillo  | Xtremegreen |
| Dynasty  | Justice   | Scorpion  |             |

## Approved Kentucky Bluegrass Cultivars:

|              |             |               |               |
|--------------|-------------|---------------|---------------|
| 4-Season     | Blue Coat   | Granite       | Prosperity    |
| Alexa II     | Blue Note   | Hampton       | Quantum Leap  |
| America      | Blue Velvet | Harmonie      | Rambo         |
| Apollo       | Boomerang   | Impact        | Rhapsody      |
| Aramintha    | Cabernet    | Jackrabbit    | Rhythm        |
| Arcadia      | Champagne   | Jefferson     | Royce         |
| Aries        | Champlain   | Juliet        | Rubicon       |
| Armada       | Chicago II  | Keeneland     | Rugby II      |
| Arrow        | Corsair     | Langara       | Rush          |
| Arrowhead    | Courtyard   | Legend        | Shariz        |
| Aura         | Dauntless   | Liberator     | Showcase      |
| Avid         | Delight     | Lunar         | Skye          |
| Award        | Diva        | Madison       | Solar Eclipse |
| Awesome      | Dynamo      | Mazama        | Sonoma        |
| Bandera      | Eagleton    | Mercury       | Sorbonne      |
| Barduke      | Emblem      | Merlot        | Starburst     |
| Barnique     | Empire      | Midnight      | Sudden Impact |
| Baron        | Envicta     | Midnight II   | Thermal Blue  |
| Baroness     | Everest     | Moon Shadow   | Total Eclipse |
| Barrister    | Everglade   | Mystere       | Touche        |
| Barvette HGT | Excursion   | Nu Destiny    | Tsunami       |
| Bedazzled    | Freedom II  | NuChicago     | Valor         |
| Belissimo    | Freedom III | NuGlade       | Washington    |
| Bewitched    | Front Page  | Oasis         | Zedor         |
| Beyond       | Futurity    | Odyssey       | Zinfandel     |
| Blackjack    | Gaelic      | Perfection    |               |
| Bluebank     | Ginney II   | Pinot         |               |
| Blueberry    | Gladstone   | Princeton 105 |               |

## Approved Hard Fescue Cultivars:

|             |           |            |            |
|-------------|-----------|------------|------------|
| Aurora Gold | Firefly   | Nordic     | Rhino      |
| Azay Blue   | Gladiator | Oxford     | Scaldis II |
| Beacon      | Granite   | Predator   | Spartan II |
| Berkshire   | Heron     | Quatro     | Stonehenge |
| Beudin      | Jetty     | Reliant II | Sword      |
| Blueray     | Minimus   | Reliant IV | Warwick    |

Chariot  
Eureka II

Miser  
Nancock

Rescue 911  
Resolute

On cut and fill slopes 2:1 or steeper add 20# Sericea Lespedeza and 15# Crown Vetch January 1 - December 31.

The Crown Vetch Seed should be double inoculated if applied with a hand seeder. Four times the normal rate of inoculant should be used if applied with a hydroseeder. If a fertilizer-seed slurry is used, the required limestone should also be included to prevent fertilizer acidity from killing the inoculant bacteria. Caution should be used to keep the inoculant below 80° F to prevent harm to the bacteria. The rates and grades of fertilizer and limestone shall be the same as specified for *Seeding and Mulching*.

Fertilizer shall be 10-20-20 analysis. A different analysis of fertilizer may be used provided the 1-2-2 ratio is maintained and the rate of application adjusted to provide the same amount of plant food as a 10-20-20 analysis and as directed.

### **Native Grass Seeding And Mulching**

**(West)**

Native Grass Seeding and Mulching shall be performed on the disturbed areas of wetlands and riparian areas, and adjacent to Stream Relocation and/or trout stream construction within a 50 foot zone on both sides of the stream or depression, measured from top of stream bank or center of depression. The stream bank of the stream relocation shall be seeded by a method that does not alter the typical cross section of the stream bank. Native Grass Seeding and Mulching shall also be performed in the permanent soil reinforcement mat section of preformed scour holes, and in other areas as directed.

The kinds of seed and fertilizer, and the rates of application of seed, fertilizer, and limestone, shall be as stated below. During periods of overlapping dates, the kind of seed to be used shall be determined. All rates are in pounds per acre.

#### **August 1 - June 1**

|       |                     |
|-------|---------------------|
| 18#   | Creeping Red Fescue |
| 8#    | Big Bluestem        |
| 6#    | Indiangrass         |
| 4#    | Switchgrass         |
| 35#   | Rye Grain           |
| 500#  | Fertilizer          |
| 4000# | Limestone           |

#### **May 1 – September 1**

|       |                           |
|-------|---------------------------|
| 18#   | Creeping Red Fescue       |
| 8#    | Big Bluestem              |
| 6#    | Indiangrass               |
| 4#    | Switchgrass               |
| 25#   | German or Browntop Millet |
| 500#  | Fertilizer                |
| 4000# | Limestone                 |

#### **Approved Creeping Red Fescue Cultivars:**

Aberdeen

Boreal

Epic

Cindy Lou

Fertilizer shall be 10-20-20 analysis. A different analysis of fertilizer may be used provided the 1-2-2 ratio is maintained and the rate of application adjusted to provide the same amount of plant food as a 10-20-20 analysis and as directed.

Native Grass Seeding and Mulching shall be performed in accordance with Section 1660 of the *Standard Specifications* and vegetative cover sufficient to restrain erosion shall be installed immediately following grade establishment.

### **Measurement and Payment**

Native Grass *Seeding and Mulching* will be measured and paid for in accordance with Article 1660-8 of the *Standard Specifications*.

### **TEMPORARY SEEDING:**

Fertilizer shall be the same analysis as specified for *Seeding and Mulching* and applied at the rate of 400 pounds and seeded at the rate of 50 pounds per acre. German Millet, or Browntop Millet shall be used in summer months and rye grain during the remainder of the year. The Engineer will determine the exact dates for using each kind of seed.

### **FERTILIZER TOPDRESSING:**

Fertilizer used for topdressing shall be 16-8-8 grade and shall be applied at the rate of 500 pounds per acre. A different analysis of fertilizer may be used provided the 2-1-1 ratio is maintained and the rate of application adjusted to provide the same amount of plant food as 16-8-8 analysis and as directed.

### **SUPPLEMENTAL SEEDING:**

The kinds of seed and proportions shall be the same as specified for *Seeding and Mulching*, and the rate of application may vary from 25# to 75# per acre. The actual rate per acre will be determined prior to the time of topdressing and the Contractor will be notified in writing of the rate per acre, total quantity needed, and areas on which to apply the supplemental seed. Minimum tillage equipment, consisting of a sod seeder shall be used for incorporating seed into the soil as to prevent disturbance of existing vegetation. A clodbuster (ball and chain) may be used where degree of slope prevents the use of a sod seeder.

### **MOWING:**

The minimum mowing height on this project shall be six inches.

### **LAWN TYPE APPEARANCE:**

All areas adjacent to lawns must be hand finished as directed to give a lawn type appearance. Remove all trash, debris, and stones  $\frac{3}{4}$ " and larger in diameter or other obstructions that could



interfere with providing a smooth lawn type appearance. These areas shall be reseeded to match their original vegetative conditions, unless directed otherwise by the Field Operations Engineer.

**MINIMIZE REMOVAL OF VEGETATION:**

The Contractor shall minimize removal of vegetation within project limits to the maximum extent practicable. Vegetation along stream banks and adjacent to other jurisdictional resources outside the construction limits shall only be removed upon approval of Engineer. No additional payment will be made for this minimization work.

**CONSTRUCTION MATERIALS MANAGEMENT**

(3-19-19) (rev. 04-27-20)

**Description**

The requirements set forth shall be adhered to in order to meet the applicable materials handling requirements of the NCG010000 permit. Structural controls installed to manage construction materials stored or used on site shall be shown on the E&SC Plan. Requirements for handling materials on construction sites shall be as follows:

**Polyacrylamides (PAMS) and Flocculants**

Polyacrylamides (PAMS) and flocculants shall be stored in leak-proof containers that are kept under storm-resistant cover or surrounded by secondary containment structures designed to protect adjacent surface waters. PAMS or other flocculants used shall be selected from the NC DWR List of Approved PAMS/Flocculants. The concentration of PAMS and other flocculants used shall not exceed those specified in the NC DWR List of Approved PAMS/Flocculants and in accordance with the manufacturer's instructions. The NC DWR List of Approved PAMS/Flocculants is available at:

[https://files.nc.gov/ncdeq/Water+Quality/Environmental+Sciences/ATU/PAM8\\_30\\_18.pdf](https://files.nc.gov/ncdeq/Water+Quality/Environmental+Sciences/ATU/PAM8_30_18.pdf)

**Equipment Fluids**

Fuels, lubricants, coolants, and hydraulic fluids, and other petroleum products shall be handled and disposed of in a manner so as not to enter surface or ground waters and in accordance with applicable state and federal regulations. Equipment used on the site must be operated and maintained properly to prevent discharge of fluids. Equipment, vehicle, and other wash waters shall not be discharged into E&SC basins or other E&SC devices. Alternative controls should be provided such that there is no discharge of soaps, solvents, or detergents.

**Waste Materials**

Construction materials and land clearing waste shall be disposed of in accordance with North Carolina General Statutes, Chapter 130A, Article 9 - Solid Waste Management, and rules governing the disposal of solid waste (15A NCAC 13B). Areas dedicated for managing

construction material and land clearing waste shall be at least 50 feet away from storm drain inlets and surface waters unless it can be shown that no other alternatives are reasonably available. Paint and other liquid construction material waste shall not be dumped into storm drains. Paint and other liquid construction waste washouts should be located at least 50 feet away from storm drain inlets unless there is no alternative. Other options are to install lined washouts or use portable, removable bags or bins. Hazardous or toxic waste shall be managed in accordance with the federal Resource Conservation and Recovery Act (RCRA) and NC Hazardous Waste Rules at 15A NCAC, Subchapter 13A. Litter and sanitary waste shall be managed in a manner to prevent it from entering jurisdictional waters and shall be disposed of offsite.

### **Herbicide, Pesticide, and Rodenticides**

Herbicide, pesticide, and rodenticides shall be stored and applied in accordance with the Federal Insecticide, Fungicide, and Rodenticide Act, North Carolina Pesticide Law of 1971 and labeling restrictions.

### **Concrete Materials**

Concrete materials onsite, including excess concrete, must be controlled and managed to avoid contact with surface waters, wetlands or buffers. No concrete or cement slurry shall be discharged from the site. (Note that discharges from onsite concrete plants require coverage under a separate NPDES permit – NCG140000.) Concrete wash water shall be managed in accordance with the *Concrete Washout Structure* provision. Concrete slurry shall be managed and disposed of in accordance with *NCDOT DGS and HOS DCAR Distribution of Class A Residuals Statewide* (Permit No. WQ0035749). Any hardened concrete residue will be disposed of, or recycled on site, in accordance with state solid waste regulations.

### **Earthen Material Stock Piles**

Earthen material stock piles shall be located at least 50 feet away from storm drain inlets and surface waters unless it can be shown that no other alternatives are reasonably available.

### **Measurement and Payment**

Conditions set within the *Construction Materials Management* provision are incidental to the project for which no direct compensation will be made.

### **WASTE AND BORROW SOURCES:**

(2-16-11) (Rev. 3-17-22)

Payment for temporary erosion control measures, except those made necessary by the Contractor's own negligence or for his own convenience, will be paid for at the appropriate contract unit price for the devices or measures utilized in borrow sources and waste areas.

No additional payment will be made for erosion control devices or permanent seeding and mulching in any commercial borrow or waste pit. All erosion and sediment control practices that may be required on a commercial borrow or waste site will be done at the Contractor's expense.

All offsite Staging Areas, Borrow and Waste sites shall be in accordance with "Borrow and Waste Site Reclamation Procedures for Contracted Projects" located at:

<https://connect.ncdot.gov/resources/roadside/FieldOperationsDocuments/Contract%20Reclamation%20Procedures.pdf>

All forms and documents referenced in the "Borrow and Waste Site Reclamation Procedures for Contracted Projects" shall be included with the reclamation plans for offsite staging areas, and borrow and waste sites.

### **SAFETY FENCE AND JURISDICTIONAL FLAGGING:**

#### **Description**

*Safety Fence* shall consist of furnishing materials, installing and maintaining polyethylene or polypropylene fence along the outside riparian buffer, wetland, or water boundary, or other boundaries located within the construction corridor to mark the areas that have been approved to infringe within the buffer, wetland, endangered vegetation, culturally sensitive areas or water. The fence shall be installed prior to any land disturbing activities.

Interior boundaries for jurisdictional areas noted above shall be delineated by stakes and highly visible flagging.

Jurisdictional boundaries at staging areas, waste sites, or borrow pits, whether considered outside or interior boundaries shall be delineated by stakes and highly visible flagging.

#### **Materials**

##### **(A) Safety Fencing**

Polyethylene or polypropylene fence shall be a highly visible preconstructed safety fence approved by the Engineer. The fence material shall have an ultraviolet coating.

Either wood posts or steel posts may be used. Wood posts shall be hardwood with a wedge or pencil tip at one end, and shall be at least 5 ft. in length with a minimum nominal 2" x 2" cross section. Steel posts shall be at least 5 ft. in length, and have a minimum weight of 0.85 lb/ft of length.

(B) Boundary Flagging

Wooden stakes shall be 4 feet in length with a minimum nominal 3/4" x 1-3/4" cross section. The flagging shall be at least 1" in width. The flagging material shall be vinyl and shall be orange in color and highly visible.

**Construction Methods**

No additional clearing and grubbing is anticipated for the installation of this fence. The fence shall be erected to conform to the general contour of the ground.

(A) Safety Fencing

Posts shall be set at a maximum spacing of 10 ft., maintained in a vertical position and hand set or set with a post driver. Posts shall be installed a minimum of 2 ft. into the ground. If hand set, all backfill material shall be thoroughly tamped. Wood posts may be sharpened to a dull point if power driven. Posts damaged by power driving shall be removed and replaced prior to final acceptance. The tops of all wood posts shall be cut at a 30-degree angle. The wood posts may, at the option of the Contractor, be cut at this angle either before or after the posts are erected.

The fence geotextile shall be attached to the wood posts with one 2" galvanized wire staple across each cable or to the steel posts with wire or other acceptable means.

Place construction stakes to establish the location of the safety fence in accordance with Article 105-9 or Article 801-1 of the *Standard Specifications*. No direct pay will be made for the staking of the safety fence. All stakeouts for safety fence shall be considered incidental to the work being paid for as "Construction Surveying", except that where there is no pay item for construction surveying, all safety fence stakeout will be performed by state forces.

The Contractor shall be required to maintain the safety fence in a satisfactory condition for the duration of the project as determined by the Engineer.

(B) Boundary Flagging

Boundary flagging delineation of interior boundaries shall consist of wooden stakes on 25 feet maximum intervals with highly visible orange flagging attached. Stakes shall be installed a minimum of 6" into the ground. Interior boundaries may be staked on a tangent that runs parallel to buffer but must not encroach on the buffer at any location. Interior boundaries of hand clearing shall be identified with a different colored flagging to distinguish it from mechanized clearing.

Boundary flagging delineation of interior boundaries will be placed in accordance with Article 105-9 or Article 801-1 of the *Standard Specifications*. No direct pay will be made for delineation of the interior boundaries. This delineation will be considered incidental to the work being paid for as *Construction Surveying*, except that where there is no pay item or construction surveying the cost of boundary flagging delineation shall be included in the unit prices bid for the various items in the contract. Installation for delineation of all jurisdictional boundaries at staging areas,

waste sites, or borrow pits shall consist of wooden stakes on 25 feet maximum intervals with highly visible orange flagging attached. Stakes shall be installed a minimum of 6" into the ground. Additional flagging may be placed on overhanging vegetation to enhance visibility but does not substitute for installation of stakes.

Installation of boundary flagging for delineation of all jurisdictional boundaries at staging areas, waste sites, or borrow pits shall be performed in accordance with Subarticle 230-4(B)(5) or Subarticle 802-2(F) of the *Standard Specifications*. No direct pay will be made for this delineation, as the cost of same shall be included in the unit prices bid for the various items in the contract.

The Contractor shall be required to maintain alternative stakes and highly visible flagging in a satisfactory condition for the duration of the project as determined by the Engineer.

### Measurement and Payment

*Safety Fence* will be measured and paid as the actual number of linear feet of polyethylene or polypropylene fence installed in place and accepted. Such payment will be full compensation including but not limited to furnishing and installing fence geotextile with necessary posts and post bracing, staples, tie wires, tools, equipment and incidentals necessary to complete this work.

Payment will be made under:

**Pay Item**  
Safety Fence

**Pay Unit**  
Linear Foot

### **CONCRETE WASHOUT:** (10-22-15)(Rev. 4-15-25)

#### **Description**

Concrete washouts are impermeable enclosures, above or below grade, to contain concrete wastewater and associated concrete mix from cleaning of ready-mix trucks, drums, pumps, tools or other equipment. Concrete washouts must collect and retain all the concrete washout water and solids, so that this material does not migrate to surface waters or into the ground water. These enclosures are not intended for concrete waste not associated with washout operations.

Acceptable concrete washouts may include constructed earthen structures, above or below ground, or commercially available devices designed specifically to capture concrete wash water.

#### **Materials**

Refer to Division 10 of the *Standard Specifications*.

**Item**  
Temporary Silt Fence

**Section**  
1605

*Safety Fence* shall meet the specifications as provided elsewhere in this contract.

Geomembrane basin liner shall consist of a minimum 10 mil thick polypropylene or polyethylene geomembrane.

### **Construction Methods**

Build an enclosed earthen berm or excavate to form an enclosure in accordance with the details and as directed by the Engineer near the project entrance(s) or at location(s) of concrete operations. Structures shall be constructed a minimum of 50 feet from drainage conveyances or jurisdictional streams or wetlands. Alternate structure designs or plans for management of concrete washout may be submitted for review and approval by the Engineer. Include in the alternate plan the method used to retain, treat and dispose of the concrete washout wastewater generated within the project limits and in accordance with the minimum setback requirements.

Install temporary silt fence around the perimeter of the structure enclosure in accordance with the details and as directed by the Engineer if the structure is not located in an area where existing erosion and sedimentation control devices are capable of containing stormwater runoff.

Post a sign with the words "Concrete Washout" in close proximity of the concrete washout area, so it is clearly visible to site personnel. Install safety fence as directed by the Engineer for visibility to construction traffic.

Install prefabricated concrete washouts, designed specifically to capture concrete wash water, at locations of additional concrete pouring operations. Acceptable systems may include geotextile lined containers, vinyl or plastic containers or roll-off containers, with or without filter bags with a minimum functional holding capacity of 36 cubic feet (1.33 cubic yards). Submit prefabricated concrete washout system for approval by the Engineer prior to installation. Place prefabricated concrete washout devices to a minimum 50 foot setback from drainage conveyances and jurisdictional streams and wetlands. If the minimum setback cannot be achieved, provide secondary containment to prevent accidental release of wastewater from reaching drainage conveyances or streams.

Prefabricated concrete washouts must be clearly and visibly labeled as such, either by the manufacturer on the product itself, or by a sign with the words "Concrete Washout" in close proximity of the concrete washout area so it is clearly visible to site personnel.

### **Maintenance and Removal**

Maintain the concrete washout structure(s) to provide adequate holding capacity plus a minimum freeboard of 12 inches. Remove and dispose of hardened concrete and return the structure to a functional condition after reaching 75% capacity. Inspect concrete washout structures for damage to liner or structure to maintain functionality.

Maintain prefabricated concrete washout systems per manufacturer's recommendations. Inspect concrete washout structures for damage to linings or structure and repair or replace as necessary.

Remove the concrete washout structures and sign upon project completion. Grade the area to match the existing topography and permanently seed and mulch area. Dispose of prefabricated concrete washout structures according to state or local waste regulations.

### **Measurement and Payment**

*Concrete Washout Structure* will be measured and paid per each enclosure installed in accordance with the details in the plans. If alternate plans or details are approved, those structures will also be paid for per each approved and installed structure. Such price and payment will be full compensation for all work including, but not limited to, furnishing all materials, labor, equipment, signage, slurry solidification and incidentals necessary to construct, maintain and remove *Concrete Washout Structure* and dispose of residual concrete washout wastewater and concrete solids.

*Prefabricated Concrete Washout* will be measured and paid per each system installed in accordance with the manufacturer's recommendations. Such price and payment will be full compensation for all work including, but not limited to, furnishing all materials, labor, equipment, signage, slurry solidification and incidentals necessary to install, maintain and remove *Prefabricated Concrete Washout*, and dispose of residual concrete washout wastewater and concrete solids.

*Temporary Silt Fence* will be measured and paid for in accordance with Article 1605-5 of the *Standard Specifications*.

*Safety Fence* shall be measured and paid for as provided elsewhere in this contract.

No measurement will be made for over excavation or stockpiling or other items necessary to complete this work.

Payment will be made under:

| <b>Pay Item</b>                | <b>Pay Unit</b> |
|--------------------------------|-----------------|
| Concrete Washout Structure     | Each            |
| Prefabricated Concrete Washout | Each            |

### **LITTER REMOVAL (MOWING AREAS ONLY):**

(07-19-22) (Rev 8-25-25)

### **Description**

This work consists of the pickup, removal, and disposal of litter from roadsides within the construction project prior to mowing operations.

## Construction Methods

Provide labor, equipment and materials necessary for the pickup and removal of litter from non-construction sources and the disposal of same into state approved landfills. The Contractor shall abide by all ordinances, laws and regulations regarding disposal of litter and recycling of eligible materials. Wastes generated from construction activities shall be managed as provided elsewhere in the contract. Litter items may consist of any item not considered normal to the right-of-way, including but not limited to, varied sizes of bottles, cans, paper, tires, tire pieces, lumber, vehicle parts, building supplies, metals, household furnishings, cardboard, plastics, ladders, brush and other items not considered normal to the right of way. Litter removal shall be performed in designated areas within five days prior to any mowing operations and as directed. Designated areas shall include vegetated medians and shoulders within the project limits including all interchange ramps and other areas to be mown. Designated areas may be omitted for litter removal by the Engineer due to safety concerns.

The Contractor shall provide adequate personnel and materials to collect and remove litter. The Contractor shall be responsible for locating and utilizing approved local landfills and recycling facilities. Refer to Section 107-25 of the *Standard Specifications* for potential hazardous materials. All collected litter shall be containerized immediately and kept off the traveled portions of the roadway, shoulders, and rights-of-way (including paved shoulders). All collected litter that is small enough to be placed in a bag shall be bagged immediately. All collected litter that is too large for a bag shall be placed into a vehicle. Extended storage or stockpiling of collected litter and recyclables will not be permitted.

The Contractor's personnel shall dispose of any litter in a landfill approved by North Carolina Division of Waste Management. The Contractor will not be allowed to use NCDOT accounts at the landfills/recycling centers nor be allowed to dispose of the litter in NCDOT trash containers on any NCDOT property.

The Contractor shall report online the number of bags of litter and any recycling on the NCDOT Litter Management Website on the date of the pickup at the following website:

<https://apps.ncdot.gov/LM>

An access code ('Pickup Key') for the online reporting portal may be obtained via emailing the Roadside Environmental Unit Litter Management Section at [ncdot.clr@ncdot.gov](mailto:ncdot.clr@ncdot.gov). The Contractor shall request access to the litter removal reporting website prior to starting initial litter collection operations.

## Measurement and Payment

The quantity of litter removal to be performed will be affected by the actual conditions that occur during construction of the project. The quantity of litter removal may be increased, decreased, or eliminated entirely as directed. Such variations in quantity will not be considered as alterations in the details of construction or a change in the character of the work.



*Manual Litter Removal* will be measured and paid as the actual number of man hours each worker spends picking up litter. Such price and payment will be full compensation for all litter removal work covered by *Litter Removal*, including, but not limited to, furnishing all materials, labor, equipment, transport, reporting, and incidentals necessary to accomplish the work.

*Litter Disposal* will be measured and paid for by the actual number of tons of litter collected and properly disposed of at a state approved landfill. Such price and payment will be full compensation for all fees, labor, transport, and incidentals necessary to dispose of collected litter associated with *Litter Removal*.

All traffic control necessary to provide a safe work area for *Litter Removal* shall be paid for as specified elsewhere in the contract.

Payment will be made under:

| <b>Pay Item</b>       | <b>Pay Unit</b> |
|-----------------------|-----------------|
| Manual Litter Removal | MHR             |
| Litter Disposal       | TON             |

### **FABRIC INSERT INLET PROTECTION**

(1-1-24)

#### **Description**

Install, maintain, and remove Fabric Insert Inlet Protection, of the type specified, in inlet structures (catch basins, drop inlets, etc.) in areas where asphalt or concrete may prevent the proper installation of a Rock Inlet Sediment Traps Type C, or as directed by the Engineer.

#### **Materials**

Provide a fabric inlet protection device composed of a fitted woven polypropylene geotextile double sewn with nylon thread suspended sack. The Fabric Insert Inlet Protection shall be manufactured to fit the opening of the catch basin or drop inlet or shall have a deflector to direct runoff from the curb opening into the fabric sack. The Fabric Insert Inlet Protection shall have a rigid frame or support system to support the loaded weight of the product. The product shall have lifting loops for removing the device from the basin and will have dump straps attached at the bottom to facilitate the emptying of the device. The Fabric Insert Inlet Protection shall have an overflow system to allow stormwater to enter the inlet structure and avoid ponding on the roadway when the device reaches capacity.

The fitted filter assembly shall have the following physical properties:

Type 1 (High Flow):

| <b>Physical</b> | <b>Test Method</b> | <b>English</b> |
|-----------------|--------------------|----------------|
| Grab Tensile    | ASTM D-4632        | 255 x 275 lbs  |

|                           |             |                             |
|---------------------------|-------------|-----------------------------|
| Minimum Puncture Strength | ASTM D-4833 | 125 lbs                     |
| Mullen Burst              | ASTM D-3786 | 420 PSI                     |
| Minimum UV Resistance     | ASTM D-4355 | 70 %.                       |
| Flow Rate                 | ASTM D-4491 | 200 gal/min/ft <sup>2</sup> |
| Apparent Opening          | ASTM D-4751 | 20 US Sieve                 |
| Permittivity              | ASTM D-4491 | 1.5 sec <sup>-1</sup>       |

Type 2 (Low Flow):

| Physical                  | Test Method | English                    |
|---------------------------|-------------|----------------------------|
| Grab Tensile              | ASTM D-4632 | 315 x 300 lbs              |
| Grab Elongation           | ASTM D-4632 | 15 x 15 %                  |
| Minimum Puncture Strength | ASTM D-4833 | 125 lbs                    |
| Mullen Burst              | ASTM D-3786 | 650 PSI                    |
| Minimum UV Resistance     | ASTM D-4355 | 70 %.                      |
| Flow Rate                 | ASTM D-4491 | 40 gal/min/ft <sup>2</sup> |
| Apparent Opening          | ASTM D-4751 | 40 US Sieve                |
| Permittivity              | ASTM D-4491 | 0.55 sec <sup>-1</sup>     |

### Construction Methods

Strictly adhere to the manufacturer's installation instructions and recommendations. Maintenance shall include regular daily inspections and after each qualifying rain event. The Fabric Insert Inlet Protection shall be emptied, cleaned and placed back into the basin when it reaches 50% capacity or as directed by the Engineer.

### Measurement and Payment

*Fabric Insert Inlet Protection, Type 1* will be measured and paid in units of each of the type specified, complete in place and accepted. Such payment shall be full compensation for furnishing and installing the *Fabric Insert Inlet Protection, Type 1*, in accordance with this specification and for all required maintenance.

*Fabric Insert Inlet Protection Cleanout* will be measured and paid in units of each for the maintenance of the device, cleanout and disposal of accumulated sediments.

Payment will be made under:

#### Pay Item

Fabric Insert Inlet Protection, Type 1  
Fabric Insert Inlet Protection Cleanout

#### Pay Unit

Each  
Each

**Rutherfordton and Spindale Landscape Design  
Project Special Provisions**

**HL – 0065 RUTHERFORDTON AND SPINDALE LANDSCAPE DESIGN SITE WORK  
TABLE OF CONTENTS**

| <b>Section</b> | <b>Description</b>    | <b>Page</b> |
|----------------|-----------------------|-------------|
| 1              | IRRIGATION            | 2           |
| 2              | SOD (ZOYSIA)          | 3           |
| 3              | STAMPED CONCRETE      | 6           |
| 4              | MONTHLY ESTABLISHMENT | 6           |
| 5              | MULCHING              | 8           |
| 6              | TOPSOIL               | 8           |

## 1

## IRRIGATION

**General:**

The contractor shall provide all materials and labor to install the irrigation system utilizing drip emitters. The department has provided a plan that shows a schematic design for the irrigation on sheet L-11. Before the installation begins, the contractor shall submit the brand and model of the irrigation components for approval by the engineer and landscape architect. Should the contractor design their own system, the plans will require final approval from the Division Roadside Environmental Engineer or the landscape architect before installation begins. If the contractor decides to provide their own design plans, they must show all locations, brands, models, and specifications for the following items: piping, emitters, controllers, rain sensors, pop-up indicator heads, back flows, valves, and valve and controller housings. The contractor shall be familiar with all state and local regulations and ordinances concerning irrigation systems and obtain all permits that are necessary for the installation of the irrigation system. If the contractor chooses to use the plans provided by NCDOT, he or she shall lay out the work as accurately as possible in accordance with the plans.

The contractor shall conduct his operations in such a manner to prevent the damage of existing structures and plant materials. If damage does occur, the contractor is responsible for restoring or replacing the damaged property to a condition that is of equal or better condition than what previously existed at no cost to NCDOT. The contractor shall be responsible for full and complete coverage of the area needing irrigation and shall make any necessary minor adjustments as directed by the engineer at no additional costs.

The contractor shall prepare an "as-built" drawing which shall include locations of all aspects of the irrigation system installed by the contractor. This may include but is not limited to all system controllers, valves (automatic and manual), pipe, bores, drip tube, wires, wire splices, and any deviation from the contract bid documents. Two (2) copies of the "as-built" drawings shall be supplied to the Department of Transportation.

**Testing:**

Upon completion of the irrigation system, the entire system shall be tested for proper operation. The contractor shall adjust the various components of the irrigation system so the overall operation of the system is most efficient. This includes synchronization of the controller, adjustments to pressure valves, and individual spray head adjustments. Lateral lines and emitters shall be inspected while a particular irrigation zone is in operation to insure there are no leaks. The contractor shall perform a pressure and leakage test of irrigation lines. The contractor shall notify the engineer two days in advance of testing, and testing shall be performed in the presence of the engineer or his representative.

The contractor shall furnish a transferable certificate of warranty and a guarantee of work and materials for a oneyear period from the date of final acceptance of the system. Final payment for the system shall not be made unless this certification is presented to the engineer. Upon completion of the irrigation system installation and testing, the contractor shall schedule a final inspection with the engineer. Final acceptance of the irrigation system shall take place upon the approval of the engineer that satisfactory installation is complete.

**Compensation:**

'Irrigation' will be paid for as a lump sum once completed and accepted. The contractor shall furnish and install the irrigation system including but not limited to trenching, backfilling, boring, installing pipe, valves, filters, pressure regulators, drip tubing, controllers, and wiring, as well as, furnishing all labor, tools and equipment, and any other incidentals necessary or required to complete the work.

**Payment will be made under:**

*Irrigation* .....LS

**2****SOD (ZOYSIA)****Description:**

This work consists of installing sod in areas as shown on the plans and as directed. The sod shall be prepared in accordance with the requirements of Section 1664 of the *Standard Specifications* and the requirements of this provision.

**Materials:**

Only "approved sod" (trade designation) consisting of 100% Meyer, El Toro, Crowne, or Compadre El Toro Zoysia sod shall be used. The sod, machine cut to the supplier's standard "big roll" sod width and length, shall be a 5/8" minimum depth, excluding top growth and thatch, at the time of cutting. Before cutting, the sod shall be uniformly mowed at a height of 3/4" to 1". Standard sod sections shall be sufficiently strong to support their own weight and retain their size and shape when suspended vertically from a firm grasp on the upper 10% of the section.

The Contractor shall obtain a certificate or limited permit issued by the North Carolina Department of Agriculture and Consumer Services (1-800-206-9333) or (919-733-6932) stating that the sod has been found to be free of injurious plant pests.

Sod shall be delivered on site within 24 hours of being cut (harvested) and be covered by acceptable means during delivery. A certificate from the sod producer stating the date and time of sod cutting shall accompany the sod when it arrives at the project site.

The Contractor shall provide sufficient water to meet the requirements of this provision.

**Construction:****(A) Soil Preparation**

Remove litter and other debris. Mow and satisfactorily dispose of weeds or other unacceptable growth on the areas to be sodded. Removal of any existing turf or vegetation for purposes of soil preparation will be incidental to completing the sod installation.

Prior to beginning preparation of the soil to receive sod, all eroded, uneven and rough areas shall be contour graded and/or filled with soil as directed. The soil shall be scarified or otherwise

loosened to a depth of not less than 3". Clods shall be broken and the top 2" to 3" of soil shall be worked into an acceptable soil bed by the use of soil pulverizers, drags, or harrows.

After soil preparation, lime and fertilizer shall be uniformly distributed by mechanical means and thoroughly mixed with the top 3" of the soil by disking, harrowing, or other approved methods. In lieu of an NCDA&CS soil report, the rates of lime and fertilizer per acre are as follows:

|       |                     |
|-------|---------------------|
| 300#  | 10-20-20 Fertilizer |
| 4000# | Limestone           |

The area shall then be harrowed, dragged, raked, or prepared by other approved methods which will give a lawn type finish. All trash, debris and stones larger than 1-½" in diameter or other obstructions that could interfere with the placing of the sod shall also be removed. The finished surface shall be moistened with water prior to placing the sod as directed.

(B) Sod Placement

Sod handling and placement shall be a continuous process of cutting, transporting and installing including repairing seams and voids. Sod shall always be installed within 36 hours after being harvested. Sod shall be watered within 2 hours of installation.

Any sod or portions of sod rejected by the Engineer during the initial placement shall be removed from the project and replaced with acceptable sod within 24 hours of notification. The Contractor shall cease any and all other placement of sod on the project until rejected sod has been replaced.

After sod has been placed, and staked where necessary, according to Section 1664 of the *Standard Specifications*, it shall then be rolled or tamped carefully and firmly by means acceptable to the Engineer to ensure proper soil contact. If rolled, roller shall have a minimum weight of 150 lb/ft of roller width. Use of rubber-tired equipment to roll shall not be allowed. Metal staples, 12" long unless otherwise approved, shall be made of 11-gauge new steel wire so as not to bend when pinned or driven through the sod. Extreme care shall be taken to prevent the installed sod from being torn or displaced. After rolling or tamping the sod, it shall be watered uniformly and thoroughly with a minimum of 1" of water, 5.6 gallons per square yard, applied immediately after installation of sod. In no case shall the time interval between sod placement and initial watering exceed 2 hours. Water shall be placed to the required quantity through sequential passes to ensure proper coverage and to prevent runoff. A minimum of ¼" should be placed on each pass.

(C) Maintenance

The Contractor shall be responsible for all watering and other maintenance (except mowing) as required to maintain the livability of the sod from installation until final acceptance, including monitoring the sod to ensure all watering and other maintenance is performed as required.

The Contractor shall be responsible for all watering and other maintenance required to maintain the livability and health of the sod from installation until completion of the 60-day observation period. Additional water shall be applied as needed and as directed to maintain the livability of

the sod. Each additional watering event shall be a minimum of 0.5" of water, 2.8 gallons per square yard, uniformly applied over the sodded area and may be placed in a series of passes to prevent runoff, with a minimum of ¼" on each pass.

Any sod or portions of sod rejected by the Engineer after placement, but prior to beginning the observation period, shall be removed from the project and replaced with acceptable sod. Satisfactory replacement of sod shall begin within 10 days of notification. Failure to replace and repair damaged or dead sod as directed may result in sanctions under Article 108-7 or Article 108-8 of the *Standard Specifications*.

(D) Observation Period

Sodding shall be inspected by the Roadside Environmental Field Operations Engineer to begin and end the 60-day observation period.

The Contractor shall maintain responsibility for the sod for a 60-day observation period beginning upon the satisfactory completion and acceptance of all work required in the plans or as directed. The Contractor shall guarantee the sod under the payment and performance bond in accordance with Article 109-10 of the *Standard Specifications*.

After the first 30 days of the 60-day observation period, the Contractor and Engineer shall meet to review the project and identify dead or damaged sod to be replaced. The Contractor, at no additional expense to the Department, shall satisfactorily replace any sod that is not in a living and healthy condition as determined by the Engineer. Replacement sod shall be furnished and installed in accordance with the same requirements as for initial sodding operation, except that the amounts of limestone, sulfur, and water may be readjusted as directed. Satisfactory replacement of sod shall begin within 10 days of notification. Failure to replace and repair damaged or dead sod as directed may result in sanctions under Article 108-7 or Article 108-8 of the *Standard Specifications*. Upon completion and acceptance of the sod repairs, the remaining 30 days of the observation period shall begin.

(E) Acceptance

At the end of the 60-day observation period, the sod furnished and installed under this contract must be in a living and healthy condition, as determined by the Engineer. Acceptance of sod will be either at the end of the 60-day observation period or at final acceptance of the project, whichever is later. The sod shall be weed free at time of final acceptance.

**Compensation:**

Sod will be measured and paid for per square yard installed and accepted as 'Zoysia 'Compadre''. Such price will be full compensation for all existing turf and vegetation removal, sod, labor, materials, tools, equipment, and all other incidentals necessary to complete the work.

**Payment Item:**

Zoysia 'Compadre' ..... SY  
Water for Planting ..... 1,000 gallons

**3****STAMPED CONCRETE****General:**

The work covered by this section consists of furnishing and installing the stamped concrete in Roundabout Area, Central Island Area, MUP Greenway Area, and all areas along US-221A as shown and designated on Landscape Plan Set.

**Materials:**

*Paving & Sidewalks:* All paving and sidewalks shall be Class "A" concrete and shall confirm to applicable portions of Section 825 and Section 1000 of the Standard Specification.

**Patterns and Colors:**

Baskete Weave Slate patterns with the overall stamped/molding size of 24"x24" with individual stone size 6"x12" arranged in alternatives pairs with joint width of 1/4" and depth of 3/8". The basket weave slate color shall be Stone Grey.

Running Bond Brick patterns with overall size of stamp/molding size of 24"x 36" with individual stone size of 3 1/2" wide, 7 1/2" long with joint width of 1/2" and depth of 1/4".

The running bond brick color shall be Red.

**Compensation:**

The stamped concrete will be paid as a lump sum. This should be determined from the dimensions shown on the plans or established by the Landscape Architect and/or Engineer. Such price and payment will be full compensation for all work covered by this special provision; including but not limited to excavation/backfilling of the placement area, pouring, and finishing the stamped concrete, and furnishing all labor, materials, equipment and any other incidentals necessary or required to complete the work.

**Payment will be made under:**

*Stamped Concrete*..... LS

**4****MONTHLY ESTABLISHMENT****General:**

There will be an establishment period for this contract that includes but is not limited to mowing and string trimming of turf areas, management of weeds and pests through herbicide or pesticide applications or by manual removal; watering; fertilization; replacement of mulch; repair or replacement of guy stakes, guy wires, and water rings; and other work as directed to ensure the survival and growth of the plant material and the appearance of the project.

Maintain trees, shrubs, grasses, perennials, groundcovers, and surrounding bed areas until final acceptance of the project. Mow and maintain a width of at least 6 feet along the outside perimeter of new shrub beds and mulch rings for individual trees and shrubs or 6 feet beyond the limits of the guy stakes, whichever is greater.



The establishment period will begin once all the plant material of a project is installed and approved unless otherwise noted in the contract. The establishment period for this contract will last 12 months. Establishment work will be required on a monthly basis and as required by the Division Roadside Environmental Engineer. The contractor or their appointed representative shall meet on the project site at a predetermined monthly schedule to identify any tasks that need to be accomplished during that month. The contractor shall be available within twenty-four (24) hours of contact by the Engineer to handle any situations requiring immediate attention.

**Weed Control:**

Weed: Any plant growing where it is not desired. Plants such as, but not limited to: clover, dandelions, purslane, chickweed, pennywort, dog fennel, crabgrass, and volunteer trees are considered weeds.

- Weeds are to be mowed, trimmed, or edged from turf areas as part of turf care operations for each mowing occurrence.
- Weeds are to be mechanically or chemically removed from plant beds, curb gutter expansion joints, pavers, and along fence lines where applicable.
- The contractor may use contact herbicides for spot treatment of weeds in plant beds, as well as preemergent herbicides when possible.

Broad application of pre/post-emergence herbicide throughout a project site will be paid as separate line items in the contract. Herbicidal treatment in the form of spot spraying, wicking, etc. will fall under establishment.

**Water for Planting:**

Water for planting will be applied in accordance with the standard specifications and paid as a separate line item in the contract. Water newly planted trees and shrubs every few days initially, then once a week depending on soil conditions and rainfall. Weekly to monthly watering should continue until the tree is established in the landscape. Watering should be focused on the root ball and planting area. In general, the soil should not stay saturated and must have time to dry out between each watering, but watering rates can vary by plant type. If necessary, the contractor may use tree irrigation bags to distribute the water, but their water level must be monitored regularly to ensure appropriate application. Be sure to check the soil moisture before watering in order to prevent damage the plant's health by overwatering.

**Replacement Planting:**

Replacement planting consists of replacing plants that are not in a healthy, living condition or do not conform to the standards representative of that in the American Standard for Nursery Stock. Replacement of reforestation plants will not be required unless specified otherwise in the plans. Perform all replacement plantings within the planting season specified in the contract. The replacement of plants shall occur as directed by the Division Roadside Environmental Engineer.

**Compensation:**

'Monthly Establishment' will be paid for each month when work is completed and approved. Such price and payment will be full compensation for all work covered by this provision

including but not limited to re-mulching, weed removal, plant replacement, mowing, and litter removal, as well as, furnishing all labor, tools and equipment, and any other incidentals necessary or required to complete the work.

**Payment Item:**

*Monthly Establishment*..... EA  
*Post-Emergence Herbicidal Treatment*.....SY  
*Pre-Emergence Herbicidal Treatment*.....SY  
*Water for Planting*.....1,000 gallons

**5****MULCHING**

Mulch for planting shall consist of double shredded hardwood mulch from a single source, unless otherwise approved by the Engineer. All mulch and the work associated with placing the mulch during the planting shall conform to article 1060-11 of the NCDOT Standard Specifications. Submit a sample for approval prior to placement. Install the mulch to a finished depth of 4 inches (unless otherwise noted), rake, and compact to create a uniform finish.

**Payment will be made under:**

*Mulch for Planting*.....CY

**6****TOPSOIL****General**

The work covered by this provision shall consist of removing the top 4" of the existing soil from the annual plant beds and furnishing and replacing it with new topsoil as directed by the Engineer.

**Material**

Topsoil shall consist of a sandy loam, silt loam, or clay loam that contains a reasonable amount of humus material. Topsoil shall be of good texture, loose, and friable and shall be representative of topsoil in the general vicinity of the project. It shall be reasonably free of sod, hard lumps, subsoil, large roots, rocks and gravel, noxious weeds/seeds, and other material that would be harmful to plant growth. The source and a sample of the topsoil in a one pound sealed plastic bag shall be submitted to the Division Roadside Environmental Engineer and approved prior to delivery to the project site. All topsoil shall be approved by the Engineer when delivered to the job site, whether or not the source of topsoil has been previously approved.

**Construction**

Care shall be exercised by the Contractor to minimize disturbance to the existing turf, brick borders, and water, sewer, irrigation, and electrical utilities. The topsoil shall be placed and spread evenly to the depth required which, after settlement, shall constitute the finish grade. Topsoil shall not be placed when the ground is frozen, excessively wet, or in a condition that the soil cannot be worked easily and dressed smoothly.

HL-0065

**PL-9**

Rutherford County


**Payment will be made under:**

*Topsoil*.....*CY*

HL-0065

TS-1

Rutherford County

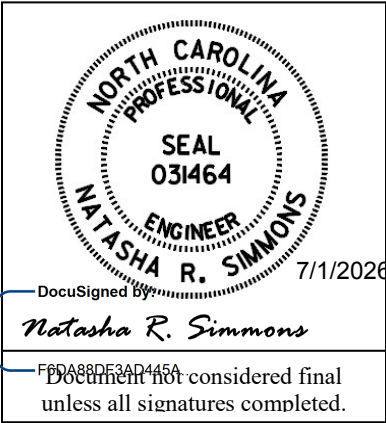

Signals and Intelligent Transportation Systems  
Project Special Provisions  
(Version 24.3)

Prepared By: NRS  
1-Jul-26

Contents

1. 2024 STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES.....3

1.1. ELECTRICAL JUNCTION BOXES (1091-5).....3

1.2. TRAFFIC SIGNAL ACTIVATION (1700-4) .....3

1.3. PEDESTALS (1098-15) .....3

2. SIGNAL HEADS.....7

2.1. MATERIALS .....7

A. General.....7

B. Vehicle Signal Heads.....9

C. Pedestrian Signal Heads.....11

3. CONTROLLERS WITH CABINETS .....12

3.1. MATERIALS – TYPE 2070LX CONTROLLERS .....12

3.2. MATERIALS – GENERAL CABINETS .....13

3.3. MATERIALS – TYPE 170E CABINETS .....14

A. Type 170 E Cabinets General .....14

B. Type 170 E Cabinet Electrical Requirements .....14

C. Type 170 E Cabinet Physical Requirements:.....21

D. Model 2018 Enhanced Conflict Monitor .....23

3.4. MATERIALS – TYPE 170 DETECTOR SENSOR UNITS .....33

3.5. MEASUREMENT AND PAYMENT .....33

4. NON-INTRUSIVE DETECTION SYSTEMS.....34

4.1. DESCRIPTION .....34

A. General.....34

4.2. MATERIALS .....34

A. General.....34

4.3. CONSTRUCTION METHODS .....40

A. Construction.....40

B. Quality Acceptance/Testing.....41

C. Contractor Warranty and Maintenance .....43

D. Training .....43

4.4. MEASUREMENT AND PAYMENT .....44

5. RECTANGULAR RAPID FLASHING BEACON SOLAR POWERED DISPLAY AND CONTROLLER ASSEMBLY .....44

5.1. DESCRIPTION .....44

5.2. MATERIALS .....44

5.3. CONSTRUCTION METHODS .....45

5.4. MEASUREMENT AND PAYMENT .....46

6. REMOVE AND STOCKPILE, RECTANGULAR RAPID FLASHING BEACON ASSEMBLY .....46

6.1. DESCRIPTION .....46

6.2. CONSTRUCTION METHODS .....46

6.3. MEASUREMENT AND PAYMENT .....46

7. ETHERNET EDGE SWITCH.....47

7.1. DESCRIPTION .....47

    A. Ethernet Edge Switch: .....47

    B. Network Management: .....47

7.2. MATERIALS .....47

    A. General: .....47

    B. Compatibility Acceptance.....47

    C. Standards: .....48

    D. Functional: .....48

    E. Physical Features: .....49

    F. Management Capabilities: .....49

    G. Electrical Specifications: .....51

    H. Environmental Specifications: .....51

    I. Ethernet Patch Cable: .....51

7.3. CONSTRUCTION METHODS .....52

    A. General: .....52

    B. Edge Switch:.....52

7.4. MEASURMENT AND PAYMENT .....52

8. EMERGENCY GENERATOR AND GENERATOR TRANSFER SWITCH.....52

8.1. DESCRIPTION .....52

8.2. MATERIALS .....52

8.3. CONSTRUCTION METHODS .....53

8.4. MEASUREMENT AND PAYMENT .....53

9. GPS EMERGENCY VEHICLE PREEMPTION SYSTEM.....53

9.1. DESCRIPTION .....53

9.2. MATERIALS .....53

9.3. CONSTRUCTION METHODS .....53

9.4. MEASUREMENT AND PAYMENT .....53

HL-0065

TS-3

Rutherford County

## 1. 2024 STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES

*The 2024 Standard Specifications are revised as follows:*

### 1.1. ELECTRICAL JUNCTION BOXES (1091-5)

Page 10-209, revise paragraphs beginning on line 26 to read "Provide electrical junction boxes with covers of the type and size indicated by the contract or plans for the termination of conduits. Boxes and covers shall meet all requirements and specifications of ANSI/SCTE 77. Structural load tests shall meet the Tier 15 application type.

Page 10-209, line 28, revise title of section 1091-5(B) from "Polymer Concrete (PC) Junction Boxes" to "Polymer Concrete (PC), Composite, and Thermoplastic Junction Boxes".

Page 10-209, revise paragraphs beginning on line 29 through line 41 to read "For PC junction boxes, use polymer concrete material made of an aggregate consisting of sand and gravel bound together with a polymer and reinforced with glass strands to fabricate box and cover components.

Provide junction boxes which have bolted covers and open bottoms. Provide vertical extensions of 6 inches to 12 inches as required by project provisions.

Provide the required logo on the cover. Provide at least two size 3/8 inch diameter hex head stainless steel cover bolts to match inserts in the box. Provide pull slot(s) with stainless steel pin(s). Bodies of junction boxes shall be a single piece.

Polymer concrete, composite, and thermoplastic junction boxes are not required to be listed electrical devices."

### 1.2. TRAFFIC SIGNAL ACTIVATION (1700-4)

Page 17-4, revise paragraph beginning on line 42 through line 46 to read "Prior to placing signal in the steady (stop-and-go) mode, the signal should be placed in yellow-red flashing mode for up to 7 days or as directed by the Engineer. Yellow-red flashing mode differs from the red-red flashing mode shown in the signal plan. Yellow-red flash mode includes flashing the yellow signal indications on all main street through movements while flashing the red signal indications on all side street signal heads and any left turn heads on the main street. The signal should not be placed in the steady (stop-and-go) mode on a Saturday or Sunday without prior approval from the Engineer. Do not place the signal in steady (stop-and-go) mode until inspected and without prior approval of the Engineer."

### 1.3. PEDESTALS (1098-15)

Pages 10-226 through 10-230, revise section 1098-15 beginning on page 10-226 line 17 through page 10-230 line 10 to read "Furnish pedestal assemblies and their components that are pre-approved on the ITS & Signals QPL with foundations that conform to the *AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals*, and the Interim Specifications as shown on the plans. Refer to *Roadway Standard Drawings* No. 1743 for structural design specifications for each type of pedestal.

#### (A) Pedestal Shaft

Furnish one piece pedestal shafts fabricated from either aluminum or galvanized steel pipe with a uniform pipe outer diameter of 4.5 inches and of the lengths specified for the type of pedestal shown on *Roadway Standard Drawing* No. 1743. Refer to Article 1743-2 for pedestal type descriptions.

**HL-0065****TS-4*****Rutherford County***

For Type I (pedestrian pushbutton pedestals) and Type II (normal-duty pedestals), furnish shafts constructed from schedule 40 extruded aluminum pipe that conforms to Aluminum Association Alloy 6061-T6 with a tensile strength of 30 ksi and a minimum wall thickness of 0.237 inch. Aluminum conduit will not develop the necessary strength required and is not allowed. Thread and deburr in accordance with American National Standard Pipe Threads, NPT (ANSI B2.1). Finish the exterior with a rough surface texture consisting of a uniform grain pattern that is perpendicular to the axis of the pipe along the full pipe length. Unless otherwise specified, do not use galvanized steel pipe for Type I and Type II pedestal shafts.

**(B) Transformer Bases**

Furnish transformer bases for each type of pedestal shown on *Roadway Standard Drawings* No. 1743 fabricated from aluminum that meets Aluminum Association Alloy 356 or equivalent, and that are designed to break upon impact in accordance with AASHTO requirements. Pre-approved transformer base shape, size, and bolt circle dimensions may vary by product supplier, but are structurally qualified for use by each pedestal type. Compliance with manufacturer's installation instructions is crucial to ensure optimal performance when impacted.

Provide a 0.5 inch minimum diameter, coarse thread hole cast into transformer base located inside of base and oriented for easy access for use in grounding and bonding.

Provide an access opening for all transformer bases with an access door that is attached with a 1/4 inch x 3/4 inch long stainless steel vandal proof screw to secure access door.

For Type I (pedestrian pushbutton pedestals) and Type II (normal-duty pedestals), provide a threaded opening at the top of the base to receive a 4 inch NPT pipe shaft. Include a set screw prep and 3/8 inch-16 x 1 inch stainless steel set screw to secure the pedestal post to the pedestal base. Fabricate the bottom of the transformer base with four equally spaced holes or slots to secure the entire assembly to the concrete foundation.

**(C) Anchor Bolts**

For each pedestal mounted on a concrete foundation, provide four anchor bolts in accordance with ASTM F1554, Grade 55, of the size and length specified in *Roadway Standard Drawings* No. 1743. Provide anchor bolts with coarse threads meeting the bolt/thread criteria specified by AISC. Provide threads for a minimum length of 4 inches on each end of the bolt. All thread anchor rods may be used. Ensure anchor bolts are hot-dipped galvanized in accordance with ASTM A153.

For each anchor bolt:

- (1) Provide three heavy hex nuts; one at the top, and two at the bottom (embedded end) of the anchor bolt. Provide hex nuts with coarse threads that match the anchor bolt thread requirements above. Provide hex nuts that meet the requirements of ASTM A563 Grade DH, ASTM A194, Grade 2H or equivalent. Galvanize all heavy hex nuts in accordance with ASTM A153.

**HL-0065****TS-5*****Rutherford County***

- (2) Provide one standard size washer that meets the requirements of ASTM F436 for use between the two heavy hex nuts on the embedded end of the anchor bolt. Galvanize in accordance with ASTM A153.
- (3) Provide one extra thick, oversized washer for use over the slotted opening of the pedestal base. Fabricate washer to meet the chemical, physical, and heat treating requirements of ASTM F436. Fabricate the washer to the diameter and thickness needed. Galvanize fabricated washer in accordance with ASTM A153. Heat treat to the same requirements as F436 (i.e. 26 to 45 HRC).

For a 3/4 inch diameter anchor bolt mounted in a 1 1/2 inch slotted opening, the dimensional requirements for an extra thick, oversized washer are as follows:

- (a) The minimum Outside Diameter (OD) required is 2 3/4 inch.
- (b) The hole Inside Diameter (ID) = Nominal Bolt Diameter + 1/16 inch = 0.812 inch.
- (c) The minimum washer thickness required is 3/8 inch.

If anchor bolts less than 3/4 inch in diameter are proposed for use to anchor pedestal bases, provide a washer calculation to ensure the washer thickness is adequate. To account for any pedestal manufacturing differences, verify the actual slotted opening width of the pedestal base anchoring points, and include it in the calculation. Anchor bolts that are less than 1/2 inch in diameter may not be used as they are not structurally adequate to support the pedestal and may inhibit the performance of the breakaway base.

The fabrication process for thick washers makes the washer slightly tapered (i.e. the top OD and the bottom OD are not the same). Install thick washers with the larger diameter face down against the pedestal base casting.

Do not use standard washers over the slotted opening of the pedestal base. Do not substitute or stack thin washers to achieve the required thickness specified or required.

In addition to the submittal requirements of Section 1098-1(B), provide Mill Certifications, Galvanization Certifications, and Heat Treating Certifications for all anchor bolts, fabricated washers, and structural hardware.

#### **(D) Pedestal Cap**

Furnish a 4 1/2 inch outside diameter slip fit domed pedestal top cap for each pedestal assembly designed to fit over the outside of the pedestal shaft. Fabricate the cap from aluminum that meets Aluminum Association Alloy 356. Ensure the cap provides 3 equally spaced stainless steel set screw fasteners to secure the cap to the pedestal shaft.

#### **(E) Pole Flange Base for 4 1/2 Inch Pipe**

As an alternative to using a frangible transformer base, furnish a flange base with cover for use with Type I pedestrian pushbutton pedestals only. Flange bases are non-breakaway supports that are to be used with a breakaway bolt system for AASHTO compliance for breakaway structures. Provide aluminum or steel flange bases with a minimum 7.5 inch diameter bolt circle. Ensure bases are either continuously welded to shafts or threaded to receive shafts. Each base should be designed to accommodate either three or four 1/2 inch bolts equally spaced on the bolt circle to receive breakaway anchors. Provide NPT threads on the internal opening of the flange base



**HL-0065****TS-6*****Rutherford County***

through the full length of the flange base with locking set screws at the top of the base to receive a 4 inch NPT pipe shaft.

Fabricate aluminum flange bases that meet Aluminum Association Alloy 356 requirements for architectural bases. Fabricate steel flange bases that meet ASTM A36.

Do not use flange bases for Type II pedestals.

**(F) Breakaway Anchors**

Use breakaway anchors installed in concrete pedestal foundations as an alternative to transformer bases. Furnish single or double neck omni-directional breakaway anchor bolt coupling systems for use with Type I (pedestrian pushbutton pedestals) only. Use with non-breakaway pole flange bases. Use 1/2 inch diameter bolts for pushbutton posts. Fabricate from steel with a minimum yield strength of 55 ksi. Galvanize in accordance with ASTM A153. Do not use breakaway anchors with Type II or III pedestals, or in conjunction with breakaway transformer bases.

**(G) Foundation**

Install concrete pedestal foundations of the type and size shown on *Roadway Standard Drawings* No. 1743.04. Furnish Class A minimum concrete that conforms to Article 1000-4.

Provide reinforcing steel that conforms to the applicable parts of Section 1070.

**(H) Screw-In Helical Foundation Anchor Assembly**

Furnish and install screw-in helical foundation as an alternative to the standard reinforced concrete foundation specified in Section 1743, for supporting Type I and Type II Pedestals.

**(1) Type I – Pedestrian Pushbutton Post:**

Fabricate pipe assembly consisting of a 4 inch diameter x 56 inch long pipe, single helical blade and square fixed attachment plate. Furnish pipe in accordance with ASTM A53 ERW Grade B and include a 2 inch x 3 inch cable opening in the pipe at 18 inches below the attachment plate. Furnish steel attachment plate and helical blade in accordance with ASTM A36. Include four slotted mounting holes in the attachment plate to fit bolt circles ranging from 7 3/4 inches to 14 3/4 inches in diameter. Furnish additional 3/4 inch keyholes at slotted holes to permit anchor bolt installation and replacement from top surface. Include combination bolt-head retainer and dirt scrapers at the attachment plate underside to allow for a level or flush-mount plate installation with respect to the finished grade. Galvanize pipe assembly components in accordance with AASHTO M 111 or an approved equivalent.

Furnish four 3/4 inch 10NC x 3 inch square head anchor bolts to meet the requirements of ASTM F3125. Provide four 3/4 inch plain flat galvanized washers, four 3/16 inch thick galvanized plate washers and four 3/4 inch galvanized hex nuts. Galvanize in accordance with AASHTO M 111 or an approved equivalent.

**(2) Type II – Normal-Duty Pedestal:**

Fabricate pipe assembly consisting of a 6 inch diameter x 60 inch long, single helical blade, 1 1/4 inch diameter stinger rod and square fixed attachment plate. Furnish pipe in accordance with ASTM A53 ERW Grade B using schedule 40 wall thickness and include a 2 inch x 3

**HL-0065****TS-7*****Rutherford County***

inch cable opening in the pipe at 18 inches below the attachment plate. Furnish steel attachment plate, helical blade and stinger rod in accordance with ASTM A36. Include four slotted mounting holes in the attachment plate to fit bolt circles ranging from 10 inches to 15 inches in diameter. Furnish additional 1 1/4 inch keyholes at slotted holes to permit anchor bolt installation and replacement from top surface. Include combination bolt-head retainer and dirt scrapers at the attachment plate underside to allow for a level or flush-mount plate installation with respect to the finished grade. Galvanize pipe assembly components in accordance with AASHTO M 111 or an approved equivalent.

Furnish four 1 inch 8NC x 4 inch galvanized Grade 5 square head anchor bolts. Provide four 1 inch plain flat galvanized washers and four 1 inch galvanized hex nuts. Galvanize in accordance with AASHTO M 111 or an approved equivalent.”

## **2. SIGNAL HEADS**

### **2.1. MATERIALS**

#### **A. General**

Fabricate vehicle signal head housings and end caps from die-cast aluminum. Fabricate 16-inch pedestrian signal head housings and end caps from die-cast aluminum. Provide visor mounting screws, door latches, and hinge pins fabricated from stainless steel. Provide interior screws, fasteners, and metal parts fabricated from stainless steel.

Fabricate tunnel and traditional visors from sheet aluminum.

Paint all surfaces inside and outside of signal housings and doors. Paint outside surfaces of tunnel and traditional visors, wire outlet bodies, wire entrance fitting brackets and end caps when supplied as components of messenger cable mounting assemblies, pole and pedestal mounting assemblies, and pedestrian pushbutton housings. Have electrostatically-applied, fused-polyester paint in highway yellow (Federal Standard 595C, Color Chip Number 13538) a minimum of 2.5 to 3.5 mils thick. Do not apply paint to the latching hardware, rigid vehicle signal head mounting brackets for mast-arm attachments, messenger cable hanger components or balance adjuster components.

Have the interior surfaces of tunnel and traditional visors painted an alkyd urea black synthetic baking enamel with a minimum gloss reflectance and meeting the requirements of MIL-E-10169, “Enamel Heat Resisting, Instrument Black.”

Where required, provide polycarbonate signal heads and visors that comply with the provisions pertaining to the aluminum signal heads listed on the QPL with the following exceptions:

Fabricate signal head housings, end caps, and visors from virgin polycarbonate material. Provide UV stabilized polycarbonate plastic with a minimum thickness of  $0.1 \pm 0.01$  inches that is highway yellow (Federal Standard 595C, Color Chip 13538). Ensure the color is incorporated into the plastic material before molding the signal head housings and end caps. Ensure the plastic formulation provides the following physical properties in the assembly (tests may be performed on separately molded specimens):

**HL-0065****TS-8*****Rutherford County***

| <b>Test</b>                                        | <b>Required</b>    | <b>Method</b> |
|----------------------------------------------------|--------------------|---------------|
| Specific Gravity                                   | 1.17 minimum       | ASTM D 792    |
| Flammability                                       | Self-extinguishing | ASTM D 635    |
| Tensile Strength, yield, PSI                       | 8500 minimum       | ASTM D 638    |
| Izod impact strength, ft-lb/in [notched, 1/8 inch] | 12 minimum         | ASTM D 256    |

For pole mounting, provide side of pole mounting assemblies with framework and all other hardware necessary to make complete, watertight connections of the signal heads to the poles and pedestals. Fabricate the mounting assemblies and frames from aluminum with all necessary hardware, screws, washers, etc. to be stainless steel. Provide mounting fittings that match the positive locking device on the signal head with the serrations integrally cast into the brackets. Provide upper and lower pole plates that have a 1 ¼-inch vertical conduit entrance hubs with the hubs capped on the lower plate and 1 ½-inch horizontal hubs. Ensure that the assemblies provide rigid attachments to poles and pedestals so as to allow no twisting or swaying of the signal heads. Ensure that all raceways are free of sharp edges and protrusions, and can accommodate a minimum of ten Number 14 AWG conductors.

For pedestal mounting, provide a post-top slipfitter mounting assembly that matches the positive locking device on the signal head with serrations integrally cast into the slipfitter. Provide stainless steel hardware, screws, washers, etc. Provide a minimum of six 3/8 X 3/4-inch long square head bolts for attachment to pedestal. Provide a center post for multi-way slipfitters.

For light emitting diode (LED) traffic signal modules, provide the following requirements for inclusion on the Department's Qualified Products List for traffic signal equipment.

1. Sample submittal,
2. Third-party independent laboratory testing results for each submitted module with evidence of testing and conformance with all of the Design Qualification Testing specified in section 6.4 of each of the following Institute of Transportation Engineers (ITE) specifications:
  - Vehicle Traffic Control Signal Heads – Light Emitting Diode (LED) Circular Signal Supplement
  - Vehicle Traffic Control Signal Heads – Light Emitting Diode (LED) Vehicle Arrow Traffic Signal Supplement
  - Pedestrian Traffic Control Signal Indications –Light Emitting Diode (LED) Signal Modules.

(Note: The Department currently recognizes two approved independent testing laboratories. They are Intertek ETL Semko and Light Metrics, Incorporated with Garwood Laboratories. Independent laboratory tests from other laboratories may be considered as part of the QPL submittal at the discretion of the Department,

3. Evidence of conformance with the requirements of these specifications,
4. A manufacturer's warranty statement in accordance with the required warranty, and
5. Submittal of manufacturer's design and production documentation for the model, including but not limited to, electrical schematics, electronic component values, proprietary part numbers, bill of materials, and production electrical and photometric test parameters.
6. Evidence of approval of the product to bear the Intertek ETL Verified product label for LED traffic signal modules.

**HL-0065****TS-9*****Rutherford County***

Ensure LED traffic signal modules meet the performance requirements for the minimum period of 15 years, provide a written warranty against defects in materials and workmanship for the modules for a period of 15 years after installation of the modules. During the warranty period, the manufacturer must provide new replacement modules within 45 days of receipt of modules that have failed at no cost to the State. Repaired or refurbished modules may not be used to fulfill the manufacturer's warranty obligations. Provide manufacturer's warranty documentation to the Department during evaluation of product for inclusion on Qualified Products List (QPL).

## **B. Vehicle Signal Heads**

Comply with the ITE standard "Vehicle Traffic Control Signal Heads". Provide housings with provisions for attaching backplates.

Provide visors that are 10 inches in length for 12-inch vehicle signal heads.

Provide a termination block with one empty terminal for field wiring for each indication plus one empty terminal for the neutral conductor. Have all signal sections wired to the termination block. Provide barriers between the terminals that have terminal screws with a minimum Number 8 thread size and that will accommodate and secure spade lugs sized for a Number 10 terminal screw.

Mount termination blocks in the yellow signal head sections on all in-line vehicle signal heads.

Furnish vehicle signal head interconnecting brackets. Provide one-piece aluminum brackets less than 4.5 inches in height and with no threaded pipe connections. Provide hand holes on the bottom of the brackets to aid in installing wires to the signal heads. Lower brackets that carry no wires and are used only for connecting the bottom signal sections together may be flat in construction.

For messenger cable mounting, provide messenger cable hangers, wire outlet bodies, balance adjusters, bottom caps, wire entrance fitting brackets, and all other hardware necessary to make complete, watertight connections of the vehicle signal heads to the messenger cable. Fabricate messenger cable hanger components, wire outlet bodies and balance adjuster components from stainless steel or malleable iron galvanized in accordance with ASTM A153 (Class A) or ASTM A123. Provide serrated rings made of aluminum. Provide messenger cable hangers with U-bolt clamps. Fabricate washers, screws, hex-head bolts and associated nuts, clevis pins, cotter pins, U-bolt clamps and nuts from stainless steel.

Provide LED vehicular traffic signal modules (hereafter referred to as modules) that consist of an assembly that uses LEDs as the light source in lieu of an incandescent lamp for use in traffic signal sections. Use LEDs that are aluminum indium gallium phosphorus (AlInGaP) technology for red and yellow indications and indium gallium nitride (InGaN) for green indications. Install the ultra bright type LEDs that are rated for 100,000 hours of continuous operation from -40°F to +165°F. Design modules to have a minimum useful life of 15 years and to meet all parameters of this specification during this period of useful life.

For the modules, provide spade terminals crimped to the lead wires and sized for a #10 screw connection to the existing terminal block in a standard signal head. Do not provide other types of crimped terminals with a spade adapter.

Ensure the power supply is integral to the module assembly. On the back of the module, permanently mark the date of manufacture (month & year) or some other method of identifying date of manufacture.

Tint the red, yellow and green lenses to correspond with the wavelength (chromaticity) of the LED. Transparent tinting films are unacceptable. Provide a lens that is integral to the unit with a smooth outer surface.

**HL-0065****TS-10****Rutherford County****1. LED Circular Signal Modules**

Provide modules in 12-inch circular sections configurations. All makes and models of LED modules purchased for use on the State Highway System shall appear on the current NCDOT Traffic Signal Qualified Products List (QPL).

Provide the manufacturer's model number and the product number (assigned by the Department) for each module that appears on the 2024 or most recent Qualified Products List. In addition, provide manufacturer's certification in accordance with Article 106-3 of the *Standard Specifications*, that each module meets or exceeds the ITE "Vehicle Traffic Control Signal Heads – Light Emitting Diode (LED) Circular Signal Supplement" dated June 27, 2005 (hereafter referred to as VTCSH Circular Supplement) and other requirements stated in this specification.

Provide modules that meet the following requirements when tested under the procedures outlined in the VTCSH Circular Supplement:

| Module Type            | Max. Wattage at 165° F | Nominal Wattage at 77° F |
|------------------------|------------------------|--------------------------|
| 12-inch red circular   | 17                     | 11                       |
| 12-inch green circular | 15                     | 15                       |

For yellow circular signal modules, provide modules tested under the procedures outlined in the VTCSH Circular Supplement to ensure power required at 77° F is 22 Watts or less for the 12-inch circular module.

Note: Use a wattmeter having an accuracy of  $\pm 1\%$  to measure the nominal wattage and maximum wattage of a circular traffic signal module. Power may also be derived from voltage, current and power factor measurements.

**2. LED Arrow Signal Modules**

Provide 12-inch omnidirectional arrow signal modules. All makes and models of LED modules purchased for use on the State Highway System shall appear on the current NCDOT Traffic Signal Qualified Products List (QPL).

Provide the manufacturer's model number and the product number (assigned by the Department) for each module that appears on the 2024 or most recent Qualified Products List. In addition, provide manufacturer's certification in accordance with Article 106-3 of the *Standard Specifications*, that each module meets or exceeds the requirements for 12-inch omnidirectional modules specified in the ITE "Vehicle Traffic Control Signal Heads – Light Emitting Diode (LED) Vehicle Arrow Traffic Signal Supplement" dated July 1, 2007 (hereafter referred to as VTCSH Arrow Supplement) and other requirements stated in this specification.

Provide modules that meet the following requirements when tested under the procedures outlined in the VTCSH Arrow Supplement:

| Module Type         | Max. Wattage at 165° F | Nominal Wattage at 77° F |
|---------------------|------------------------|--------------------------|
| 12-inch red arrow   | 12                     | 9                        |
| 12-inch green arrow | 11                     | 11                       |

For yellow arrow signal modules, provide modules tested under the procedures outlined in the VTCSH Arrow Supplement to insure power required at 77° F is 12 Watts or less.

Note: Use a wattmeter having an accuracy of  $\pm 1\%$  to measure the nominal wattage and maximum wattage of an arrow traffic signal module. Power may also be derived from voltage, current and power factor measurements.

**C. Pedestrian Signal Heads**

Provide pedestrian signal heads with international symbols that meet the MUTCD. Do not provide letter indications.

Comply with the ITE standard for “Pedestrian Traffic Control Signal Indications” and the following sections of the ITE standard for “Vehicle Traffic Control Signal Heads” in effect on the date of advertisement:

- Section 3.00 - “Physical and Mechanical Requirements”
- Section 4.01 - “Housing, Door, and Visor: General”
- Section 4.04 - “Housing, Door, and Visor: Materials and Fabrication”
- Section 7.00 - “Exterior Finish”

Provide a double-row termination block with three empty terminals and number 10 screws for field wiring. Provide barriers between the terminals that accommodate a spade lug sized for number 10 terminal screws. Mount the termination block in the hand section. Wire all signal sections to the terminal block.

Where required by the plans, provide 16-inch pedestrian signal heads with traditional three-sided, rectangular visors, 6 inches long.

Provide 2-inch diameter pedestrian push-buttons with weather-tight housings fabricated from die-cast aluminum and threading in compliance with the NEC for rigid metal conduit. Provide a weep hole in the housing bottom and ensure that the unit is vandal resistant.

Provide push-button housings that are suitable for mounting on flat or curved surfaces and that will accept 1/2-inch conduit installed in the top. Provide units that have a heavy duty push-button assembly with a sturdy, momentary, normally-open switch. Have contacts that are electrically insulated from the housing and push-button. Ensure that the push-buttons are rated for a minimum of 5 mA at 24 volts DC and 250 mA at 12 volts AC.

Provide standard R10-3 signs with mounting hardware that comply with the MUTCD in effect on the date of advertisement. Provide R10-3E signs for countdown pedestrian heads and R10-3B for non-countdown pedestrian heads.

Design the LED pedestrian traffic signal modules (hereafter referred to as modules) for installation into standard pedestrian traffic signal sections that do not contain the incandescent signal section reflector, lens, eggcrate visor, gasket, or socket. Provide modules that consist of an assembly that uses LEDs as the light source in lieu of an incandescent lamp. Use LEDs that are of the latest aluminum indium gallium phosphorus (AlInGaP) technology for the Portland Orange hand and countdown displays. Use LEDs that are of the latest indium gallium nitride (InGaN) technology for the Lunar White walking man displays. Install the ultra-bright type LEDs that are rated for 100,000 hours of continuous operation from -40°F to +165°F. Design modules to have a minimum useful life of 60 months and to meet all parameters of this specification during this period of useful life.

Design all modules to operate using a standard 3 - wire field installation. Provide spade terminals crimped to the lead wires and sized for a #10 screw connection to the existing terminal block in a standard pedestrian signal housing. Do not provide other types of crimped terminals with a spade adapter.

Ensure the power supply is integral to the module assembly. On the back of the module, permanently mark the date of manufacture (month & year) or some other method of identifying date of manufacture.

**HL-0065****TS-12*****Rutherford County***

Provide modules in 16-inch displays which have the solid hand/walking man overlay on the left and the countdown on the right configuration,. All makes and models of LED modules purchased for use on the State Highway System shall appear on the current NCDOT Traffic Signal Qualified Products List (QPL).

Provide the manufacturer's model number and the product number (assigned by the Department) for each module that appears on the 2024 or most recent Qualified Products List. In addition, provide manufacturer's certification in accordance with Article 106-3 of the *Standard Specifications*, that each module meets or exceeds the ITE "Pedestrian Traffic Control Signal Indicators - Light Emitting Diode (LED) Signal Modules" dated August 04, 2010 (hereafter referred to as PTCSI Pedestrian Standard) and other requirements stated in this specification.

Provide modules that meet the following requirements when tested under the procedures outlined in the PTCSI Pedestrian Standard:

| Module Type            | Max. Wattage at 165° F | Nominal Wattage at 77° F |
|------------------------|------------------------|--------------------------|
| Hand Indication        | 16                     | 13                       |
| Walking Man Indication | 12                     | 9                        |
| Countdown Indication   | 16                     | 13                       |

Note: Use a wattmeter having an accuracy of  $\pm 1\%$  to measure the nominal wattage and maximum wattage of a circular traffic signal module. Power may also be derived from voltage, current and power factor measurements.

Provide module lens that is hard coated or otherwise made to comply with the material exposure and weathering effects requirements of the Society of Automotive Engineers (SAE) J576. Ensure all exposed components of the module are suitable for prolonged exposure to the environment, without appreciable degradation that would interfere with function or appearance.

Ensure the countdown display continuously monitors the traffic controller to automatically learn the pedestrian phase time and update for subsequent changes to the pedestrian phase time.

Ensure the countdown display begins normal operation upon the completion of the preemption sequence and no more than one pedestrian clearance cycle.

### **3. CONTROLLERS WITH CABINETS**

#### **3.1. MATERIALS – TYPE 2070LX CONTROLLERS**

Furnish model 2070LX controller units that conform to CALTRANS *Transportation Electrical Equipment Specifications* (TEES) (dated March 12, 2009, plus Errata 1 dated January 21, 2010 and Errata 2 dated December 5, 2014) except as required herein.

The Department will provide software at the beginning of the burning-in period. Contractor shall give 5 working days notice before needing software. Program software provided by the Department.

Provide model 2070LX controllers with Linux kernel 2.6.18 or higher and device drivers, composed of the unit chassis and at a minimum the following modules and assemblies:

- MODEL 2070-1C, CPU Module, Single Board, with 8Mb Datakey (blue in color)
- MODEL 2070-2E+, Field I/O Module (FI/O)
  - Note: Configure the Field I/O Module to disable both the External WDT Shunt/Toggle Switch and SP3 (SP3 active indicator is "off")

**HL-0065****TS-13*****Rutherford County***

- MODEL 2070-3B, Front Panel Module (FP), Display B (8x40)
- MODEL 2070-4A, Power Supply Module, 10 AMP

The 2070-1C module's CPU shall be capable of executing all single and double precision floating point instructions directly within the CPU hardware.

Provide all board support package (BSP), toolchain, libraries, and documentation to the state and to any specified applications software manufacturer when requested by the state to facilitate the porting, building, testing, and support the Department's application software.

### **3.2.MATERIALS – GENERAL CABINETS**

Provide a moisture resistant coating on all circuit boards.

Provide one 20 mm diameter radial lead UL-recognized metal oxide varistor (MOV) between each load switch field terminal and equipment ground. Electrical performance is outlined below.

| <b>PROPERTIES OF MOV SURGE PROTECTOR</b>     |                          |
|----------------------------------------------|--------------------------|
| Maximum Continuous Applied Voltage at 185° F | 150 VAC (RMS)<br>200 VDC |
| Maximum Peak 8x20µs Current at 185° F        | 6500 A                   |
| Maximum Energy Rating at 185° F              | 80 J                     |
| Voltage Range 1 mA DC Test at 77° F          | 212-268 V                |
| Max. Clamping Voltage 8x20µs, 100A at 77° F  | 395 V                    |
| Typical Capacitance (1 MHz) at 77° F         | 1600 pF                  |

Provide a power line surge protector that is a two-stage device that will allow connection of the radio frequency interference filter between the stages of the device. Ensure that a maximum continuous current is at least 10A at 120V. Ensure that the device can withstand a minimum of 20 peak surge current occurrences at 20,000A for an 8x20 microsecond waveform. Provide a maximum clamp voltage of 395V at 20,000A with a nominal series inductance of 200µh. Ensure that the voltage does not exceed 395V. Provide devices that comply with the following:



**HL-0065****TS-14****Rutherford County**

| <b>Frequency (Hz)</b> | <b>Minimum Insertion Loss (dB)</b> |
|-----------------------|------------------------------------|
| 60                    | 0                                  |
| 10,000                | 30                                 |
| 50,000                | 55                                 |
| 100,000               | 50                                 |
| 500,000               | 50                                 |
| 2,000,000             | 60                                 |
| 5,000,000             | 40                                 |
| 10,000,000            | 20                                 |
| 20,000,000            | 25                                 |

### **3.3. MATERIALS – TYPE 170E CABINETS**

#### **A. Type 170 E Cabinets General**

Conform to the city of Los Angeles' Specification No. 54-053-08, *Traffic Signal Cabinet Assembly Specification* (dated July 2008), except as required herein.

Furnish model 332 base mounted cabinets with auxiliary output files installed and configured for 8 vehicle phases, 4 pedestrian phases, and 6 overlaps. Do not reassign load switches to accommodate overlaps unless shown on electrical details.

Provide model 200 load switches, model 222 loop detector sensors, model 252 AC isolators, and model 242 DC isolators according to the electrical details. As a minimum, provide one (1) model 2018 conflict monitor, one (1) model 206L power supply unit, two (2) model 204 flashers, one (1) DC isolator (located in slot I14), and four (4) model 430 flash transfer relays (provide seven (7) model 430 flash transfer relays if auxiliary output file is installed) with each cabinet.

#### **B. Type 170 E Cabinet Electrical Requirements**

Provide a cabinet assembly designed to ensure that upon leaving any cabinet switch or conflict monitor initiated flashing operation, the controller starts up in the programmed start up phases and start up interval.

Furnish two sets of non-fading cabinet wiring diagrams and schematics in a paper envelope or container and placed in the cabinet drawer.

All AC+ power is subject to radio frequency signal suppression.

Provide surge suppression in the cabinet for each type of cabinet device. Provide surge protection for the full capacity of the cabinet input file. Provide surge suppression devices that operate properly over a temperature range of -40° F to +185° F. Ensure the surge suppression devices provide both common and differential modes of protection.

Provide a pluggable power line surge protector that is installed on the back of the PDA (power distribution assembly) chassis to filter and absorb power line noise and switching transients. Ensure the device incorporates LEDs for failure indication and provides a dry relay contact closure for the purpose of remote sensing. Ensure the device meets the following specifications:

Peak Surge Current (Single pulse, 8x20µs).....20,000A

**HL-0065**

**TS-15**

***Rutherford County***

- Occurrences (8x20µs waveform).....10 minimum @ 20,000A
- Maximum Clamp Voltage.....395VAC
- Operating Current.....15 amps
- Response Time.....< 5 nanoseconds

Provide a loop surge suppressor for each set of loop terminals in the cabinet. Ensure the device meets the following specifications:

- Peak Surge Current (6 times, 8x20µs)
  - (Differential Mode).....400A
  - (Common Mode).....1,000A
- Occurrences (8x20µs waveform).....500 min @ 200A
- Maximum Clamp Voltage
  - (Differential Mode @400A).....35V
  - (Common Mode @1,000A).....35V
- Response Time.....< 5 nanoseconds
- Maximum Capacitance.....35 pF

Provide a data communications surge suppressor for each communications line entering or leaving the cabinet. Ensure the device meets the following specifications:

- Peak Surge Current (Single pulse, 8x20µs).....10,000A
- Occurrences (8x20µs waveform).....100 min @ 2,000A
- Maximum Clamp Voltage.....Rated for equipment protected
- Response Time.....< 1 nanosecond
- Maximum Capacitance.....1,500 pF
- Maximum Series Resistance.....15Ω

Provide a DC signal surge suppressor for each DC input channel in the cabinet. Ensure the device meets the following specifications:

- Peak Surge Current (Single pulse, 8x20µs).....10,000A
- Occurrences (8x20µs waveform).....100 @ 2,000A
- Maximum Clamp Voltage.....30V
- Response Time.....< 1 nanosecond


Provide a 120 VAC signal surge suppressor for each AC+ interconnect signal input. Ensure the device meets the following specifications:

|                                                |                     |
|------------------------------------------------|---------------------|
| Peak Surge Current (Single pulse, 8x20μs)..... | 20,000A             |
| Maximum Clamp Voltage.....                     | 350VAC              |
| Response Time.....                             | < 200 nanoseconds   |
| Discharge Voltage.....                         | <200 Volts @ 1,000A |
| Insulation Resistance.....                     | ≥100 MΩ             |

Provide conductors for surge protection wiring that are of sufficient size (ampacity) to withstand maximum overcurrents which could occur before protective device thresholds are attained and current flow is interrupted.

If additional surge protected power outlets are needed to accommodate fiber transceivers, modems, etc., install a UL listed, industrial, heavy-duty type power outlet strip with a minimum rating of 15 A / 125 VAC, 60 Hz. Provide a strip that has a minimum of 3 grounded outlets. Ensure the power outlet strip plugs into one of the controller unit receptacles located on the rear of the PDA. Ensure power outlet strip is mounted securely; provide strain relief if necessary.

Provide a door switch in the front and a door switch in the rear of the cabinet that will provide the controller unit with a Door Ajar alarm when either the front or the rear door is open. Ensure the door switches apply DC ground to the Input File when either the front door or the rear door is open.

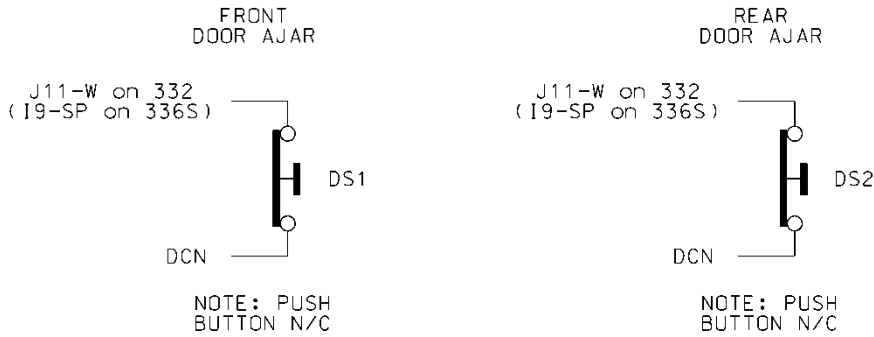


Furnish a fluorescent fixture in the rear across the top of the cabinet and another fluorescent fixture in the front across the top of the cabinet at a minimum. Ensure that the fixtures provide sufficient light to illuminate all terminals, labels, switches, and devices in the cabinet. Conveniently locate the fixtures so as not to interfere with a technician’s ability to perform work on any devices or terminals in the cabinet. Provide a protective diffuser to cover exposed bulbs. Install 16 watt T-4 lamps in the fluorescent fixtures. Provide a door switch to provide power to each fixture when the respective door is open. Wire the fluorescent fixtures to the 15 amp ECB (equipment circuit breaker).

HL-0065

TS-17

Rutherford County

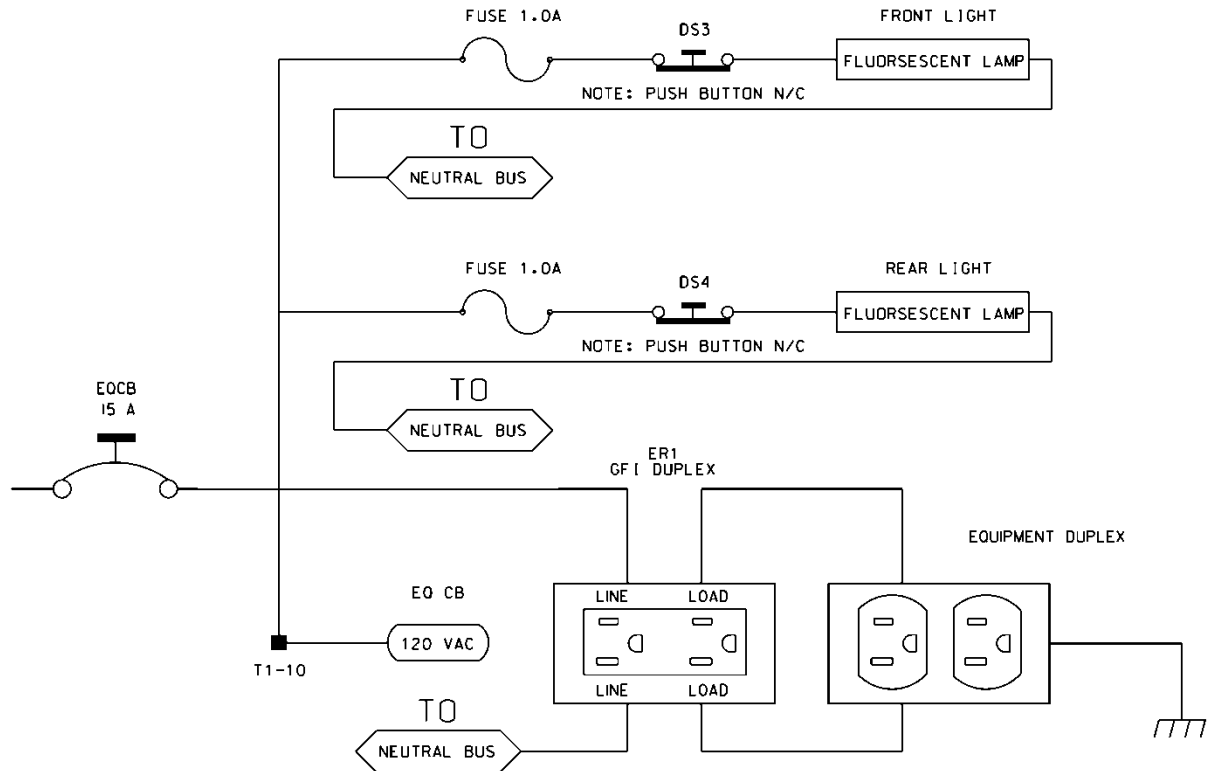

Furnish a police panel with a police panel door. Ensure that the police panel door permits access to the police panel when the main door is closed. Ensure that no rainwater can enter the cabinet even with the police panel door open. Provide a police panel door hinged on the right side as viewed from the front. Provide a police panel door lock that is keyed to a standard police/fire call box key. In addition to the requirements of LA Specification No. 54-053-08, provide the police panel with a toggle switch connected to switch the intersection operation between normal stop-and-go operation (AUTO) and manual operation (MANUAL). Ensure that manual control can be implemented using inputs and software such that the controller provides full programmed clearance times for the yellow clearance and red clearance for each phase while under manual control.

Provide a 1/4-inch locking phone jack in the police panel for a hand control to manually control the intersection. Provide sufficient room in the police panel for storage of a hand control and cord.

For model 332 base mounted cabinets, ensure terminals J14-E and J14-K are wired together on the rear of the Input File. Connect TB9-12 (J14 Common) on the Input Panel to T1-2 (AC-) on the rear of the PDA.

Provide detector test switches mounted at the top of the cabinet rack or other convenient location which may be used to place a call on each of eight phases based on the chart below. Provide three positions for each switch: On (place call), Off (normal detector operation), and Momentary On (place momentary call and return to normal detector operation after switch is released). Ensure that the switches are located such that the technician can read the controller display and observe the intersection.

Connect detector test switches for cabinets as follows:

**HL-0065****TS-18*****Rutherford County***

| <b>332 Cabinet</b>            |                  |
|-------------------------------|------------------|
| <b>Detector Call Switches</b> | <b>Terminals</b> |
| Phase 1                       | I1-W             |
| Phase 2                       | I4-W             |
| Phase 3                       | I5-W             |
| Phase 4                       | I8-W             |
| Phase 5                       | J1-W             |
| Phase 6                       | J4-W             |
| Phase 7                       | J5-W             |
| Phase 8                       | J8-W             |

Provide the PCB 28/56 connector for the conflict monitor unit (CMU) with 28 independent contacts per side, dual-sided with 0.156 inch contact centers. Provide the PCB 28/56 connector contacts with solder eyelet terminations. Ensure all connections to the PCB 28/56 connector are soldered to the solder eyelet terminations.

Ensure that all cabinets have the CMU connector wired according to the 332 cabinet connector pin assignments (include all wires for auxiliary output file connection). Wire pins 13, 16, R, and U of the CMU connector to a separate 4 pin plug, P1, as shown below. Provide a second plug, P2, which will mate with P1 and is wired to the auxiliary output file as shown below. Provide an additional plug, P3, which will mate with P1 and is wired to the pedestrian yellow circuits as shown below. When no auxiliary output file is installed in the cabinet, provide wires for the green and yellow inputs for channels 11, 12, 17, and 18, the red inputs for channels 17 and 18, and the wires for the P2 plug. Terminate the two-foot wires with ring type lugs, insulated, and bundled for optional use.

| <b>PIN</b> | <b>P1</b>       |                | <b>P2</b>       |                | <b>P3</b>       |                |
|------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|
|            | <b>FUNCTION</b> | <b>CONN TO</b> | <b>FUNCTION</b> | <b>CONN TO</b> | <b>FUNCTION</b> | <b>CONN TO</b> |
| 1          | CH-9G           | CMU-13         | OLA-GRN         | A123           | 2P-YEL          | 114            |
| 2          | CH-9Y           | CMU-16         | OLA-YEL         | A122           | 4P-YEL          | 105            |
| 3          | CH-10G          | CMU-R          | OLB-GRN         | A126           | 6P-YEL          | 120            |
| 4          | CH-10Y          | CMU-U          | OLB-YEL         | A125           | 8P-YEL          | 111            |

Do not provide the P20 terminal assembly (red monitor board) or red interface ribbon cable as specified in LA Specification No. 54-053-08.

Provide a P20 connector that mates with and is compatible with the red interface connector mounted on the front of the conflict monitor. Ensure that the P20 connector and the red interface connector on the conflict monitor are center polarized to ensure proper connection. Ensure that removal of the P20 connector will cause the conflict monitor to recognize a latching fault condition and place the cabinet into flashing operation.

**HL-0065****TS-19*****Rutherford County***

Wire the P20 connector to the output file and auxiliary output file using 22 AWG stranded wires. Ensure the length of these wires is a minimum of 42 inches in length. Provide a durable braided sleeve around the wires to organize and protect the wires.

Wire the P20 connector to the traffic signal red displays to provide inputs to the conflict monitor as shown below. Ensure the pedestrian Don't Walk circuits are wired to channels 13 through 16 of the P20 connector. When no auxiliary output file is installed in the cabinet, provide wires for channels 9 through 12 reds. Provide a wire for special function 1. Terminate the unused wires with ring type lugs, insulated, and bundled for optional use.

| <b>P20 Connector</b> |                 |                |            |                 |                |
|----------------------|-----------------|----------------|------------|-----------------|----------------|
| <b>PIN</b>           | <b>FUNCTION</b> | <b>CONN TO</b> | <b>PIN</b> | <b>FUNCTION</b> | <b>CONN TO</b> |
| 1                    | Channel 15 Red  | 119            | 2          | Channel 16 Red  | 110            |
| 3                    | Channel 14 Red  | 104            | 4          | Chassis GND     | 01-9           |
| 5                    | Channel 13 Red  | 113            | 6          | N/C             |                |
| 7                    | Channel 12 Red  | AUX 101        | 8          | Spec Function 1 |                |
| 9                    | Channel 10 Red  | AUX 124        | 10         | Channel 11 Red  | AUX 114        |
| 11                   | Channel 9 Red   | AUX 121        | 12         | Channel 8 Red   | 107            |
| 13                   | Channel 7 Red   | 122            | 14         | Channel 6 Red   | 134            |
| 15                   | Channel 5 Red   | 131            | 16         | Channel 4 Red   | 101            |
| 17                   | Channel 3 Red   | 116            | 18         | Channel 2 Red   | 128            |
| 19                   | Channel 1 Red   | 125            | 20         | Red Enable      | 01-14          |

Ensure the controller unit outputs to the auxiliary output file are pre-wired to the C5 connector. When no auxiliary output file is installed in the cabinet, connect the C5 connector to a storage socket located on the Input Panel or on the rear of the PDA.

Do not wire pin 12 of the load switch sockets.


In addition to the requirements of LA Specification No. 54-053-08, ensure relay K1 on the Power Distribution Assembly (PDA) is a four pole relay and K2 on the PDA is a two pole relay.

Provide a two pole, ganged circuit breaker for the flash bus circuit. Ensure the flash bus circuit breaker is an inverse time circuit breaker rated for 10 amps at 120 VAC with a minimum of 10,000 RMS symmetrical amperes short circuit current rating. Do not provide the auxiliary switch feature on the flash bus circuit breaker. Ensure the ganged flash bus circuit breaker is certified by the circuit breaker manufacturer to provide gang tripping operation.

HL-0065

TS-20

Rutherford County

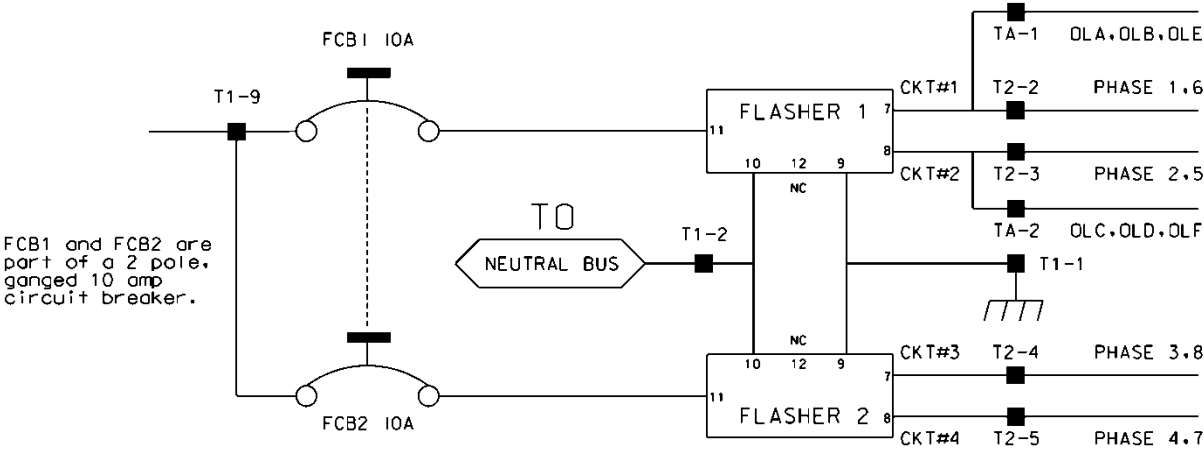

Ensure auxiliary output files are wired as follows:

| AUXILIARY OUTPUT FILE<br>TERMINAL BLOCK TA ASSIGNMENTS |                                                       |
|--------------------------------------------------------|-------------------------------------------------------|
| POSITION                                               | FUNCTION                                              |
| 1                                                      | Flasher Unit #1, Circuit 1/FTR1 (OLA, OLB)/FTR3 (OLE) |
| 2                                                      | Flasher Unit #1, Circuit 2/FTR2 (OLC, OLD)/FTR3 (OLF) |
| 3                                                      | Flash Transfer Relay Coils                            |
| 4                                                      | AC -                                                  |
| 5                                                      | Power Circuit 5                                       |
| 6                                                      | Power Circuit 5                                       |
| 7                                                      | Equipment Ground Bus                                  |
| 8                                                      | NC                                                    |

Provide four spare load resistors mounted in each cabinet. Ensure each load resistor is rated as shown in the table below. Wire one side of each load resistor to AC-. Connect the other side of each resistor to a separate terminal on a four (4) position terminal block. Mount the load resistors and terminal block either inside the back of Output File No. 1 or on the upper area of the Service Panel.

| ACCEPTABLE LOAD RESISTOR<br>VALUES |           |
|------------------------------------|-----------|
| VALUE (ohms)                       | WATTAGE   |
| 1.5K – 1.9 K                       | 25W (min) |
| 2.0K – 3.0K                        | 10W (min) |

**HL-0065****TS-21*****Rutherford County***

Provide Model 200 load switches, Model 204 flashers, Model 242 DC isolators, Model 252 AC isolators, and Model 206L power supply units that conform to CALTRANS' *"Transportation Electrical Equipment Specifications"* dated March 12, 2009 with Erratum 1.

**C. Type 170 E Cabinet Physical Requirements:**

Do not mold, cast, or scribe the name "City of Los Angeles" on the outside of the cabinet door as specified in LA Specification No. 54-053-08. Do not provide a Communications Terminal Panel as specified in LA Specification No. 54-053-08. Do not provide terminal block TBB on the Service Panel. Do not provide Cabinet Verification Test Program software or associated test jigs as specified in LA Specification No. 54-053-08.

Furnish unpainted, natural, aluminum cabinet shells. Ensure that all non-aluminum hardware on the cabinet is stainless steel or a Department approved non-corrosive alternate.

Ensure the lifting eyes, gasket channels, police panel, and all supports welded to the enclosure and doors are fabricated from 0.125 inch minimum thickness aluminum sheet and meet the same standards as the cabinet and doors.

Provide front and rear doors with latching handles that allow padlocking in the closed position. Furnish 0.75 inch minimum diameter stainless steel handles with a minimum 0.5 inch shank. Place the padlocking attachment at 4.0 inches from the handle shank center to clear the lock and key. Provide an additional 4.0 inches minimum gripping length.

Provide Corbin #2 locks on the front and rear doors. Provide one (1) Corbin #2 and one (1) police master key with each cabinet. Ensure main door locks allow removal of keys in the locked position only.


Provide a surge protection panel with 16 loop surge protection devices and designed to allow sufficient free space for wire connection/disconnection and surge protection device replacement. For model 332 cabinets, provide an additional 20 loop surge protection devices. Provide an additional two AC+ interconnect surge devices to protect one slot and eight DC surge protection devices to protect four slots. Provide no protection devices on slot I14.



HL-0065

TS-22

Rutherford County

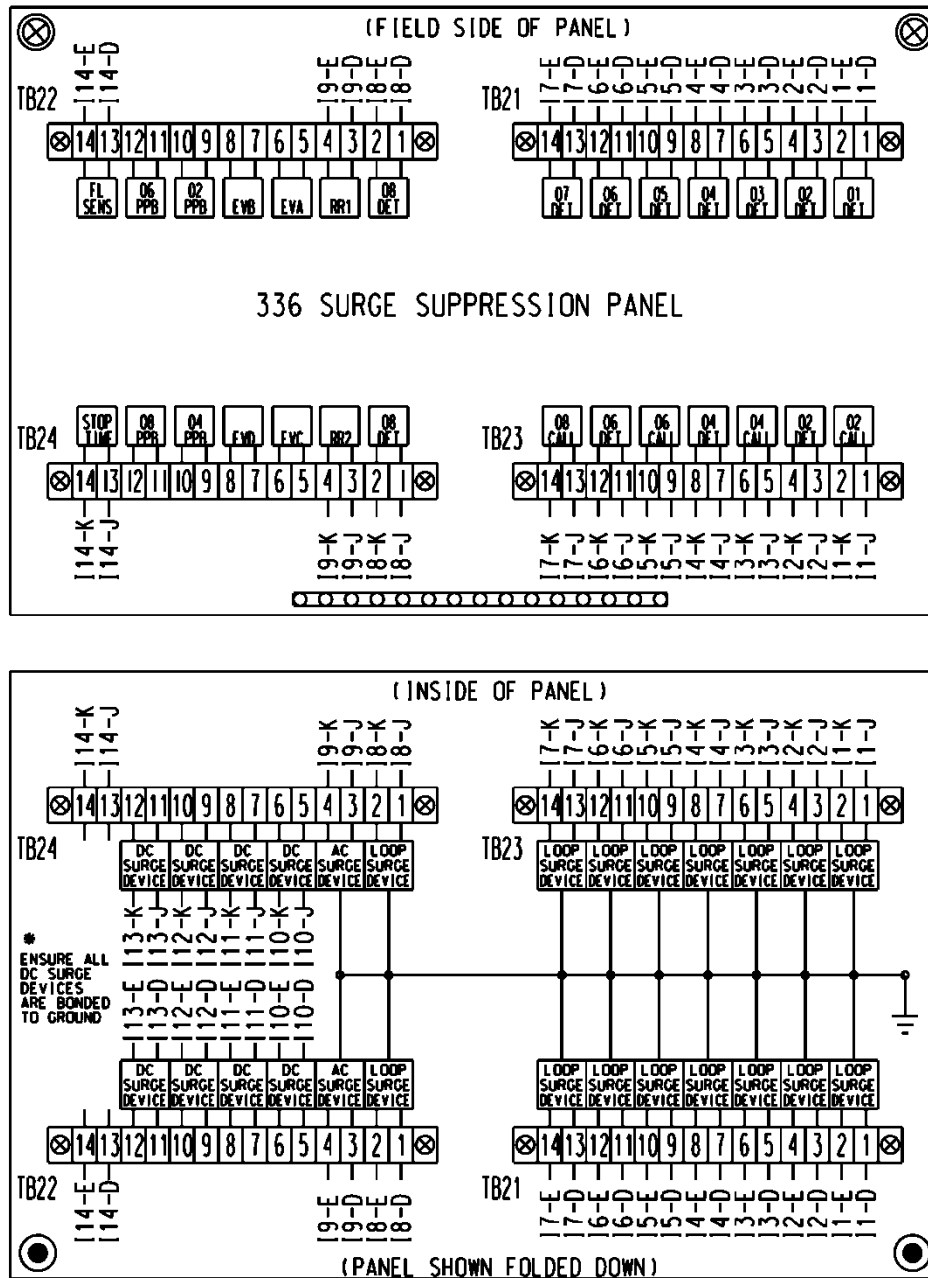

For base mounted cabinets, mount surge protection panels on the left side of the cabinet as viewed from the rear. Attach each panel to the cabinet rack assembly using bolts and make it easily removable. Mount the surge protection devices in vertical rows on each panel and connect the devices to one side of 12 position, double row terminal blocks with #8 screws. For each surge protection panel, terminate all grounds from the surge protection devices on a copper equipment ground bus attached to the surge protection panel. Wire the terminals to the rear of a standard input file using spade lugs for input file protection.

Provide permanent labels that indicate the slot and the pins connected to each terminal that may be viewed from the rear cabinet door. Label and orient terminals so that each pair of inputs is next to each other. Indicate on the labeling the input file (I or J), the slot number (1-14) and the terminal pins of the input slots (either D & E for upper or J & K for lower).

Provide a minimum 14 x 16 inch pull out, hinged top shelf located immediately below controller mounting section of the cabinet. Ensure the shelf is designed to fully expose the table surface outside the controller at a height approximately even with the bottom of the controller. Ensure the shelf has a storage bin interior which is a minimum of 1 inch deep and approximately the same dimensions as the shelf. Provide an access to the storage area by lifting the hinged top of the shelf. Fabricate the shelf and slide from aluminum or stainless steel and ensure the assembly can support the 2070 controller plus 15 pounds of additional weight. Ensure shelf has a locking mechanism to secure it in the fully extended position and does not inhibit the removal of the 2070 controller or removal of cards inside the controller when fully extended. Provide a locking mechanism that is easily released when the shelf is to be returned to its non-use position directly under the controller.

#### **D. Model 2018 Enhanced Conflict Monitor**

Furnish Model 2018 Enhanced Conflict Monitors that provide monitoring of 18 channels. Ensure each channel consists of a green, yellow, and red field signal input. Ensure that the conflict monitor meets or exceeds CALTRANS' Transportation Electrical Equipment Specifications dated March 12, 2009, with Erratum 1 (hereafter referred to as CALTRANS' 2009 TEES) for a model 210 monitor unit and other requirements stated in this specification.

Ensure the conflict monitor is provided with an 18 channel conflict programming card. Pin EE and Pin T of the conflict programming card shall be connected together. Pin 16 of the conflict programming card shall be floating. Ensure that the absence of the conflict programming card will cause the conflict monitor to trigger (enter into fault mode), and remain in the triggered state until the programming card is properly inserted and the conflict monitor is reset.

Provide a conflict monitor that incorporates LED indicators into the front panel to dynamically display the status of the monitor under normal conditions and to provide a comprehensive review of field inputs with monitor status under fault conditions. Ensure that the monitor indicates the channels that were active during a conflict condition and the channels that experienced a failure for all other per channel fault conditions detected. Ensure that these indications and the status of each channel are retained until the Conflict Monitor is reset. Furnish LED indicators for the following:

- AC Power (Green LED indicator)
- VDC Failed (Red LED indicator)
- WDT Error (Red LED indicator)
- Conflict (Red LED indicator)
- Red Fail (Red LED indicator)
- Dual Indication (Red LED indicator)
- Yellow/Clearance Failure (Red LED indicator)
- PCA/PC Ajar (Red LED indicator)
- Monitor Fail/Diagnostic Failure (Red LED indicator)
- 54 Channel Status Indicators (1 Red, 1 Yellow, and 1 Green LED indicator for each of the 18 channels)

**HL-0065****TS-24*****Rutherford County***

Provide a switch to set the Red Fail fault timing. Ensure that when the switch is in the ON position the Red Fail fault timing value is set to 1350 +/- 150 ms (2018 mode). Ensure that when the switch is in the OFF position the Red Fail fault timing value is set to 850 +/- 150 ms (210 mode).

Provide a switch to set the Watchdog fault timing. Ensure that when the switch is in the ON position the Watchdog fault timing value is set to 1.0 +/- 0.1 s (2018 mode). Ensure that when the switch is in the OFF position the Watchdog fault timing value is set to 1.5 +/- 0.1 s (210 mode).

Provide a jumper or switch to set the AC line brown-out levels. Ensure that when the jumper is present or the switch is in the ON position the AC line dropout voltage threshold is 98 +/- 2 Vrms, the AC line restore voltage threshold is 103 +/- 2 Vrms, and the AC line brown-out timing value is set to 400 +/- 50ms (2018 mode). Ensure that when the jumper is not present or the switch is in the OFF position the AC line dropout voltage threshold is 92 +/- 2 Vrms, the AC line restore voltage threshold is 98 +/- 2 Vrms, and the AC line brown-out timing value is set to 80 +/- 17 ms (210 mode).

Provide a jumper or switch that will enable and disable the Watchdog Latch function. Ensure that when the jumper is not present or the switch is in the OFF position the Watchdog Latch function is disabled. In this mode of operation, a Watchdog fault will be reset following a power loss, brownout, or power interruption. Ensure that when the jumper is present or the switch is in the ON position the Watchdog Latch function is enabled. In this mode of operation, a Watchdog fault will be retained until a Reset command is issued.


Provide a jumper that will reverse the active polarity for pin #EE (output relay common). Ensure that when the jumper is not present pin #EE (output relay common) will be considered 'Active' at a voltage greater than 70 Vrms and 'Not Active' at a voltage less than 50 Vrms (Caltrans mode). Ensure that when the jumper is present pin #EE (output relay common) will be considered 'Active' at a voltage less than 50 Vrms and 'Not Active' at a voltage greater than 70 Vrms (Failsafe mode).

In addition to the connectors required by CALTRANS' 2009 TEES, provide the conflict monitor with a red interface connector mounted on the front of the monitor. Ensure the connector is a 20 pin, right angle, center polarized, male connector with latching clip locks and polarizing keys. Ensure the right angle solder tails are designed for a 0.062" thick printed circuit board. Keying of the connector shall be between pins 3 and 5, and between 17 and 19. Ensure the connector has two rows of pins with the odd numbered pins on one row and the even pins on the other row. Ensure the connector pin row spacing is 0.10" and pitch is 0.10". Ensure the mating length of the connector pins is 0.24". Ensure the pins are finished with gold plating 30μ" thick.

HL-0065

TS-25

Rutherford County

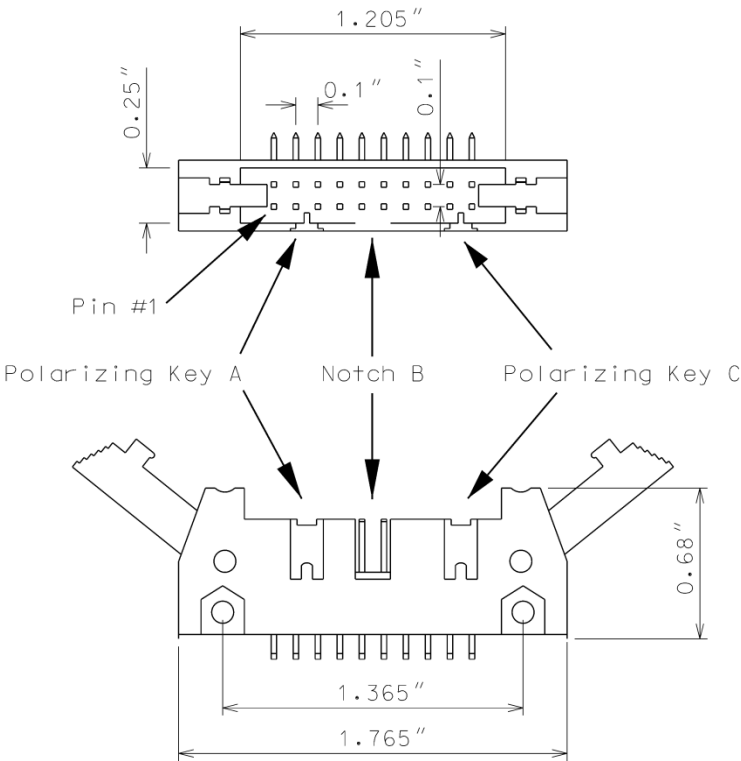

Ensure the red interface connector pins on the monitor have the following functions:

| Pin # | Function       | Pin # | Function           |
|-------|----------------|-------|--------------------|
| 1     | Channel 15 Red | 2     | Channel 16 Red     |
| 3     | Channel 14 Red | 4     | Chassis Ground     |
| 5     | Channel 13 Red | 6     | Special Function 2 |
| 7     | Channel 12 Red | 8     | Special Function 1 |
| 9     | Channel 10 Red | 10    | Channel 11 Red     |
| 11    | Channel 9 Red  | 12    | Channel 8 Red      |
| 13    | Channel 7 Red  | 14    | Channel 6 Red      |
| 15    | Channel 5 Red  | 16    | Channel 4 Red      |
| 17    | Channel 3 Red  | 18    | Channel 2 Red      |
| 19    | Channel 1 Red  | 20    | Red Enable         |

Ensure that removal of the P20 cable connector will cause the conflict monitor to recognize a latching fault condition and place the cabinet into flashing operation.

Provide Special Function 1 and Special Function 2 inputs to the unit which shall disable only Red Fail Monitoring when either input is sensed active. A Special Function input shall be sensed active when the input voltage exceeds 70 Vrms with a minimum duration of 550 ms. A Special Function input shall be sensed not active when the input voltage is less than 50 Vrms or the duration is less

than 250 ms. A Special Function input is undefined by these specifications and may or may not be sensed active when the input voltage is between 50 Vrms and 70 Vrms or the duration is between 250 ms and 550 ms.

Ensure the conflict monitor recognizes field signal inputs for each channel that meet the following requirements:

- consider a Red input greater than 70 Vrms and with a duration of at least 500 ms as an “on” condition;
- consider a Red input less than 50 Vrms or with a duration of less than 200 ms as an “off” condition (no valid signal);
- consider a Red input between 50 Vrms and 70 Vrms or with a duration between 200 ms and 500 ms to be undefined by these specifications;
- consider a Green or Yellow input greater than 25 Vrms and with a duration of at least 500 ms as an “on” condition;
- consider a Green or Yellow input less than 15 Vrms or with a duration of less than 200 ms as an “off” condition; and
- consider a Green or Yellow input between 15 Vrms and 25 Vrms or with a duration between 200 ms and 500 ms to be undefined by these specifications.

Provide a conflict monitor that recognizes the faults specified by CALTRANS’ 2009 TEES and the following additional faults. Ensure the conflict monitor will trigger upon detection of a fault and will remain in the triggered (in fault mode) state until the unit is reset at the front panel or through the external remote reset input for the following failures:

1. **Red Monitoring or Absence of Any Indication (Red Failure):** A condition in which no “on” voltage signal is detected on any of the green, yellow, or red inputs to a given monitor channel. If a signal is not detected on at least one input (R, Y, or G) of a conflict monitor channel for a period greater than 1000 ms when used with a 170 controller and 1500 ms when used with a 2070 controller, ensure monitor will trigger and put the intersection into flash. If the absence of any indication condition lasts less than 700 ms when used with a 170 controller and 1200 ms when used with a 2070 controller, ensure conflict monitor will not trigger. Red fail monitoring shall be enabled on a per channel basis by the use of switches located on the conflict monitor. Have red monitoring occur when all of the following input conditions are in effect:
  - a) Red Enable input to monitor is active (Red Enable voltages are “on” at greater than 70 Vrms, off at less than 50 Vrms, undefined between 50 and 70 Vrms), and
  - b) Neither Special Function 1 nor Special Function 2 inputs are active.
  - c) Pin #EE (output relay common) is not active
2. **Short/Missing Yellow Indication Fault (Clearance Error):** Yellow indication following a green is missing or shorter than 2.7 seconds (with  $\pm 0.1$ -second accuracy). If a channel fails to detect an “on” signal at the Yellow input for a minimum of 2.7 seconds ( $\pm 0.1$  second) following the detection of an “on” signal at a Green input for that channel, ensure that the monitor triggers and generates a clearance/short yellow error fault indication. Short/missing

yellow (clearance) monitoring shall be enabled on a per channel basis by the use of switches located on the conflict monitor. This fault shall not occur when the channel is programmed for Yellow Inhibit, when the Red Enable signal is inactive or pin #EE (output relay common) is active.

3. **Dual Indications on the Same Channel:** In this condition, more than one indication (R,Y,G) is detected as “on” at the same time on the same channel. If dual indications are detected for a period greater than 500 ms, ensure that the conflict monitor triggers and displays the proper failure indication (Dual Ind fault). If this condition is detected for less than 200 ms, ensure that the monitor does not trigger. G-Y-R dual indication monitoring shall be enabled on a per channel basis by the use of switches located on the conflict monitor. G-Y dual indication monitoring shall be enabled for all channels by use of a switch located on the conflict monitor. This fault shall not occur when the Red Enable signal is inactive or pin #EE (output relay common) is active.
4. **Configuration Settings Change:** The configuration settings are comprised of (as a minimum) the permissive diode matrix, dual indication switches, yellow disable jumpers, any option switches, any option jumpers, and the Watchdog Enable switch. Ensure the conflict monitor compares the current configuration settings with the previous stored configuration settings on power-up, on reset, and periodically during operation. If any of the configuration settings are changed, ensure that the conflict monitor triggers and causes the program card indicator to flash. Ensure that configuration change faults are only reset by depressing and holding the front panel reset button for a minimum of three seconds. Ensure the external remote reset input does not reset configuration change faults.

Ensure the conflict monitor will trigger and the AC Power indicator will flash at a rate of 2 Hz  $\pm$  20% with a 50% duty cycle when the AC Line voltage falls below the “drop-out” level. Ensure the conflict monitor will resume normal operation when the AC Line voltage returns above the “restore” level. Ensure the AC Power indicator will remain illuminated when the AC voltage returns above the “restore” level. Should an AC Line power interruption occur while the monitor is in the fault mode, then upon restoration of AC Line power, the monitor will remain in the fault mode and the correct fault and channel indicators will be displayed.

Provide a flash interval of at least 6 seconds and at most 16 seconds in duration following a power-up, an AC Line interruption, or a brownout restore. Ensure the conflict monitor will suspend all fault monitoring functions, close the Output relay contacts, and flash the AC indicator at a rate of 4 Hz  $\pm$  20% with a 50% duty cycle during this interval. Ensure the termination of the flash interval after at least 6 seconds if the Watchdog input has made 5 transitions between the True and False state and the AC Line voltage is greater than the “restore” level. If the watchdog input has not made 5 transitions between the True and False state within 10  $\pm$  0.5 seconds, the monitor shall enter a WDT error fault condition.

Ensure the conflict monitor will monitor an intersection with a minimum of four approaches using the four-section Flashing Yellow Arrow (FYA) vehicle traffic signal as outlined by the NCHRP 3-54 research project for protected-permissive left turn signal displays. Ensure the conflict monitor will operate in the FYA mode and FYAc (Compact) mode as specified below to monitor each channel pair for the following fault conditions: Conflict, Flash Rate Detection, Red Fail, Dual Indication, and

**HL-0065****TS-28*****Rutherford County***

Clearance. Provide a switch to select between the FYA mode and FYAc mode. Provide a switch to select each FYA phase movement for monitoring.

**FYA mode**

| FYA Signal Head       | Phase 1          | Phase 3           | Phase 5           | Phase 7           |
|-----------------------|------------------|-------------------|-------------------|-------------------|
| Red Arrow             | Channel 9 Red    | Channel 10 Red    | Channel 11 Red    | Channel 12 Red    |
| Yellow Arrow          | Channel 9 Yellow | Channel 10 Yellow | Channel 11 Yellow | Channel 12 Yellow |
| Flashing Yellow Arrow | Channel 9 Green  | Channel 10 Green  | Channel 11 Green  | Channel 12 Green  |
| Green Arrow           | Channel 1 Green  | Channel 3 Green   | Channel 5 Green   | Channel 7 Green   |

**FYAc mode**

| FYA Signal Head       | Phase 1          | Phase 3          | Phase 5          | Phase 7           |
|-----------------------|------------------|------------------|------------------|-------------------|
| Red Arrow             | Channel 1 Red    | Channel 3 Red    | Channel 5 Red    | Channel 7 Red     |
| Yellow Arrow          | Channel 1 Yellow | Channel 3 Yellow | Channel 5 Yellow | Channel 7 Yellow  |
| Flashing Yellow Arrow | Channel 1 Green  | Channel 3 Green  | Channel 5 Green  | Channel 7 Green   |
| Green Arrow           | Channel 9 Green  | Channel 9 Yellow | Channel 10 Green | Channel 10 Yellow |

If a FYA channel pair is enabled for FYA operation, the conflict monitor will monitor the FYA logical channel pair for the additional following conditions:

1. **Conflict:** Channel conflicts are detected based on the permissive programming jumpers on the program card. This operation remains unchanged from normal operation except for the solid Yellow arrow (FYA clearance) signal.
2. **Yellow Change Interval Conflict:** During the Yellow change interval of the Permissive Turn channel (flashing Yellow arrow) the conflict monitor shall verify that no conflicting channels to the solid Yellow arrow channel (clearance) are active. These conflicting channels shall be determined by the program card compatibility programming of the Permissive Turn channel (flashing Yellow arrow). During the Yellow change interval of the Protected Turn channel (solid Green arrow) the conflict monitor shall verify that no conflicting channels to the solid Yellow arrow channel (clearance) are active as determined by the program card compatibility programming of the Protected Turn channel (solid Green arrow).

3. **Flash Rate Detection:** The conflict monitor unit shall monitor for the absence of a valid flash rate for the Permissive turn channel (flashing Yellow arrow). If the Permissive turn channel (flashing Yellow arrow) is active for a period greater than 1600 milliseconds, ensure the conflict monitor triggers and puts the intersection into flash. If the Permissive turn channel (flashing Yellow arrow) is active for a period less than 1400 milliseconds, ensure the conflict monitor does not trigger. Ensure the conflict monitor will remain in the triggered (in fault mode) state until the unit is reset at the front panel or through the external remote reset input. Provide a jumper or switch that will enable and disable the Flash Rate Detection function. Ensure that when the jumper is not present or the switch is in the OFF position the Flash Rate Detection function is enabled. Ensure that when the jumper is present or the switch is in the ON position the Flash Rate Detection function is disabled.
4. **Red Monitoring or Absence of Any Indication (Red Failure):** The conflict monitor unit shall detect a red failure if there is an absence of voltage on all four of the inputs of a FYA channel pair (RA, YA, FYA, GA).
5. **Dual Indications on the Same Channel:** The conflict monitor unit shall detect a dual indication if two or more inputs of a FYA channel pair (RA, YA, FYA, GA) are “on” at the same time.
6. **Short/Missing Yellow Indication Fault (Clearance Error):** The conflict monitor unit shall monitor the solid Yellow arrow for a clearance fault when terminating both the Protected Turn channel (solid Green arrow) interval and the Permissive Turn channel (flashing Yellow arrow) interval.

Ensure that the conflict monitor will log at least nine of the most recent events detected by the monitor in non-volatile EEPROM memory (or equivalent). For each event, record at a minimum the time, date, type of event, status of each field signal indication with RMS voltage, and specific channels involved with the event. Ensure the conflict monitor will log the following events: monitor reset, configuration, previous fault, and AC line. Furnish the signal sequence log that shows all channel states (Greens, Yellows, and Reds) and the Red Enable State for a minimum of 2 seconds prior to the current fault trigger point. Ensure the display resolution of the inputs for the signal sequence log is not greater than 50 ms.

For conflict monitors used within an Ethernet communications system, provide a conflict monitor with an Ethernet 10/100 Mbps, RJ-45 port for data communication access to the monitor by a local notebook computer and remotely via a workstation or notebook computer device connected to the signal system local area network. The Ethernet port shall be electrically isolated from the conflict monitor’s electronics and shall provide a minimum of 1500 Vrms isolation. Integrate monitor with Ethernet network in cabinet. Provide software to retrieve the time and date from a network server in order to synchronize the on-board times between the conflict monitor and the controller. Furnish and install the following Windows based, graphic user interface software on workstations and notebook computers where the signal system client software is installed: 1) software to view and retrieve all event log information, 2) software that will search and display a list of conflict monitor IP addresses and IDs on the network, and 3) software to change the conflict monitor’s network parameters such as IP address and subnet mask.

For non-Ethernet connected monitors, provide a RS-232C/D compliant port (DB-9 female connector) on the front panel of the conflict monitor in order to provide communications from the conflict monitor to the 170/2070 controller or to a Department-furnished laptop computer. Electrically isolate the port interface electronics from all monitor electronics, excluding Chassis Ground. Ensure that the controller can receive all event log information through a controller



**HL-0065****TS-30*****Rutherford County***

Asynchronous Communications Interface Adapter (Type 170E) or Async Serial Comm Module (2070). Furnish and connect a serial cable from the conflict monitor's DB-9 connector to Comm Port 1 of the 2070 controller. Ensure conflict monitor communicates with the controller. Provide a Windows based graphic user interface software to communicate directly through the same monitor RS-232C/D compliant port to retrieve and view all event log information to a Department-furnished laptop computer. The RS-232C/D compliant port on the monitor shall allow the monitor to function as a DCE device with pin connections as follows:

| <b>Conflict Monitor RS-232C/D (DB-9 Female) Pinout</b> |                 |            |
|--------------------------------------------------------|-----------------|------------|
| <b>Pin Number</b>                                      | <b>Function</b> | <b>I/O</b> |
| 1                                                      | DCD             | O          |
| 2                                                      | TX Data         | O          |
| 3                                                      | RX Data         | I          |
| 4                                                      | DTR             | I          |
| 5                                                      | Ground          | -          |
| 6                                                      | DSR             | O          |
| 7                                                      | CTS             | I          |
| 8                                                      | RTS             | O          |
| 9                                                      | NC              | -          |

**HL-0065****TS-31*****Rutherford County*****MONITOR BOARD EDGE CONNECTOR**

| <b>Pin #</b> | <b>Function (Back Side)</b> | <b>Pin #</b> | <b>Function (Component Side)</b> |
|--------------|-----------------------------|--------------|----------------------------------|
| 1            | Channel 2 Green             | A            | Channel 2 Yellow                 |
| 2            | Channel 13 Green            | B            | Channel 6 Green                  |
| 3            | Channel 6 Yellow            | C            | Channel 15 Green                 |
| 4            | Channel 4 Green             | D            | Channel 4 Yellow                 |
| 5            | Channel 14 Green            | E            | Channel 8 Green                  |
| 6            | Channel 8 Yellow            | F            | Channel 16 Green                 |
| 7            | Channel 5 Green             | H            | Channel 5 Yellow                 |
| 8            | Channel 13 Yellow           | J            | Channel 1 Green                  |
| 9            | Channel 1 Yellow            | K            | Channel 15 Yellow                |
| 10           | Channel 7 Green             | L            | Channel 7 Yellow                 |
| 11           | Channel 14 Yellow           | M            | Channel 3 Green                  |
| 12           | Channel 3 Yellow            | N            | Channel 16 Yellow                |
| 13           | Channel 9 Green             | P            | Channel 17 Yellow                |
| 14           | Channel 17 Green            | R            | Channel 10 Green                 |
| 15           | Channel 11 Yellow           | S            | Channel 11 Green                 |
| 16           | Channel 9 Yellow            | T            | Channel 18 Yellow                |
| 17           | Channel 18 Green            | U            | Channel 10 Yellow                |
| --           |                             | --           |                                  |
| 18           | Channel 12 Yellow           | V            | Channel 12 Green                 |
| 19           | Channel 17 Red              | W            | Channel 18 Red                   |
| 20           | Chassis Ground              | X            | Not Assigned                     |
| 21           | AC-                         | Y            | DC Common                        |
| 22           | Watchdog Timer              | Z            | External Test Reset              |
| 23           | +24VDC                      | AA           | +24VDC                           |
| 24           | Tied to Pin 25              | BB           | Stop Time (Output)               |
| 25           | Tied to Pin 24              | CC           | Not Assigned                     |
| 26           | Not Assigned                | DD           | Not Assigned                     |
| 27           | Relay Output, Side #3, N.O. | EE           | Relay Output, Side #2, Common    |
| 28           | Relay Output, Side #1, N.C. | FF           | AC+                              |

-- Slotted for keying between Pins 17/U and 18/V

HL-0065

TS-32

Rutherford County


---

**CONFLICT PROGRAM CARD PIN ASSIGNMENTS**


---

| <b>Pin #</b> | <b>Function (Back Side)</b> | <b>Pin #</b> | <b>Function (Component Side)</b> |
|--------------|-----------------------------|--------------|----------------------------------|
| 1            | Channel 2 Green             | A            | Channel 1 Green                  |
| 2            | Channel 3 Green             | B            | Channel 2 Green                  |
| 3            | Channel 4 Green             | C            | Channel 3 Green                  |
| 4            | Channel 5 Green             | D            | Channel 4 Green                  |
| 5            | Channel 6 Green             | E            | Channel 5 Green                  |
| 6            | Channel 7 Green             | F            | Channel 6 Green                  |
| 7            | Channel 8 Green             | H            | Channel 7 Green                  |
| 8            | Channel 9 Green             | J            | Channel 8 Green                  |
| 9            | Channel 10 Green            | K            | Channel 9 Green                  |
| 10           | Channel 11 Green            | L            | Channel 10 Green                 |
| 11           | Channel 12 Green            | M            | Channel 11 Green                 |
| 12           | Channel 13 Green            | N            | Channel 12 Green                 |
| 13           | Channel 14 Green            | P            | Channel 13 Green                 |
| 14           | Channel 15 Green            | R            | Channel 14 Green                 |
| 15           | Channel 16 Green            | S            | Channel 15 Green                 |
| 16           | N/C                         | T            | PC AJAR                          |
| 17           | Channel 1 Yellow            | U            | Channel 9 Yellow                 |
| 18           | Channel 2 Yellow            | V            | Channel 10 Yellow                |
| 19           | Channel 3 Yellow            | W            | Channel 11 Yellow                |
| 20           | Channel 4 Yellow            | X            | Channel 12 Yellow                |
| 21           | Channel 5 Yellow            | Y            | Channel 13 Yellow                |
| 22           | Channel 6 Yellow            | Z            | Channel 14 Yellow                |
| 23           | Channel 7 Yellow            | AA           | Channel 15 Yellow                |
| 24           | Channel 8 Yellow            | BB           | Channel 16 Yellow                |
| --           |                             | --           |                                  |
| 25           | Channel 17 Green            | CC           | Channel 17 Yellow                |
| 26           | Channel 18 Green            | DD           | Channel 18 Yellow                |
| 27           | Channel 16 Green            | EE           | PC AJAR (Program Card)           |
| 28           | Yellow Inhibit Common       | FF           | Channel 17 Green                 |

-- Slotted for keying between Pins 24/BB and 25/CC

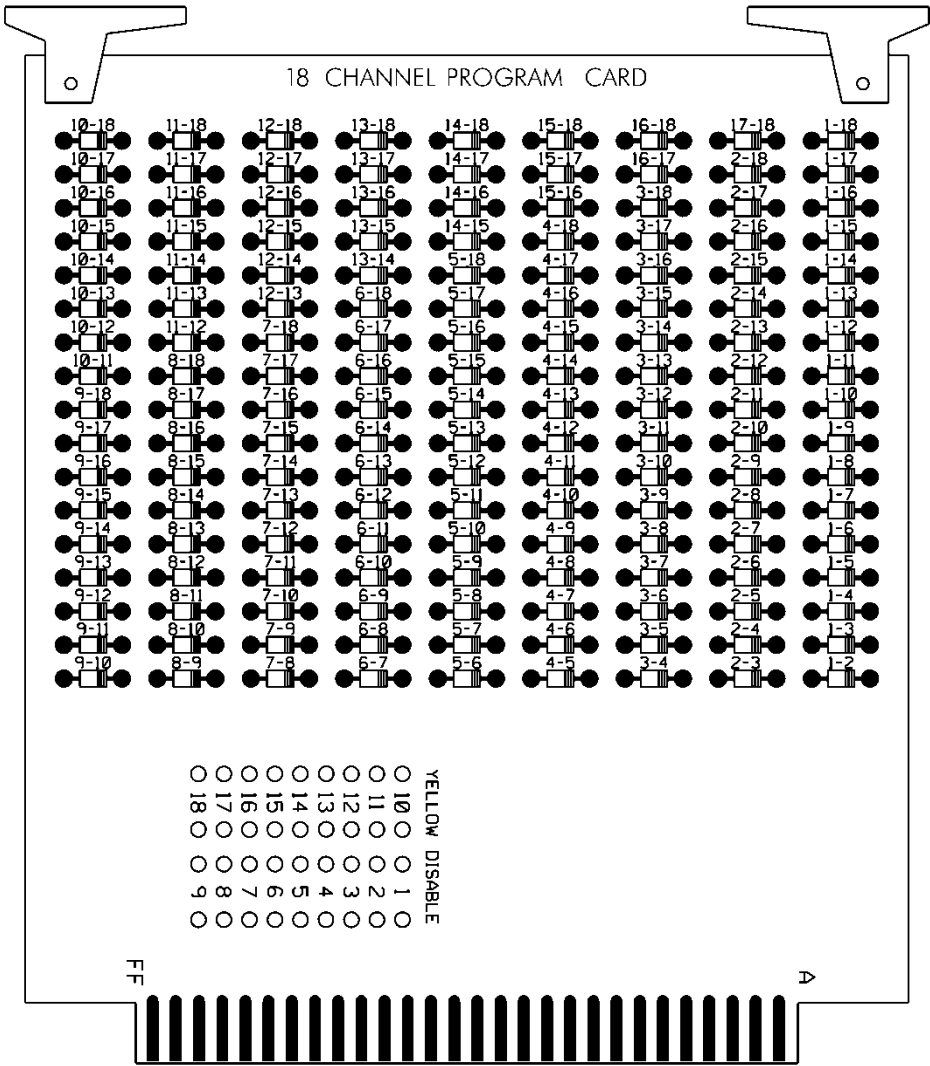

3.4. MATERIALS – TYPE 170 DETECTOR SENSOR UNITS

Furnish detector sensor units that comply with Chapter 5 Section 1, “General Requirements,” and Chapter 5 Section 2, “Model 222 & 224 Loop Detector Sensor Unit Requirements,” of the CALTRANS “Transportation Electrical Equipment Specifications” dated March 12, 2009 with Erratum 1.

3.5. MEASUREMENT AND PAYMENT

Controller (\_\_\_\_\_) will be measured and paid as the actual number of each type of controller furnished, installed, and accepted.

Payment will be made under:

| Pay Item                  | Pay Unit |
|---------------------------|----------|
| Controller (2070LX) ..... | Each     |

## 4. NON-INTRUSIVE DETECTION SYSTEMS

### 4.1. DESCRIPTION

#### A. General

Design, furnish, provide training, and install non-intrusive detection systems (**Video, Microwave, or Lidar**) with all necessary hardware in accordance with the plans and specifications. Ensure the firmware and software furnished and installed as part of an Intelligent Transportation System (ITS) or traffic signal project are the most current and approved releases or versions, unless otherwise requested by the Department. Provide all equipment, materials, and work in accordance with all manufacturers' recommendations. All equipment, cables, and hardware must be part of an engineered system that is designed by the manufacturer to fully interoperate with all other system components.

Provide a non-intrusive detection system which provides advanced and presence detection. The non-intrusive detection system includes, but is not limited to, system sensor(s), including the detector housing (if applicable), mounting hardware, non-intrusive detection system processor, system management software, cabling between the detector and the cabinet, surge suppressors, terminations, output expansion modules which mount in the traffic signal controller cabinet input files, vertical conduit, weather heads and related equipment. The non-intrusive detection system processor shall have the ability to communicate with Transportation Management Center (TMC) computers for remote access.

### 4.2. MATERIALS

#### A. General

Material and equipment furnished under this specification must be pre-approved on the Department's QPL by the date of installation. Miscellaneous hardware such as cables and mounting hardware do not need to be pre-approved.

Furnish non-intrusive detection systems with either a simple keyboard or a mouse with monitor and appropriate software, or with system software for use on Department owned laptop PCs. Provide software compatible with the latest NCDOT-approved version of Microsoft Windows to provide remote detection monitoring.

Ensure that software furnished is licensed for use by the Department and by any other agency responsible for maintaining or operating the system. Provide the Department with a license to duplicate and distribute the software as necessary for design and maintenance support.

Design and furnish non-intrusive detection systems that detect vehicles by processing system inputs and provide detection outputs in real time.

Furnish all required sensor units, detection system processor units, software packages, cabling, poles, mast arms, harnesses, mounting assemblies, surge protection panels, grounding systems, messenger cable, and all necessary hardware.

Furnish systems that allow the display of detection zones superimposed on an image of the roadway on a Department furnished monitor or laptop computer screen. Ensure detection zones can be defined and data entered using a simple keyboard or mouse and monitor, or using a laptop PC with software.

Provide design drawings showing design details and detection sensor unit locations for review and acceptance before installation. Provide mounting height and location requirements for detection sensor units on the design based on the site survey. Design non-intrusive detection systems with all necessary hardware. Do not design for the installation of poles in medians.

Obtain the Engineer's approval before furnishing the non-intrusive detection systems. The contractor is responsible for the final design of non-intrusive detection systems. Review and acceptance of the designs by the Department does not relieve the contractor from the responsibility to provide fully functional systems and to ensure that the required detection zones can be provided.

Provide all associated equipment manuals and documentation.

Use a non-intrusive sensor that is compatible with the detection system processor and meets the following technical and functional requirements:

## 1. Requirements

### 1.1 Detector Sensor

- For Microwave and Lidar Detectors: Provide a detector for side-fire, forward-fire, overhead, or other appropriate configuration. Ensure the detector will detect vehicles in sunny, cloudy, rainy, snowy, and foggy weather conditions. Microwave detection systems shall be FCC-certified and have authorization to operate within the frequency range established and approved by the FCC. Ensure Lidar detection systems meet all applicable laser safety regulations and FCC requirements. Detectors shall be capable of extending at minimum 200 feet from the sensor origin. Ensure the detector is provided with water-tight housing offering NEMA 4X protection.
- Signal to Noise Ratio shall be greater than 50 dB.
- For Electromagnetic interference, ensure compliance with FCC Part 15, Subpart B, Class A device requirements, which apply to the detection sensor and associated connected equipment in their installed condition.
- Furnish power cable appropriately sized to meet the power requirements of the sensors. At a minimum, provide three-conductor 120 VAC field power cable. Size the power conductors from the power source to the detector input so that no more than a 3% voltage drop is experienced (NEC 210-19 a., FPN No. 4). Provide power from the cabinet power source through a surge suppressor and then to the detection sensor.
- If the sensors support Power-over-Ethernet, provide any external POE injectors that are required. Ensure the POE injectors meet the following minimum requirements:
  - Working temp/humidity: 14° F to 131° F/maximum 90%, non-condensing
  - Connectors: Shielded RJ-45, EIA 568A and EIA 568B
  - Input Power: 100 to 240 VAC, 50 to 60 Hz
  - Pass Through Data Rates: 10/100/1000 Mbps
  - Regulatory: IEEE 802.3bt (POE)
  - Number of Ports: 1 In and 1 Out
  - Safety Approvals: UL Listed

- Ensure the POE Injector is designed for Plug-and-Play installation, requiring no configurations and supports automatic detection and protection of non-standard Ethernet Terminal configurations.
- All connections to the system sensor assembly shall be professionally sealed to manufacturer recommendations to ensure a waterproof connection.
- Where cables, power cables, and other cables are required between the sensor assembly and other components located in the controller cabinet, furnish surge protection in the controller cabinet.
- If furnishing cable, comply with manufacturer recommendations.
- Provide terminal blocks and tie points for cable.
- Environmental: Ensure that temperature and humidity limits of the sensor adhere to the latest published version of NEMA TS-2 requirements.
- Shock and Vibration: Ensure the sensor adheres to shock and vibration requirements of the latest published version of NEMA TS-2 and, where applicable, IEC 60068.

## 1.2 Detection System Processor

Furnish detection system processors that detect vehicles by processing system inputs and provide detection outputs in real time. The detection system processor shall accept inputs from the detectors installed at the intersection such that signals from one or more sensors can be processed in real time. If required, additional detection system processors should be provided to handle the number of detectors installed at the location. As a minimum, meet the following requirements for each non-intrusive detection system processor installation.

- Provide a “fail-safe” mode whereby failure of one or more of the detector sensor units or power failure of the system will cause constant calls to be placed on the affected detection outputs.
- Provide compensation for minor movement of up to 2 percent of the field of view at 400 **feet** without falsely detecting vehicles.
- Include detection indicators on the front panel of the processor module for each channel of detection provided through that module to indicate detector output in real time when the system is operational.
- Include an RJ-45 Ethernet port connector on the system processor to enable communication from a programming device.
- Provide the ability to remotely monitor detectors and system.
- Ensure the system supports both NEMA TS-2 SDLC communications and wired I/O interface for integration into Caltrans Type 170 cabinets or NEMA TS-2 type cabinets.
- Provide a detection system processor that operates reliably in a typical roadside traffic cabinet environment.
- Environmental: Ensure that temperature and humidity limits of the system processor adhere to the latest published version of NEMA TS-2 requirements

- Shock and Vibration: Ensure the sensor adheres to shock and vibration requirements of the latest published version of NEMA TS-2 and, where applicable, IEC 60068.

Ensure processor modules that plug into a detector rack or input file meet the following requirements:

- Ensure the processor module completely fits within the loop detector slots of the traffic signal controller cabinet input file and that provides a standard relay closure detector input to the controller.
- Provide from one to four detector outputs through the processor module which communicate through the input file edge card connector.
- Use a module that is not wider than two standard input file slots.
- Provide power to the processor modules through the signal cabinet detector input file.

## 2. **Functional Requirements for Non-intrusive Detection Systems**

Provide the ability to program each detection call (input to the controller) with the following functions:

- Full Time Delay – Delay timer is active continuously,
- Extend – Call is extended for this amount of time after vehicle leaves detection area,
- Delay Call/Extend Call – This feature uses a combination of full-time delay and extend time on the same detection call. Ensure operation is as follows: Vehicle calls are received after the delay timer times out. When a call is detected, it is held until the detection area is empty and the programmed extend time expires. If another vehicle enters the detection area before the extend timer times out, the call is held and the extend time is reset. When the extend timer times out, the delay timer must expire before another vehicle call can be received.

Ensure that Detection Systems provide advanced and presence detection. Verify that the system can, at a minimum, emulate the output of a pair of 6 ft. by 6 ft. in-pavement loops spaced 16 ft. apart.

Provide the capability to create detection zones of varying size and shape to allow the best coverage of the viewable roadway lanes and ramps. Provide the capability to save the detection zone format on the processor module card once drawn for a particular sensor image.

Ensure the system allows the user to edit previously defined detector configurations. Ensure the system user can use a laptop to reprogram, calibrate, adjust or alter any previously defined detector configurations in the field and reprogram any detector configurations over the network or from a remote location.

Ensure detection zones can be overlapped. Ensure the system can detect vehicles in multiple travel lanes.

Detect either approaching or receding vehicles in multiple lanes within the field of view (FOV) of each non-intrusive sensor. Provide the capability of detecting vehicles



in at least 24 detection zones per non-intrusive sensor with the detection system. Allow the detection zones to be combined to form one output.

When a vehicle is within a detection zone, provide for a change in color or intensity of the detection zone perimeter or other appropriate display changes on the monitor or Department furnished laptop computer screen.

Verify that any traffic data collected by the system and the system configuration is stored within internal non-volatile memory within the non-intrusive detection system processor. Perform software updates through an Ethernet, serial, or USB port. Verify that data can be retrieved from the system either locally or via requests from computers at the central Transportation Management Center (TMC) over the communications network.

Ensure the detection system includes computer software, which enables the user to program, calibrate, operate, and view current status of all system features using a laptop computer, or network-connected workstation at the central TMC. Ensure individual vehicle actuations can be viewed while observing the systems input data.

Ensure the non-intrusive detection system configuration data can be uploaded and saved to a laptop or TMC workstation computer for later re-loading to the non-intrusive detection processor if necessary.

Verify that the detection system is IP-addressable and that all communication addresses are user programmable. Ensure the setup program assigns an IP address to the detection processor.

Ensure the detection system processor front panel includes a visual display of the status of each input. Indicators shall display, at a minimum, the status of the detection system processor communications, the status of the detection system processor, the status of communications, and whether each sensor is actively detecting. The processor shall allow a remote user to gain remote access, collect data, control, and configure the system.

### 3. Accuracy Requirements for Non-intrusive Detection Systems

Provide a non-intrusive detection system that meets the below minimum accuracy requirements:

| Parameter          | Condition       | Accuracy (System) | False Detection | Missed Detection |
|--------------------|-----------------|-------------------|-----------------|------------------|
| Presence Detection | Daytime         | 95% - 110%        | 10%             | 5%               |
| Presence Detection | Nighttime       | 95% - 115%        | 15%             | 5%               |
| Presence Detection | Adverse Weather | 95% - 115%        | 15%             | 5%               |

| Parameter          | Condition       | Accuracy (System) | False Detection | Missed Detection |
|--------------------|-----------------|-------------------|-----------------|------------------|
| Advanced Detection | Daytime         | 95% - 110%        | 10%             | 5%               |
| Advanced Detection | Nighttime       | 95% - 115%        | 15%             | 5%               |
| Advanced Detection | Adverse Weather | 95% - 115%        | 15%             | 5%               |

**Table 1a:** Outlines the requirements for the average system accuracy.

Non-intrusive detection system averages shall consistently satisfy the system-level performance criteria defined in Table 1a with minimal variance from these parameters during the selected testing period(s). It is recognized that individual detector units may operate under variable field conditions that constrain strict adherence to these parameters. A tolerance band of  $\pm 20\%$  in place of the specified values is therefore allowable for individual detectors as shown in Table 1b. Individual detectors shall consistently meet these parameters.

| Parameter          | Condition       | Accuracy (Detector) | False Detection | Missed Detection |
|--------------------|-----------------|---------------------|-----------------|------------------|
| Presence Detection | Daytime         | 80% - 120%          | 20%             | 20%              |
| Presence Detection | Nighttime       | 80% - 120%          | 20%             | 20%              |
| Presence Detection | Adverse Weather | 80% - 120%          | 20%             | 20%              |

| Parameter          | Condition       | Accuracy (Detector) | False Detection | Missed Detection |
|--------------------|-----------------|---------------------|-----------------|------------------|
| Advanced Detection | Daytime         | 80% - 120%          | 20%             | 20%              |
| Advanced Detection | Nighttime       | 80% - 120%          | 20%             | 20%              |
| Advanced Detection | Adverse Weather | 80% - 120%          | 20%             | 20%              |

**Table 1b:** Outlines the requirements for the accuracy of the individual detectors.

#### 4. Testing

Develop and submit plans for post installation testing to the Engineer for consideration and approval. Ensure the plans test all functional requirements and the accuracy requirements stipulated in the specifications. Further guidance and testing resources may be obtained by contacting the Product Qualification Engineer in the TSMO unit.

##### 4.1 Post Installation Test Requirements

Utilize the following test procedures after the non-intrusive detection system has been installed in its entirety. Commence no post-installation testing until all non-intrusive detection systems in the project have been configured and/or calibrated to gather speed, volume, occupancy and/or presence detection. Including the accuracy testing requirements, at a minimum, provide the following on the test plan to be submitted and approved by the Engineer:

- Inspect all vehicle detection system field components to ensure proper installation and cable termination.
- Verify that field construction has been completed.
- Inspect the quality and tightness of ground and surge protector connections.
- Check power supply voltage and outputs and ensure device connections are as specified in the Plans and specifications.

- Verify that the installation of cables and connections between all detectors and field cabinets are as specified in the Plans and specifications.
- Demonstrate that each non-intrusive Detection System is fully operational and collecting the required data types at the specified interval.

### 4.3. CONSTRUCTION METHODS

#### A. Construction

##### 1. Non-intrusive Detection System Installation Requirements

###### 1.1 General Installation Requirements

Arrange and conduct site surveys with Department personnel, and the system manufacturer's representative as necessary, to determine proper detector sensor unit selection and placement. Provide the Department at least 3 working days' notice before conducting site surveys. The non-intrusive detection system's manufacturer shall provide support both remotely and on-site for all phases of the installation.

Before beginning work at locations requiring non-intrusive detection systems, furnish system software. Upon activation of detection zones, provide detector configuration files. Ensure that up-to-date detection configuration files are furnished for various detection zone configurations that may be required for construction phasing.

Place into operation non-intrusive detection systems. Configure non-intrusive detection systems to achieve required detection in designated zones. If requested, have a certified manufacturer's representative on site to supervise and assist with installation, set up, and testing of the system.

Install all non-intrusive detection sensors, non-intrusive detection system processors, output expansion modules, and associated enclosures and equipment per manufacturer recommendations. Make all necessary adjustments and modifications to the detection system prior to obtaining recommendation for system acceptance testing.

Installation, surge protection, and all cabling shall comply with manufacturer's recommendations, at a minimum, or as specified in the plans. All equipment, cables, and hardware must be part of an engineered system that is designed by the manufacturer to fully interoperate with all other system components and be fully protected from all surge potential. Connectors installed outside the cabinets and enclosures shall be manufacturer terminated and be corrosion resistant, weatherproof, and watertight. Use a UL listed cable that is ozone and UV resistant and weather resistant. Label cables with permanent cable labels at each end.

Relocate detector sensor units and reconfigure detection zones as necessary according to the plans for construction phases.

Furnish an as-built cabinet wiring diagram, identified by location, for each non-intrusive detection system cabinet. Include all wiring, cabling, connections, and

**HL-0065****TS-41*****Rutherford County***

detector mounting height. Furnish an operation manual with programming instructions and a maintenance manual. Place all documentation in a weatherproof holder in the cabinet. Provide an additional copy of the documentation to the Engineer.

### 1.2 Detector Sensor Installation

Adjust the detector sensor as recommended by the manufacturer, and as required to minimize vehicle occlusion.

### 1.3 Cabinet Equipment

Install all non-intrusive detection system equipment into a cabinet with the following equipment:

Wiring, Conductors and Terminal Blocks: Use stranded copper for all conductors, including those in jacketed cables, except for earth ground conductors, which may be solid copper. Neatly arrange all wiring, firmly lace or bundle it, and mechanically secure the wiring without the use of adhesive fasteners. Route and secure all wiring and cabling to avoid sharp edges and to avoid conflicts with other equipment or cabling. Route detector control wiring, and 120 VAC power wiring separately. Terminate all wiring on a terminal block, strip, busbar, or device clamp or lug; do not splice any wiring.

Label cables for detection system sensors. Number all terminal blocks, terminal strips, circuit breakers, and busbar breakers and have each item and each terminal position numbered and named according to function. Labels shall be weather and wear resistant.

Protect all copper wiring and cabling entering the cabinet housing by surge protection devices. Terminate all wiring between cabinet devices and the transient surge protection devices, except for the signal feed, on terminal strips. Use a minimum #16 AWG grounding wire for each surge protection device, or larger if recommended by the surge protection device manufacturer. Do not “daisy chain” with the grounding wires of other devices including other surge suppressors. Install grounding wires with the absolute minimum length possible between the surge protection device and the ground busbar. Label all surge protection devices on the mounting panel.

Furnish and install a surge suppressor for each signal line. The surge protection device shall have a surge current rating of 10 kA. For each cabinet housing, include surge protection devices for the detection system power lines installed on the terminal block.

All surge protection shall be furnished and installed by the Contractor to protect not only the cabinet processor, but the detector sensor itself from ground rise potential (i.e., surge up to the detector sensor).

## **B. Quality Acceptance/Testing**

The acceptance testing of the vehicle detection systems shall consist of two phases: 1) post installation detection system testing, as outlined in these specifications and 2) burn-in period.

Perform acceptance testing for all equipment, hardware, and work as provided under these specifications. Perform all testing in the presence of the Engineer. Submit all testing plans and documents to the Engineer during the submittal phase of the vehicle detection equipment.

## **1. Burn-in Period**

### **1.1 General Requirements**

Provide a 30-day burn-in period for all work and equipment included in the Contract and associated with the vehicle detection system. The burn-in period shall consist of the field operation of the specific vehicle detection system in a manner that is in full accordance with the requirements of the Plans and Specifications.

Conduct only one (1) burn-in period on the entire Contract for all vehicle detection devices. Burn-in tests of individual vehicle detection devices or groups of vehicle detection devices will not be acceptable. Commence with the burn-in period only after meeting all of the following requirements:

All work required in all Contract documents for the vehicle detection system project-wide has been completed and inspected by the Engineer.

Successfully complete the post-installation vehicle detection system testing.

Commence with the burn-in period upon written authorization by the Department to commence. Terminate the burn-in period 30 consecutive days thereafter unless an equipment malfunction occurs. Stop the burn-in period for the length of time any equipment is defective. After repairing the equipment so that it functions properly, resume the burn-in period at the point it was stopped.

Successful completion and acceptance of the burn-in period will be granted on the 31st day unless any equipment has malfunctioned. If any equipment has failed during the burn-in period, final acceptance will be withheld until all the equipment is functioning properly.

When one specific piece of equipment has malfunctioned more than three times during the 30-day burn-in period, replace that unit with a new unit at no cost to the Department. Multiple failures of detection devices in different locations shall be determined as a failure of the 30-day burn-in period. The Contractor shall investigate the detection system failure and shall give a full report to the Engineer. The Contractor shall replace the failed devices and shall restart the burn-in period at Day 1, once those devices have been replaced and retested.

### **1.2 Contractor Responsibilities**

During the burn-in period, maintain all work under this Contract in accordance with the Plans and Specifications. Restore any work or equipment to proper operating condition within 8 hours after notification.

### **1.3 Department Responsibilities**

Department responsibilities during the burn-in period will be as follows:

**HL-0065****TS-43*****Rutherford County***

- Expeditious notification of Contractor upon failure or malfunction of equipment.

#### 1.4 Burn-in Period Acceptance

The Department will make burn-in period acceptance after satisfactory completion of the required burn-in period and based on a comprehensive field inspection of the complete vehicle detection system in accordance with the Specifications. Upon burn-in period acceptance but prior to Final Acceptance of the entire Contract, the Contractor is responsible for all maintenance of the vehicle detection system(s) installed or renovated in accordance with the specifications.

### **C. Contractor Warranty and Maintenance**

Equipment provided under this specification shall be warranted by the manufacturer to be free from defects in materials and workmanship for a minimum of three (3) years from burn-in period acceptance.

The manufacturer and supplier's warranties shall be transferable to the agency or user that is responsible for maintenance and shall be continuous throughout their duration.

During the warranty period, the manufacturer shall repair or replace any faulty equipment without cost to the purchaser, NCDOT, or the maintaining agency for all incidentals to the repair or replacement, including but not limited to parts, labor, or shipping.

The manufacturer shall be responsible for providing firmware or software updates associated with the non-intrusive detection system at no cost to NCDOT or the maintaining agency during the warranty period. Further, the manufacturer is also responsible for ensuring that any updates will not degrade the original functionality of the product warranted.

The manufacturer and/or supplier shall provide consultation to the Department or user that is responsible for maintenance as needed at no cost during the warranty period for operating questions or problems that arise.

### **D. Training**

Provide at least eight (8) hours of training on the setup, configuration, operation, maintenance, and troubleshooting of the non-intrusive detection system. Setup, configuration, and operation training should last a minimum of three (3) hours and must include instructions for programming, hands on training in programming detection zone, adjusting, and calibrating the detection system. Operation and maintenance training should last a minimum of five (5) hours and must include instructions on troubleshooting, maintenance, and operation for all detection system components. Arrange for training to be conducted by the manufacturer's representative at an approved site within the Division responsible for administration of the project. Thirty days before conducting training, submit a detailed course curriculum, draft manuals and materials, and resumes. Obtain approval of the submittal before conducting the training. At least one week before beginning training, provide two sets of complete documentation necessary to maintain and operate the system. Do not perform training until installation of the detection systems is complete. Each class will have a maximum of ten (10) people. The contractor must provide a training notebook for each trainee and an electronic copy of the training to the Department.

4.4. MEASUREMENT AND PAYMENT

*Microwave Vehicle Detectors – Multiple Zones (Presence)* will be measured and paid for as the actual number of microwave vehicle detectors – multiple zones (presence) furnished, installed, and accepted.

*Microwave Vehicle Detectors – Multiple Zones (Approach)* will be measured and paid for as the actual number of microwave vehicle detectors - multiple zones (approach) furnished, installed, and accepted.

No measurement will be made of non-intrusive detection system support, adjustments or repositioning, power and detector cables, and trenching as these items will be considered incidental to furnishing and installing non-intrusive detection systems.

Payment will be made under:

| Pay Item                                                      | Pay Unit |
|---------------------------------------------------------------|----------|
| Microwave Vehicle Detectors – Multiple Zones (Presence) ..... | Each     |
| Microwave Vehicle Detectors – Multiple Zones (Approach) ..... | Each     |

5. RECTANGULAR RAPID FLASHING BEACON SOLAR POWERED DISPLAY AND CONTROLLER ASSEMBLY

5.1. DESCRIPTION

Provide rectangular rapid flashing beacon (RRFB) that is solar powered and pedestrian activated. Ensure the RRFB consists of two rapidly flashing rectangular-shaped yellow indications, signs, solar panel, battery, controller assembly and all necessary hardware. Ensure multiple RRFB units at a given crosswalk are synchronized.

Ensure the RRFB meets the physical display and operational requirements provided in the most recent version of the MUTCD, including all published revisions.

5.2. MATERIALS

Comply with Section 1094 of the *Standard Specifications* for ground mounted sign supports. Unless otherwise shown on the plans, Three Pound Steel U-Channel Posts shall be used for mounting the rectangular rapid flashing beacon assembly.

Provide two rapid flashing yellow indications that are aligned horizontally in a single housing with a space between both indications of a minimum of 7” from inside edge of one indication to inside edge of the other indication. Ensure each indication is rectangular-shaped and has minimum dimensions of 5” wide by 2” high. Provide a Light Emitting Diode (LED) array for each indication. Provide Independent Laboratory Certification and test results for each indication facing motorists as evidence that the light intensity meets the Class 1 requirements for of the Society of Automotive Engineers (SAE) standard J595 (Directional Flashing Optical Warning Devices for Authorized Emergency, Maintenance, and Service Vehicles) dated November 2008. Provide an aluminum housing that can be attached to a 4.5” OD pedestal pole. Powder coat the housing with an electrostatically applied, fused-polyester paint in highway yellow (Federal Standard 595C, Color Chip Number 13538) a minimum of 2.5 to 3.5 mils thick. Ensure the housing does not project beyond the outside edges of a W11-2 or S1-1 sign. Ensure the two indications are installed into the housing assembly to face in the direction of the approaching vehicular traffic. When specified,

provide two additional identical indications for the motorists in a similar constructed housing that can be attached on the opposite side of the pole.

Provide the two yellow indications facing motorists to flash in a rapidly alternating “wig-wag” flashing sequence (left light on, then right light on). Ensure 70 to 80 periods of flashing per minute with the left indication emitting two slow pulses of light and the right indication emitting four rapid pulses of light followed by a long pulse of light. Ensure the indications have approximately equal periods of rapid pulsing light emissions and dark operation. Ensure flash rates are not at frequencies between 5 and 30 flashes per second to avoid flash-induced seizures. Provide a flashing yellow LED indication on the end of the housing to provide notification of activation and operation of the device to pedestrians in the crosswalk.

During operation, ensure the RRFB remains dark until a pedestrian actuation occurs and then returns back dark at a programmed time after the pedestrian activation. Provide wireless communication equipment to ensure all RRFBs associated at a given crosswalk simultaneously start operation of their alternating rapid flashing indications when activated and cease operation simultaneously. Provide a means to prevent interference with other systems utilizing similar communications equipment.

Provide a 12VDC sealed gel, sealed lead acid, or absorption glass mat battery with sufficient capacity for 5 days of 3 hours of continuous operation with no additional charge from solar panel. Ensure the battery is located in a moisture and corrosion resistant enclosure. Provide a solar panel with a minimum array-to-load ratio of 1.2 and charging circuitry for the battery. Provide a solar sizing report that shows the system loss of load probability is 0% for the entire year for Raleigh, North Carolina. Provide mounting hardware to allow solar panel to be tilted at least 45 degrees from horizontal and panned 360 degrees.

Provide stainless steel fasteners for all items exposed to the weather. For fasteners protected from the weather, provide fasteners fabricated from stainless steel or other corrosion-resistant materials.

Ensure assemblies provide protection from environmental conditions and accidental contact equivalent to a NEMA 3R-rated enclosure. Ensure all components operate properly within the following limits unless otherwise noted:

- Humidity: 5% to 95%, non-condensing
- Ambient Temperature: -30.0°F to +165°F
- Shock - NEMA TS2-2003, Section 2.1.10
- Vibration - NEMA TS2-2003, Section 2.1.9

### **5.3. CONSTRUCTION METHODS**

For each approach to the RRFB location, use two RRFB assemblies, installed at the crosswalk, one on the right-hand side of the roadway and one on the left-hand side of the roadway. On a divided highway, install the left-hand side assembly in the median, if practical, rather than on the far-left side of the highway. Each RRFB assembly shall consist of a W11-2 (Pedestrian) or S1-1 (School) crossing warning sign, a RRFB, and W16-7p (downward diagonal arrow) plaque. Install the RRFB on the same support as the associated W11-2 (Pedestrian) or S1-1 (School) crossing warning sign and plaque. Do not install an RRFB independent of the crossing signs for the approach the RRFB faces.

Ensure that the outside edges of the RRFB indications, including any housings, do not project beyond the outside edges of the W11-2 or S1-1 sign. Locate the RRFB between the bottom of the



crossing warning sign and the top of the supplemental W16-7p plaque, rather than 12 inches above or below the sign assembly.

If using pushbuttons to activate the RRFBs (versus passive detection), install the pushbutton assembly below the RRFB and W16-7p plaque. Mount the pushbutton at a minimum height of 3.5 feet but no higher than 4.0 feet above the adjacent pedestrian travel way. With pushbutton activation, mount a pedestrian instructional sign with legend “PUSH BUTTON FOR WARNING LIGHTS/WAIT FOR GAP IN TRAFFIC” adjacent to or integral with each pedestrian pushbutton.

Obtain flashing duration to be programmed into the RRFB from the Engineer.

**5.4. MEASUREMENT AND PAYMENT**

*Rectangular Rapid Flashing Beacon Assembly* will be measured and paid as the actual number of rectangular rapid flashing beacon assemblies furnished, installed, and accepted.

No measurement will be made of rapidly flashing rectangular-shaped yellow indications, signs, solar panel, battery, controller assembly, mounting posts, and all necessary hardware as these items will be considered incidental to furnishing and installing rectangular rapid flashing beacon assemblies.

Payment will be made under:

| Pay Item                                         | Pay Unit |
|--------------------------------------------------|----------|
| Rectangular Rapid Flashing Beacon Assembly ..... | Each     |

**6. REMOVE AND STOCKPILE, RECTANGULAR RAPID FLASHING BEACON ASSEMBLY**

**6.1. DESCRIPTION**

Properly remove and stockpile existing rectangular rapid flashing beacon assemblies in accordance with the contract.

**6.2. CONSTRUCTION METHODS**

For an existing rectangular rapid flashing beacon assembly noted on the signing plans for stockpiling, notify the Engineer in writing two (2) weeks prior to commencement of construction activities in the block in which the existing rectangular rapid flashing beacon assembly is located.

Prior to removal of the rectangular rapid flashing beacon assembly, document the assembly condition using photography or video. Remove the existing way finding assembly and transport to a location specified by the Engineer for stockpiling. Upon stockpiling the way finding sign, document the condition of the sign. Dispose of any non-reusable hardware and footing(s) per NCDOT Standard Specification 907 (if applicable). Provide all sign condition documentation to the Engineer.

Repair any areas or materials within the project limits disturbed or damaged in the performance of the work required under this section as directed by the Engineer.

**6.3. MEASUREMENT AND PAYMENT**

*Remove and Stockpile, Rectangular Rapid Flashing Beacon Assembly* will be measured and paid as the actual number of rectangular rapid flashing beacon assemblies satisfactorily removed, stockpiled and accepted by the Engineer.

**HL-0065****TS-47****Rutherford County**

The Engineer shall not be liable for any damage in the removal or transit of the stockpiled rectangular rapid flashing beacon assemblies.

Payment will be made under:

**Pay Item****Pay Unit**

Remove and Stockpile, Rectangular Rapid Flashing Beacon Assembly..... Each

**7. ETHERNET EDGE SWITCH**

Furnish and install a managed Ethernet edge switch as specified below that is fully compatible, interoperable, and completely interchangeable and functional within the existing Division traffic signal system communications network.

**7.1. DESCRIPTION****A. Ethernet Edge Switch:**

Furnish and install a hardened, field Ethernet edge switch (hereafter “edge switch”) for the traffic signal controller as specified below. Ensure that the edge switch provides wire-speed, fast Ethernet connectivity at transmission rates of 1000 megabits per second from each remote traffic signal controller location to the routing switches.

Contact NCDIT to arrange for the programming of the new Field Ethernet Switches with the necessary network configuration data, including but not limited to, the IP Address, Default Gateway, Subnet Mask and VLAN ID information. Provide a minimum ten (10) working days notice to allow NCDIT to program the new devices.

**B. Network Management:**

Ensure that the edge switch is fully compatible with the existing Division Network Management Software.

**7.2. MATERIALS****A. General:**

Ensure that the edge switch is fully compatible and interoperable with the trunk Ethernet network interface and that the edge switch supports half and full duplex Ethernet communications.

Furnish an edge switch that provide 99.999% error-free operation, and that complies with the Electronic Industries Alliance (EIA) Ethernet data communication requirements using single-mode fiber-optic transmission medium and copper transmission medium. Ensure that the edge switch has a minimum mean time between failures (MTBF) of 10 years, or 87,600 hours, as calculated using the Bellcore/Telcordia SR-332 standard for reliability prediction.

**B. Compatibility Acceptance**

The Engineer has the authority to require the Contractor to submit a sample Field Ethernet Switch and SFP along with all supporting documentation, software and testing procedures to allow a compatibility acceptance test to be performed prior to approving the proposed Field Ethernet Switch and Field Ethernet Transceiver for deployment. **The Compatibility Acceptance testing will ensure that the proposed device is 100% compatible and interoperable with the existing Division Signal System network, monitoring software and Traffic Operations Center network hardware.** Allow fifteen (15) working days for the Compatibility Acceptance Testing to be performed.

**C. Standards:**

Ensure that the edge switch complies with all applicable IEEE networking standards for Ethernet communications, including but not limited to:

- IEEE 802.1D standard for media access control (MAC) bridges used with the Spanning Tree Protocol (STP);
- IEEE 802.1Q standard for port-based virtual local area networks (VLANs);
- IEEE 802.1P standard for Quality of Service (QoS);
- IEEE 802.1w standard for MAC bridges used with the Rapid Spanning Tree Protocol (RSTP);
- IEEE 802.1s standard for MAC bridges used with the Multiple Spanning Tree Protocol;
- IEEE 802.1x standard for port based network access control, including RADIUS;
- IEEE 802.3 standard for local area network (LAN) and metropolitan area network (MAN) access and physical layer specifications;
- IEEE 802.3u supplement standard regarding 100 Base TX/100 Base FX;
- IEEE 802.3x standard regarding flow control with full duplex operation; and
- IFC 2236 regarding IGMP v2 compliance.
- IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
- IEEE 802.3ad Ethernet Link Aggregation
- IEEE 802.3i for 10BASE-T (10 Mbit/s over Fiber-Optic)
- IEEE 802.3ab for 1000BASE-T (1Gbit/s over Ethernet)
- IEEE 802.3z for 1000BASE-X (1 Gbit/s Ethernet over Fiber-Optic)

**D. Functional:**

Ensure that the edge switch supports all Layer 2 management features and certain Layer 3 features related to multicast data transmission and routing. These features shall include, but not be limited to:

- An STP healing/convergence rate that meets or exceeds specifications published in the IEEE 802.1D standard.
- An RSTP healing/convergence rate that meets or exceeds specifications published in the IEEE 802.1w standard.
- An Ethernet edge switch that is a port-based VLAN and supports VLAN tagging that meets or exceeds specifications as published in the IEEE 802.1Q standard, and has a minimum 4-kilobit VLAN address table (254 simultaneous).
- A forwarding/filtering rate that is a minimum of 14,880 packets per second for 10 megabits per second and 148,800 packets per second for 100 megabits per second.
- A minimum 4-kilobit MAC address table.
- Support of Traffic Class Expediting and Dynamic Multicast Filtering.
- Support of, at a minimum, snooping of Version 2 & 3 of the Internet Group Management Protocol (IGMP).
- Support of remote and local setup and management via telnet or secure Web-based GUI and command line interfaces.
- Support of the Simple Network Management Protocol version 3 (SNMPv3). Verify that the Ethernet edge switch can be accessed using the resident EIA-232 management port, a telecommunication network, or the Trivial File Transfer Protocol (TFTP).

- Port security through controlling access by the users. Ensure that the Ethernet edge switch has the capability to generate an alarm and shut down ports when an unauthorized user accesses the network.
- Support of remote monitoring (RMON-1 & RMON-2) of the Ethernet agent.
- Support of the TFTP and SNTP. Ensure that the Ethernet edge switch supports port mirroring for troubleshooting purposes when combined with a network analyzer.

#### **E. Physical Features:**

*Ports:* Provide 10/100/1000 Mbps auto-negotiating ports (RJ-45) copper Fast Ethernet ports for all edge switches. Provide auto-negotiation circuitry that will automatically negotiate the highest possible data rate and duplex operation possible with attached devices supporting the IEEE 802.3 Clause 28 auto-negotiation standard.

*Optical Ports:* Ensure that all fiber-optic link ports operate at 1310 or 1550 nanometers in single mode. Provide Type LC connectors for the optical ports, as specified in the Plans or by the Engineer. Do not use mechanical transfer registered jack (MTRJ) type connectors.

Provide an edge switch having a minimum of two optical 100/1000 Base X ports capable of transmitting data at 100/1000 megabits per second. Ensure that each optical port consists of a pair of fibers; one fiber will transmit (TX) data and one fiber will receive (RX) data. Ensure that the optical ports have an optical power budget of at least 15 dB. Provide small form-factor pluggable modules (SFPs) with a maximum range that meets or exceeds the distance requirement as indicated on the Plans.

*Copper Ports:* Provide an edge switch that includes a minimum of four copper ports. Provide Type RJ-45 copper ports and that auto-negotiate speed (i.e., 10/100/1000 Base) and duplex (i.e., full or half). Ensure that all 10/100/1000 Base TX ports meet the specifications detailed in this section and are compliant with the IEEE 802.3 standard pinouts. Ensure that all Category 6 unshielded twisted pair/shielded twisted pair network cables are compliant with the EIA/TIA-568-B standard.

*Port Security:* Ensure that the edge switch supports/complies with the following (remotely) minimum requirements:

- Ability to configure static MAC addresses access;
- Ability to disable automatic address learning per ports; know hereafter as Secure Port. Secure Ports only forward; and
- Trap and alarm upon any unauthorized MAC address and shutdown for programmable duration. Port shutdown requires administrator to manually reset the port before communications are allowed.

#### **F. Management Capabilities:**

Ensure that the edge switch supports all Layer 2 management features and certain Layer 3 features related to multicast data transmission and routing. These features shall include, but not be limited to:

- An STP healing/convergence rate that meets or exceeds specifications published in the IEEE 802.1 D standards;
- An RSTP healing/convergence rate that meets or exceeds specifications published in the IEEE 802.1w standard;

- An Ethernet edge switch that is a port-based VLAN and supports VLAN tagging that meets or exceeds specifications as published in the IEEE 802.1Q standard, and has a minimum 4-kilobit VLAN address table (254 simultaneous);
- A forwarding/filtering rate that is a minimum of 14,880 packets per second for 10 megabits per second, 148,800 packets per second for 100 megabits per second and 1,488,000 packets per second for 1000 megabits per second;
- A minimum 4-kilobit MAC address table;
- Support of Traffic Class Expediting and Dynamic Multicast Filtering.
- Support of, at a minimum, snooping of Version 2 & 3 of the Internet Group Management Protocol (IGMP);
- Support of remote and local setup and management via telnet or secure Web-based GUI and command line interfaces; and
- Support of the Simple Network Management Protocol (SNMP). Verify that the Ethernet edge switch can be accessed using the resident EIA-232 management port, a telecommunication network, or the Trivial File Transfer Protocol (TFTP).

*Network Capabilities:* Provide an edge switch that supports/complies with the following minimum requirements:

- Provide full implementation of IGMPv2 snooping (RFC 2236);
- Provide full implementation of SNMPv1, SNMPv2c, and/or SNMPv3;
- Provide support for the following RMON-I groups, at a minimum:
  - Part 1: Statistics
  - Part 2: History
  - Part 3: Alarm
  - Part 9: Event
- Provide support for the following RMON-2 groups, at a minimum:
  - Part 13: Address Map
  - Part 16: Layer Host
  - Part 17: Layer Matrix
  - Part 18: User History
- Capable of mirroring any port to any other port within the switch;
- Meet the IEEE 802.1Q (VLAN) standard per port for up to four VLANs;
- Meet the IEEE 802.3ad (Port Trunking) standard for a minimum of two groups of four ports;
- Password manageable;
- Telnet/CLI;
- HTTP (Embedded Web Server) with Secure Sockets Layer (SSL); and
- Full implementation of RFC 783 (TFTP) to allow remote firmware upgrades.

*Network Security:* Provide an edge switch that supports/complies with the following (remotely) minimum network security requirements:

- Multi-level user passwords;
- RADIUS centralized password management (IEEE 802.1X);
- SNMPv3 encrypted authentication and access security;
- Port security through controlling access by the users: ensure that the Ethernet edge switch has the capability to generate an alarm and shut down ports when an unauthorized user accesses the network;
- Support of remote monitoring (RMON-1&2) of the Ethernet agent; and

- Support of the TFTP and SNTP. Ensure that the Ethernet edge switch supports port mirroring for troubleshooting purposes when combined with a network analyzer.

### G. Electrical Specifications:

Ensure that the edge switch operates and power is supplied with 115 volts of alternating current (VAC). Ensure that the edge switch has a minimum operating input of 110 VAC and a maximum operating input of 130 VAC. Ensure that if the device requires operating voltages other than 120 VAC, supply the required voltage converter. Ensure that the maximum power consumption does not exceed 50 watts. Ensure that the edge switch has diagnostic light emitting diodes (LEDs), including link, TX, RX, speed (for Category 6 ports only), and power LEDs.

### H. Environmental Specifications:

Ensure that the edge switch performs all of the required functions during and after being subjected to an ambient operating temperature range of -30 degrees to 165 degrees Fahrenheit as defined in the environmental requirements section of the NEMA TS 2 standard, with a noncondensing humidity of 0 to 95%.

Provide certification that the device has successfully completed environmental testing as defined in the environmental requirements section of the NEMA TS 2 standard. Provide certification that the device meets the vibration and shock resistance requirements of Sections 2.1.9 and 2.1.10, respectively, of the NEMA TS 2 standard. Ensure that the edge switch is protected from rain, dust, corrosive elements, and typical conditions found in a roadside environment.

The edge switch shall meet or exceed the following environmental standards:

- IEEE 1613 (electric utility substations)
- IEC 61850-3 (electric utility substations)
- IEEE 61800-3 (variable speed drive systems)
- IEC 61000-6-2 (generic industrial)
- EMF – FCC Part 15 CISPR (EN5502) Class A

### I. Ethernet Patch Cable:

Furnish a factory pre-terminated/pre-connectorized Ethernet patch cable with each edge switch. Furnish Ethernet patch cables meeting the following physical requirements:

- Five (5)-foot length
- Category 6 or better
- Factory-installed RJ-45 connectors on both ends
- Molded anti-snag hoods over connectors
- Gold plated connectors
- Copper-clad aluminum is **NOT** allowed.

Furnish Fast Ethernet patch cords meeting the following minimum performance requirements:

- TIA/EIA-568-B-5, Additional Transmission Performance Specifications for 4-pair 100  $\Omega$  Enhanced Category 6 Cabling
- Frequency Range: 1-100 MHz
- Near-End Crosstalk (NEXT): 30.1 dB
- Power-sum NEXT: 27.1 dB
- Attenuation to Crosstalk Ratio (ACR): 6.1 dB

- Power-sum ACR: 3.1 dB
- Return Loss: 10dB
- Propagation Delay: 548 nsec

7.3. CONSTRUCTION METHODS

A. General:

Ensure that the edge switch is UL listed.

Verify that network/field/data patch cords meet all ANSI/EIA/TIA requirements for Category 6 four-pair unshielded twisted pair cabling with stranded conductors and RJ45 connectors.

Contact the Division a minimum of 10 working days prior to installation to allow for the programming of the edge switch.

B. Edge Switch:

Mount the edge switch inside each field cabinet by securely fastening the edge switch to the upper end of the right rear vertical rail of the equipment rack using manufacturer-recommended or Engineer-approved attachment methods, attachment hardware and fasteners.

Ensure that the edge switch is mounted securely in the cabinet and is fully accessible by field technicians without blocking access to other equipment. Verify that fiber-optic jumpers consist of a length of cable that has connectors on both ends, primarily used for interconnecting termination or patching facilities and/or equipment.

7.4. MEASUREMENT AND PAYMENT

*Ethernet Edge Switch* will be measured and paid as the actual number of Ethernet edge switches furnished, installed, and accepted.

No separate measurement will be made for Ethernet patch cable, small form factor pluggable modules (SFPs), power cord, mounting hardware, nuts, bolts, brackets, or edge switch programming as these will be considered incidental to furnishing and installing the edge switch.

Payment will be made under:

| Pay Item                   | Pay Unit |
|----------------------------|----------|
| Ethernet Edge Switch ..... | Each     |

8. EMERGENCY GENERATOR AND GENERATOR TRANSFER SWITCH

8.1. DESCRIPTION

Provide a portable generator and generator transfer switch as an alternate electrical source for each traffic signal to be used in the event of inclement weather or other power-disrupting event.

8.2. MATERIALS

All materials and equipment must be listed on the current ITS and Signals Qualified Products List (QPL) or be approved prior to installation by the Traffic Engineering and Safety Systems Branch to ensure suitability for the application.

Provide a lockable manual transfer switch box with L14-30P plug that retains NEMA 3R rainproof rating with the generator cord set connected. Use Reliance Controls Model CSR521 or equivalent. Provide necessary conduits and cabling as outlined on the drawings titled “Typical

Electrical Service for Traffic Signals with Emergency Generator Provisions.” All specified wires shall be stranded copper with THWN insulation unless otherwise noted on the drawings.

8.3. CONSTRUCTION METHODS

Install transfer switch materials such that electrical services shall be in substantial compliance with the drawings titled “Typical Electrical Service for Traffic Signals with Emergency Generator Provisions.” Install transfer switch to allow power usage from either the electric utility or the portable generator.

Perform all work in accordance with the current edition of the National Electrical Code (NEC).

8.4. MEASUREMENT AND PAYMENT

*Transfer Switch* will be measured and paid for as the actual number of transfer switches at cabinet locations furnished, installed and accepted.

No measurement will be made for installation of portable generator, as they will be considered the responsibility of the agency that deploys the generators.

Payment will be made under:

| Pay Item             | Pay Unit |
|----------------------|----------|
| Transfer Switch..... | Each     |

9. GPS EMERGENCY VEHICLE PREEMPTION SYSTEM

9.1. DESCRIPTION

Install GPS-enabled Emergency Vehicle Preemption (GPS EVP) system intersection equipment at locations specified on the signal plans.

9.2. MATERIALS

All materials, equipment, hardware, and software must be listed on the current ITS and Signals Qualified Products List (QPL) or be approved prior to installation by the Transportation Mobility and Safety Branch to ensure suitability for the application.

The GPS EVP Intersection Equipment shall include the GPS Radio unit, phase selection, GPS Card Rack, the installation cables, mounting hardware, system software, lead-in cable, and any additional components as needed to provide the EVP signal operations as shown on the signal plans.

9.3. CONSTRUCTION METHODS

Install GPS EVP Intersection Equipment in cabinets at intersections specified on the signal plans. Program the GPS EVP system to provide the EVP signal operations as shown on the signal plans. All work shall be completed in accordance with the Manufacturer’s instructions.

9.4. MEASUREMENT AND PAYMENT

*GPS Emergency Vehicle Preemption System* will be measured and paid for as the actual number of intersections at which emergency vehicle preemption systems are installed and accepted.

No separate measurement will be made for the GPS radio unit, GPS Card Rack, installation cables, mounting hardware, system software, lead-in cable, and any additional components as



**HL-0065**

**TS-54**

***Rutherford County***

needed as part of the EVP operations. GPS EVP programming, setup, and testing will be considered incidental.

Payment will be made under:

| <b>Pay Item</b>                               | <b>Pay Unit</b> |
|-----------------------------------------------|-----------------|
| GPS Emergency Vehicle Preemption System ..... | Each            |

**PROJECT SPECIAL PROVISION**

(10-18-95) (Rev. 10-15-24)

Z-1

**PERMITS**

The Contractor's attention is directed to the following permits, which have been issued to the Department of Transportation by the authority granting the permit.

| <b><u>PERMIT</u></b>                                     | <b><u>AUTHORITY GRANTING THE PERMIT</u></b>                 |
|----------------------------------------------------------|-------------------------------------------------------------|
| Dredge and Fill and/or<br>Work in Navigable Waters (404) | U. S. Army Corps of Engineers                               |
| Water Quality (401)                                      | Division of Water Resources, DEQ<br>State of North Carolina |

The Contractor shall comply with all applicable permit conditions during construction of this project.

Agents of the permitting authority will periodically inspect the project for adherence to the permits.

The Contractor's attention is also directed to Articles 107-10 and 107-13 of the *Standard Specifications* and the following:

Should the Contractor propose to utilize construction methods (such as temporary structures or fill in waters and/or wetlands for haul roads, work platforms, cofferdams, etc.) not specifically identified in the permit (individual, general, or nationwide) authorizing the project it shall be the Contractor's responsibility to coordinate with the Engineer to determine what, if any, additional permit action is required. The Contractor shall also be responsible for initiating the request for the authorization of such construction method by the permitting agency. The request shall be submitted through the Engineer. The Contractor shall not utilize the construction method until it is approved by the permitting agency. The request normally takes approximately 60 days to process; however, no extensions of time or additional compensation will be granted for delays resulting from the Contractor's request for approval of construction methods not specifically identified in the permit.

**Where construction moratoriums are contained in a permit condition which restricts the Contractor's activities to certain times of the year, those moratoriums will apply only to the portions of the work taking place in the restricted waters, wetlands or buffer zones, provided that activities outside those areas is done in such a manner as to not affect the restricted waters, wetlands or buffer zones.**



STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION

JOSH STEIN  
GOVERNOR

DANIEL H. JOHNSON  
SECRETARY

June 5, 2026

MEMORANDUM TO: Division Construction Units  
Contract Standards and Development Unit

FROM: Karina Clough, Division 13 PDEA Engineer  
Division Environmental Unit

SUBJECT: Environmental Permits for the Roadway Improvements from the intersection of S Washinton Street and Maple Drive to Spindale Street in Rutherfordton, NC and Spindale, NC in Rutherford County, Division 13,  
**TIP: HL-0065 WBS 50685.3.1**

Please find enclosed the following permits for this project:

| Agency                                                                    | Permit Type                                                                                                                     | Permit Expiration                    |
|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| US Army Corps of Engineers<br>Section 404 Clean Water Act Permit          | Nationwide Permit 14 Non-reporting<br>issued March 15, 2026                                                                     | March 14, 2031                       |
| NC Division of Water Resources<br>Section 401 Water Quality Certification | Water Quality Certification<br>General Certification 8569<br>dated March 15, 2026<br><i>Written Authorization not required.</i> | <i>expires with above<br/>permit</i> |

Work is authorized by the above referenced permit provided it is accomplished in strict accordance with the permitted plans.

The Environmental Coordination and Permitting Group or the Division Environmental Office must be consulted if any deviation from the permit(s) is required.

The General Conditions and Certifications for Nationwide and Regional Permits can be referenced at:  
[https://xfer.services.ncdot.gov/pdea/EnvironmentalPermits/\\_General\\_Conditions\\_and\\_Certifications/](https://xfer.services.ncdot.gov/pdea/EnvironmentalPermits/_General_Conditions_and_Certifications/)

*If the project greensheet is only found in on the Commitment Tracker in SharePoint:*

The Project Commitments "Greensheet" is located on the Preconstruction SharePoint Dashboard at:  
<https://connect.ncdot.gov/site/preconstruction>

**Nationwide Permit 14 - Linear Transportation Projects**

Effective Date: March 15, 2026; Expiration Date: March 15, 2031  
(NWP Final Notice, 91 FR 768, Pages 768-886)

Linear Transportation Projects. Activities required for crossings of waters of the United States associated with the construction, expansion, modification, or improvement of linear transportation projects (e.g., roads, highways, railways, trails, driveways, airport runways, and taxiways) in waters of the United States. For linear transportation projects in non-tidal waters, the discharge of dredged or fill material cannot cause the loss of greater than 1/2-acre of waters of the United States. For linear transportation projects in tidal waters, the discharge of dredged or fill material cannot cause the loss of greater than 1/3-acre of waters of the United States. Any stream channel modification, including bank stabilization, is limited to the minimum necessary to construct or protect the linear transportation project; such modifications must be in the immediate vicinity of the project.

This NWP also authorizes temporary structures, fills, and work, including the use of temporary mats, necessary to construct the linear transportation project. Appropriate measures must be taken to maintain normal downstream flows and minimize flooding to the maximum extent practicable, when temporary structures, work, and discharges of dredged or fill material, including cofferdams, are necessary for construction activities, access fills, or dewatering of construction sites. Temporary fills must consist of materials, and be placed in a manner, that will not be eroded by expected high flows. Temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The areas affected by temporary fills must be revegetated, as appropriate.

This NWP cannot be used to authorize non-linear features commonly associated with transportation projects, such as vehicle maintenance or storage buildings, parking lots, train stations, or aircraft hangars.

Notification: The permittee must submit a pre-construction notification to the district engineer prior to commencing the activity if: (1) the loss of waters of the United States exceeds 1/10-acre; or (2) there is a discharge of dredged or fill material in a special aquatic site, including wetlands. (See general condition 32.) (Authorities: Sections 10 and 404)

Note 1: For linear transportation projects crossing a single waterbody more than one time at separate and distant locations, or multiple waterbodies at separate and distant locations, each crossing is considered a single and complete project for purposes of NWP authorization. Linear transportation projects must comply with 33 CFR 330.6(d).

Note 2: Some discharges of dredged or fill material for the construction of farm roads or forest roads, or temporary roads for moving mining equipment, may qualify for an exemption under Section 404(f) of the Clean Water Act (see 33 CFR 323.4).

Note 3: For NWP 14 activities that require pre-construction notification, the PCN must include any other NWP(s), regional general permit(s), or individual permit(s) used or

intended to be used to authorize any part of the proposed project or any related activity, including other separate and distant crossings that require Department of the Army authorization but do not require pre-construction notification (see paragraph (b)(4) of general condition 32). The district engineer will evaluate the PCN in accordance with Section D, "District Engineer's Decision." The district engineer may require mitigation to ensure that the authorized activity results in no more than minimal individual and cumulative adverse environmental effects (see general condition 23).

Nationwide Permit General Conditions

Note: To qualify for NWP authorization, the prospective permittee must comply with the following general conditions, as applicable, in addition to any regional or case-specific conditions imposed by the division engineer or district engineer. Prospective permittees should contact the appropriate Corps district office to determine if regional conditions have been imposed on an NWP. Prospective permittees should also contact the appropriate Corps district office to determine the status of Clean Water Act Section 401 water quality certification and/or Coastal Zone Management Act consistency for an NWP. Every person who may wish to obtain permit authorization under one or more NWPs, or who is currently relying on an existing or prior permit authorization under one or more NWPs, has been and is on notice that all of the provisions of 33 CFR 330.1 through 330.6 apply to every NWP authorization. Note especially 33 CFR 330.5 relating to the modification, suspension, or revocation of any NWP authorization.

1. Navigation. (a) No activity may cause more than a minimal adverse effect on navigation.

(b) Any safety lights and signals prescribed by the U.S. Coast Guard, through regulations or otherwise, must be installed and maintained at the permittee's expense on authorized facilities in navigable waters of the United States.

(c) The permittee understands and agrees that, if future operations by the United States require the removal, relocation, or other alteration, of the structure or work herein authorized, or if, in the opinion of the Secretary of the Army or his or her authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the permittee will be required, upon due notice from the Corps of Engineers, to remove, relocate, or alter the structural work or obstructions caused thereby, without expense to the United States. No claim shall be made against the United States on account of any such removal or alteration.

2. Aquatic Life Movements. No activity may substantially disrupt the necessary life cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, unless the activity's primary purpose is to impound water. All permanent and temporary crossings of waterbodies shall be suitably culverted, bridged, or otherwise designed and constructed to maintain low flows to sustain the movement of those aquatic species. If a bottomless culvert cannot be used, then the crossing should be designed and constructed to minimize adverse effects to aquatic life movements.

3. Spawning Areas. Activities in spawning areas during spawning seasons must be avoided to the maximum extent practicable. Activities that result in the physical destruction (e.g., through excavation, fill, or downstream smothering by substantial turbidity) of an important spawning area are not authorized.
4. Migratory Bird Breeding Areas. Activities in waters of the United States that serve as breeding areas for migratory birds must be avoided to the maximum extent practicable.
5. Shellfish Beds. No activity may occur in areas of concentrated shellfish populations, unless the activity is directly related to a shellfish harvesting activity authorized by NWP 4 and 48, or is a shellfish seeding or habitat restoration activity authorized by NWP 27.
6. Suitable Material. No activity may use unsuitable material (e.g., trash, debris, car bodies, asphalt, etc.). Material used for construction or discharged must be free from toxic pollutants in toxic amounts (see section 307 of the Clean Water Act).
7. Water Supply Intakes. No activity may occur in the proximity of a public water supply intake, except where the activity is for the repair or improvement of public water supply intake structures or adjacent bank stabilization.
8. Adverse Effects From Impoundments. If the activity creates an impoundment of water, adverse effects to the aquatic system due to accelerating the passage of water, and/or restricting its flow must be minimized to the maximum extent practicable.
9. Management of Water Flows. To the maximum extent practicable, the pre-construction course, condition, capacity, and location of open waters must be maintained for each activity, including stream channelization, storm water management activities, and temporary and permanent road crossings, except as provided below. The activity must be constructed to withstand expected high flows, including tidal flows. The activity must not restrict or impede the passage of normal or high flows, including tidal flows, unless the primary purpose of the activity is to impound water or manage high flows. The activity may alter the pre-construction course, condition, capacity, and location of open waters if it benefits the aquatic environment (e.g., stream restoration or relocation activities).
10. Fills Within 100-Year Floodplains. The activity must comply with applicable FEMA-approved state or local floodplain management requirements.
11. Equipment. Heavy equipment working in wetlands or mudflats must be placed on mats, or other measures must be taken to minimize soil disturbance. If mats are used to minimize soil disturbance, the affected areas must be returned to pre-construction elevations, and revegetated as appropriate. In circumstances where the use of mats has caused significant soil compaction, efforts using techniques (e.g., soil reaeration techniques) to break up the compaction should be employed to return the soil to a pre-construction state prior to returning to pre-construction elevations.
12. Soil Erosion and Sediment Controls. Appropriate soil erosion and sediment controls must be used and maintained in effective operating condition during construction, and all exposed soil and other fills, as well as any work below the ordinary high water mark

or high tide line, must be permanently stabilized at the earliest practicable date. Permittees are encouraged to perform work within waters of the United States during periods of low-flow or no-flow, or during low tides.

13. Removal of Temporary Structures and Fills. Temporary structures must be removed, to the maximum extent practicable, after their use has been discontinued. Temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The affected areas must be revegetated, as appropriate.

14. Proper Maintenance. Any authorized structure or fill shall be properly maintained, including maintenance to ensure public safety and compliance with applicable NWP general conditions, as well as any activity-specific conditions added by the district engineer to an NWP authorization.

15. Single and Complete Project. The activity must be a single and complete project. The same NWP cannot be used more than once for the same single and complete project.

16. Wild and Scenic Rivers. (a) No NWP activity may occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a “study river” for possible inclusion in the system while the river is in an official study status, unless the appropriate Federal agency with direct management responsibility for such river has determined in writing that the proposed activity will not adversely affect the Wild and Scenic River designation or study status.

(b) If a proposed NWP activity will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a “study river” for possible inclusion in the system while the river is in an official study status, the permittee must submit a pre-construction notification (see general condition 32). The district engineer will coordinate the PCN with the Federal agency with direct management responsibility for that river. Permittees shall not begin the NWP activity until notified by the district engineer that the Federal agency with direct management responsibility for that river has determined in writing that the proposed NWP activity will not adversely affect the Wild and Scenic River designation or study status.

(c) Information on Wild and Scenic Rivers may be obtained from the appropriate Federal land management agency responsible for the designated Wild and Scenic River or study river (e.g., National Park Service, U.S. Forest Service, Bureau of Land Management, U.S. Fish and Wildlife Service). Information on these rivers is also available at: <http://www.rivers.gov/>.

17. Tribal Rights. No activity or its operation may impair reserved tribal rights, including, but not limited to, reserved water rights and treaty fishing and hunting rights.

18. Endangered Species. (a) No activity is authorized under any NWP which is likely to directly or indirectly jeopardize the continued existence of a threatened or endangered species or a species proposed for such designation, as identified under the federal Endangered Species Act (ESA), or which will directly or indirectly destroy or adversely modify designated critical habitat or critical habitat proposed for such designation. No activity is authorized under any NWP which “may affect” a listed species or critical

habitat, unless ESA section 7 consultation addressing the consequences of the proposed activity on listed species or critical habitat has been completed. See 50 CFR 402.02 for the definition of “effects of the action” for the purposes of ESA section 7 consultation.

(b) Federal agencies should follow their own procedures for complying with the requirements of the ESA (see 33 CFR 330.4(f)(1)). If pre-construction notification is required for the proposed activity, the federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate documentation has been submitted. If the appropriate documentation has not been submitted, additional ESA section 7 consultation may be necessary for the activity and the respective federal agency would be responsible for fulfilling its obligation under section 7 of the ESA.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed such designation) might be affected or is in the vicinity of the activity, or if the activity is located in designated critical habitat or critical habitat proposed for such designation, and shall not begin work on the activity until notified by the district engineer that the requirements of the ESA have been satisfied and that the activity is authorized. For activities that might affect federally-listed endangered or threatened species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation), the pre-construction notification must include the name(s) of the endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or that utilize the designated critical habitat (or critical habitat proposed for such designation) that might be affected by the proposed activity. The district engineer will determine whether the proposed activity “may affect” or will have “no effect” to listed species and designated critical habitat and will notify the non-federal applicant of the Corps’ determination within 45 days of receipt of a complete pre-construction notification. For activities where the non-federal applicant has identified listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) that might be affected or is in the vicinity of the activity, and has so notified the Corps, the applicant shall not begin work until the Corps has provided notification that the proposed activity will have “no effect” on listed species (or species proposed for listing or designated critical habitat (or critical habitat proposed for such designation), or until ESA section 7 consultation or conference has been completed. If the non-federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(d) As a result of formal or informal consultation or conference with the FWS or NMFS the district engineer may add species-specific permit conditions to the NWP.

(e) Authorization of an activity by an NWP does not authorize the “take” of a threatened or endangered species as defined under the ESA. In the absence of separate authorization (e.g., an ESA Section 10 Permit, a Biological Opinion with “incidental take” provisions, etc.) from the FWS or the NMFS, the Endangered Species Act prohibits any person subject to the jurisdiction of the United States to take a listed species, where



"take" means to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture, or collect, or to attempt to engage in any such conduct. The word "harm" in the definition of "take" means an act which actually kills or injures wildlife. Such an act may include significant habitat modification or degradation where it actually kills or injures wildlife by significantly impairing essential behavioral patterns, including breeding, feeding or sheltering.

(f) If the non-federal permittee has a valid ESA section 10(a)(1)(B) incidental take permit with an approved Habitat Conservation Plan for a project or a group of projects that includes the proposed NWP activity, the non-federal permittee should provide a copy of that ESA section 10(a)(1)(B) permit with the PCN required by paragraph (c) of this general condition. The district engineer will coordinate with the agency that issued the ESA section 10(a)(1)(B) permit to determine whether the proposed NWP activity and the associated incidental take were considered in the internal ESA section 7 consultation conducted for the ESA section 10(a)(1)(B) permit. If that coordination results in concurrence from the agency that the proposed NWP activity and the associated incidental take were considered in the internal ESA section 7 consultation for the ESA section 10(a)(1)(B) permit, the district engineer does not need to conduct a separate ESA section 7 consultation for the proposed NWP activity. The district engineer will notify the non-federal applicant within 45 days of receipt of a complete pre-construction notification whether the ESA section 10(a)(1)(B) permit covers the proposed NWP activity or whether additional ESA section 7 consultation is required.

(g) Information on the location of threatened and endangered species and their critical habitat can be obtained directly from the offices of the FWS and NMFS or their web pages at <http://www.fws.gov/> or <http://www.fws.gov/ipac> and <http://www.nmfs.noaa.gov/pr/species/esa/> respectively.

19. Migratory Birds and Bald and Golden Eagles. The permittee is responsible for ensuring that an action authorized by an NWP complies with the Migratory Bird Treaty Act and the Bald and Golden Eagle Protection Act. The permittee is responsible for contacting the appropriate local office of the U.S. Fish and Wildlife Service to determine what measures, if any, are necessary or appropriate to reduce adverse effects to migratory birds or eagles, including whether "incidental take" permits are necessary and available under the Migratory Bird Treaty Act or Bald and Golden Eagle Protection Act for a particular activity.

20. Historic Properties. (a) No activity is authorized under any NWP which may have the potential to cause effects on properties listed, or eligible for listing, in the National Register of Historic Places until the requirements of Section 106 of the National Historic Preservation Act (NHPA) have been satisfied.

(b) Federal permittees should follow their own procedures for complying with the requirements of section 106 of the National Historic Preservation Act (see 33 CFR 330.4(g)(1)). If pre-construction notification is required for the proposed NWP activity, the federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate documentation has been submitted. If the appropriate documentation is not submitted, then additional consultation under section

106 may be necessary. The respective federal agency is responsible for fulfilling its obligation to comply with section 106.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if the NWP activity might have the potential to cause effects on any historic properties listed on, determined to be eligible for listing on, or potentially eligible for listing on the National Register of Historic Places, including previously unidentified properties. For such activities, the pre-construction notification must state which historic properties might have the potential to be affected by the proposed NWP activity or include a vicinity map indicating the location of the historic properties or the potential for the presence of historic properties. Assistance regarding information on the location of, or potential for, the presence of historic properties can be sought from the State Historic Preservation Officer, Tribal Historic Preservation Officer, or designated tribal representative, as appropriate, and the National Register of Historic Places (see 33 CFR 330.4(g)). When reviewing pre-construction notifications, district engineers will comply with the current procedures for addressing the requirements of section 106 of the National Historic Preservation Act. The district engineer shall make a reasonable and good faith effort to carry out appropriate identification efforts commensurate with potential impacts, which may include background research, consultation, oral history interviews, sample field investigation, and/or field survey. Based on the information submitted in the PCN and these identification efforts, the district engineer shall determine whether the proposed NWP activity has the potential to cause effects on historic properties. Section 106 consultation is not required when the district engineer determines that the activity does not have the potential to cause effects on historic properties (see 36 CFR 800.3(a)). Section 106 consultation is required when the district engineer determines that the activity has the potential to cause effects on historic properties. The district engineer will conduct consultation with consulting parties identified under 36 CFR 800.2(c) when he or she makes any of the following effect determinations for the purposes of section 106 of the NHPA: no historic properties affected, no adverse effect, or adverse effect.

(d) Where the non-federal applicant has identified historic properties on which the proposed NWP activity might have the potential to cause effects and has so notified the Corps, the non-federal applicant shall not begin the activity until notified by the district engineer either that the activity has no potential to cause effects on historic properties or that NHPA section 106 consultation has been completed. For non-federal permittees, the district engineer will notify the prospective permittee within 45 days of receipt of a complete pre-construction notification whether NHPA section 106 consultation is required. If NHPA section 106 consultation is required, the district engineer will notify the non-federal applicant that he or she cannot begin the activity until section 106 consultation is completed. If the non-federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(e) Prospective permittees should be aware that section 110k of the NHPA (54 U.S.C. 306113) prevents the Corps from granting a permit or other assistance to an applicant who, with intent to avoid the requirements of section 106 of the NHPA, has intentionally significantly adversely affected a historic property to which the permit would relate, or having legal power to prevent it, allowed such significant adverse effect to occur, unless

the Corps, after consultation with the Advisory Council on Historic Preservation (ACHP), determines that circumstances justify granting such assistance despite the adverse effect created or permitted by the applicant. If circumstances justify granting the assistance, the Corps is required to notify the ACHP and provide documentation specifying the circumstances, the degree of damage to the integrity of any historic properties affected, and proposed mitigation. This documentation must include any views obtained from the applicant, SHPO/THPO, appropriate Indian tribes if the undertaking occurs on or affects historic properties on tribal lands or affects properties of interest to those tribes, and other parties known to have a legitimate interest in the impacts to the permitted activity on historic properties.

21. Discovery of Previously Unknown Remains and Artifacts. Permittees that discover any previously unknown historic, cultural or archeological remains and artifacts while accomplishing the activities authorized by NWP, must immediately notify the district engineer of what they have found, and to the maximum extent practicable, avoid construction activities that may affect the remains and artifacts until the required coordination has been completed. The district engineer will initiate the federal, tribal, and state coordination required to determine if the items or remains warrant a recovery effort or if the site is eligible for listing in the National Register of Historic Places.

22. Designated Critical Resource Waters. Critical resource waters include, NOAA-managed marine sanctuaries and marine monuments, and National Estuarine Research Reserves. The district engineer may designate, after notice and opportunity for public comment, additional waters officially designated by a state as having particular environmental or ecological significance, such as outstanding national resource waters or state natural heritage sites. The district engineer may also designate additional critical resource waters after notice and opportunity for public comment.

(a) Discharges of dredged or fill material into waters of the United States are not authorized by NWPs 7, 12, 14, 16, 17, 21, 29, 31, 35, 39, 40, 42, 43, 44, 49, 50, 51, 52, 57 and 58 for any activity within, or directly affecting, critical resource waters, including wetlands adjacent to such waters.

(b) For NWPs 3, 8, 10, 13, 15, 18, 19, 22, 23, 25, 27, 28, 30, 33, 34, 36, 37, 38, and 54, notification is required in accordance with general condition 32, for any activity proposed by permittees in the designated critical resource waters including wetlands adjacent to those waters. The district engineer may authorize activities under these NWPs only after she or he determines that the impacts to the critical resource waters will be no more than minimal.

23. Mitigation. The district engineer will consider the following factors when determining appropriate and practicable mitigation necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal:

(a) The activity must be designed and constructed to avoid and minimize adverse effects, both temporary and permanent, to waters of the United States to the maximum extent practicable at the project site (i.e., on site).

(b) Mitigation in all its forms (avoiding, minimizing, rectifying, reducing, or compensating for resource losses) will be required to the extent necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal.

(c) Compensatory mitigation at a minimum one-for-one ratio will be required for all wetland losses that exceed 1/10-acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate or the adverse environmental effects of the proposed activity are no more than minimal, and provides an activity-specific waiver of this requirement. For wetland losses of 1/10-acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects.

(d) Compensatory mitigation at a minimum one-for-one ratio will be required for all losses of stream bed that exceed 3/100-acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate or the adverse environmental effects of the proposed activity are no more than minimal, and provides an activity-specific waiver of this requirement. This compensatory mitigation requirement may be satisfied through the restoration or enhancement of riparian areas next to streams in accordance with paragraph (e) of this general condition. For losses of stream bed of 3/100-acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects. Compensatory mitigation for losses of streams should be provided, if practicable, through stream rehabilitation, enhancement, or preservation, because streams are difficult-to-replace resources (see 33 CFR 332.3(e)(3)).

(e) Compensatory mitigation plans for NWP activities in or near streams or other open waters will normally include a requirement for the restoration or enhancement, maintenance, and legal protection (e.g., conservation easements) of riparian areas next to open waters. In some cases, the restoration or maintenance/protection of riparian areas may be the only compensatory mitigation required. If restoring riparian areas involves planting vegetation, only native species should be planted. The width of the required riparian area will address documented water quality or aquatic habitat loss concerns. Normally, the riparian area will be 25 to 50 feet wide on each side of the stream, but the district engineer may require slightly wider riparian areas to address documented water quality or habitat loss concerns. If it is not possible to restore or maintain/protect a riparian area on both sides of a stream, or if the waterbody is a lake or coastal waters, then restoring or maintaining/protecting a riparian area along a single bank or shoreline may be sufficient. Where both wetlands and open waters exist on the project site, the district engineer will determine the appropriate compensatory mitigation (e.g., riparian areas and/or wetlands compensation) based on what is best for the aquatic environment on a watershed basis. In cases where riparian areas are determined to be the most appropriate form of minimization or compensatory mitigation, the district engineer may waive or reduce the requirement to provide wetland compensatory mitigation for wetland losses.

(f) Compensatory mitigation projects provided to offset losses of aquatic resources must comply with the applicable provisions of 33 CFR part 332.

(1) The prospective permittee is responsible for proposing an appropriate compensatory mitigation option if compensatory mitigation is necessary to ensure that the activity results in no more than minimal adverse environmental effects. For the NWP, the preferred mechanism for providing compensatory mitigation is mitigation bank credits or in-lieu fee program credits (see 33 CFR 332.3(b)(2) and (3)). However, if an appropriate number and type of mitigation bank or in-lieu credits are not available at the time the PCN is submitted to the district engineer, the district engineer may approve the use of permittee-responsible mitigation.

(2) The amount of compensatory mitigation required by the district engineer must be sufficient to ensure that the authorized activity results in no more than minimal individual and cumulative adverse environmental effects (see 33 CFR 330.1(e)(3)). (See also 33 CFR 332.3(f).)

(3) Since the likelihood of success is greater and the impacts to potentially valuable uplands are reduced, aquatic resource restoration should be the first compensatory mitigation option considered for permittee-responsible mitigation.

(4) If permittee-responsible mitigation is the proposed option, the prospective permittee is responsible for submitting a mitigation plan. A conceptual or detailed mitigation plan may be used by the district engineer to make the decision on the NWP verification request, but a final mitigation plan that addresses the applicable requirements of 33 CFR 332.4(c)(2) through (14) must be approved by the district engineer before the permittee begins work in waters of the United States, unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation (see 33 CFR 332.3(k)(3)). If permittee-responsible mitigation is the proposed option, and the proposed compensatory mitigation site is located on land in which another federal agency holds an easement, the district engineer will coordinate with that federal agency to determine if proposed compensatory mitigation project is compatible with the terms of the easement.

(5) If mitigation bank or in-lieu fee program credits are the proposed option, the mitigation plan needs to address only the baseline conditions at the impact site and the number of credits to be provided (see 33 CFR 332.4(c)(1)(ii)).

(6) Compensatory mitigation requirements (e.g., resource type and amount to be provided as compensatory mitigation, site protection, ecological performance standards, monitoring requirements) may be addressed through conditions added to the NWP authorization, instead of components of a compensatory mitigation plan (see 33 CFR 332.4(c)(1)(ii)).

(g) Compensatory mitigation will not be used to increase the acreage losses allowed by the acreage limits of the NWPs. For example, if an NWP has an acreage limit of 1/2-acre, it cannot be used to authorize any NWP activity resulting in the loss of greater than 1/2-acre of waters of the United States, even if compensatory mitigation is

provided that replaces or restores some of the lost waters. However, compensatory mitigation can and should be used, as necessary, to ensure that an NWP activity already meeting the established acreage limits also satisfies the no more than minimal impact requirement for the NWPs.

(h) Permittees may propose the use of mitigation banks, in-lieu fee programs, or permittee-responsible mitigation. When developing a compensatory mitigation proposal, the permittee must consider appropriate and practicable options consistent with the framework at 33 CFR 332.3(b). For activities resulting in the loss of marine or estuarine resources, permittee-responsible mitigation may be environmentally preferable if there are no mitigation banks or in-lieu fee programs in the area that have marine or estuarine credits available for sale or transfer to the permittee. For permittee-responsible mitigation, the special conditions of the NWP verification must clearly indicate the party or parties responsible for the implementation and performance of the compensatory mitigation project, and, if required, its long-term management.

(i) Where certain functions and services of waters of the United States are permanently adversely affected by a regulated activity, such as discharges of dredged or fill material into waters of the United States that will convert a forested or scrub-shrub wetland to a herbaceous wetland in a permanently maintained utility line right-of-way, mitigation may be required to reduce the adverse environmental effects of the activity to the no more than minimal level.

24. Safety of Impoundment Structures. To ensure that all impoundment structures are safely designed, the district engineer may require non-federal applicants to demonstrate that the structures comply with established state or federal, dam safety criteria or have been designed by qualified persons. The district engineer may also require documentation that the design has been independently reviewed by similarly qualified persons, and appropriate modifications made to ensure safety.

25. Water Quality. (a) Where the certifying authority (state, authorized tribe, or EPA, as appropriate) has not previously certified compliance of an NWP with CWA section 401, a CWA section 401 water quality certification for the proposed activity which may result in any discharge from a point source into waters of the United States must be obtained or waived (see 33 CFR 330.4(c)). If the permittee cannot comply with all of the conditions of a water quality certification previously issued by the certifying authority for the issuance of the NWP, then the permittee must obtain a water quality certification or waiver for the proposed activity which may result in any discharge from a point source into waters of the United States in order for the activity to be authorized by an NWP.

(b) If the NWP activity requires pre-construction notification and the certifying authority has not previously certified compliance of an NWP with CWA section 401, the proposed activity which may result in any discharge from a point source into waters of the United States is not authorized by an NWP until water quality certification is obtained or waived. If the certifying authority issues a water quality certification for the proposed discharge into waters of the United States, the permittee must submit a copy of the certification to the district engineer. The discharge into waters of the United States is not authorized by an NWP until the district engineer has notified the permittee that the water

quality certification requirement has been satisfied (i.e., by the issuance of a water quality certification or a waiver and completion of the Section 401(a)(2) process).

(c) The district engineer or certifying authority may require additional water quality management measures to ensure that the authorized activity does not result in more than minimal degradation of water quality.

26. Coastal Zone Management. In coastal states where an NWP has not previously received a state coastal zone management consistency concurrence, an individual state coastal zone management consistency concurrence must be obtained, or a presumption of concurrence must occur (see 33 CFR 330.4(d)). If the permittee cannot comply with all of the conditions of a coastal zone management consistency concurrence previously issued by the state, then the permittee must obtain an individual coastal zone management consistency concurrence or presumption of concurrence in order for the activity to be authorized by an NWP. The district engineer or a state may require additional measures to ensure that the authorized activity is consistent with state coastal zone management requirements.

27. Regional and Case-By-Case Conditions. The activity must comply with any regional conditions that may have been added by the division engineer (see 33 CFR 330.4(e)) and with any case specific conditions added by the Corps or by the state, Indian Tribe, or U.S. EPA in its CWA section 401 Water Quality Certification, or by the state in its Coastal Zone Management Act consistency determination.

28. Use of Multiple Nationwide Permits. The use of more than one NWP for a single and complete project is authorized, subject to the following restrictions:

(a) The total acreage loss of waters of the United States for a single and complete project cannot exceed the acreage limit of the NWP with the highest specified acreage limit when multiple NWPs are used to authorize an activity.

(b) If only one of the NWPs used to authorize the single and complete project has a specified acreage limit, the acreage loss of waters of the United States for that single and complete project cannot exceed that specified acreage limit. For example, if a road crossing over tidal waters is constructed under NWP 14 (which has an acreage limit of 1/3 acre in tidal waters), with associated bank stabilization authorized by NWP 13 (which does not have a specified acreage limit), the maximum acreage loss of waters of the United States for the total project cannot exceed 1/3-acre.

(c) If two or more of the NWPs used to authorize the single and complete project have specified acreage limits, the acreage loss of waters of the United States authorized by each of those NWPs cannot exceed the specified acreage limits of each of those NWPs. For example, if a commercial development is constructed under NWP 39 (which has a 1/2-acre limit), and the single and complete project includes the filling of a ditch authorized by NWP 46 (which has a 1-acre limit), the maximum acreage loss of waters of the United States for the construction of the commercial development under NWP 39 cannot exceed 1/2-acre, and the total acreage loss of waters of United States caused by the combination of the NWP 39 and NWP 46 activities cannot exceed 1 acre.

29. Transfer of Nationwide Permit Verifications. If the permittee sells the property associated with a nationwide permit verification, the permittee may transfer the nationwide permit verification to the new owner by submitting a letter to the appropriate Corps district office to validate the transfer. A copy of the nationwide permit verification must be attached to the letter, and the letter must contain the following statement and signature:

“When the structures or work authorized by this nationwide permit are still in existence at the time the property is transferred, the terms and conditions of this nationwide permit, including any special conditions, will continue to be binding on the new owner(s) of the property. To validate the transfer of this nationwide permit and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date below.”

---

(Transferee)

---

(Date)

30. Compliance Certification. Each permittee who receives an NWP verification letter from the Corps must provide a signed certification documenting completion of the authorized activity and implementation of any required compensatory mitigation. The successful completion of any required permittee-responsible mitigation, including the achievement of ecological performance standards, will be addressed separately by the district engineer. The Corps will provide the permittee the certification document with the NWP verification letter. The certification document will include:

- (a) A statement that the authorized activity was done in accordance with the NWP authorization, including any general, regional, or activity-specific conditions;
- (b) A statement that the implementation of any required compensatory mitigation was completed in accordance with the permit conditions. If credits from a mitigation bank or in-lieu fee program are used to satisfy the compensatory mitigation requirements, the certification must include the documentation required by 33 CFR 332.3(l)(3) to confirm that the permittee secured the appropriate number and resource type of credits; and
- (c) The signature of the permittee certifying the completion of the activity and mitigation.

The completed certification document must be submitted to the district engineer within 30 days of completion of the authorized activity or the implementation of any required compensatory mitigation, whichever occurs later.

31. Activities Affecting Structures or Works Built by the United States. If an NWP activity also requires review by, or permission from, the Corps pursuant to 33 U.S.C. 408 because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of



Engineers (USACE) federally authorized Civil Works project (a “USACE project”), the prospective permittee must submit a pre-construction notification. See paragraph (b)(10) of general condition 32. An activity that requires section 408 permission and/or review is not authorized by an NWP until the appropriate Corps office issues the section 408 permission or completes its review to alter, occupy, or use the USACE project, and the district engineer issues a written NWP verification.

**32. Pre-Construction Notification.** (a) *Timing.* Where required by the terms of the NWP, the prospective permittee must notify the district engineer by submitting a pre-construction notification (PCN) as early as possible. The district engineer must determine if the PCN is complete within 30 calendar days of the date of receipt and, if the PCN is determined to be incomplete, notify the prospective permittee within that 30 day period to request the additional information necessary to make the PCN complete. The request must specify the information needed to make the PCN complete. As a general rule, district engineers will request additional information necessary to make the PCN complete only once. However, if the prospective permittee does not provide all of the requested information, then the district engineer will notify the prospective permittee that the PCN is still incomplete and the PCN review process will not commence until all of the requested information has been received by the district engineer. The prospective permittee shall not begin the activity until either:

(1) He or she is notified in writing by the district engineer that the activity may proceed under the NWP with any special conditions imposed by the district or division engineer; or

(2) 45 calendar days have passed from the district engineer’s receipt of the complete PCN and the prospective permittee has not received written notice from the district or division engineer. However, if the permittee was required to notify the Corps pursuant to general condition 18 that listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) might be affected or are in the vicinity of the activity, or to notify the Corps pursuant to general condition 20 that the activity might have the potential to cause effects to historic properties, the permittee cannot begin the activity until receiving written notification from the Corps that there is “no effect” on listed species or “no potential to cause effects” on historic properties, or that any consultation required under Section 7 of the Endangered Species Act (see 33 CFR 330.4(f)) and/or section 106 of the National Historic Preservation Act (see 33 CFR 330.4(g)) has been completed. If the proposed activity requires a written waiver to exceed specified limits of an NWP, the permittee may not begin the activity until the district engineer issues the waiver. If the district or division engineer notifies the permittee in writing that an individual permit is required within 45 calendar days of receipt of a complete PCN, the permittee cannot begin the activity until an individual permit has been obtained. Subsequently, the permittee’s right to proceed under the NWP may be modified, suspended, or revoked only in accordance with the procedure set forth in 33 CFR 330.5(d)(2).

(b) *Contents of Pre-Construction Notification:* The PCN must be in writing and include the following information:

(1) Name, address and telephone numbers of the prospective permittee;

(2) Location of the proposed activity;

(3) Identify the specific NWP or NWP(s) the prospective permittee wants to use to authorize the proposed activity;

(4) (i) A description of the proposed activity; the activity's purpose; direct and indirect adverse environmental effects the activity would cause, including the anticipated amount of loss of wetlands, other special aquatic sites, and other waters expected to result from the NWP activity, in acres, linear feet, or other appropriate unit of measure; a description of any proposed mitigation measures intended to reduce the adverse environmental effects caused by the proposed activity; and any other NWP(s), regional general permit(s), or individual permit(s) used or intended to be used to authorize any part of the proposed project or any related activity, including other separate and distant crossings for linear projects that require Department of the Army authorization but do not require pre-construction notification. The description of the proposed activity and any proposed mitigation measures should be sufficiently detailed to allow the district engineer to determine that the adverse environmental effects of the activity will be no more than minimal and to determine the need for compensatory mitigation or other mitigation measures.

(ii) For linear projects where one or more single and complete crossings require pre-construction notification, the PCN must include the quantity of anticipated losses of wetlands, other special aquatic sites, and other waters for each single and complete crossing of those wetlands, other special aquatic sites, and other waters (including those single and complete crossings authorized by an NWP but do not require PCNs). This information will be used by the district engineer to evaluate the cumulative adverse environmental effects of the proposed linear project, and does not change those non-PCN NWP activities into NWP PCNs.

(iii) Sketches should be provided when necessary to show that the activity complies with the terms of the NWP. (Sketches usually clarify the activity and when provided results in a quicker decision. Sketches should contain sufficient detail to provide an illustrative description of the proposed activity (e.g., a conceptual plan), but do not need to be detailed engineering plans);

(5) The PCN must include a delineation of waters, wetlands, and other special aquatic sites on the project site. Wetland delineations must be prepared in accordance with the current method required by the Corps. The permittee may ask the Corps to delineate the special aquatic sites and other waters on the project site, but there may be a delay if the Corps does the delineation, especially if the project site is large or contains many wetlands, other special aquatic sites, and other waters. Furthermore, the 45-day period will not start until the delineation has been submitted to or completed by the Corps, as appropriate. For NWP 27 activities that require PCNs because of other general conditions or regional conditions imposed by division engineers, see Note 2 of that NWP;

(6) If the proposed activity will result in the loss of greater than 1/10-acre of wetlands or 3/100-acre of stream bed and a PCN is required, the prospective permittee must submit a statement describing how the compensatory mitigation requirement will be satisfied,

or explaining why the adverse environmental effects are no more than minimal and why compensatory mitigation should not be required. As an alternative, the prospective permittee may submit a conceptual or detailed mitigation plan.

(7) For non-federal permittees, if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) might be affected or is in the vicinity of the activity, or if the activity is located in designated critical habitat (or critical habitat proposed for such designation), the PCN must include the name(s) of those endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or utilize the designated critical habitat (or critical habitat proposed for such designation) that might be affected by the proposed activity. For NWP activities that require pre-construction notification, federal permittees must provide documentation demonstrating compliance with the Endangered Species Act;

(8) For non-federal permittees, if the NWP activity might have the potential to cause effects to a historic property listed on, determined to be eligible for listing on, or potentially eligible for listing on, the National Register of Historic Places, the PCN must state which historic property might have the potential to be affected by the proposed activity or include a vicinity map indicating the location of the historic property. For NWP activities that require pre-construction notification, federal permittees must provide documentation demonstrating compliance with section 106 of the National Historic Preservation Act;

(9) For an activity that will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a “study river” for possible inclusion in the system while the river is in an official study status, the PCN must identify the Wild and Scenic River or the “study river” (see general condition 16); and

(10) For an NWP activity that requires permission from, or review by, the Corps pursuant to 33 U.S.C. 408 because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of Engineers federally authorized civil works project, the pre-construction notification must include a statement confirming that the project proponent has submitted a written request for section 408 permission from, or review by, the Corps office having jurisdiction over that USACE project.

(c) *Form of Pre-Construction Notification:* The nationwide permit pre-construction notification form (Form ENG 6082) should be used for NWP PCNs. A letter containing the required information may also be used. Applicants may provide electronic files of PCNs and supporting materials if the district engineer has established tools and procedures for electronic submittals.

(d) *Agency Coordination:* (1) The district engineer will consider any comments from federal and state agencies concerning the proposed activity’s compliance with the terms and conditions of the NWPs and the need for mitigation to reduce the activity’s adverse environmental effects so that they are no more than minimal.

(2) Agency coordination is required for: (i) all NWP activities that require pre-construction notification and result in the loss of greater than 1/2-acre of waters of the

United States; (ii) NWP 13 activities in excess of 500 linear feet, fills greater than one cubic yard per running foot, or involve discharges of dredged or fill material into special aquatic sites; and (iii) NWP 54 activities in excess of 500 linear feet, or that extend into the waterbody more than 30 feet from the mean low water line in tidal waters or the ordinary high water mark in the Great Lakes.

(3) When agency coordination is required, the district engineer will immediately provide (e.g., via e-mail, facsimile transmission, overnight mail, or other expeditious manner) a copy of the complete PCN to the appropriate federal or state offices (FWS, state natural resource or water quality agency, EPA, and, if appropriate, the NMFS). With the exception of NWP 37, these agencies will have 10 calendar days from the date the material is transmitted to notify the district engineer via telephone, facsimile transmission, or e-mail that they intend to provide substantive, site-specific comments. The comments must explain why the agency believes the adverse environmental effects will be more than minimal. If so contacted by an agency, the district engineer will wait an additional 15 calendar days before making a decision on the pre-construction notification. The district engineer will fully consider agency comments received within the specified time frame concerning the proposed activity's compliance with the terms and conditions of the NWPs, including the need for mitigation to ensure that the net adverse environmental effects of the proposed activity are no more than minimal. The district engineer will provide no response to the resource agency, except as provided below. The district engineer will indicate in the administrative record associated with each pre-construction notification that the resource agencies' concerns were considered. For NWP 37, the emergency watershed protection and rehabilitation activity may proceed immediately in cases where there is an unacceptable hazard to life or a significant loss of property or economic hardship will occur. The district engineer will consider any comments received to decide whether the NWP 37 authorization should be modified, suspended, or revoked in accordance with the procedures at 33 CFR 330.5.

(4) In cases where the prospective permittee is not a federal agency, the district engineer will provide a response to NMFS within 30 calendar days of receipt of any Essential Fish Habitat conservation recommendations, as required by section 305(b)(4)(B) of the Magnuson-Stevens Fishery Conservation and Management Act.

(5) Applicants are encouraged to provide the Corps with either electronic files or multiple copies of pre-construction notifications to expedite agency coordination.

#### District Engineer's Decision

1. In reviewing the PCN for the proposed activity, the district engineer will determine whether the activity authorized by the NWP will result in more than minimal individual or cumulative adverse environmental effects or may be contrary to the public interest. If a project proponent requests authorization by a specific NWP, the district engineer should issue the NWP verification for that activity if it meets the terms and conditions of that NWP, unless he or she determines, after considering mitigation, that the proposed activity will result in more than minimal individual and cumulative adverse effects on the

aquatic environment and other aspects of the public interest and exercises discretionary authority to require an individual permit for the proposed activity. For a linear project, this determination will include an evaluation of the single and complete crossings of waters of the United States that require PCNs to determine whether they individually satisfy the terms and conditions of the NWP(s), as well as the cumulative effects caused by all of the crossings of waters of the United States authorized by an NWP. If an applicant requests a waiver of an applicable limit, as provided for in NWPs 13, 36, or 54, the district engineer will only grant the waiver upon a written determination that the NWP activity will result in only minimal individual and cumulative adverse environmental effects.

2. When making minimal adverse environmental effects determinations the district engineer will consider the direct and indirect effects caused by the NWP activity. He or she will also consider the cumulative adverse environmental effects caused by activities authorized by an NWP and whether those cumulative adverse environmental effects are no more than minimal. The district engineer will also consider site specific factors, such as the environmental setting in the vicinity of the NWP activity, the type of resource that will be affected by the NWP activity, the functions provided by the aquatic resources that will be affected by the NWP activity, the degree or magnitude to which the aquatic resources perform those functions, the extent that aquatic resource functions will be lost as a result of the NWP activity (e.g., partial or complete loss), the duration of the adverse effects (temporary or permanent), the importance of the aquatic resource functions to the region (e.g., watershed or ecoregion), and mitigation required by the district engineer. If an appropriate functional or condition assessment method is available and practicable to use, that assessment method may be used by the district engineer to assist in the minimal adverse environmental effects determination. The district engineer may add activity-specific conditions to the NWP authorization to address site-specific environmental concerns.

3. If the proposed NWP activity requires a PCN and will result in a loss of greater than 1/10-acre of wetlands or 3/100-acre of stream bed, the prospective permittee should submit a mitigation proposal with the PCN. Applicants may also propose compensatory mitigation for NWP activities with smaller impacts, or for impacts to other types of waters. However, compensatory mitigation shall not be required for activities authorized by NWP 27 because those activities must result in net increases in aquatic resource functions and services (see the text of NWP 27). The district engineer will consider any proposed compensatory mitigation or other mitigation measures the applicant has included in the proposal when determining whether the net adverse environmental effects of the proposed NWP activity are no more than minimal. The compensatory mitigation proposal may be either conceptual or detailed. If the district engineer determines that the proposed activity complies with the terms and conditions of the NWP and that the adverse environmental effects are no more than minimal, after considering mitigation, the district engineer will notify the permittee and include any activity-specific conditions in the NWP verification the district engineer deems necessary. Conditions for compensatory mitigation requirements must comply with the appropriate provisions at 33 CFR 332.3(k). The district engineer must approve the final mitigation plan before the permittee commences work in waters of the United States,

unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation. If the prospective permittee elects to submit a compensatory mitigation plan with the PCN, the district engineer will expeditiously review the proposed compensatory mitigation plan. The district engineer must review the proposed compensatory mitigation plan within 45 calendar days of receiving a complete PCN and determine whether the proposed mitigation would ensure that the NWP activity results in no more than minimal adverse environmental effects. If the net adverse environmental effects of the NWP activity (after consideration of the mitigation proposal) are determined by the district engineer to be no more than minimal, the district engineer will provide a timely written response to the applicant. The response will state that the NWP activity can proceed under the terms and conditions of the NWP, including any activity-specific conditions added to the NWP authorization by the district engineer.

4. If the district engineer determines that the adverse environmental effects of the proposed NWP activity are more than minimal, then the district engineer will notify the applicant either: (a) that the activity does not qualify for authorization under the NWP and instruct the applicant on the procedures to seek authorization under an individual permit; (b) that the activity is authorized under the NWP subject to the applicant's submission of a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal; or (c) that the activity is authorized under the NWP with specific modifications or conditions. Where the district engineer determines that mitigation is required to ensure no more than minimal adverse environmental effects, the activity will be authorized within the 45-day PCN review period (unless additional time is required to comply with general conditions 16, 18, 20, and/or 31), with activity-specific conditions that state the mitigation requirements. The authorization will include the necessary conceptual or detailed mitigation plan or a requirement that the applicant submit a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal. When compensatory mitigation is required, no work in waters of the United States may occur until the district engineer has approved a specific mitigation plan or has determined that prior approval of a final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation.

### Further Information

1. District engineers have authority to determine if an activity complies with the terms and conditions of an NWP.
2. NWPs do not obviate the need to obtain other federal, state, or local permits, approvals, or authorizations required by law.
3. NWPs do not grant any property rights or exclusive privileges.
4. NWPs do not authorize any injury to the property or rights of others.
5. NWPs do not authorize interference with any existing or proposed Federal project (see general condition 31).

## Nationwide Permit Definitions

Best management practices (BMPs): Policies, practices, procedures, or structures implemented to mitigate the adverse environmental effects on surface water quality resulting from development. BMPs are categorized as structural or non-structural.

Compensatory mitigation: The restoration (re-establishment or rehabilitation), establishment (creation), enhancement, and/or in certain circumstances preservation of aquatic resources for the purposes of offsetting unavoidable adverse impacts which remain after all appropriate and practicable avoidance and minimization has been achieved.

Currently serviceable: Useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.

Direct effects: Effects that are caused by the activity and occur at the same time and place.

Discharge: The term “discharge” means any discharge of dredged or fill material into waters of the United States.

Ecological reference: A model used to plan and design an aquatic ecosystem restoration, enhancement, or establishment activity under NWP 27. An ecological reference may be based on: (1) the structure, functions, and dynamics of an aquatic ecosystem type or a riparian area type that currently exists in the region; (2) the structure, functions, and dynamics of an aquatic ecosystem type or riparian area type that existed in the region in the past; and/or (3) indigenous and local ecological knowledge that apply to the aquatic ecosystem type or riparian area type (i.e., a cultural ecosystem). Cultural ecosystems are ecosystems that have developed under the joint influence of natural processes and human management activities (e.g., fire stewardship). An ecological reference takes into account the range of variation of the aquatic habitat type or riparian area type in the region.

Enhancement: The manipulation of the physical, chemical, or biological characteristics of an aquatic resource to heighten, intensify, or improve a specific aquatic resource function(s). Enhancement results in the gain of selected aquatic resource function(s), but may also lead to a decline in other aquatic resource function(s). Enhancement does not result in a gain in aquatic resource area.

Establishment (creation): The manipulation of the physical, chemical, or biological characteristics present to develop an aquatic resource that did not previously exist at an upland site. Establishment results in a gain in aquatic resource area.

High Tide Line: The line of intersection of the land with the water’s surface at the maximum height reached by a rising tide. The high tide line may be determined, in the absence of actual data, by a line of oil or scum along shore objects, a more or less continuous deposit of fine shell or debris on the foreshore or berm, other physical markings or characteristics, vegetation lines, tidal gages, or other suitable means that delineate the general height reached by a rising tide. The line encompasses spring high

tides and other high tides that occur with periodic frequency but does not include storm surges in which there is a departure from the normal or predicted reach of the tide due to the piling up of water against a coast by strong winds such as those accompanying a hurricane or other intense storm.

Historic Property: Any prehistoric or historic district, site (including archaeological site), building, structure, or other object included in, or eligible for inclusion in, the National Register of Historic Places maintained by the Secretary of the Interior. This term includes artifacts, records, and remains that are related to and located within such properties. The term includes properties of traditional religious and cultural importance to an Indian tribe or Native Hawaiian organization and that meet the National Register criteria (36 CFR part 60).

Independent utility: A test to determine what constitutes a single and complete non-linear project in the Corps Regulatory Program. A project is considered to have independent utility if it would be constructed absent the construction of other projects in the project area. Portions of a multi-phase project that depend upon other phases of the project do not have independent utility. Phases of a project that would be constructed even if the other phases were not built can be considered as separate single and complete projects with independent utility.

Indirect effects: Effects that are caused by the activity and are later in time or farther removed in distance, but are still reasonably foreseeable.

Loss of waters of the United States: Waters of the United States that are permanently adversely affected by filling, flooding, excavation, or drainage because of the regulated activity. The loss of stream bed includes the acres of stream bed that are permanently adversely affected by filling or excavation because of the regulated activity. Permanent adverse effects include permanent discharges of dredged or fill material that change an aquatic area to dry land, increase the bottom elevation of a waterbody, or change the use of a waterbody. The acreage of loss of waters of the United States is a threshold measurement of the impact to jurisdictional waters or wetlands for determining whether a project may qualify for an NWP; it is not a net threshold that is calculated after considering compensatory mitigation that may be used to offset losses of aquatic functions and services. Waters of the United States temporarily filled, flooded, excavated, or drained, but restored to pre-construction contours and elevations after construction, are not included in the measurement of loss of waters of the United States. Impacts resulting from activities that do not require Department of the Army authorization, such as activities eligible for exemptions under section 404(f) of the Clean Water Act, are not considered when calculating the loss of waters of the United States.

Nature-based solutions: Actions to protect, sustainably manage, and restore natural or modified ecosystems, that address societal challenges effectively and adaptively, simultaneously providing human well-being and biodiversity benefits.

Navigable waters: Waters subject to section 10 of the Rivers and Harbors Act of 1899. These waters are defined at 33 CFR part 329.



Non-tidal wetland: A non-tidal wetland is a wetland that is not subject to the ebb and flow of tidal waters. Non-tidal wetlands contiguous to tidal waters are located landward of the high tide line (i.e., spring high tide line).

Open water: For purposes of the NWP's, an open water is any area that in a year with normal patterns of precipitation has water flowing or standing above ground to the extent that an ordinary high water mark can be determined. Aquatic vegetation within the area of flowing or standing water is either non-emergent, sparse, or absent. Vegetated shallows are considered to be open waters. Examples of "open waters" include rivers, streams, lakes, and ponds.

Ordinary High Water Mark: The term ordinary high water mark means that line on the shore established by the fluctuations of water and indicated by physical characteristics such as a clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, the presence of litter and debris, or other appropriate means that consider the characteristics of the surrounding areas.

Perennial stream: A perennial stream has surface water flowing continuously year-round during a typical year.

Practicable: Available and capable of being done after taking into consideration cost, existing technology, and logistics in light of overall project purposes.

Pre-construction notification: A request submitted by the project proponent to the Corps for confirmation that a particular activity is authorized by nationwide permit. The request may be a permit application, letter, or similar document that includes information about the proposed work and its anticipated environmental effects. Pre-construction notification may be required by the terms and conditions of a nationwide permit, or by regional conditions. A pre-construction notification may be voluntarily submitted in cases where pre-construction notification is not required and the project proponent wants confirmation that the activity is authorized by nationwide permit.

Preservation: The removal of a threat to, or preventing the decline of, aquatic resources by an action in or near those aquatic resources. This term includes activities commonly associated with the protection and maintenance of aquatic resources through the implementation of appropriate legal and physical mechanisms. Preservation does not result in a gain of aquatic resource area or functions.

Re-establishment: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former aquatic resource. Re-establishment results in rebuilding a former aquatic resource and results in a gain in aquatic resource area and functions.

Rehabilitation: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of repairing natural/historic functions to a degraded aquatic resource. Rehabilitation results in a gain in aquatic resource function, but does not result in a gain in aquatic resource area.

Restoration: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former or degraded aquatic

resource. For the purpose of tracking net gains in aquatic resource area, restoration is divided into two categories: re-establishment and rehabilitation.

Riffle and pool complex: Riffle and pool complexes are special aquatic sites under the 404(b)(1) Guidelines. Riffle and pool complexes sometimes characterize steep gradient sections of streams. Such stream sections are recognizable by their hydraulic characteristics. The rapid movement of water over a coarse substrate in riffles results in a rough flow, a turbulent surface, and high dissolved oxygen levels in the water. Pools are deeper areas associated with riffles. A slower stream velocity, a streaming flow, a smooth surface, and a finer substrate characterize pools.

Riparian areas: Riparian areas are lands next to streams, lakes, and estuarine-marine shorelines. Riparian areas are transitional between terrestrial and aquatic ecosystems, through which surface and subsurface hydrology connects riverine, lacustrine, estuarine, and marine waters with their adjacent wetlands, non-wetland waters, or uplands. Riparian areas provide a variety of ecological functions and services and help improve or maintain local water quality. (See general condition 23.)

Shellfish seeding: The placement of shellfish seed and/or suitable substrate to increase shellfish production. Shellfish seed consists of immature individual shellfish or individual shellfish attached to shells or shell fragments (i.e., spat on shell). Suitable substrate may consist of shellfish shells, shell fragments, or other appropriate materials placed into waters for shellfish habitat.

Single and complete linear project: A linear project is a project constructed for the purpose of getting people, goods, or services from a point of origin to a terminal point, which often involves multiple crossings of one or more waterbodies at separate and distant locations. The term “single and complete project” is defined as that portion of the total linear project proposed or accomplished by one owner/developer or partnership or other association of owners/developers that includes all crossings of a single water of the United States (i.e., a single waterbody) at a specific location. For linear projects crossing a single or multiple waterbodies several times at separate and distant locations, each crossing is considered a single and complete project for purposes of NWP authorization. However, individual channels in a braided stream or river, or individual arms of a large, irregularly shaped wetland or lake, etc., are not separate waterbodies, and crossings of such features cannot be considered separately.

Single and complete non-linear project: For non-linear projects, the term “single and complete project” is defined at 33 CFR 330.2(i) as the total project proposed or accomplished by one owner/developer or partnership or other association of owners/developers. A single and complete non-linear project must have independent utility (see definition of “independent utility”). Single and complete non-linear projects may not be “piecemealed” to avoid the limits in an NWP authorization.

Stormwater management: Stormwater management is the mechanism for controlling stormwater runoff for the purposes of reducing downstream erosion, water quality degradation, and flooding and mitigating the adverse effects of changes in land use on the aquatic environment.

Stormwater management facilities: Stormwater management facilities are those facilities, including but not limited to, stormwater retention and detention ponds and best management practices, which retain water for a period of time to control runoff and/or improve the quality (i.e., by reducing the concentration of nutrients, sediments, hazardous substances and other pollutants) of stormwater runoff.

Stream bed: The substrate of the stream channel between the ordinary high water marks. The substrate may be bedrock or inorganic particles that range in size from clay to boulders. The substrate may also be comprised, in part, of organic matter, such as large or small wood fragments, leaves, algae, and other organic materials. Wetlands contiguous to the stream bed, but outside of the ordinary high water marks, are not considered part of the stream bed.

Stream channelization: The manipulation of a stream's course, condition, capacity, or location that causes more than minimal interruption of normal stream processes. A channelized jurisdictional stream remains a water of the United States.

Structure: An object that is arranged in a definite pattern of organization. Examples of structures include, without limitation, any pier, boat dock, boat ramp, wharf, dolphin, weir, boom, breakwater, bulkhead, revetment, riprap, jetty, artificial island, artificial reef, permanent mooring structure, power transmission line, permanently moored floating vessel, piling, aid to navigation, or any other manmade obstacle or obstruction.

Tidal wetland: A tidal wetland is a jurisdictional wetland that is inundated by tidal waters. Tidal waters rise and fall in a predictable and measurable rhythm or cycle due to the gravitational pulls of the moon and sun. Tidal waters end where the rise and fall of the water surface can no longer be practically measured in a predictable rhythm due to masking by other waters, wind, or other effects. Tidal wetlands are located channelward of the high tide line.

Tribal lands: Any lands title to which is either: 1) held in trust by the United States for the benefit of any Indian tribe or individual; or 2) held by any Indian tribe or individual subject to restrictions by the United States against alienation.

Tribal rights: Those rights legally accruing to a tribe or tribes by virtue of inherent sovereign authority, unextinguished aboriginal title, treaty, statute, judicial decisions, executive order or agreement, and that give rise to legally enforceable remedies.

Vegetated shallows: Vegetated shallows are special aquatic sites under the 404(b)(1) Guidelines. They are areas that are permanently inundated and under normal circumstances have rooted aquatic vegetation, such as seagrasses in marine and estuarine systems and a variety of vascular rooted plants in freshwater systems.

Waterbody: For purposes of the NWP, a waterbody is a "water of the United States." If a wetland is adjacent to a waterbody determined to be a water of the United States, that waterbody and any adjacent wetlands are considered together as a single aquatic unit (see 33 CFR 328.4(c)(2)).

DocuSign Envelope ID: 72785528-7EB9-4485-8B68-29FEA0BF1497

**STATE OF NORTH CAROLINA  
DEPARTMENT OF ENVIRONMENTAL QUALITY  
DIVISION OF WATER RESOURCES**

**WATER QUALITY GENERAL CERTIFICATION NO. 8569**

**GENERAL CERTIFICATION FOR PROJECTS ELIGIBLE FOR US ARMY CORPS OF ENGINEERS  
NATIONWIDE PERMIT NUMBER 14 (LINEAR TRANSPORTATION PROJECTS)**

Water Quality General Certification Number 8569 is issued in conformity with the requirements of Section 401, Public Laws 92-500 and 95-217 of the United States and subject to the North Carolina Regulations in 15A NCAC 02H .0500 and 15A NCAC 02B .0200 for the discharge of fill material to surface waters and wetland areas as described in the corresponding Nationwide Permit issued pursuant to 33 CFR 330 of the US Army Corps of Engineers regulations.

The State of North Carolina certifies that the specified category of activity will comply with water quality requirements and applicable portions of Sections 301, 302, 303, 306 and 307 of the Public Laws 92-500 and 95-217 if conducted in accordance with the conditions hereinafter set forth.

Effective date: March 15, 2026

Signed this day: December 15, 2025

By

DocuSigned by:  
*Richard E. Rogers, Jr.*  
B2B16AD426A64B6...

Richard E. Rogers, Jr.  
Director

GC8569

**GENERAL CERTIFICATION COVERAGE:**

**Activities authorized by Coastal Area Management Act (CAMA) General Permits that are eligible for US Army Corps of Engineers Nationwide Permit 14 qualify for coverage under this General Certification as long as they comply with all of the Activity Specific and General Conditions of this Certification listed below.**

**Activities are eligible for US Army Corps of Engineers Nationwide Permit 14 qualify for coverage under this General Certification unless they meet one of the thresholds listed below. Activities meeting any one (1) of the thresholds or circumstances listed below are not eligible for coverage under this General Certification and therefore require an Individual 401 Water Quality Certification from the Division of Water Resources (DWR).**

- a) If any of the conditions of this General Certification cannot be met; or
- b) Total permanent impacts to streams greater than or equal to 300 linear feet; or
- c) Total permanent impacts to wetlands equal to or greater than one-half (1/2) acre; or
- d) Total permanent impacts to open waters equal to or greater than one-half (1/2) acre; or
- e) Any project proposing to satisfy compensatory mitigation through Permittee Responsible Mitigation; or
- f) Any high-density project, as determined by the density thresholds and criteria specified in 15A NCAC 02H .1017(4) which triggers all of the following thresholds:
  - i. Proposes to disturb one acre or more of land (including a project that disturbs less than one acre of land that is part of a larger common plan of development or sale); and
  - ii. Has permanent wetland, stream, or open water impacts; and
  - iii. Is proposing new built-upon area; and
  - iv. Is not subject to a stormwater management plan review and approval under a state stormwater program<sup>1</sup> or a state-approved local government stormwater program<sup>2</sup>, or has vested rights, exemptions, or other legacy rights or exemptions from state or locally implemented stormwater programs or propose to satisfy state or locally-implemented stormwater programs through use of community in-lieu fee programs

**For the purposes of the thresholds above (a-f), the Permittee shall account for all impacts from the Single and Complete Project (e.g. impacts from dedicated borrow and waste sites, impacts from associated infrastructure/utilities) as determined by the US Army Corps of Engineers, and all secondary indirect impacts resulting from the proposed activities.**

**Activities listed under Section I of this General Certification must receive a Certificate of Coverage from DWR prior to initiation of any activities covered by this General Certification.**

<sup>1</sup> e.g. Coastal Counties, HQW, ORW, or state-implemented Phase II NPDES

<sup>2</sup> e.g. Delegated Phase II NPDES, Water Supply Watershed, Nutrient-Sensitive Waters, or Universal Stormwater Management Program

## GC8569

**I. NOTIFICATION AND REQUIREMENTS FOR CERTIFICATE OF COVERAGE:**

**Activities listed in this Section must obtain a Certificate of Coverage from DWR prior to initiation of any activities covered by this General Certification.**

***If the activity is authorized or proposed for authorization by a Coastal Area Management Act (CAMA) Major Permit, then skip to k) in this list.***

- a) Total permanent impacts to streams greater than or equal to 150 linear feet, including any topographic/slope stabilization or in-stream stabilization needed for stream crossings; or
- b) Total temporary and permanent impacts to wetlands equal to or greater than one-tenth (1/10) of an acre; or
- c) Total temporary and permanent impacts to open waters and/or ditches subject to Section 404 of the Clean Water Act (CWA) equal to or greater than one-half (1/2) of an acre; or
- d) Any impacts to streams or wetlands from excavation or dredging other than excavation that is conducted as preparation for installing permanent fill or structures; or
- e) Any stream restoration or relocation, other than stream relocations that are conducted for the purpose of proper culvert installation, alignment, protection, repair or maintenance where the relocation length is equal to or less than 50 feet in length and the relocated stream is designed and installed based on current natural channel techniques; or
- f) Any permanent impacts to waters, or to wetlands adjacent to waters, designated as: ORW (including SAV), HQW (including PNA), SA, WS-I, WS-II, or North Carolina or National Wild and Scenic River; or
- g) Any permanent impacts to waters, or to wetlands adjacent to waters, designated as Trout unless:
  - i. The impacts are not adjacent to any existing structures; and
  - ii. All conditions of this General Certification can be met, including adherence to any moratoriums as stated in General Condition II.9; and
- h) Any permanent impacts to coastal wetlands [15A NCAC 07H .0205], or Unique Wetlands (UWL) [15A NCAC 02B .0231]; or
- i) Any sediment and erosion control measures installed in wetlands or waters beyond the footprint of temporary and/or permanent wetland and/or waters impacts covered by this General Certification; or
- j) Any impacts to streams and/or open waters that are subject to state regulated riparian buffers in the Neuse, Tar-Pamlico, or Catawba River Basins or in the Randleman Lake, Jordan Lake or Goose Creek Watersheds (or any other basin or watershed with State Regulated Riparian Area Protection Rules [15A NCAC 02B .0714; 15A NCAC 02B .0734; 15A NCAC 02B .0614; 15A NCAC 02B .0724; 15A NCAC 02B .0267; 15A NCAC 02B .0607] in effect at the time of application) *unless*:

GC8569

- i. The activities are listed as “EXEMPT” or “DEEMED ALLOWABLE” from these rules; or
  - ii. A Buffer Authorization Certificate is issued by the NC Division of Coastal Management (DCM); or
  - iii. A Buffer Authorization Certificate, Certificate with Exception, or Minor Variance is issued by a delegated or designated local government implementing a state riparian buffer program pursuant to 143-215.23; or
  - iv. Site access, equipment storage, and work is done solely from or in the water, avoiding all land disturbance in or near the buffer.
- k) Activities authorized or proposed for authorization by a Coastal Area Management Act (CAMA) Major Permit **except for** projects that are covered by any one of the following criteria:
- i. Boat Ramps and associated necessary infrastructure (i.e. roads and parking lots) that comply with all of the following:
    - A. Excavation or fill of wetlands and/or open water area is less than 500 square feet total; and
    - B. Excavation or fill of coastal wetlands (as defined in 15A NCAC 07H .0205) is equal to or less than 100 square feet;
  - ii. Living shorelines/marsh sills that comply with all of the following:
    - A. the landward edge of the sill does not extend waterward of the normal high water or normal water line more than 30 feet or five feet waterward of the existing wetlands whichever distance is greater; and
    - B. the activity will not involve the excavation or fill of any Submerged Aquatic Vegetation (SAV); and
    - C. the activity will not involve the excavation or fill of significant shellfish resources (as identified by the Division of Marine Fisheries); and
    - D. the activity does not result in any fill landward of the toe of the sill alignment; or
  - iii. All other shoreline protection measures not covered by item ii above that comply with all of the following:
    - A. tie into existing bulkheads, land, or other shoreline protection measures or do not extend waterward of the normal high water or normal water line more than 10 feet; and
    - B. the activity will not involve the excavation or fill of any Submerged Aquatic Vegetation (SAV); and
    - C. the activity will not involve the excavation or fill of significant shellfish resources (as identified by the Division of Marine Fisheries); and
    - D. Excavation or fill of wetlands and/or open water area is less than 500 square feet total; and
    - E. Excavation or fill of coastal wetlands (as defined in 15A NCAC 07H .0205) is equal to or less than 100 square feet;
  - iv. Piers and docks designed to accommodate up to, but not exceeding, 10 vessels that comply with all of the following:

## GC8569

- A. the water depth is equal to or greater than two feet of water at normal low water level or normal water level (whichever is applicable); and
  - B. they are not located within Outstanding Resource Waters (ORW) as defined in 15A NCAC 02B. 0225;
- v. Any other projects that involve only shading of waters or wetlands that are not covered by item (iv) above;
- vi. Maintenance dredging to restore the documented historical dimensions of the dredged channel of less than 0.5 acres of open water or non-vegetated wetlands, that comply with all of the following:
  - A. the activity will not involve the excavation or fill of any Submerged Aquatic Vegetation (SAV); and
  - B. the activity will not involve the excavation or fill of significant shellfish resources (as identified by the Division of Marine Fisheries); and
- vii. Utility lines as long as all impacts are temporary;
- viii. New development (impacts shall include the entire project, including but not limited to: boat ramps, bulkheads or other shoreline stabilization measures) that comply with all of the following:
  - A. Excavation or fill of non-coastal wetlands and/or open water area is less than 1/10 acre total; and
  - B. Excavation or fill within a Coastal Shoreline Area of Environmental Concern (AEC) is no more than 2,000 square feet

**For the purposes of the thresholds above (a-k), the Permittee shall account for all impacts from the Single and Complete Project (e.g. impacts from dedicated borrow and waste sites, impacts from associated infrastructure/utilities) as determined by the US Army Corps of Engineers, and all secondary indirect impacts resulting from the proposed activities.**

**A note:** In accordance with 15A NCAC 02H .0506(c) and Session Law 2017-10, compensatory mitigation is required for losses from the entire single and complete project of greater than or equal to 300 linear feet of perennial streams and/or greater than or equal to 0.10 acre of wetlands, whether a Certificate of Coverage or an Individual is required.

## II. ACTIVITY SPECIFIC CONDITIONS

1. Disturbed streambanks shall be stabilized at the end of each working day to ensure downstream water quality standards are maintained throughout construction. Streambanks shall be permanently stabilized with native riparian vegetation when practical. Temporary vegetation utilized for immediate stabilization and erosion control shall consist of native vegetation or annual vegetation such that it will not compete with permanent vegetation.  
*Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
2. If this Water Quality Certification is used to access residential, commercial or industrial building sites, then all parcels owned by the permittee that are part of the single and complete project authorized by this Certification must be buildable without additional impacts to streams or wetlands.



## GC8569

*Citation: 15A NCAC 02H .0502(a); 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

*If this Water Quality Certification is used for utility-related impacts, then the following Activity Specific Conditions shall apply to those impacts.*

3. Any construction corridor that is parallel to a stream or open water shall not be closer than 10 feet to the top of bank or ordinary high-water mark. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
4. Where there are temporary or permanent impacts from stream crossings, underground utility lines shall cross the stream channel at a near-perpendicular direction (i.e., between 75 degrees and 105 degrees to the stream bank). Utility line replacements within existing easements or alignments may follow the existing alignments. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
5. Construction corridors in wetlands and/or across stream channels shall be minimized to the maximum extent practicable and shall not exceed 40 feet wide.

For construction corridors in wetlands and across stream channels, stumps shall be grubbed only as needed to install the utility line, and remaining stumps shall be cut off at grade level. The general stripping of topsoil within wetlands along the construction corridor is prohibited. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

6. Permanent maintained access corridors in wetlands and across stream channels shall be restricted to the minimum width practicable and shall not exceed 30 feet wide for underground utilities. For parallel adjacent lines with less than 20 feet between them, the permanent maintained corridor shall be restricted to the minimum width practicable not to exceed 15 feet from the edge of the outer most lines. Parallel adjacent lines with 20 feet or more between them shall be treated as individual lines with the access corridor the minimum width practicable not to exceed 30 feet wide for each line. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
7. For all utility lines constructed within wetlands, an anti-seep collar shall be placed at the downstream (utility line gradient) wetland boundary and every 150 feet up the gradient until the utility exits the wetland. Anti-seep collars may be constructed with class B concrete, compacted clay, PVC pipe, or metal collars. Wetland crossings that are directionally drilled, and perpendicular wetland crossings that are open cut and less than 150 feet long do not require anti-seep collars. The compacted clay shall have a specific infiltration of  $1 \times 10^{-5}$  cm/sec or less. A section and plan view diagram is attached for the anti-seep collars.

The following specifications shall apply to class B concrete:

- i. Minimum cement content, sacks per cubic yard with rounded coarse aggregate 5.0
- ii. Minimum cement content, sacks per cubic yard with angular coarse aggregate 5.5
- iii. Maximum water-cement ratio gallons per sack 6.8
- iv. Slump range 2" to 4"
- v. Minimum strength - 28-day psi 2,500

## GC8569

*Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

8. The permittee shall restore wetland contours to pre-construction conditions. Any excess material will be removed to a high ground disposal area.

The mixing of topsoil and subsoils within the wetlands along utility corridors shall be minimized to the greatest extent practical. During excavation, the soils shall be placed on fabric to minimize impacts whenever possible. Topsoil excavated from utility trenches will be piled separately from subsoils and will be backfilled into the trench only after the subsoils have been placed and compacted. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

### III. GENERAL CONDITIONS

1. For all activities that require a Certificate of Coverage under Section I of this General Certification: The Certificate of Coverage is issued specifically for the plans, specifications, and associated application materials for the proposed project approved by DWR by the issuance of the COC. Any final construction plans for a project must include or reference the application and plans submitted to the DWR. The Permittee must evaluate all other acquired permits to ensure that they are consistent with the plans submitted to the DWR, and all relative impacts are accounted for and shown on the final construction plans. Any modifications or additional impacts to streams and/or wetlands within the project require the permittee to notify the DWR and may require submission of a new application package with the appropriate fee to redetermine eligibility under this General Certification. *Citation: 15A NCAC 02H .0506(b)(2) and (3); 15A NCAC 02H .0507(c)*
2. If the property is sold, the Permittee shall provide the new owner with a copy of this General Certification and all plans and specifications incorporated by reference for all activities that require a Certificate of Coverage under Section I of this General Certification. The Permittee may transfer a certificate of coverage issued under this General Certification to the new owner by submitting a letter to the Division with the following statement: *"At the time the property is transferred, the terms and conditions of this 401 Individual Water Quality General Certification, including the responsibility to ensure compliance, are binding on the new owner(s) of the property."* The letter shall be signed and dated by both the transferee and the new owner. *Citation: 15A NCAC 02H .0507(d)(2)*
3. For all projects that include multiple parcels and/or lots, including transportation and/or utility-related projects installed as infrastructure for multiple parcels and/or lots, deed notifications or similar mechanisms shall be placed on all lots/parcels that include jurisdictional wetlands, streams, open waters, and state-regulated riparian buffers within the overall project boundaries. These mechanisms shall be put in place at the time of recording of the property or individual parcels, whichever is appropriate. *Citation: 15A NCAC 02H .0502(a); 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

## GC8569

4. The Permittee shall allow the Director, or an authorized representative (including an authorized contractor acting as a representative of the Director), upon the presentation of credentials and other documents as may be required by law, to: *Citation: 15A NCAC 02H .0502(e); 15A NCAC 02H .0507(c)*
  - a. Enter, at reasonable times, upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this certificate;
  - b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this certificate;
  - c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this certificate; and
  - d. Sample or monitor at reasonable times, for the purposes of assuring certificate compliance or as otherwise authorized by the Clean Water Act, any substances or parameters at any location
5. In accordance with 15A NCAC 02H .0506(c) and Session Law 2017-10, compensatory mitigation is required for losses from the entire single and complete project of greater than or equal to 300 linear feet of perennial streams and/or greater than or equal to 0.10 acre of wetlands. For linear publicly owned and maintained transportation projects that have not been determined to be part of a larger common plan of development, the stream mitigation threshold is applied per perennial stream. The Compensatory Mitigation Responsibility Transfer (CMRT) Form(s) attached to the Certificate of Coverage issued for a specific project, shall be completed and provided to DWR prior to **any** impacts occurring. If the Mitigation Provider specified in the CMRT Form(s) changes after issuance of the Certificate of Coverage or Individual Certificate with MRT Form, then the Permittee shall request a revised CMRT Form from DWR prior to conducting any impacts. *Citation: 15A NCAC 02H .0506(c); 15A NCAC 02H .0507(c)*
6. For High Density Development projects subject to a State, or State approved Local Government Delegated Program, the Permittee shall secure an *approved* stormwater management plan (SMP) from the appropriate agency **before any** impacts authorized in this Certification occur. Before any permanent building or other permanent structure is occupied at the site the permanent stormwater management control measures or devices for the building and/or structures shall be constructed and operational. If any Erosion and Sediment Control devices share locations with any of the Stormwater Control Measures, the area must be restored to the approved stormwater design condition within 30 days of close-out of the Erosion and Sediment Control Plan. *Citation: 15A NCAC 02H .0506(b)(2) and (3); 15A NCAC 02H .0507(c)*

## GC8569

7. For phased projects with conceptual future phases, when final design plans are completed, the Permittee shall ensure that final designs shall reflect all appropriate avoidance and minimization of impacts to wetlands, streams, and other surface waters. For projects that have been issued a Certificate of Coverage under this General Certification, the Permittee shall submit a request for a modified Certificate of Coverage if the impacts from the final design differ from those identified in the existing Certificate of Coverage. No construction activities (including temporary impacts) shall begin at such impact locations until a new Certificate of Coverage has been secured. *Citation: 15A NCAC 02H .0506(b)(2) and (3); 15A NCAC 02H .0507(c)*
8. All wetlands, streams, and surface waters located within the limits of disturbance and within 50 feet of the limits of disturbance/construction area on the project site shall be clearly marked (example- orange fabric fencing) prior to any land disturbing activities. The marking/fencing shall be maintained until the project or project phase is completed. Impacts to areas within the marked area/fencing are prohibited unless otherwise authorized by this certification. *Citation: 15A NCAC 02H .0506(b)(2); 15A NCAC 02H .0507(c)*
9. When requested by DWR, the Permittee and/or authorized agent shall schedule a pre-construction meeting with DWR, shall contact the appropriate DWR Regional Office upon project commencement of construction, shall submit a Certificate of Completion and/or shall provide as-built documentation. *Citation: 15A NCAC 02H .0502(e); 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
10. For projects that include draining a pond or lake, appropriate erosion and sediment control measures shall be utilized while draining the pond or lake to ensure limited impact to downstream waters as well as to native aquatic species. Such measures shall also be utilized to avoid any sediment release into downstream waters as a result of pond draining. The permittee shall observe any natural channel re-establishment, or utilize natural channel construction techniques, to ensure that the jurisdictional stream channel above and below the drained pond remain stable, and that no additional impacts occur within the natural stream channel as a result of draining the pond. The Permittee shall consult with NCWRC prior to the relocation or release of any aquatic species during pond draining or dam removal activities. During pond or lake refill, sufficient flow shall be continually released to the receiving stream to ensure aquatic life survival and maintenance of biological integrity. *Citation: 15A NCAC 02H .0506(b)(2); 15A NCAC 02H .0507(c)*
11. The permittee shall report to the appropriate DWR Regional Office any noncompliance with, and/or any violation of, stream or wetland standards [15A NCAC 02B .0200], including but not limited to sediment impacts to streams or wetlands. Information shall be provided orally within 24 hours (or the next business day if a weekend or holiday) from the time the permittee became aware of the non-compliance circumstances. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

## GC8569

12. A copy of this General Certification, and when applicable, the Certificate of Coverage, shall be retained on site during the construction and maintenance of this project, or with the project manager, and be available for inspection at all times. The Permittee shall require its contractors and/or agents to comply with the terms and conditions of this permit in the construction and maintenance of this project and shall provide each of its contractors and/or agents associated with the construction or maintenance of this project with a copy of this General Certification. If the Permittee becomes aware of any inability to comply with any of the conditions of this General Certification, they must notify the appropriate Regional Office within 24 hours (or the next business day if a weekend or holiday) from the time the Permittee becomes aware of the circumstances. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
13. No additional temporary or permanent impacts from waste, spoil, solids, fill, excavation, or staging of equipment, shall occur in wetlands or waters beyond the footprint of the impacts (including temporary impacts) identified in a Certificate of Coverage; or for projects that do not require a Certificate of Coverage; beyond the thresholds established for use of this General Certification. *Citation: 15A NCAC 02H .0506; 15A NCAC 02H .0507(c)*
14. All activities shall be in compliance with any applicable State Regulated Riparian Buffer Rules in Chapter 2B of Title 15A in the North Carolina Administrative Code. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
15. When applicable, all construction activities shall be performed and maintained in full compliance with G.S. Chapter 113A Article 4 (Sedimentation Pollution Control Act of 1973). Regardless of applicability of the Sedimentation Pollution Control Act, all projects shall incorporate appropriate Best Management Practices for the control of sediment and erosion so that no violations of state water quality standards, statutes, or rules occur.

Design, installation, operation, and maintenance of all sediment and erosion control measures shall be equal to or exceed the requirements specified in the most recent version of the *North Carolina Erosion and Sediment Control Planning and Design Manual*, or the *North Carolina Department of Transportation Erosion and Sediment Control Design and Construction Manual*.

Appropriate measures should be installed prior to any land clearing activities to protect wetlands, streams, and/or buffers from turbidity and/or sedimentation. These measures should be routinely inspected and properly maintained, and excavated materials should be contained outside wetland, stream, and/or buffer boundaries.

For installation of bridges that involve driving or drilling activities within stream channels, open waters, or along streambanks turbidity curtains shall be installed within the surface water.

## GC8569

All devices shall be maintained on all construction sites, borrow sites, and waste pile (spoil) sites, including contractor-owned or leased borrow pits associated with the project. Sufficient materials required for stabilization and/or repair of erosion control measures and stormwater routing and treatment shall be on site at all times.

For borrow pit sites, the erosion and sediment control measures shall be designed, installed, operated, and maintained in accordance with the most recent version of the *North Carolina Surface Mining Manual*. Reclamation measures and implementation shall comply with the reclamation in accordance with the requirements of the Sedimentation Pollution Control Act and the Mining Act of 1971.

If the project occurs in waters or watersheds classified as Primary Nursery Areas (PNAs), SA, WS-I, WS-II, High Quality Waters (HQW), or Outstanding Resource Waters (ORW), then the sedimentation and erosion control designs shall comply with the requirements set forth in 15A NCAC 04B .0124, *Design Standards in Sensitive Watersheds*. Citation: 15A NCAC 02H .0506(b)(2); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200; 15A NCAC 02B .0231

16. Sediment and Erosion Control Measures (S&EC) in wetlands or waters should be avoided to the maximum extent possible and any S&EC occurring in wetlands or waters shall be restored to pre-existing conditions upon completion of the project. The Permittee shall utilize sediment and erosion control measures that avoid and minimize the need for the placement of silt fence along streams at the normal water level. Where measures are placed within authorized impact areas then placement of such measures shall not be conducted in a manner that results in a loss of function of any wetlands, streambeds, or streambanks. Any erosion control measures, including silt fence, installed within wetlands shall be removed from wetlands and the natural grade restored and revegetated within two (2) months of the date the appropriate sediment and erosion control program has released the specific area within the project to ensure wetland standards are maintained upon completion of the project. Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200; 15A NCAC 02B .0231
17. Erosion control matting shall not be placed within a stream bed. Erosion control matting that incorporates plastic mesh and/or plastic twine shall not be used along streambanks or within wetlands. Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)
18. If the project is covered by NPDES Construction Stormwater Permit Number NCG010000 or NPDES Construction Stormwater Permit Number NCG250000, full compliance with permit conditions including the erosion and sedimentation control plan, inspections and maintenance, self-monitoring, record keeping and reporting requirements is required. 15A NCAC 02H .0506(b) and (c); 15A NCAC 02H .0507(c)
19. The North Carolina Department of Transportation (NCDOT) shall maintain full compliance with the conditions related to construction activities and post construction stormwater design, construction and maintenance, within the most recent version of their Individual NPDES Stormwater Permit Number NCS000250. Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200; 15A NCAC 02B .0231

## GC8569

20. For projects impacting waters classified by the NC Environmental Management Commission as High Quality Waters (HQP), including Water Supply I or II (WSI, WSII) and/or as Outstanding Resources Waters (ORW) post construction stormwater shall be managed in accordance with 15A NCAC 02B .0224(d) or .0225 as applicable.
21. All work in or adjacent to streams, ponds, lakes, and reservoirs shall be conducted so that the work area is isolated from surface waters. Approved best management practices from the most current version of the DEMLR [NC Erosion and Sediment Control Planning and Design Manual](#), or the *NC Department of Transportation Best Management Practices For Construction and Maintenance Activities Manual*, such as sandbags, rock berms, cofferdams, pump-arounds, and other diversion structures shall be used to minimize excavation in flowing water. Water that comes in contact with the work area shall be treated through an appropriate sediment/erosion control measure (sediment basin, filter bag, etc) prior to discharging to a surface water. All temporarily disturbed areas for the purpose of isolation/dewatering shall be restored to original grade, including each stream's original cross-sectional dimensions, planform pattern, and longitudinal bed profile. All temporarily impacted sites shall be restored and stabilized with native vegetation as practicable. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200*
22. For all activities that require a Certificate of Coverage under Section I of this General Certification: *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 04B .0125*

The Permittee shall allow NCWRC and/or DMF to implement pre-construction species surveys and relocations. The Permittee shall adhere to NCWRC and/or DMF recommended moratoria. If NCWRC and/or DMF provides recommended design modifications to protect federally/state listed aquatic species, the permittee shall implement these to the degree possible. If the recommended conditions cannot be met, a project proponent may apply for coverage under an individual 401 water quality certification.

For all other activities:

Work within a designated trout watershed as identified by the Wilmington District of the US Army Corps of Engineers or work within identified state or federal endangered or threatened species habitat shall be coordinated with NCWRC and/or DMF prior to initiating of project activities.

The Permittee shall adhere to NCWRC and/or DMF recommended moratoria. Exceptions to this condition require written approval by the resource agency responsible for the given moratorium. If activities must occur during periods of high biological activity of aquatic species (e.g. sea turtle nesting, fish spawning, or bird nesting) all biological surveys, relocations, and/or monitoring requested by the state agency must be conducted.

GC8569

23. Culverts shall be designed and installed in such a manner that the original stream profiles are not altered and allows for aquatic life movement during low flows. The dimension, pattern, and profile of the stream above and below a pipe or culvert shall not be modified by widening the stream channel or by reducing the depth of the stream in connection with the construction activity. The width, height, and gradient of a proposed culvert shall be such as to pass the average historical low flow and spring flow without adversely altering flow velocity. If the width of the culvert is wider than the stream channel, the culvert shall include multiple boxes/pipes, baffles, benches and/or sills to maintain the natural width of the stream channel. If multiple culverts/pipes/barrels are used, low flows shall be accommodated in one culvert/pipe and additional culverts/pipes shall be installed such that they receive only flows above bankfull.

Placement of culverts and other structures in streams shall also meet one of the following requirements:

- a. For structures less than 72" in diameter/width and in area where topographic constraints dictate culvert slopes will be greater than 2.5%, culverts shall be installed "at grade" such that low flow conditions in the stream are maintained provided that all alternative options for flattening the slope have been investigated and aquatic life movement/connectivity has been provided when possible (e.g. rock ladders, cross-vanes, sills, baffles etc.); or
- b. When bedrock is present in culvert locations, culvert burial is not required, provided that there is documentation of the presence of bedrock.
- c. For all other culverts:
  - i. Culverts with a diameter greater than 48 inches shall be below the elevation of the streambed by one foot
  - ii. Culverts with diameter less than or equal to 48 inches shall be below the streambed by 20% of the culvert diameter

If a culvert outlet is submerged within a pool or scour hole and designed to provide for aquatic passage, then culvert burial into the streambed is not required.

Documentation such as a location map of the culvert, culvert profile drawings, slope calculations, geotechnical reports, photographs, etc. shall be provided to DWR upon written request.

For culvert replacements within the same location/footprint, and of similar length, culverts shall be designed and installed to meet the above requirements of this Condition unless prohibited by existing conditions on site, such as existing infrastructure or topographic constraints.



## GC8569

Installation of culverts in wetlands shall ensure continuity of water movement and be designed to adequately accommodate high water or flood conditions. When roadways, causeways, or other fill projects are constructed across FEMA-designated floodways or wetlands, openings such as culverts or bridges shall be provided to maintain the natural hydrology of the system as well as prevent constriction of the floodway that may result in destabilization of streams or wetlands.

The establishment of native woody vegetation and other soft stream bank stabilization techniques shall be used where practicable instead of rip-rap or other bank hardening methods. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

24. Bridge piles and bents shall be constructed using driven piles (hammer or vibratory) or drilled shaft construction methods. More specifically, jetting or other methods of pile driving are prohibited under this General Certification. *15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200*
25. Unless already approved by an NPDES permit, bridge deck drains shall not discharge directly into the stream. Stormwater shall be directed across the bridge and pre-treated through site-appropriate means to the maximum extent practicable (e.g. grassed swales, pre-formed scour holes, vegetated buffers, etc.) before entering the stream. This condition may be waived with prior written approval from the NCDWR. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*
26. Application of fertilizer to establish planted/seeded vegetation within disturbed riparian areas and/or wetlands shall be conducted at agronomic rates and shall comply with all other Federal, State and Local regulations. Fertilizer application shall be accomplished in a manner that minimizes the risk of contact between the fertilizer and surface waters. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0231*
27. Discharging hydroseed mixtures and washing out hydroseeders and other equipment in, or adjacent to, surface waters is prohibited. *Citation: 15A NCAC 02H.0506(b)*
28. If concrete is used during construction (including bulkhead components, such as deadman anchors, tie-back systems and concrete caps), then all necessary measures shall be taken to isolate the concrete from waters of the state by maintaining a dry work area to prevent direct contact between curing concrete and surface waters. Drill slurry and water that inadvertently contacts uncured concrete shall not be discharged to waters of the state. Water that inadvertently contacts uncured concrete shall not be discharged to surface waters due to the potential for elevated pH and possible aquatic life and fish kills. Any water that contacts uncured concrete shall be captured, treated, and disposed of properly. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200; 15A NCAC 02B .0231*

## GC8569

29. All temporary pipes, culverts, rip-rap pads etc. in streams shall be installed so as not to restrict stream flow or installed in such a manner that restricts aquatic life movement during low flow conditions. All temporary pipes and/or culverts shall be installed as outlined in the most recent edition of the *North Carolina Erosion and Sediment Control Planning and Design Manual* or the *North Carolina Surface Mining Manual* or the *North Carolina Department of Transportation Best Management Practices for Construction and Maintenance Activities*. Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)
30. All temporary fill and temporary culverts shall be removed, and the impacted area shall be returned to natural conditions, within 60 calendar days after the temporary impact is no longer necessary. The impacted areas shall be restored to original grade, including each stream's original cross-sectional dimensions, planform pattern, and longitudinal bed profile. All temporarily impacted sites shall be restored and stabilized with native vegetation when practicable. For all areas where wetlands are impacted by temporary roads constructed by temporary fill material, the Permittee shall remove the fill material and conduct activities necessary to restore preconstruction hydrology by addressing soil compaction. When temporary fill has been added to wetlands, or heavy equipment has been placed within a wetland, the Permittee shall ensure restoration of preconstruction soil conditions when restoring wetland areas. Upon restoration of the wetland, the Permittee shall inspect the area quarterly for a minimum of two years to document successful restoration. The Permittee shall provide documentation of inspections to DWR when requested. The monitoring requirement can be relieved with review and written approval by DWR. If the area is not restored to preconstruction conditions the impacts shall be considered permanent, and the Permittee shall request a modified Certificate of Coverage from DWR. With prior written approval from DWR, removal of temporary fill and temporary culverts and restoration of the impacted area may be postponed to accommodate moratorium periods. Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)
31. Demolition of existing structures, such as culvert or bridge removal, shall be conducted to ensure water quality standards are maintained. NCDOT activities shall adhere to NCDOT's *Best Management Practices for Construction and Maintenance Activities*. Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200
32. Any rip-rap or other armoring materials required for proper culvert placement, stream stabilization, or restoration of temporarily disturbed areas shall be restricted to the area directly impacted by the construction activity covered by this General Certification. All rip-rap or other non-natural armoring material placed in streams shall be placed such that the original streambed elevation and streambank contours are restored, and that the finished elevation of the rip rap shall not exceed that of the original stream bed. All rip-rap or other armoring materials shall consist of clean rock or masonry material free of debris or toxic pollutants. Placement of rip-rap or other armoring materials shall not result in destabilization of the stream bed or banks upstream or downstream of the area or be installed in a manner that precludes aquatic life passage. Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)

## GC8569

33. Any rip-rap or other non-natural armoring material (i.e. gabion baskets, revetments, bulkheads, seawalls, retaining walls) used for stream or shoreline stabilization shall be of a size and density to prevent movement by wave, current action, or stream flows, and shall consist of clean rock or masonry material free of debris or toxic pollutants. Rip-rap or other armoring materials shall not be installed in the streambed except in specific areas required for velocity control and to ensure structural integrity of bank stabilization measures. Any rip-rap or other armoring materials placed in the streambed shall be such that the finished elevation of the rip rap or other armoring materials shall not exceed that of the original stream bed. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0201*
34. Rip-rap groins proposed in accordance with 15A NCAC 07H .1401 (NC Division of Coastal Management General Permit for construction of Wooden and Rip-rap Groins in Estuarine and Public Trust Waters) shall meet all the specific conditions for design and construction specified in 15A NCAC 07H .1405. *Citation: 15A NCAC 02H .0507(c); 15A NCAC 07H .1400*
35. All mechanized equipment operated near surface waters shall be inspected and maintained regularly to prevent contamination of surface waters from fuels, lubricants, hydraulic fluids, or other toxic materials. Construction shall be staged in order to minimize the exposure of equipment to surface waters to the maximum extent practicable. Fueling, lubrication, and general equipment maintenance shall be performed in a manner to prevent, to the maximum extent practicable, contamination of surface waters by fuels and oils. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200*
36. Heavy equipment working in wetlands shall be placed on mats or non-impact equipment shall be used to ensure no disturbance and/or compaction of soil from equipment except within the footprint of the impacts covered by this Certification. Heavy equipment necessary for in stream activities shall be operated from the banks to the maximum extent practical and in no cases shall cause unstable stream banks or a violation of water quality standards. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0231*
37. In accordance with G.S. 143-215.85(b), the Permittee shall report any petroleum spill of 25 gallons or more; any spill regardless of amount that causes a sheen on surface waters; any petroleum spill regardless of amount occurring within 100 feet of surface waters; and any petroleum spill less than 25 gallons that cannot be cleaned up within 24 hours. *Citation: 15A NCAC 02H .0507(c); N.C.G.S 143-215.85(b)*
38. For all dam removal projects meeting the definition under G.S. 143-215.25 and requirements under G.S. 143-215.27 of a professionally supervised dam removal, the applicant shall provide documentation that any sediment that may be released has similar or lower level of contamination than sediment sampled from downstream of the dam in accordance with Session Law 2017-145. *Citation: 15A NCAC 02H .0502; 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c); 15A NCAC 02B .0200; S.L. 2017-145;*

## GC8569

39. The Permittee and their authorized agents shall conduct all activities in a manner consistent with State water quality standards (including any requirements resulting from compliance with §303(d) of the Clean Water Act), and any other appropriate requirements of State and Federal Law. *Citation: 15A NCAC 02H .0506(b); 15A NCAC 02H .0507(c)*

**IV. DEFINITIONS**

**Temporary Impacts:** Any impact that temporarily disturbs a stream, wetland, or open water and returns the disturbed area to pre-construction conditions, form and function or improved form and function within a duration that will ensure minimal disturbance to ecological function, including biological transport, migration, and reproduction.

**Permanent Impacts:** Any impact that modifies the form or function of a stream, wetland, or open water in a permanent manner, or for a duration that is sufficiently long to disrupt natural processes within the surface water. Examples include culverts, fill, riprap, streambank or shoreline stabilization, dredging, relocations, restoration. Permanent impacts may (1) improve the function of surface waters, such as stream and wetland restorations, (2) be neutral to the function of the surface waters, or (3) cause a reduction or loss of function of surface waters.

**Secondary Indirect Impacts** – Effects that are caused by the activity and are later in time or farther removed in distance but are still reasonably foreseeable. Secondary indirect impacts may (1) improve the function of surface waters, such as stream and wetland restorations, (2) be neutral to the function of the surface waters, or (3) cause a reduction or loss of function of surface waters.

**Stream Restoration** - the process of converting an unstable, altered, or degraded stream corridor, including adjacent riparian zone and flood-prone areas, to its natural or referenced stable conditions considering recent and future watershed conditions. This process also includes restoring the geomorphic dimension, pattern, and profile as well as biological and chemical integrity, including transport of water and sediment produced by the stream's watershed in order to achieve dynamic equilibrium. 'Reference' or 'reference reach' means a stable stream that is in dynamic equilibrium with its valley and contributing watershed. A reference reach can be used to develop natural channel design criteria for stream restoration projects.

**Stream Relocation** - Stream relocation is when a stream is moved laterally to a new location to allow a project, or part of a project, to be constructed in the stream's former location. For permitting purposes, stream relocations may be considered a loss of function pursuant to 15A NCAC 2H .0506(c) depending on the documented condition and location of the existing stream and the proposed design and success of the relocated stream.

## GC8569

**V. ADMINISTRATIVE PROVISIONS**

In accordance with 15A NCAC 02H .0506(b), the Director of the North Carolina Division of Water Resources may require submission of an application for an Individual Certification for any project if, based on the unique characteristics of the project, it is determined by the Director that the conditions in this general certification will not ensure that the proposed activity will comply with state water quality standards, which includes designated uses, numeric criteria, narrative criteria and the state's antidegradation policy.

This General Certification does not relieve the permittee of the responsibility to obtain all other required Federal, State, or Local approvals before proceeding with the project, including those required by, but not limited to, Sediment and Erosion Control, Non-Discharge, Water Supply Watershed, Division of Coastal Management and Trout Buffer regulations.

This General Certification, and any associated certificates of coverage, neither grants nor affirms any property right, license, or privilege in any waters, or any right of use in any waters. This General Certification does not authorize any person to interfere with the riparian rights, littoral rights, or water use rights of any other person and does not create any prescriptive right or any right of priority regarding any usage of water. This General Certification shall not be interposed as a defense in any action respecting the determination of riparian or littoral rights or other rights to water use. No consumptive user is deemed by virtue of this General Certification to possess any prescriptive or other right of priority with respect to any other consumptive user regardless of the quantity of the withdrawal or the date on which the withdrawal was initiated or expanded.

This General Certification shall expire on the same day as the expiration date of the corresponding Nationwide Permit. The conditions in effect on the date of issuance of Certification for a specific project shall remain in effect for the life of the project, regardless of the expiration date of this General Certification. For purposes of this paragraph for projects that do not require issuance of a certificate of coverage, the date of issuance shall be deemed to be the date that activities covered by this General Certification were initiated. This General Certification is rescinded when the US Army Corps of Engineers reauthorizes the corresponding Nationwide Permit or when deemed appropriate by the Director of the Division of Water Resources, consistent with the provisions of 15A NCAC 2H .0507.

Non-compliance with or violation of the conditions herein set forth by a specific project may result in revocation of any Certificate of Coverage issued under this General Certification for the project and may also result in criminal and/or civil penalties.

## RUTHERFORD COUNTY

TYPE OF WORK: GRADING, PAVING, DRAINAGE

See Sheet 1A For Index of Sheets

PERMIT DRAWING  
SHEET 1 OF 4

| SACRE | SACRED PROJECT EXPANSION NO. | PROJECT NO. | DESCRIPTION                 |
|-------|------------------------------|-------------|-----------------------------|
| N.C.  | HL-0065                      | I           | PE<br>ROW<br>UTIL<br>CONST. |
|       |                              |             |                             |
|       |                              |             |                             |
|       |                              |             |                             |
|       |                              |             |                             |



NOTES:

1. CLEARING LIMITS ON THIS PROJECT SHALL BE PERFORMED TO THE LIMITS ESTABLISHED BY METHOD II.
2. PORTIONS OF THIS PROJECT ARE WITHIN THE MUNICIPAL BOUNDARIES OF RUTHERFORDTON AND SPINDALE.
3. THIS IS A NO CONTROL-OF-ACCESS PROJECT EXCEPT WITHIN THE LIMITS OF THE ROUNDABOUT.

BEGIN TIP PROJECT HI-0065

- L1-STA, 11+8984

☆ EXISTING SIGNAL  
★ PROPOSED SIGNAL

**INCOMPLETE PLANS**  
DO NOT USE FOR R/W ACQUISITION

**DOCUMENT NOT CONSIDERED FINAL**  
UNLESS ALL SIGNATURES COMPLETED



---

---

**HYDRAULICS ENGINEER**

SIGNATURE: *P.E.*  
**ROADWAY DESIGN ENGINEER**

---

*SIGNATURE:* \_\_\_\_\_ *p.k.*

Prepared in the Office of:



RIGHT OF WAY DATE: \_\_\_\_\_

LETTING DATE:  
AUGUST 18, 2026


PROJECT LENGTH

LENGTH ROADWAY TIP PROJECT HL-0065 = 2.390 MILES  
PROJECT LENGTH BASED ON  
-L1-, -L2-, AND -L3-

DESIGN DATA

2026 = 14,600  
2046 = 21,400  
K = 8 %  
D = 52.5%  
T = 5 %\*  
V = 40 MPH  
TTST=1 DUAL  
FUNG CLASS =  
MINOR ARTERIAL

GRAPHIC SCALES



## CONTACT:

*TIP PROJECT: HL-0065*









NOTES:

NC DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
3/5/2026  
Rutherford  
HL-0065  
50685.1.1

County: RUTHERFORD

| Line #        | Item Number  | Sec # | Description                                                                    | Quantity    | Unit Cost | Amount |
|---------------|--------------|-------|--------------------------------------------------------------------------------|-------------|-----------|--------|
| ROADWAY ITEMS |              |       |                                                                                |             |           |        |
| 0001          | 0000100000-N | 800   | MOBILIZATION                                                                   | Lump Sum    | L.S.      |        |
| 0002          | 0000400000-N | 801   | CONSTRUCTION SURVEYING                                                         | Lump Sum    | L.S.      |        |
| 0003          | 0036000000-E | 225   | UNDERCUT EXCAVATION                                                            | 1,000<br>CY |           |        |
| 0004          | 0043000000-N | 226   | GRADING                                                                        | Lump Sum    | L.S.      |        |
| 0005          | 0050000000-E | 226   | SUPPLEMENTARY CLEARING &<br>GRUBBING                                           | 1<br>ACR    |           |        |
| 0006          | 0195000000-E | 265   | SELECT GRANULAR MATERIAL                                                       | 700<br>CY   |           |        |
| 0007          | 0196000000-E | 270   | GEOTEXTILE FOR SOIL<br>STABILIZATION                                           | 1,000<br>SY |           |        |
| 0008          | 0255000000-E | SP    | GENERIC GRADING ITEM<br>HAULING AND DISPOSAL OF<br>PETROLEUM CONTAMINATED SOIL | 50<br>TON   |           |        |
| 0009          | 0318000000-E | 300   | FOUNDATION CONDITIONING<br>MATERIAL, MINOR STRUCTURES                          | 850<br>TON  |           |        |
| 0010          | 0321000000-E | 300   | FOUNDATION CONDITIONING<br>GEOTEXTILE                                          | 2,700<br>SY |           |        |
| 0011          | 0335200000-E | 305   | 15" DRAINAGE PIPE                                                              | 160<br>LF   |           |        |
| 0012          | 0335300000-E | 305   | 18" DRAINAGE PIPE                                                              | 8<br>LF     |           |        |
| 0013          | 0335400000-E | 305   | 24" DRAINAGE PIPE                                                              | 12<br>LF    |           |        |
| 0014          | 0448200000-E | 310   | 15" RC PIPE CULVERTS, CLASS IV                                                 | 4,048<br>LF |           |        |
| 0015          | 0448300000-E | 310   | 18" RC PIPE CULVERTS, CLASS IV                                                 | 3,156<br>LF |           |        |
| 0016          | 0448400000-E | 310   | 24" RC PIPE CULVERTS, CLASS IV                                                 | 488<br>LF   |           |        |
| 0017          | 0448500000-E | 310   | 30" RC PIPE CULVERTS, CLASS IV                                                 | 56<br>LF    |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                         | Quantity     | Unit Cost | Amount |
|--------|--------------|-------|-----------------------------------------------------|--------------|-----------|--------|
| 0018   | 0588000000-E | 310   | 18" CS PIPE CULVERTS, 0.064" THICK                  | 28<br>LF     |           |        |
| 0019   | 0995000000-E | 340   | PIPE REMOVAL                                        | 2,194<br>LF  |           |        |
| 0020   | 1099500000-E | 505   | SHALLOW UNDERCUT                                    | 3,770<br>CY  |           |        |
| 0021   | 1099700000-E | 505   | CLASS IV SUBGRADE STABILIZATION                     | 7,160<br>TON |           |        |
| 0022   | 1110000000-E | 510   | STABILIZER AGGREGATE                                | 400<br>TON   |           |        |
| 0023   | 1112000000-E | 505   | GEOTEXTILE FOR SUBGRADE STABILIZATION               | 11,070<br>SY |           |        |
| 0024   | 1121000000-E | 520   | AGGREGATE BASE COURSE                               | 1,120<br>TON |           |        |
| 0025   | 1220000000-E | 545   | INCIDENTAL STONE BASE                               | 1,000<br>TON |           |        |
| 0026   | 1297000000-E | 607   | MILLING ASPHALT PAVEMENT, ****<br>DEPTH<br>(1-1/2") | 41,000<br>SY |           |        |
| 0027   | 1330000000-E | 607   | INCIDENTAL MILLING                                  | 3,600<br>SY  |           |        |
| 0028   | 1491000000-E | 610   | ASPHALT CONC BASE COURSE, TYPE<br>B25.0C            | 4,320<br>TON |           |        |
| 0029   | 1503000000-E | 610   | ASPHALT CONC INTERMEDIATE<br>COURSE, TYPE I19.0C    | 3,080<br>TON |           |        |
| 0030   | 1519000000-E | 610   | ASPHALT CONC SURFACE COURSE,<br>TYPE S9.5B          | 6,410<br>TON |           |        |
| 0031   | 1523000000-E | 610   | ASPHALT CONC SURFACE COURSE,<br>TYPE S9.5C          | 810<br>TON   |           |        |
| 0032   | 1575000000-E | 620   | ASPHALT BINDER FOR PLANT MIX                        | 890<br>TON   |           |        |
| 0033   | 1693000000-E | 654   | ASPHALT PLANT MIX, PAVEMENT<br>REPAIR               | 710<br>TON   |           |        |
| 0034   | 1891000000-E | SP    | GENERIC PAVING ITEM<br>4" CONCRETE SIDE PATH        | 6,550<br>SY  |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                       | Quantity    | Unit Cost | Amount |
|--------|--------------|-------|-------------------------------------------------------------------|-------------|-----------|--------|
| 0035   | 1891500000-N | SP    | GENERIC PAVING ITEM<br>STAMPED CONCRETE                           | Lump Sum    | L.S.      |        |
| 0036   | 2022000000-E | 815   | SUBDRAIN EXCAVATION                                               | 112<br>CY   |           |        |
| 0037   | 2026000000-E | 815   | GEOTEXTILE FOR SUBSURFACE<br>DRAINS                               | 500<br>SY   |           |        |
| 0038   | 2036000000-E | 815   | SUBDRAIN COARSE AGGREGATE                                         | 84<br>CY    |           |        |
| 0039   | 2044000000-E | 815   | 6" PERFORATED SUBDRAIN PIPE                                       | 500<br>LF   |           |        |
| 0040   | 2070000000-N | 815   | SUBDRAIN PIPE OUTLET                                              | 6<br>EA     |           |        |
| 0041   | 2077000000-E | 815   | 6" OUTLET PIPE                                                    | 1<br>LF     |           |        |
| 0042   | 2190000000-N | 828   | TEMPORARY STEEL PLATE COVERS<br>FOR MASONRY DRAINAGE<br>STRUCTURE | 10<br>EA    |           |        |
| 0043   | 2253000000-E | 840   | PIPE COLLARS                                                      | 0.893<br>CY |           |        |
| 0044   | 2275000000-E | SP    | FLOWABLE FILL                                                     | 4<br>CY     |           |        |
| 0045   | 2286000000-N | 840   | MASONRY DRAINAGE STRUCTURES                                       | 150<br>EA   |           |        |
| 0046   | 2308000000-E | 840   | MASONRY DRAINAGE STRUCTURES                                       | 57.4<br>LF  |           |        |
| 0047   | 2364000000-N | 840   | FRAME WITH TWO GRATES, STD<br>840.16                              | 12<br>EA    |           |        |
| 0048   | 2367000000-N | 840   | FRAME WITH TWO GRATES, STD<br>840.29                              | 23<br>EA    |           |        |
| 0049   | 2374000000-N | 840   | FRAME WITH GRATE & HOOD, STD<br>840.03, TYPE **<br>(E)            | 17<br>EA    |           |        |
| 0050   | 2374000000-N | 840   | FRAME WITH GRATE & HOOD, STD<br>840.03, TYPE **<br>(F)            | 45<br>EA    |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                           | Quantity     | Unit Cost | Amount |
|--------|--------------|-------|-----------------------------------------------------------------------|--------------|-----------|--------|
| 0051   | 2374000000-N | 840   | FRAME WITH GRATE & HOOD, STD 840.03, TYPE ** (G)                      | 52<br>EA     |           |        |
| 0052   | 2396000000-N | 840   | FRAME WITH COVER, STD 840.54                                          | 12<br>EA     |           |        |
| 0053   | 2418000000-E | SP    | FRAME WITH GRATES, DRIVEWAY DROP INLET                                | 93<br>LF     |           |        |
| 0054   | 2451000000-N | 852   | CONCRETE TRANSITIONAL SECTION FOR DROP INLET                          | 5<br>EA      |           |        |
| 0055   | 2535000000-E | 846   | *** X *** CONCRETE CURB (9" X 12")                                    | 800<br>LF    |           |        |
| 0056   | 2535000000-E | 846   | *** X *** CONCRETE CURB (9" X 18")                                    | 310<br>LF    |           |        |
| 0057   | 2542000000-E | 846   | 1'-6" CONCRETE CURB & GUTTER                                          | 165<br>LF    |           |        |
| 0058   | 2549000000-E | 846   | 2'-6" CONCRETE CURB & GUTTER                                          | 17,190<br>LF |           |        |
| 0059   | 2591000000-E | 848   | 4" CONCRETE SIDEWALK                                                  | 2,500<br>SY  |           |        |
| 0060   | 2605000000-N | 848   | CONCRETE CURB RAMPS                                                   | 120<br>EA    |           |        |
| 0061   | 2612000000-E | 848   | 6" CONCRETE DRIVEWAY                                                  | 740<br>SY    |           |        |
| 0062   | 2655000000-E | 852   | 5" MONOLITHIC CONCRETE ISLANDS (KEYED IN)                             | 1,890<br>SY  |           |        |
| 0063   | 2738000000-E | SP    | GENERIC PAVING ITEM 12" CONCRETE TRUCK APRON, CLASS AA CONCRETE       | 470<br>SY    |           |        |
| 0064   | 2752000000-E | SP    | GENERIC PAVING ITEM 1'-6" CONCRETE CURB AND GUTTER, CLASS AA CONCRETE | 395<br>LF    |           |        |
| 0065   | 2761000000-E | 848   | GENERIC PAVING ITEM 6" CONCRETE SIDEWALK                              | 130<br>SY    |           |        |
| 0066   | 2800000000-N | 858   | ADJUSTMENT OF CATCH BASINS                                            | 1<br>EA      |           |        |
| 0067   | 2830000000-N | 858   | ADJUSTMENT OF MANHOLES                                                | 1<br>EA      |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                               | Quantity  | Unit Cost | Amount |
|--------|--------------|-------|-----------------------------------------------------------|-----------|-----------|--------|
| 0068   | 2893000000-N | 859   | CONVERT EXISTING CATCH BASIN TO JUNCTION BOX WITH MANHOLE | 7<br>EA   |           |        |
| 0069   | 2920000000-N | 859   | CONVERT EXISTING DROP INLET TO CATCH BASIN                | 1<br>EA   |           |        |
| 0070   | 2938000000-N | 859   | CONVERT EXISTING DROP INLET TO JUNCTION BOX WITH MANHOLE  | 2<br>EA   |           |        |
| 0071   | 2965000000-N | 859   | CONVERT EXISTING JUNCTION BOX TO CATCH BASIN              | 1<br>EA   |           |        |
| 0072   | 3030000000-E | 862   | STEEL BEAM GUARDRAIL                                      | 700<br>LF |           |        |
| 0073   | 3045000000-E | 862   | STEEL BEAM GUARDRAIL, SHOP CURVED                         | 75<br>LF  |           |        |
| 0074   | 3105000000-N | 862   | STEEL BEAM GUARDRAIL TERMINAL SECTIONS                    | 2<br>EA   |           |        |
| 0075   | 3150000000-N | 862   | ADDITIONAL GUARDRAIL POSTS                                | 10<br>EA  |           |        |
| 0076   | 3210000000-N | 862   | GUARDRAIL END UNITS, TYPE CAT-1                           | 7<br>EA   |           |        |
| 0077   | 3287000000-N | 862   | GUARDRAIL END UNITS, TYPE TL-3                            | 3<br>EA   |           |        |
| 0078   | 3288000000-N | 862   | GUARDRAIL END UNITS, TYPE TL-2                            | 1<br>EA   |           |        |
| 0079   | 3360000000-E | 863   | REMOVE EXISTING GUARDRAIL                                 | 850<br>LF |           |        |
| 0080   | 3533000000-E | 866   | CHAIN LINK FENCE, *** FABRIC (72")                        | 200<br>LF |           |        |
| 0081   | 3539000000-E | 866   | METAL LINE POSTS FOR *** CHAIN LINK FENCE (72")           | 16<br>EA  |           |        |
| 0082   | 3545000000-E | 866   | METAL TERMINAL POSTS FOR *** CHAIN LINK FENCE (72")       | 5<br>EA   |           |        |
| 0083   | 3559000000-E | 866   | ** STRAND BARBED WIRE FENCE WITH POSTS (3)                | 200<br>LF |           |        |
| 0084   | 3575000000-E | SP    | GENERIC FENCING ITEM BICYCLE/PEDESTRIAN SAFETY RAIL       | 400<br>LF |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                            | Quantity    | Unit Cost | Amount |
|--------|--------------|-------|--------------------------------------------------------|-------------|-----------|--------|
| 0085   | 3649000000-E | 876   | RIP RAP, CLASS B                                       | 100<br>TON  |           |        |
| 0086   | 3656000000-E | 876   | GEOTEXTILE FOR DRAINAGE                                | 5,685<br>SY |           |        |
| 0087   | 4048000000-E | 902   | REINFORCED CONCRETE SIGN FOUNDATIONS                   | 3<br>CY     |           |        |
| 0088   | 4060000000-E | 903   | SUPPORTS, BREAKAWAY STEEL BEAM                         | 2,802<br>LB |           |        |
| 0089   | 4072000000-E | 903   | SUPPORTS, 3-LB STEEL U-CHANNEL                         | 2,449<br>LF |           |        |
| 0090   | 4096000000-N | 904   | SIGN ERECTION, TYPE D                                  | 2<br>EA     |           |        |
| 0091   | 4102000000-N | 904   | SIGN ERECTION, TYPE E                                  | 147<br>EA   |           |        |
| 0092   | 4108000000-N | 904   | SIGN ERECTION, TYPE F                                  | 27<br>EA    |           |        |
| 0093   | 4110000000-N | 904   | SIGN ERECTION, TYPE *** (GROUND MOUNTED) (A)           | 4<br>EA     |           |        |
| 0094   | 4116100000-N | 904   | SIGN ERECTION, RELOCATE TYPE **** (GROUND MOUNTED) (D) | 2<br>EA     |           |        |
| 0095   | 4116100000-N | 904   | SIGN ERECTION, RELOCATE TYPE **** (GROUND MOUNTED) (E) | 6<br>EA     |           |        |
| 0096   | 4116100000-N | 904   | SIGN ERECTION, RELOCATE TYPE **** (GROUND MOUNTED) (F) | 1<br>EA     |           |        |
| 0097   | 4155000000-N | 907   | DISPOSAL OF SIGN SYSTEM, U-CHANNEL                     | 104<br>EA   |           |        |
| 0098   | 4158000000-N | 907   | DISPOSAL OF SIGN SYSTEM, WOOD                          | 9<br>EA     |           |        |
| 0099   | 4192000000-N | 907   | DISPOSAL OF SUPPORT, U-CHANNEL                         | 20<br>EA    |           |        |
| 0100   | 4237000000-N | 907   | STOCKPILE SIGN, D, E OR F                              | 5<br>EA     |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                             | Quantity    | Unit Cost | Amount |
|--------|--------------|-------|---------------------------------------------------------|-------------|-----------|--------|
| 0101   | 4238000000-N | 907   | DISPOSAL OF SIGN, D, E OR F                             | 32<br>EA    |           |        |
| 0102   | 4360000000-N | SP    | GENERIC SIGNING ITEM<br>RELOCATE WAYFINDING ASSEMBLY    | 7<br>EA     |           |        |
| 0103   | 4400000000-E | 1110  | WORK ZONE SIGNS (STATIONARY)                            | 1,282<br>SF |           |        |
| 0104   | 4405000000-E | 1110  | WORK ZONE SIGNS (PORTABLE)                              | 1,652<br>SF |           |        |
| 0105   | 4410000000-E | 1110  | WORK ZONE SIGNS (BARRICADE<br>MOUNTED)                  | 32<br>SF    |           |        |
| 0106   | 4415000000-N | 1115  | FLASHING ARROW BOARD                                    | 6<br>EA     |           |        |
| 0107   | 4420000000-N | 1120  | PORTABLE CHANGEABLE MESSAGE<br>SIGN                     | 2<br>EA     |           |        |
| 0108   | 4430000000-N | 1130  | DRUMS                                                   | 823<br>EA   |           |        |
| 0109   | 4435000000-N | 1135  | CONES                                                   | 935<br>EA   |           |        |
| 0110   | 4445000000-E | 1145  | BARRICADES (TYPE III)                                   | 48<br>LF    |           |        |
| 0111   | 4447000000-E | SP    | PEDESTRIAN CHANNELIZING<br>DEVICES                      | 885<br>LF   |           |        |
| 0112   | 4455000000-N | 1150  | FLAGGER                                                 | 49<br>DAY   |           |        |
| 0113   | 4480000000-N | 1165  | TMA                                                     | 2<br>EA     |           |        |
| 0114   | 4507000000-E | 1170  | WATER FILLED BARRIER                                    | 500<br>LF   |           |        |
| 0115   | 4510000000-N | 1190  | LAW ENFORCEMENT                                         | 98<br>HR    |           |        |
| 0116   | 4516000000-N | 1180  | SKINNY DRUM                                             | 92<br>EA    |           |        |
| 0117   | 4600000000-N | SP    | GENERIC TRAFFIC CONTROL ITEM<br>AUDIBLE WARNING DEVICES | 77<br>EA    |           |        |



County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                           | Quantity      | Unit Cost | Amount |
|--------|--------------|-------|-----------------------------------------------------------------------|---------------|-----------|--------|
| 0118   | 4600000000-N | SP    | GENERIC TRAFFIC CONTROL ITEM<br>PEDESTRIAN TRANSPORT SERVICE          | 350<br>EA     |           |        |
| 0119   | 4600000000-N | SP    | GENERIC TRAFFIC CONTROL ITEM<br>TEMPORARY CURB RAMPS                  | 22<br>EA      |           |        |
| 0120   | 4650000000-N | 1251  | TEMPORARY RAISED PAVEMENT<br>MARKERS                                  | 96<br>EA      |           |        |
| 0121   | 4685000000-E | 1205  | THERMOPLASTIC PAVEMENT<br>MARKING LINES (4", 90 MILS)                 | 35,203<br>LF  |           |        |
| 0122   | 4695000000-E | 1205  | THERMOPLASTIC PAVEMENT<br>MARKING LINES (8", 90 MILS)                 | 4,700<br>LF   |           |        |
| 0123   | 4709000000-E | 1205  | THERMOPLASTIC PAVEMENT<br>MARKING LINES (24", 90 MILS)                | 1,972<br>LF   |           |        |
| 0124   | 4720000000-E | 1205  | THERMOPLASTIC PAVEMENT<br>MARKING CHARACTER (90 MILS)                 | 19<br>EA      |           |        |
| 0125   | 4725000000-E | 1205  | THERMOPLASTIC PAVEMENT<br>MARKING SYMBOL (90 MILS)                    | 119<br>EA     |           |        |
| 0126   | 4726110000-E | 1205  | HEATED-IN-PLACE THERMOPLASTIC<br>PAVEMENT MARKING SYMBOL (90<br>MILS) | 1<br>EA       |           |        |
| 0127   | 4770000000-E | 1205  | COLD APPLIED PLASTIC PAVEMENT<br>MARKING LINES, TYPE ** (4")<br>(IV)  | 270<br>LF     |           |        |
| 0128   | 4810000000-E | 1205  | PAINT PAVEMENT MARKING LINES (4")                                     | 101,528<br>LF |           |        |
| 0129   | 4820000000-E | 1205  | PAINT PAVEMENT MARKING LINES (8")                                     | 9,998<br>LF   |           |        |
| 0130   | 4835000000-E | 1205  | PAINT PAVEMENT MARKING LINES<br>(24")                                 | 2,352<br>LF   |           |        |
| 0131   | 4840000000-N | 1205  | PAINT PAVEMENT MARKING<br>CHARACTER                                   | 4<br>EA       |           |        |
| 0132   | 4845000000-N | 1205  | PAINT PAVEMENT MARKING SYMBOL                                         | 75<br>EA      |           |        |
| 0133   | 4850000000-E | 1205  | REMOVAL OF PAVEMENT MARKING<br>LINES (4")                             | 20,078<br>LF  |           |        |
| 0134   | 4860000000-E | 1205  | REMOVAL OF PAVEMENT MARKING<br>LINES (8")                             | 1,801<br>LF   |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                                            | Quantity    | Unit Cost | Amount |
|--------|--------------|-------|----------------------------------------------------------------------------------------|-------------|-----------|--------|
| 0135   | 4870000000-E | 1205  | REMOVAL OF PAVEMENT MARKING LINES (24")                                                | 1,088<br>LF |           |        |
| 0136   | 4875000000-N | 1205  | REMOVAL OF PAVEMENT MARKING SYMBOLS & CHARACTERS                                       | 84<br>EA    |           |        |
| 0137   | 4890000000-E | SP    | GENERIC PAVEMENT MARKING ITEM YIELD LINE PAINT PAVEMENT MARKING (24")                  | 392<br>LF   |           |        |
| 0138   | 4890000000-E | SP    | GENERIC PAVEMENT MARKING ITEM YIELD LINE THERMOPLASTIC PAVEMENT MARKING (24", 90 MILS) | 163<br>LF   |           |        |
| 0139   | 4895000000-N | SP    | GENERIC PAVEMENT MARKING ITEM POLYCARBONATE H-SHAPED MARKERS                           | 654<br>EA   |           |        |
| 0140   | 5325200000-E | 1510  | 2" WATER LINE                                                                          | 40<br>LF    |           |        |
| 0141   | 5325600000-E | 1510  | 6" WATER LINE                                                                          | 2,160<br>LF |           |        |
| 0142   | 5325800000-E | 1510  | 8" WATER LINE                                                                          | 8,060<br>LF |           |        |
| 0143   | 5326200000-E | 1510  | 12" WATER LINE                                                                         | 1,105<br>LF |           |        |
| 0144   | 5326600000-E | 1510  | 16" WATER LINE                                                                         | 860<br>LF   |           |        |
| 0145   | 5329000000-E | 1510  | DUCTILE IRON WATER PIPE FITTINGS                                                       | 4,300<br>LB |           |        |
| 0146   | 5536000000-E | 1515  | 2" VALVE                                                                               | 2<br>EA     |           |        |
| 0147   | 5540000000-E | 1515  | 6" VALVE                                                                               | 20<br>EA    |           |        |
| 0148   | 5546000000-E | 1515  | 8" VALVE                                                                               | 26<br>EA    |           |        |
| 0149   | 5558000000-E | 1515  | 12" VALVE                                                                              | 2<br>EA     |           |        |
| 0150   | 5558600000-E | 1515  | 16" VALVE                                                                              | 4<br>EA     |           |        |
| 0151   | 5648000000-N | 1515  | RELOCATE WATER METER                                                                   | 11<br>EA    |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                  | Quantity     | Unit Cost | Amount |
|--------|--------------|-------|--------------------------------------------------------------|--------------|-----------|--------|
| 0152   | 5649000000-N | 1515  | RECONNECT WATER METER                                        | 64<br>EA     |           |        |
| 0153   | 5666000000-N | 1515  | FIRE HYDRANT                                                 | 10<br>EA     |           |        |
| 0154   | 5673000000-E | 1515  | FIRE HYDRANT LEG                                             | 196<br>LF    |           |        |
| 0155   | 5686500000-E | 1515  | WATER SERVICE LINE                                           | 1,640<br>LF  |           |        |
| 0156   | 5691300000-E | 1520  | 8" SANITARY GRAVITY SEWER                                    | 5,880<br>LF  |           |        |
| 0157   | 5775000000-E | 1525  | 4' DIA UTILITY MANHOLE                                       | 31<br>EA     |           |        |
| 0158   | 5781000000-E | 1525  | UTILITY MANHOLE WALL 4' DIA                                  | 25<br>LF     |           |        |
| 0159   | 5801000000-E | 1530  | ABANDON 8" UTILITY PIPE                                      | 1,126<br>LF  |           |        |
| 0160   | 5804000000-E | 1530  | ABANDON 12" UTILITY PIPE                                     | 1,105<br>LF  |           |        |
| 0161   | 5810000000-E | 1530  | ABANDON 16" UTILITY PIPE                                     | 795<br>LF    |           |        |
| 0162   | 5828000000-N | 1530  | REMOVE UTILITY MANHOLE                                       | 5<br>EA      |           |        |
| 0163   | 5882000000-N | SP    | GENERIC UTILITY ITEM<br>REMOVE AND STOCKPILE FIRE<br>HYDRANT | 11<br>EA     |           |        |
| 0164   | 6000000000-E | 1605  | TEMPORARY SILT FENCE                                         | 13,250<br>LF |           |        |
| 0165   | 6006000000-E | 1610  | STONE FOR EROSION CONTROL,<br>CLASS A                        | 1,280<br>TON |           |        |
| 0166   | 6009000000-E | 1610  | STONE FOR EROSION CONTROL,<br>CLASS B                        | 390<br>TON   |           |        |
| 0167   | 6012000000-E | 1610  | SEDIMENT CONTROL STONE                                       | 1,835<br>TON |           |        |
| 0168   | 6015000000-E | 1615  | TEMPORARY MULCHING                                           | 21<br>ACR    |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                      | Quantity     | Unit Cost | Amount |
|--------|--------------|-------|----------------------------------|--------------|-----------|--------|
| 0169   | 6018000000-E | 1620  | SEED FOR TEMPORARY SEEDING       | 1,200<br>LB  |           |        |
| 0170   | 6021000000-E | 1620  | FERTILIZER FOR TEMPORARY SEEDING | 6<br>TON     |           |        |
| 0171   | 6024000000-E | 1622  | TEMPORARY SLOPE DRAINS           | 200<br>LF    |           |        |
| 0172   | 6029000000-E | SP    | SAFETY FENCE                     | 500<br>LF    |           |        |
| 0173   | 6030000000-E | 1630  | SILT EXCAVATION                  | 1,140<br>CY  |           |        |
| 0174   | 6036000000-E | 1631  | MATTING FOR EROSION CONTROL      | 32,000<br>SY |           |        |
| 0175   | 6037000000-E | 1629  | COIR FIBER MAT                   | 100<br>SY    |           |        |
| 0176   | 6042000000-E | 1632  | 1/4" HARDWARE CLOTH              | 6,620<br>LF  |           |        |
| 0177   | 6070000000-N | 1639  | SPECIAL STILLING BASINS          | 1<br>EA      |           |        |
| 0178   | 6071002000-E | 1642  | FLOCCULANT                       | 220<br>LB    |           |        |
| 0179   | 6071012000-E | 1642  | COIR FIBER WATTLE                | 280<br>LF    |           |        |
| 0180   | 6084000000-E | 1660  | SEEDING & MULCHING               | 21<br>ACR    |           |        |
| 0181   | 6087000000-E | 1660  | MOWING                           | 11<br>ACR    |           |        |
| 0182   | 6090000000-E | 1661  | SEED FOR REPAIR SEEDING          | 300<br>LB    |           |        |
| 0183   | 6093000000-E | 1661  | FERTILIZER FOR REPAIR SEEDING    | 0.75<br>TON  |           |        |
| 0184   | 6096000000-E | 1662  | SEED FOR SUPPLEMENTAL SEEDING    | 400<br>LB    |           |        |
| 0185   | 6108000000-E | 1665  | FERTILIZER TOPDRESSING           | 12<br>TON    |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                                | Quantity  | Unit Cost | Amount |
|--------|--------------|-------|----------------------------------------------------------------------------|-----------|-----------|--------|
| 0186   | 6114500000-N | 1667  | SPECIALIZED HAND MOWING                                                    | 7<br>MHR  |           |        |
| 0187   | 6114800000-N | SP    | MANUAL LITTER REMOVAL                                                      | 9<br>MHR  |           |        |
| 0188   | 6114900000-E | SP    | LITTER DISPOSAL                                                            | 4<br>TON  |           |        |
| 0189   | 6117000000-N | 1675  | RESPONSE FOR EROSION CONTROL                                               | 50<br>EA  |           |        |
| 0190   | 6117500000-N | SP    | CONCRETE WASHOUT STRUCTURE                                                 | 5<br>EA   |           |        |
| 0191   | 6132000000-N | SP    | GENERIC EROSION CONTROL ITEM<br>FABRIC INSERT INLET PROTECTION<br>CLEANOUT | 366<br>EA |           |        |
| 0192   | 6132000000-N | SP    | GENERIC EROSION CONTROL ITEM<br>FABRIC INSERT INLET PROTECTION,<br>TYPE 1  | 122<br>EA |           |        |
| 0193   | 6132000000-N | SP    | GENERIC EROSION CONTROL ITEM<br>PREFABRICATED CONCRETE<br>WASHOUT          | 20<br>EA  |           |        |
| 0194   | 6215000000-N | 1670  | ACER SACCHARUM, SUGAR MAPLE,<br>(30 GAL, 8'-10' HT, 2" CAL)                | 11<br>EA  |           |        |
| 0195   | 6260000000-N | 1670  | CORNUS FLORIDA, FLOWERING<br>DOGWOOD,<br>(25 GAL, 6'-8' HT)                | 1<br>EA   |           |        |
| 0196   | 6390000000-N | 1670  | ILEX VOMITORIA, YAUPON HOLLY,<br>(5 GAL, 15"-18", 4' OC)                   | 48<br>EA  |           |        |
| 0197   | 6400000000-N | 1670  | ITEA VIRGINICA, VIRGINIA<br>SWEETSPIRE,<br>(3 GAL, 18"-24", 3' OC)         | 23<br>EA  |           |        |
| 0198   | 6410000000-N | 1670  | JUNIPERUS VIRGINIANA, EASTERN<br>RED CEDAR,<br>(25 GAL, 6'-8' HT)          | 8<br>EA   |           |        |
| 0199   | 6640000000-N | 1670  | GENERIC PLANTING ITEM<br>ECHINACEA PURPUREA, EASTERN<br>PURPLE CONEFLOWER  | 9<br>EA   |           |        |
| 0200   | 6640000000-N | 1670  | GENERIC PLANTING ITEM<br>IRIS VERNA, DWARF FLAG IRIS                       | 120<br>EA |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                           | Quantity     | Unit Cost | Amount |
|--------|--------------|-------|-----------------------------------------------------------------------|--------------|-----------|--------|
| 0201   | 6640000000-N | 1670  | GENERIC PLANTING ITEM<br>MUHLENBERGIA CAPILLARIS, PINK<br>MUHLY GRASS | 127<br>EA    |           |        |
| 0202   | 6640000000-N | 1670  | GENERIC PLANTING ITEM<br>RUDBECKIA HIRTA, BLACK EYED<br>SUSAN         | 1,071<br>EA  |           |        |
| 0203   | 6645000000-N | SP    | GENERIC PLANTING ITEM<br>MONTHLY ESTABLISHMENT                        | 12<br>EA     |           |        |
| 0204   | 6650000000-E | 1670  | MULCH FOR PLANTING                                                    | 150<br>CY    |           |        |
| 0205   | 6655000000-E | 1670  | WATER FOR PLANTING                                                    | 1<br>M/G     |           |        |
| 0206   | 6665000000-E | 1670  | POSTEMERGENT HERBICIDAL<br>TREATMENT FOR PLANT BEDS                   | 1,350<br>SY  |           |        |
| 0207   | 6670000000-E | 1670  | PREEMERGENT HERBICIDAL<br>TREATMENT FOR PLANT BEDS                    | 1,350<br>SY  |           |        |
| 0208   | 6674000000-N | SP    | GENERIC PLANTING ITEM (LS)<br>IRRIGATION                              | Lump Sum     | L.S.      |        |
| 0209   | 6675000000-E | SP    | GENERIC PLANTING ITEM<br>SOD (ZOYSIA)                                 | 1,936<br>SY  |           |        |
| 0210   | 6900000000-E | SP    | TOPSOIL                                                               | 150<br>CY    |           |        |
| 0211   | 7048500000-E | 1705  | PEDESTRIAN SIGNAL HEAD (16", 1<br>SECTION W/COUNTDOWN)                | 37<br>EA     |           |        |
| 0212   | 7060000000-E | 1705  | SIGNAL CABLE                                                          | 12,500<br>LF |           |        |
| 0213   | 7120000000-E | 1705  | VEHICLE SIGNAL HEAD (12", 3<br>SECTION)                               | 60<br>EA     |           |        |
| 0214   | 7132000000-E | 1705  | VEHICLE SIGNAL HEAD (12", 4<br>SECTION)                               | 15<br>EA     |           |        |
| 0215   | 7144000000-E | 1705  | VEHICLE SIGNAL HEAD (12", 5<br>SECTION)                               | 1<br>EA      |           |        |
| 0216   | 7264000000-E | 1710  | MESSENGER CABLE (3/8")                                                | 1,850<br>LF  |           |        |
| 0217   | 7300000000-E | 1715  | UNPAVED TRENCHING (*****<br>(1, 2"))                                  | 125<br>LF    |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                     | Quantity    | Unit Cost | Amount |
|--------|--------------|-------|-------------------------------------------------|-------------|-----------|--------|
| 0218   | 7300000000-E | 1715  | UNPAVED TRENCHING (*****)<br>(2, 2")            | 200<br>LF   |           |        |
| 0219   | 7300000000-E | 1715  | UNPAVED TRENCHING (*****)<br>(4, 2")            | 40<br>LF    |           |        |
| 0220   | 7301000000-E | 1715  | DIRECTIONAL DRILL (*****)<br>(1, 2")            | 475<br>LF   |           |        |
| 0221   | 7301000000-E | 1715  | DIRECTIONAL DRILL (*****)<br>(2, 2")            | 225<br>LF   |           |        |
| 0222   | 7324000000-N | 1716  | JUNCTION BOX (STANDARD SIZE)                    | 24<br>EA    |           |        |
| 0223   | 7348000000-N | 1716  | JUNCTION BOX (OVER-SIZED, HEAVY<br>DUTY)        | 5<br>EA     |           |        |
| 0224   | 7360000000-N | 1720  | WOOD POLE                                       | 20<br>EA    |           |        |
| 0225   | 7372000000-N | 1721  | GUY ASSEMBLY                                    | 39<br>EA    |           |        |
| 0226   | 7420000000-E | 1722  | 2" RISER WITH WEATHERHEAD                       | 31<br>EA    |           |        |
| 0227   | 7444000000-E | 1725  | INDUCTIVE LOOP SAWCUT                           | 850<br>LF   |           |        |
| 0228   | 7456100000-E | 1726  | LEAD-IN CABLE (14-2)                            | 6,025<br>LF |           |        |
| 0229   | 7575142010-N | 1736  | 900MHZ SERIAL/ETHERNET SPREAD<br>SPECTRUM RADIO | 1<br>EA     |           |        |
| 0230   | 7575142060-N | 1737  | MODIFY RADIO INSTALLATION                       | 3<br>EA     |           |        |
| 0231   | 7636000000-N | 1745  | SIGN FOR SIGNALS                                | 29<br>EA    |           |        |
| 0232   | 7642100000-N | 1743  | TYPE I POST WITH FOUNDATION                     | 15<br>EA    |           |        |
| 0233   | 7642200000-N | 1743  | TYPE II PEDESTAL WITH FOUNDATION                | 16<br>EA    |           |        |
| 0234   | 7648000000-N | 1746  | RELOCATE EXISTING SIGN                          | 10<br>EA    |           |        |

County: RUTHERFORD

| Line # | Item Number  | Sec # | Description                                                                       | Quantity | Unit Cost | Amount |
|--------|--------------|-------|-----------------------------------------------------------------------------------|----------|-----------|--------|
| 0235   | 7684000000-N | 1750  | SIGNAL CABINET FOUNDATION                                                         | 4<br>EA  |           |        |
| 0236   | 7696000000-N | 1751  | CONTROLLERS WITH CABINET<br>(*****)<br>(2070LX, BASE MOUNTED)                     | 5<br>EA  |           |        |
| 0237   | 7744000000-N | 1751  | DETECTOR CARD (TYPE 170)                                                          | 5<br>EA  |           |        |
| 0238   | 7901000000-N | 1753  | CABINET BASE EXTENDER                                                             | 5<br>EA  |           |        |
| 0239   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>CONTROLLER (2070LX)                                        | 1<br>EA  |           |        |
| 0240   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>ETHERNET EDGE SWITCH                                       | 4<br>EA  |           |        |
| 0241   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>GPS EMERGENCY VEHICLE<br>PREEMPTION SYSTEM                 | 2<br>EA  |           |        |
| 0242   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>MICROWAVE VEHICLE DETECTORS -<br>MULTIPLE ZONES (APPROACH) | 10<br>EA |           |        |
| 0243   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>MICROWAVE VEHICLE DETECTORS -<br>MULTIPLE ZONES (PRESENCE) | 9<br>EA  |           |        |
| 0244   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>RECTANGULAR RAPID FLASHING<br>BEACON ASSEMBLY              | 12<br>EA |           |        |
| 0245   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>TRANSFER SWITCH                                            | 7<br>EA  |           |        |

1355/Jul14/Q452955.043/D1097831608070/E245

Total Amount Of Bid For Entire Project :



**Vendor 1 of 1: WRIGHT BROTHERS CIVIL  
CONSTRUCTION LLC (21037)  
Call Order 007 (Proposal C205219)**

**Bid Information**

|                           |                                      |                      |                                                                              |
|---------------------------|--------------------------------------|----------------------|------------------------------------------------------------------------------|
| <b>Proposal County:</b>   | RUTHERFORD                           | <b>Bid Checksum:</b> | 5c11d5d413ce8e994833a<br>c100113409af1e9ced7b6<br>d0d70144a551a6419591f<br>f |
| <b>Vendor Address:</b>    | P.O. Box 437<br>CHARLESTON, TN 37310 | <b>Bid Total:</b>    | \$22,868,021.00                                                              |
| <b>Signature Check:</b>   | Dean H Briggs                        | <b>Items Total:</b>  | \$22,868,021.00                                                              |
| <b>Time Bid Received:</b> | 08/18/2026 12:45 PM                  | <b>Time Total:</b>   | \$0.00                                                                       |
| <b>Amendment Count:</b>   | 0                                    |                      |                                                                              |

**Bidding Errors:**

None.

**Vendor 1 of 1: WRIGHT BROTHERS CIVIL  
CONSTRUCTION LLC (21037)  
Call Order 007 (Proposal C205219)**

**Bid Bond Information**

---

|                               |                                                             |
|-------------------------------|-------------------------------------------------------------|
| <b>Projects:</b> 5068501      | <b>Bond Maximum:</b>                                        |
| <b>Counties:</b> RUTHERFORD   | <b>State of Incorporation:</b>                              |
| <b>Bond ID:</b> SNC0807789023 | <b>Agency Execution Date:</b> 08/07/2026 04:05:10 PM        |
| <b>Paid By Check:</b> No      | <b>Surety Name:</b> Surety2000                              |
| <b>Bond Percent:</b> 5%       | <b>Bond Agency Name:</b> Marsh USA LLC (Salt Lake City, UT) |

Letting: L260818  
08/18/26 2:00 PM

North Carolina Department of Transportation  
21037 - WRIGHT BROTHERS CIVIL CONSTRUCTION LLC

Contract ID: C205219  
Call: 007

BondID: SNC0807789023  
Surety Registry Agency: Surety2000  
Verified?: 1  
Surety Agency: Liberty Mutual Insurance Company  
Bond Execution Date: 08/07/2026 04:05:10 PM

# General

|                                                   |  |                                                           |
|---------------------------------------------------|--|-----------------------------------------------------------|
| <b>WRIGHT BROTHERS CIVIL CONSTRUCTION<br/>LLC</b> |  | <div><div>*</div><div>Bidder</div></div> <div>21037</div> |
| P.O. Box 437<br>CHARLESTON, TN 37310              |  |                                                           |

Proposal details:

|                              |         |          |            |
|------------------------------|---------|----------|------------|
| Call                         | 007     | Location | RUTHERFORD |
| Contract ID                  | C205219 |          |            |
| Project ID                   |         |          |            |
| 50685.3.1 RUTHERFORD HL-0065 |         |          |            |

## Schedule of items

Item total: \$22,868,021.00

|                                                                          |              |              |                  |                 |
|--------------------------------------------------------------------------|--------------|--------------|------------------|-----------------|
| Section 0001                                                             |              |              |                  | \$22,868,021.00 |
| ROADWAY ITEMS                                                            |              |              |                  |                 |
| Line 0001                                                                | 0000100000-N | 1.000 LS     | \$ 1,140,000.000 | \$ 1,140,000.00 |
| MOBILIZATION                                                             |              |              |                  |                 |
| Line 0002                                                                | 0000400000-N | 1.000 LS     | \$ 278,100.000   | \$ 278,100.00   |
| CONSTRUCTION SURVEYING                                                   |              |              |                  |                 |
| Line 0003                                                                | 0036000000-E | 1,000.000 CY | \$ 33.000        | \$ 33,000.00    |
| UNDERCUT EXCAVATION                                                      |              |              |                  |                 |
| Line 0004                                                                | 0043000000-N | 1.000 LS     | \$ 3,118,620.000 | \$ 3,118,620.00 |
| GRADING                                                                  |              |              |                  |                 |
| Line 0005                                                                | 0050000000-E | 1.000 ACR    | \$ 29,400.000    | \$ 29,400.00    |
| SUPPLEMENTARY CLEARING & GRUBBING                                        |              |              |                  |                 |
| Line 0006                                                                | 0195000000-E | 700.000 CY   | \$ 85.000        | \$ 59,500.00    |
| SELECT GRANULAR MATERIAL                                                 |              |              |                  |                 |
| Line 0007                                                                | 0196000000-E | 1,000.000 SY | \$ 7.650         | \$ 7,650.00     |
| GEOTEXTILE FOR SOIL STABILIZATION                                        |              |              |                  |                 |
| Line 0008                                                                | 0255000000-E | 50.000 TON   | \$ 150.000       | \$ 7,500.00     |
| GENERIC GRADING ITEM HAULING AND DISPOSAL OF PETROLEUM CONTAMINATED SOIL |              |              |                  |                 |
| Line 0009                                                                | 0318000000-E | 850.000 TON  | \$ 77.750        | \$ 66,087.50    |
| FOUNDATION CONDITIONING MATERIAL, MINOR STRUCTURES                       |              |              |                  |                 |
| Line 0010                                                                | 0321000000-E | 2,700.000 SY | \$ 8.000         | \$ 21,600.00    |
| FOUNDATION CONDITIONING GEOTEXTILE                                       |              |              |                  |                 |

|           |                                                          |               |            |               |
|-----------|----------------------------------------------------------|---------------|------------|---------------|
| Line 0011 | 0335200000-E<br>15" DRAINAGE PIPE                        | 160.000 LF    | \$ 156.000 | \$ 24,960.00  |
| Line 0012 | 0335300000-E<br>18" DRAINAGE PIPE                        | 8.000 LF      | \$ 224.000 | \$ 1,792.00   |
| Line 0013 | 0335400000-E<br>24" DRAINAGE PIPE                        | 12.000 LF     | \$ 267.000 | \$ 3,204.00   |
| Line 0014 | 0448200000-E<br>15" RC PIPE CULVERTS,<br>CLASS IV        | 4,048.000 LF  | \$ 138.000 | \$ 558,624.00 |
| Line 0015 | 0448300000-E<br>18" RC PIPE CULVERTS,<br>CLASS IV        | 3,156.000 LF  | \$ 151.000 | \$ 476,556.00 |
| Line 0016 | 0448400000-E<br>24" RC PIPE CULVERTS,<br>CLASS IV        | 488.000 LF    | \$ 193.000 | \$ 94,184.00  |
| Line 0017 | 0448500000-E<br>30" RC PIPE CULVERTS,<br>CLASS IV        | 56.000 LF     | \$ 248.000 | \$ 13,888.00  |
| Line 0018 | 0588000000-E<br>18" CS PIPE CULVERTS,<br>0.064" THICK    | 28.000 LF     | \$ 175.000 | \$ 4,900.00   |
| Line 0019 | 0995000000-E<br>PIPE REMOVAL                             | 2,194.000 LF  | \$ 94.250  | \$ 206,784.50 |
| Line 0020 | 1099500000-E<br>SHALLOW UNDERCUT                         | 3,770.000 CY  | \$ 33.000  | \$ 124,410.00 |
| Line 0021 | 1099700000-E<br>CLASS IV SUBGRADE<br>STABILIZATION       | 7,160.000 TON | \$ 55.000  | \$ 393,800.00 |
| Line 0022 | 1110000000-E<br>STABILIZER AGGREGATE                     | 400.000 TON   | \$ 55.000  | \$ 22,000.00  |
| Line 0023 | 1112000000-E<br>GEOTEXTILE FOR SUBGRADE<br>STABILIZATION | 11,070.000 SY | \$ 7.400   | \$ 81,918.00  |
| Line 0024 | 1121000000-E                                             |               |            |               |

|                                                                               |               |               |                 |
|-------------------------------------------------------------------------------|---------------|---------------|-----------------|
| AGGREGATE BASE COURSE                                                         | 1,120.000 TON | \$ 70.000     | \$ 78,400.00    |
| Line 0025 1220000000-E<br>INCIDENTAL STONE BASE                               | 1,000.000 TON | \$ 80.000     | \$ 80,000.00    |
| Line 0026 1297000000-E<br>MILLING ASPHALT PAVEMENT,<br>****" DEPTH (1-1/2")   | 41,000.000 SY | \$ 4.800      | \$ 196,800.00   |
| Line 0027 1330000000-E<br>INCIDENTAL MILLING                                  | 3,600.000 SY  | \$ 11.300     | \$ 40,680.00    |
| Line 0028 1491000000-E<br>ASPHALT CONC BASE<br>COURSE, TYPE B25.0C            | 4,320.000 TON | \$ 156.000    | \$ 673,920.00   |
| Line 0029 1503000000-E<br>ASPHALT CONC<br>INTERMEDIATE COURSE, TYPE<br>I19.0C | 3,080.000 TON | \$ 151.000    | \$ 465,080.00   |
| Line 0030 1519000000-E<br>ASPHALT CONC SURFACE<br>COURSE, TYPE S9.5B          | 6,410.000 TON | \$ 169.000    | \$ 1,083,290.00 |
| Line 0031 1523000000-E<br>ASPHALT CONC SURFACE<br>COURSE, TYPE S9.5C          | 810.000 TON   | \$ 169.000    | \$ 136,890.00   |
| Line 0032 1575000000-E<br>ASPHALT BINDER FOR PLANT<br>MIX                     | 890.000 TON   | \$ 790.000    | \$ 703,100.00   |
| Line 0033 1693000000-E<br>ASPHALT PLANT MIX,<br>PAVEMENT REPAIR               | 710.000 TON   | \$ 400.000    | \$ 284,000.00   |
| Line 0034 1891000000-E<br>GENERIC PAVING ITEM 4"<br>CONCRETE SIDE PATH        | 6,550.000 SY  | \$ 80.000     | \$ 524,000.00   |
| Line 0035 1891500000-N<br>GENERIC PAVING ITEM<br>STAMPED CONCRETE             | 1.000 LS      | \$ 34,200.000 | \$ 34,200.00    |
| Line 0036 2022000000-E<br>SUBDRAIN EXCAVATION                                 | 112.000 CY    | \$ 58.500     | \$ 6,552.00     |

|                                                                   |              |            |              |               |
|-------------------------------------------------------------------|--------------|------------|--------------|---------------|
| Line 0037                                                         | 2026000000-E | 500.000 SY | \$ 6.450     | \$ 3,225.00   |
| GEOTEXTILE FOR<br>SUBSURFACE DRAINS                               |              |            |              |               |
| Line 0038                                                         | 2036000000-E | 84.000 CY  | \$ 111.000   | \$ 9,324.00   |
| SUBDRAIN COARSE<br>AGGREGATE                                      |              |            |              |               |
| Line 0039                                                         | 2044000000-E | 500.000 LF | \$ 16.050    | \$ 8,025.00   |
| 6" PERFORATED SUBDRAIN<br>PIPE                                    |              |            |              |               |
| Line 0040                                                         | 2070000000-N | 6.000 EA   | \$ 1,000.000 | \$ 6,000.00   |
| SUBDRAIN PIPE OUTLET                                              |              |            |              |               |
| Line 0041                                                         | 2077000000-E | 1.000 LF   | \$ 670.000   | \$ 670.00     |
| 6" OUTLET PIPE                                                    |              |            |              |               |
| Line 0042                                                         | 2190000000-N | 10.000 EA  | \$ 6,500.000 | \$ 65,000.00  |
| TEMPORARY STEEL PLATE<br>COVERS FOR MASONRY<br>DRAINAGE STRUCTURE |              |            |              |               |
| Line 0043                                                         | 2253000000-E | 0.893 CY   | \$ 2,800.000 | \$ 2,500.40   |
| PIPE COLLARS                                                      |              |            |              |               |
| Line 0044                                                         | 2275000000-E | 4.000 CY   | \$ 760.000   | \$ 3,040.00   |
| FLOWABLE FILL                                                     |              |            |              |               |
| Line 0045                                                         | 2286000000-N | 150.000 EA | \$ 6,015.000 | \$ 902,250.00 |
| MASONRY DRAINAGE<br>STRUCTURES                                    |              |            |              |               |
| Line 0046                                                         | 2308000000-E | 57.400 LF  | \$ 905.000   | \$ 51,947.00  |
| MASONRY DRAINAGE<br>STRUCTURES                                    |              |            |              |               |
| Line 0047                                                         | 2364000000-N | 12.000 EA  | \$ 1,900.000 | \$ 22,800.00  |
| FRAME WITH TWO GRATES,<br>STD 840.16                              |              |            |              |               |
| Line 0048                                                         | 2367000000-N | 23.000 EA  | \$ 1,775.000 | \$ 40,825.00  |
| FRAME WITH TWO GRATES,<br>STD 840.29                              |              |            |              |               |



|           |                                                                     |               |              |               |
|-----------|---------------------------------------------------------------------|---------------|--------------|---------------|
| Line 0049 | 2374000000-N<br>FRAME WITH GRATE & HOOD,<br>STD 840.03, TYPE ** (E) | 17.000 EA     | \$ 1,900.000 | \$ 32,300.00  |
| Line 0050 | 2374000000-N<br>FRAME WITH GRATE & HOOD,<br>STD 840.03, TYPE ** (F) | 45.000 EA     | \$ 2,000.000 | \$ 90,000.00  |
| Line 0051 | 2374000000-N<br>FRAME WITH GRATE & HOOD,<br>STD 840.03, TYPE ** (G) | 52.000 EA     | \$ 2,000.000 | \$ 104,000.00 |
| Line 0052 | 2396000000-N<br>FRAME WITH COVER, STD<br>840.54                     | 12.000 EA     | \$ 1,375.000 | \$ 16,500.00  |
| Line 0053 | 2418000000-E<br>FRAME WITH GRATES,<br>DRIVEWAY DROP INLET           | 93.000 LF     | \$ 1,050.000 | \$ 97,650.00  |
| Line 0054 | 2451000000-N<br>CONCRETE TRANSITIONAL<br>SECTION FOR DROP INLET     | 5.000 EA      | \$ 1,800.000 | \$ 9,000.00   |
| Line 0055 | 2535000000-E<br>*** X *** CONCRETE CURB (9"<br>X 12")               | 800.000 LF    | \$ 35.900    | \$ 28,720.00  |
| Line 0056 | 2535000000-E<br>*** X *** CONCRETE CURB (9"<br>X 18")               | 310.000 LF    | \$ 35.900    | \$ 11,129.00  |
| Line 0057 | 2542000000-E<br>1'-6" CONCRETE CURB &<br>GUTTER                     | 165.000 LF    | \$ 51.000    | \$ 8,415.00   |
| Line 0058 | 2549000000-E<br>2'-6" CONCRETE CURB &<br>GUTTER                     | 17,190.000 LF | \$ 51.750    | \$ 889,582.50 |
| Line 0059 | 2591000000-E<br>4" CONCRETE SIDEWALK                                | 2,500.000 SY  | \$ 91.250    | \$ 228,125.00 |
| Line 0060 | 2605000000-N<br>CONCRETE CURB RAMPS                                 | 120.000 EA    | \$ 4,000.000 | \$ 480,000.00 |

|                                                                       |              |              |              |               |
|-----------------------------------------------------------------------|--------------|--------------|--------------|---------------|
| Line 0061                                                             | 2612000000-E | 740.000 SY   | \$ 114.000   | \$ 84,360.00  |
| 6" CONCRETE DRIVEWAY                                                  |              |              |              |               |
| Line 0062                                                             | 2655000000-E | 1,890.000 SY | \$ 108.000   | \$ 204,120.00 |
| 5" MONOLITHIC CONCRETE ISLANDS (KEYED IN)                             |              |              |              |               |
| Line 0063                                                             | 2738000000-E | 470.000 SY   | \$ 257.000   | \$ 120,790.00 |
| GENERIC PAVING ITEM 12" CONCRETE TRUCK APRON, CLASS AA CONCRETE       |              |              |              |               |
| Line 0064                                                             | 2752000000-E | 395.000 LF   | \$ 56.500    | \$ 22,317.50  |
| GENERIC PAVING ITEM 1'-6" CONCRETE CURB AND GUTTER, CLASS AA CONCRETE |              |              |              |               |
| Line 0065                                                             | 2761000000-E | 130.000 SY   | \$ 124.000   | \$ 16,120.00  |
| GENERIC PAVING ITEM 6" CONCRETE SIDEWALK                              |              |              |              |               |
| Line 0066                                                             | 2800000000-N | 1.000 EA     | \$ 1,000.000 | \$ 1,000.00   |
| ADJUSTMENT OF CATCH BASINS                                            |              |              |              |               |
| Line 0067                                                             | 2830000000-N | 1.000 EA     | \$ 1,450.000 | \$ 1,450.00   |
| ADJUSTMENT OF MANHOLES                                                |              |              |              |               |
| Line 0068                                                             | 2893000000-N | 7.000 EA     | \$ 3,100.000 | \$ 21,700.00  |
| CONVERT EXISTING CATCH BASIN TO JUNCTION BOX WITH MANHOLE             |              |              |              |               |
| Line 0069                                                             | 2920000000-N | 1.000 EA     | \$ 3,200.000 | \$ 3,200.00   |
| CONVERT EXISTING DROP INLET TO CATCH BASIN                            |              |              |              |               |
| Line 0070                                                             | 2938000000-N | 2.000 EA     | \$ 3,200.000 | \$ 6,400.00   |
| CONVERT EXISTING DROP INLET TO JUNCTION BOX WITH MANHOLE              |              |              |              |               |
| Line 0071                                                             | 2965000000-N | 1.000 EA     | \$ 3,200.000 | \$ 3,200.00   |
| CONVERT EXISTING JUNCTION BOX TO CATCH BASIN                          |              |              |              |               |
| Line 0072                                                             | 3030000000-E |              |              |               |

|                                                                                  |            |              |              |
|----------------------------------------------------------------------------------|------------|--------------|--------------|
| STEEL BEAM GUARDRAIL                                                             | 700.000 LF | \$ 28.200    | \$ 19,740.00 |
| Line 0073 3045000000-E<br>STEEL BEAM GUARDRAIL,<br>SHOP CURVED                   | 75.000 LF  | \$ 29.400    | \$ 2,205.00  |
| Line 0074 3105000000-N<br>STEEL BEAM GUARDRAIL<br>TERMINAL SECTIONS              | 2.000 EA   | \$ 125.000   | \$ 250.00    |
| Line 0075 3150000000-N<br>ADDITIONAL GUARDRAIL<br>POSTS                          | 10.000 EA  | \$ 12.450    | \$ 124.50    |
| Line 0076 3210000000-N<br>GUARDRAIL END UNITS, TYPE<br>CAT-1                     | 7.000 EA   | \$ 1,075.000 | \$ 7,525.00  |
| Line 0077 3287000000-N<br>GUARDRAIL END UNITS, TYPE<br>TL-3                      | 3.000 EA   | \$ 3,600.000 | \$ 10,800.00 |
| Line 0078 3288000000-N<br>GUARDRAIL END UNITS, TYPE<br>TL-2                      | 1.000 EA   | \$ 3,500.000 | \$ 3,500.00  |
| Line 0079 3360000000-E<br>REMOVE EXISTING<br>GUARDRAIL                           | 850.000 LF | \$ 1.150     | \$ 977.50    |
| Line 0080 3533000000-E<br>CHAIN LINK FENCE, ***<br>FABRIC (72")                  | 200.000 LF | \$ 20.900    | \$ 4,180.00  |
| Line 0081 3539000000-E<br>METAL LINE POSTS FOR ***<br>CHAIN LINK FENCE (72")     | 16.000 EA  | \$ 141.000   | \$ 2,256.00  |
| Line 0082 3545000000-E<br>METAL TERMINAL POSTS FOR<br>*** CHAIN LINK FENCE (72") | 5.000 EA   | \$ 395.000   | \$ 1,975.00  |
| Line 0083 3559000000-E<br>** STRAND BARBED WIRE<br>FENCE WITH POSTS (3)          | 200.000 LF | \$ 14.100    | \$ 2,820.00  |
| Line 0084 3575000000-E                                                           |            |              |              |

|                                                                                        |              |              |               |
|----------------------------------------------------------------------------------------|--------------|--------------|---------------|
| GENERIC FENCING ITEM<br>BICYCLE/PEDESTRIAN<br>SAFETY RAIL                              | 400.000 LF   | \$ 311.000   | \$ 124,400.00 |
| Line 0085 3649000000-E<br>RIP RAP, CLASS B                                             | 100.000 TON  | \$ 194.000   | \$ 19,400.00  |
| Line 0086 3656000000-E<br>GEOTEXTILE FOR DRAINAGE                                      | 5,685.000 SY | \$ 5.450     | \$ 30,983.25  |
| Line 0087 4048000000-E<br>REINFORCED CONCRETE SIGN<br>FOUNDATIONS                      | 3.000 CY     | \$ 1,300.000 | \$ 3,900.00   |
| Line 0088 4060000000-E<br>SUPPORTS, BREAKAWAY<br>STEEL BEAM                            | 2,802.000 LB | \$ 10.550    | \$ 29,561.10  |
| Line 0089 4072000000-E<br>SUPPORTS, 3-LB STEEL U-<br>CHANNEL                           | 2,449.000 LF | \$ 11.750    | \$ 28,775.75  |
| Line 0090 4096000000-N<br>SIGN ERECTION, TYPE D                                        | 2.000 EA     | \$ 115.000   | \$ 230.00     |
| Line 0091 4102000000-N<br>SIGN ERECTION, TYPE E                                        | 147.000 EA   | \$ 103.000   | \$ 15,141.00  |
| Line 0092 4108000000-N<br>SIGN ERECTION, TYPE F                                        | 27.000 EA    | \$ 91.750    | \$ 2,477.25   |
| Line 0093 4110000000-N<br>SIGN ERECTION, TYPE ***<br>(GROUND MOUNTED) (A)              | 4.000 EA     | \$ 1,400.000 | \$ 5,600.00   |
| Line 0094 4116100000-N<br>SIGN ERECTION, RELOCATE<br>TYPE **** (GROUND<br>MOUNTED) (D) | 2.000 EA     | \$ 166.000   | \$ 332.00     |
| Line 0095 4116100000-N<br>SIGN ERECTION, RELOCATE<br>TYPE **** (GROUND<br>MOUNTED) (E) | 6.000 EA     | \$ 155.000   | \$ 930.00     |

|           |                                                                              |              |               |              |
|-----------|------------------------------------------------------------------------------|--------------|---------------|--------------|
| Line 0096 | 4116100000-N<br>SIGN ERECTION, RELOCATE<br>TYPE **** (GROUND<br>MOUNTED) (F) | 1.000 EA     | \$ 143.000    | \$ 143.00    |
| Line 0097 | 4155000000-N<br>DISPOSAL OF SIGN SYSTEM,<br>U-CHANNEL                        | 104.000 EA   | \$ 25.200     | \$ 2,620.80  |
| Line 0098 | 4158000000-N<br>DISPOSAL OF SIGN SYSTEM,<br>WOOD                             | 9.000 EA     | \$ 25.200     | \$ 226.80    |
| Line 0099 | 4192000000-N<br>DISPOSAL OF SUPPORT, U-<br>CHANNEL                           | 20.000 EA    | \$ 25.200     | \$ 504.00    |
| Line 0100 | 4237000000-N<br>STOCKPILE SIGN, D, E OR F                                    | 5.000 EA     | \$ 172.000    | \$ 860.00    |
| Line 0101 | 4238000000-N<br>DISPOSAL OF SIGN, D, E OR F                                  | 32.000 EA    | \$ 27.500     | \$ 880.00    |
| Line 0102 | 4360000000-N<br>GENERIC SIGNING ITEM<br>RELOCATE WAYFINDING<br>ASSEMBLY      | 7.000 EA     | \$ 2,775.000  | \$ 19,425.00 |
| Line 0103 | 4400000000-E<br>WORK ZONE SIGNS<br>(STATIONARY)                              | 1,282.000 SF | \$ 7.650      | \$ 9,807.30  |
| Line 0104 | 4405000000-E<br>WORK ZONE SIGNS<br>(PORTABLE)                                | 1,652.000 SF | \$ 37.400     | \$ 61,784.80 |
| Line 0105 | 4410000000-E<br>WORK ZONE SIGNS<br>(BARRICADE MOUNTED)                       | 32.000 SF    | \$ 8.600      | \$ 275.20    |
| Line 0106 | 4415000000-N<br>FLASHING ARROW BOARD                                         | 6.000 EA     | \$ 6,250.000  | \$ 37,500.00 |
| Line 0107 | 4420000000-N<br>PORTABLE CHANGEABLE<br>MESSAGE SIGN                          | 2.000 EA     | \$ 31,400.000 | \$ 62,800.00 |
| Line 0108 | 4430000000-N                                                                 |              |               |              |

|                                                                                           |            |                |               |
|-------------------------------------------------------------------------------------------|------------|----------------|---------------|
| DRUMS                                                                                     | 823.000 EA | \$ 68.000      | \$ 55,964.00  |
| Line 0109 4435000000-N<br>CONES                                                           | 935.000 EA | \$ 39.600      | \$ 37,026.00  |
| Line 0110 4445000000-E<br>BARRICADES (TYPE III)                                           | 48.000 LF  | \$ 44.000      | \$ 2,112.00   |
| Line 0111 4447000000-E<br>PEDESTRIAN CHANNELIZING<br>DEVICES                              | 885.000 LF | \$ 38.500      | \$ 34,072.50  |
| Line 0112 4455000000-N<br>FLAGGER                                                         | 49.000 DAY | \$ 1,600.000   | \$ 78,400.00  |
| Line 0113 4480000000-N<br>TMA                                                             | 2.000 EA   | \$ 158,600.000 | \$ 317,200.00 |
| Line 0114 4507000000-E<br>WATER FILLED BARRIER                                            | 500.000 LF | \$ 106.000     | \$ 53,000.00  |
| Line 0115 4510000000-N<br>LAW ENFORCEMENT                                                 | 98.000 HR  | \$ 100.000     | \$ 9,800.00   |
| Line 0116 4516000000-N<br>SKINNY DRUM                                                     | 92.000 EA  | \$ 46.700      | \$ 4,296.40   |
| Line 0117 4600000000-N<br>GENERIC TRAFFIC CONTROL<br>ITEM AUDIBLE WARNING<br>DEVICES      | 77.000 EA  | \$ 1,100.000   | \$ 84,700.00  |
| Line 0118 4600000000-N<br>GENERIC TRAFFIC CONTROL<br>ITEM PEDESTRIAN<br>TRANSPORT SERVICE | 350.000 EA | \$ 47.600      | \$ 16,660.00  |
| Line 0119 4600000000-N<br>GENERIC TRAFFIC CONTROL<br>ITEM TEMPORARY CURB<br>RAMPS         | 22.000 EA  | \$ 350.000     | \$ 7,700.00   |
| Line 0120 4650000000-N<br>TEMPORARY RAISED<br>PAVEMENT MARKERS                            | 96.000 EA  | \$ 16.300      | \$ 1,564.80   |
| Line 0121 4685000000-E                                                                    |            |                |               |

|                                                                                           |                |            |              |
|-------------------------------------------------------------------------------------------|----------------|------------|--------------|
| THERMOPLASTIC PAVEMENT MARKING LINES (4", 90 MILS)                                        | 35,203.000 LF  | \$ 1.450   | \$ 51,044.35 |
| Line 0122 4695000000-E<br>THERMOPLASTIC PAVEMENT MARKING LINES (8", 90 MILS)              | 4,700.000 LF   | \$ 3.650   | \$ 17,155.00 |
| Line 0123 4709000000-E<br>THERMOPLASTIC PAVEMENT MARKING LINES (24", 90 MILS)             | 1,972.000 LF   | \$ 16.000  | \$ 31,552.00 |
| Line 0124 4720000000-E<br>THERMOPLASTIC PAVEMENT MARKING CHARACTER (90 MILS)              | 19.000 EA      | \$ 197.000 | \$ 3,743.00  |
| Line 0125 4725000000-E<br>THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS)                 | 119.000 EA     | \$ 225.000 | \$ 26,775.00 |
| Line 0126 4726110000-E<br>HEATED-IN-PLACE THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS) | 1.000 EA       | \$ 505.000 | \$ 505.00    |
| Line 0127 4770000000-E<br>COLD APPLIED PLASTIC PAVEMENT MARKING LINES, TYPE ** (4") (IV)  | 270.000 LF     | \$ 7.300   | \$ 1,971.00  |
| Line 0128 4810000000-E<br>PAINT PAVEMENT MARKING LINES (4")                               | 101,528.000 LF | \$ 0.400   | \$ 40,611.20 |
| Line 0129 4820000000-E<br>PAINT PAVEMENT MARKING LINES (8")                               | 9,998.000 LF   | \$ 1.400   | \$ 13,997.20 |
| Line 0130 4835000000-E<br>PAINT PAVEMENT MARKING LINES (24")                              | 2,352.000 LF   | \$ 5.900   | \$ 13,876.80 |
| Line 0131 4840000000-N<br>PAINT PAVEMENT MARKING CHARACTER                                | 4.000 EA       | \$ 95.500  | \$ 382.00    |
| Line 0132 4845000000-N                                                                    | 75.000 EA      | \$ 112.000 | \$ 8,400.00  |

PAINT PAVEMENT MARKING  
SYMBOL

|           |                                                                                                                 |               |            |                 |
|-----------|-----------------------------------------------------------------------------------------------------------------|---------------|------------|-----------------|
| Line 0133 | 4850000000-E<br>REMOVAL OF PAVEMENT<br>MARKING LINES (4")                                                       | 20,078.000 LF | \$ 0.850   | \$ 17,066.30    |
| Line 0134 | 4860000000-E<br>REMOVAL OF PAVEMENT<br>MARKING LINES (8")                                                       | 1,801.000 LF  | \$ 1.400   | \$ 2,521.40     |
| Line 0135 | 4870000000-E<br>REMOVAL OF PAVEMENT<br>MARKING LINES (24")                                                      | 1,088.000 LF  | \$ 3.350   | \$ 3,644.80     |
| Line 0136 | 4875000000-N<br>REMOVAL OF PAVEMENT<br>MARKING SYMBOLS &<br>CHARACTERS                                          | 84.000 EA     | \$ 101.000 | \$ 8,484.00     |
| Line 0137 | 4890000000-E<br>GENERIC PAVEMENT<br>MARKING ITEM YIELD LINE<br>PAINT PAVEMENT MARKING<br>(24")                  | 392.000 LF    | \$ 7.300   | \$ 2,861.60     |
| Line 0138 | 4890000000-E<br>GENERIC PAVEMENT<br>MARKING ITEM YIELD LINE<br>THERMOPLASTIC PAVEMENT<br>MARKING (24", 90 MILS) | 163.000 LF    | \$ 18.550  | \$ 3,023.65     |
| Line 0139 | 4895000000-N<br>GENERIC PAVEMENT<br>MARKING ITEM<br>POLYCARBONATE H-SHAPED<br>MARKERS                           | 654.000 EA    | \$ 52.000  | \$ 34,008.00    |
| Line 0140 | 5325200000-E<br>2" WATER LINE                                                                                   | 40.000 LF     | \$ 96.000  | \$ 3,840.00     |
| Line 0141 | 5325600000-E<br>6" WATER LINE                                                                                   | 2,160.000 LF  | \$ 141.000 | \$ 304,560.00   |
| Line 0142 | 5325800000-E<br>8" WATER LINE                                                                                   | 8,060.000 LF  | \$ 152.000 | \$ 1,225,120.00 |
| Line 0143 | 5326200000-E<br>12" WATER LINE                                                                                  | 1,105.000 LF  | \$ 226.000 | \$ 249,730.00   |



|                                  |              |              |               |               |
|----------------------------------|--------------|--------------|---------------|---------------|
| Line 0144                        | 5326600000-E | 860.000 LF   | \$ 339.000    | \$ 291,540.00 |
| 16" WATER LINE                   |              |              |               |               |
| Line 0145                        | 5329000000-E | 4,300.000 LB | \$ 22.600     | \$ 97,180.00  |
| DUCTILE IRON WATER PIPE FITTINGS |              |              |               |               |
| Line 0146                        | 5536000000-E | 2.000 EA     | \$ 2,825.000  | \$ 5,650.00   |
| 2" VALVE                         |              |              |               |               |
| Line 0147                        | 5540000000-E | 20.000 EA    | \$ 3,025.000  | \$ 60,500.00  |
| 6" VALVE                         |              |              |               |               |
| Line 0148                        | 5546000000-E | 26.000 EA    | \$ 4,275.000  | \$ 111,150.00 |
| 8" VALVE                         |              |              |               |               |
| Line 0149                        | 5558000000-E | 2.000 EA     | \$ 11,050.000 | \$ 22,100.00  |
| 12" VALVE                        |              |              |               |               |
| Line 0150                        | 5558600000-E | 4.000 EA     | \$ 14,200.000 | \$ 56,800.00  |
| 16" VALVE                        |              |              |               |               |
| Line 0151                        | 5648000000-N | 11.000 EA    | \$ 4,500.000  | \$ 49,500.00  |
| RELOCATE WATER METER             |              |              |               |               |
| Line 0152                        | 5649000000-N | 64.000 EA    | \$ 2,250.000  | \$ 144,000.00 |
| RECONNECT WATER METER            |              |              |               |               |
| Line 0153                        | 5666000000-N | 10.000 EA    | \$ 15,800.000 | \$ 158,000.00 |
| FIRE HYDRANT                     |              |              |               |               |
| Line 0154                        | 5673000000-E | 196.000 LF   | \$ 113.000    | \$ 22,148.00  |
| FIRE HYDRANT LEG                 |              |              |               |               |
| Line 0155                        | 5686500000-E | 1,640.000 LF | \$ 67.750     | \$ 111,110.00 |
| WATER SERVICE LINE               |              |              |               |               |
| Line 0156                        | 5691300000-E | 5,880.000 LF | \$ 169.000    | \$ 993,720.00 |
| 8" SANITARY GRAVITY SEWER        |              |              |               |               |
| Line 0157                        | 5775000000-E | 31.000 EA    | \$ 11,300.000 | \$ 350,300.00 |
| 4' DIA UTILITY MANHOLE           |              |              |               |               |

|           |                                                                              |               |              |               |
|-----------|------------------------------------------------------------------------------|---------------|--------------|---------------|
| Line 0158 | 5781000000-E<br>UTILITY MANHOLE WALL 4'<br>DIA                               | 25.000 LF     | \$ 1,125.000 | \$ 28,125.00  |
| Line 0159 | 5801000000-E<br>ABANDON 8" UTILITY PIPE                                      | 1,126.000 LF  | \$ 11.300    | \$ 12,723.80  |
| Line 0160 | 5804000000-E<br>ABANDON 12" UTILITY PIPE                                     | 1,105.000 LF  | \$ 16.950    | \$ 18,729.75  |
| Line 0161 | 5810000000-E<br>ABANDON 16" UTILITY PIPE                                     | 795.000 LF    | \$ 33.900    | \$ 26,950.50  |
| Line 0162 | 5828000000-N<br>REMOVE UTILITY MANHOLE                                       | 5.000 EA      | \$ 3,400.000 | \$ 17,000.00  |
| Line 0163 | 5882000000-N<br>GENERIC UTILITY ITEM<br>REMOVE AND STOCKPILE FIRE<br>HYDRANT | 11.000 EA     | \$ 1,125.000 | \$ 12,375.00  |
| Line 0164 | 6000000000-E<br>TEMPORARY SILT FENCE                                         | 13,250.000 LF | \$ 3.650     | \$ 48,362.50  |
| Line 0165 | 6006000000-E<br>STONE FOR EROSION<br>CONTROL, CLASS A                        | 1,280.000 TON | \$ 69.000    | \$ 88,320.00  |
| Line 0166 | 6009000000-E<br>STONE FOR EROSION<br>CONTROL, CLASS B                        | 390.000 TON   | \$ 69.000    | \$ 26,910.00  |
| Line 0167 | 6012000000-E<br>SEDIMENT CONTROL STONE                                       | 1,835.000 TON | \$ 69.000    | \$ 126,615.00 |
| Line 0168 | 6015000000-E<br>TEMPORARY MULCHING                                           | 21.000 ACR    | \$ 1,400.000 | \$ 29,400.00  |
| Line 0169 | 6018000000-E<br>SEED FOR TEMPORARY<br>SEEDING                                | 1,200.000 LB  | \$ 3.650     | \$ 4,380.00   |
| Line 0170 | 6021000000-E<br>FERTILIZER FOR TEMPORARY<br>SEEDING                          | 6.000 TON     | \$ 2,000.000 | \$ 12,000.00  |
| Line 0171 | 6024000000-E                                                                 |               |              |               |

|                                                            |               |              |              |
|------------------------------------------------------------|---------------|--------------|--------------|
| TEMPORARY SLOPE DRAINS                                     | 200.000 LF    | \$ 30.000    | \$ 6,000.00  |
| Line 0172 6029000000-E<br>SAFETY FENCE                     | 500.000 LF    | \$ 3.400     | \$ 1,700.00  |
| Line 0173 6030000000-E<br>SILT EXCAVATION                  | 1,140.000 CY  | \$ 0.010     | \$ 11.40     |
| Line 0174 6036000000-E<br>MATTING FOR EROSION<br>CONTROL   | 32,000.000 SY | \$ 1.700     | \$ 54,400.00 |
| Line 0175 6037000000-E<br>COIR FIBER MAT                   | 100.000 SY    | \$ 11.300    | \$ 1,130.00  |
| Line 0176 6042000000-E<br>1/4" HARDWARE CLOTH              | 6,620.000 LF  | \$ 10.100    | \$ 66,862.00 |
| Line 0177 6070000000-N<br>SPECIAL STILLING BASINS          | 1.000 EA      | \$ 1,200.000 | \$ 1,200.00  |
| Line 0178 6071002000-E<br>FLOCCULANT                       | 220.000 LB    | \$ 28.200    | \$ 6,204.00  |
| Line 0179 6071012000-E<br>COIR FIBER WATTLE                | 280.000 LF    | \$ 13.550    | \$ 3,794.00  |
| Line 0180 6084000000-E<br>SEEDING & MULCHING               | 21.000 ACR    | \$ 3,400.000 | \$ 71,400.00 |
| Line 0181 6087000000-E<br>MOWING                           | 11.000 ACR    | \$ 113.000   | \$ 1,243.00  |
| Line 0182 6090000000-E<br>SEED FOR REPAIR SEEDING          | 300.000 LB    | \$ 5.650     | \$ 1,695.00  |
| Line 0183 6093000000-E<br>FERTILIZER FOR REPAIR<br>SEEDING | 0.750 TON     | \$ 1,100.000 | \$ 825.00    |
| Line 0184 6096000000-E<br>SEED FOR SUPPLEMENTAL<br>SEEDING | 400.000 LB    | \$ 11.300    | \$ 4,520.00  |
| Line 0185 6108000000-E<br>FERTILIZER TOPDRESSING           | 12.000 TON    | \$ 2,000.000 | \$ 24,000.00 |

|           |                                                                                            |            |              |              |
|-----------|--------------------------------------------------------------------------------------------|------------|--------------|--------------|
| Line 0186 | 6114500000-N<br>SPECIALIZED HAND MOWING                                                    | 7.000 MHR  | \$ 113.000   | \$ 791.00    |
| Line 0187 | 6114800000-N<br>MANUAL LITTER REMOVAL                                                      | 9.000 MHR  | \$ 113.000   | \$ 1,017.00  |
| Line 0188 | 6114900000-E<br>LITTER DISPOSAL                                                            | 4.000 TON  | \$ 560.000   | \$ 2,240.00  |
| Line 0189 | 6117000000-N<br>RESPONSE FOR EROSION<br>CONTROL                                            | 50.000 EA  | \$ 282.000   | \$ 14,100.00 |
| Line 0190 | 6117500000-N<br>CONCRETE WASHOUT<br>STRUCTURE                                              | 5.000 EA   | \$ 2,100.000 | \$ 10,500.00 |
| Line 0191 | 6132000000-N<br>GENERIC EROSION CONTROL<br>ITEM FABRIC INSERT INLET<br>PROTECTION CLEANOUT | 366.000 EA | \$ 239.000   | \$ 87,474.00 |
| Line 0192 | 6132000000-N<br>GENERIC EROSION CONTROL<br>ITEM FABRIC INSERT INLET<br>PROTECTION, TYPE 1  | 122.000 EA | \$ 188.000   | \$ 22,936.00 |
| Line 0193 | 6132000000-N<br>GENERIC EROSION CONTROL<br>ITEM PREFABRICATED<br>CONCRETE WASHOUT          | 20.000 EA  | \$ 1,200.000 | \$ 24,000.00 |
| Line 0194 | 6215000000-N<br>ACER SACCHARUM, SUGAR<br>MAPLE, (30 GAL, 8'-10' HT, 2"<br>CAL)             | 11.000 EA  | \$ 560.000   | \$ 6,160.00  |
| Line 0195 | 6260000000-N<br>CORNUS FLORIDA,<br>FLOWERING DOGWOOD, (25<br>GAL, 6'-8' HT)                | 1.000 EA   | \$ 361.000   | \$ 361.00    |
| Line 0196 | 6390000000-N<br>ILEX VOMITORIA, YAUPON<br>HOLLY, (5 GAL, 15"-18", 4' OC)                   | 48.000 EA  | \$ 103.000   | \$ 4,944.00  |
| Line 0197 | 6400000000-N                                                                               | 23.000 EA  | \$ 66.750    | \$ 1,535.25  |

ITEA VIRGINICA, VIRGINIA  
SWEETSPIRE, (3 GAL, 18"-24",  
3' OC)

|           |                                                                                   |          |            |             |
|-----------|-----------------------------------------------------------------------------------|----------|------------|-------------|
| Line 0198 | 6410000000-N<br>JUNIPERUS VIRGINIANA,<br>EASTERN RED CEDAR, (25<br>GAL, 6'-8' HT) | 8.000 EA | \$ 497.000 | \$ 3,976.00 |
|-----------|-----------------------------------------------------------------------------------|----------|------------|-------------|

|           |                                                                                              |          |           |           |
|-----------|----------------------------------------------------------------------------------------------|----------|-----------|-----------|
| Line 0199 | 6640000000-N<br>GENERIC PLANTING ITEM<br>ECHINACEA PURPUREA,<br>EASTERN PURPLE<br>CONEFLOWER | 9.000 EA | \$ 49.700 | \$ 447.30 |
|-----------|----------------------------------------------------------------------------------------------|----------|-----------|-----------|

|           |                                                                      |            |           |             |
|-----------|----------------------------------------------------------------------|------------|-----------|-------------|
| Line 0200 | 6640000000-N<br>GENERIC PLANTING ITEM IRIS<br>VERNA, DWARF FLAG IRIS | 120.000 EA | \$ 36.700 | \$ 4,404.00 |
|-----------|----------------------------------------------------------------------|------------|-----------|-------------|

|           |                                                                                       |            |           |             |
|-----------|---------------------------------------------------------------------------------------|------------|-----------|-------------|
| Line 0201 | 6640000000-N<br>GENERIC PLANTING ITEM<br>MUHLENBERGIA CAPILLARIS,<br>PINK MUHLY GRASS | 127.000 EA | \$ 56.500 | \$ 7,175.50 |
|-----------|---------------------------------------------------------------------------------------|------------|-----------|-------------|

|           |                                                                               |              |           |              |
|-----------|-------------------------------------------------------------------------------|--------------|-----------|--------------|
| Line 0202 | 6640000000-N<br>GENERIC PLANTING ITEM<br>RUDBECKIA HIRTA, BLACK<br>EYED SUSAN | 1,071.000 EA | \$ 30.200 | \$ 32,344.20 |
|-----------|-------------------------------------------------------------------------------|--------------|-----------|--------------|

|           |                                                                |           |              |              |
|-----------|----------------------------------------------------------------|-----------|--------------|--------------|
| Line 0203 | 6645000000-N<br>GENERIC PLANTING ITEM<br>MONTHLY ESTABLISHMENT | 12.000 EA | \$ 2,250.000 | \$ 27,000.00 |
|-----------|----------------------------------------------------------------|-----------|--------------|--------------|

|           |                                    |            |            |              |
|-----------|------------------------------------|------------|------------|--------------|
| Line 0204 | 6650000000-E<br>MULCH FOR PLANTING | 150.000 CY | \$ 105.000 | \$ 15,750.00 |
|-----------|------------------------------------|------------|------------|--------------|

|           |                                    |           |              |             |
|-----------|------------------------------------|-----------|--------------|-------------|
| Line 0205 | 6655000000-E<br>WATER FOR PLANTING | 1.000 M/G | \$ 1,100.000 | \$ 1,100.00 |
|-----------|------------------------------------|-----------|--------------|-------------|

|           |                                                                     |              |          |           |
|-----------|---------------------------------------------------------------------|--------------|----------|-----------|
| Line 0206 | 6665000000-E<br>POSTEMERGENT HERBICIDAL<br>TREATMENT FOR PLANT BEDS | 1,350.000 SY | \$ 0.550 | \$ 742.50 |
|-----------|---------------------------------------------------------------------|--------------|----------|-----------|

|           |                                                                    |              |          |           |
|-----------|--------------------------------------------------------------------|--------------|----------|-----------|
| Line 0207 | 6670000000-E<br>PREEMERGENT HERBICIDAL<br>TREATMENT FOR PLANT BEDS | 1,350.000 SY | \$ 0.550 | \$ 742.50 |
|-----------|--------------------------------------------------------------------|--------------|----------|-----------|

|           |              |          |               |              |
|-----------|--------------|----------|---------------|--------------|
| Line 0208 | 6674000000-N | 1.000 LS | \$ 52,400.000 | \$ 52,400.00 |
|-----------|--------------|----------|---------------|--------------|

GENERIC PLANTING ITEM (LS)  
IRRIGATION

|           |                                                                           |               |              |               |
|-----------|---------------------------------------------------------------------------|---------------|--------------|---------------|
| Line 0209 | 6675000000-E<br>GENERIC PLANTING ITEM SOD<br>(ZOYSIA)                     | 1,936.000 SY  | \$ 24.900    | \$ 48,206.40  |
| Line 0210 | 6900000000-E<br>TOPSOIL                                                   | 150.000 CY    | \$ 115.000   | \$ 17,250.00  |
| Line 0211 | 7048500000-E<br>PEDESTRIAN SIGNAL HEAD<br>(16", 1 SECTION<br>W/COUNTDOWN) | 37.000 EA     | \$ 1,150.000 | \$ 42,550.00  |
| Line 0212 | 7060000000-E<br>SIGNAL CABLE                                              | 12,500.000 LF | \$ 6.900     | \$ 86,250.00  |
| Line 0213 | 7120000000-E<br>VEHICLE SIGNAL HEAD (12", 3<br>SECTION)                   | 60.000 EA     | \$ 1,825.000 | \$ 109,500.00 |
| Line 0214 | 7132000000-E<br>VEHICLE SIGNAL HEAD (12", 4<br>SECTION)                   | 15.000 EA     | \$ 2,050.000 | \$ 30,750.00  |
| Line 0215 | 7144000000-E<br>VEHICLE SIGNAL HEAD (12", 5<br>SECTION)                   | 1.000 EA      | \$ 2,850.000 | \$ 2,850.00   |
| Line 0216 | 7264000000-E<br>MESSENGER CABLE (3/8")                                    | 1,850.000 LF  | \$ 6.900     | \$ 12,765.00  |
| Line 0217 | 7300000000-E<br>UNPAVED TRENCHING<br>(***** (1, 2"))                      | 125.000 LF    | \$ 13.750    | \$ 1,718.75   |
| Line 0218 | 7300000000-E<br>UNPAVED TRENCHING<br>(***** (2, 2"))                      | 200.000 LF    | \$ 17.200    | \$ 3,440.00   |
| Line 0219 | 7300000000-E<br>UNPAVED TRENCHING<br>(***** (4, 2"))                      | 40.000 LF     | \$ 34.400    | \$ 1,376.00   |
| Line 0220 | 7301000000-E<br>DIRECTIONAL DRILL<br>(***** (1, 2"))                      | 475.000 LF    | \$ 34.400    | \$ 16,340.00  |

|           |                                                                 |              |              |              |
|-----------|-----------------------------------------------------------------|--------------|--------------|--------------|
| Line 0221 | 7301000000-E<br>DIRECTIONAL DRILL<br>(*****)(2, 2")             | 225.000 LF   | \$ 45.900    | \$ 10,327.50 |
| Line 0222 | 7324000000-N<br>JUNCTION BOX (STANDARD<br>SIZE)                 | 24.000 EA    | \$ 1,125.000 | \$ 27,000.00 |
| Line 0223 | 7348000000-N<br>JUNCTION BOX (OVER-SIZED,<br>HEAVY DUTY)        | 5.000 EA     | \$ 1,700.000 | \$ 8,500.00  |
| Line 0224 | 7360000000-N<br>WOOD POLE                                       | 20.000 EA    | \$ 1,375.000 | \$ 27,500.00 |
| Line 0225 | 7372000000-N<br>GUY ASSEMBLY                                    | 39.000 EA    | \$ 1,075.000 | \$ 41,925.00 |
| Line 0226 | 7420000000-E<br>2" RISER WITH<br>WEATHERHEAD                    | 31.000 EA    | \$ 1,125.000 | \$ 34,875.00 |
| Line 0227 | 7444000000-E<br>INDUCTIVE LOOP SAWCUT                           | 850.000 LF   | \$ 25.200    | \$ 21,420.00 |
| Line 0228 | 7456100000-E<br>LEAD-IN CABLE (14-2)                            | 6,025.000 LF | \$ 6.900     | \$ 41,572.50 |
| Line 0229 | 7575142010-N<br>900MHZ SERIAL/ETHERNET<br>SPREAD SPECTRUM RADIO | 1.000 EA     | \$ 5,400.000 | \$ 5,400.00  |
| Line 0230 | 7575142060-N<br>MODIFY RADIO INSTALLATION                       | 3.000 EA     | \$ 344.000   | \$ 1,032.00  |
| Line 0231 | 7636000000-N<br>SIGN FOR SIGNALS                                | 29.000 EA    | \$ 690.000   | \$ 20,010.00 |
| Line 0232 | 7642100000-N<br>TYPE I POST WITH<br>FOUNDATION                  | 15.000 EA    | \$ 2,900.000 | \$ 43,500.00 |
| Line 0233 | 7642200000-N<br>TYPE II PEDESTAL WITH<br>FOUNDATION             | 16.000 EA    | \$ 4,300.000 | \$ 68,800.00 |
| Line 0234 | 7648000000-N                                                    |              |              |              |

|                                                                                                                |           |               |               |
|----------------------------------------------------------------------------------------------------------------|-----------|---------------|---------------|
| RELOCATE EXISTING SIGN                                                                                         | 10.000 EA | \$ 920.000    | \$ 9,200.00   |
| Line 0235 7684000000-N<br>SIGNAL CABINET<br>FOUNDATION                                                         | 4.000 EA  | \$ 3,150.000  | \$ 12,600.00  |
| Line 0236 7696000000-N<br>CONTROLLERS WITH<br>CABINET<br>(*****<br>(2070LX, BASE MOUNTED)                      | 5.000 EA  | \$ 27,000.000 | \$ 135,000.00 |
| Line 0237 7744000000-N<br>DETECTOR CARD (TYPE 170)                                                             | 5.000 EA  | \$ 459.000    | \$ 2,295.00   |
| Line 0238 7901000000-N<br>CABINET BASE EXTENDER                                                                | 5.000 EA  | \$ 1,375.000  | \$ 6,875.00   |
| Line 0239 7980000000-N<br>GENERIC SIGNAL ITEM<br>CONTROLLER (2070LX)                                           | 1.000 EA  | \$ 6,875.000  | \$ 6,875.00   |
| Line 0240 7980000000-N<br>GENERIC SIGNAL ITEM<br>ETHERNET EDGE SWITCH                                          | 4.000 EA  | \$ 3,150.000  | \$ 12,600.00  |
| Line 0241 7980000000-N<br>GENERIC SIGNAL ITEM GPS<br>EMERGENCY VEHICLE<br>PREEMPTION SYSTEM                    | 2.000 EA  | \$ 9,175.000  | \$ 18,350.00  |
| Line 0242 7980000000-N<br>GENERIC SIGNAL ITEM<br>MICROWAVE VEHICLE<br>DETECTORS - MULTIPLE<br>ZONES (APPROACH) | 10.000 EA | \$ 19,200.000 | \$ 192,000.00 |
| Line 0243 7980000000-N<br>GENERIC SIGNAL ITEM<br>MICROWAVE VEHICLE<br>DETECTORS - MULTIPLE<br>ZONES (PRESENCE) | 9.000 EA  | \$ 18,900.000 | \$ 170,100.00 |
| Line 0244 7980000000-N<br>GENERIC SIGNAL ITEM<br>RECTANGULAR RAPID<br>FLASHING BEACON<br>ASSEMBLY              | 12.000 EA | \$ 8,600.000  | \$ 103,200.00 |



Line 0245 7980000000-N

GENERIC SIGNAL ITEM  
TRANSFER SWITCH

7.000 EA

\$ 4,000.000

\$ 28,000.00

# Miscellaneous data

## ELECTRONIC BID SUBMISSION

By submitting this bid electronically, I hereby acknowledge that all requirements included in the hard copy proposal, addendum, amendments, plans, standard specifications, supplemental specifications and special provisions are part of the bid and contract. Further, I acknowledge that I have read, understand, accept, acknowledge and agree to comply with all statements in this electronic bid.

---

## NON-COLLUSION, DEBARMENT AND GIFT BAN CERTIFICATION

The prequalified bidder declares (or certifies, verifies, or states) under penalty of perjury under the laws of the United States that neither he, nor any official, agent or employee has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with any bid or contract, that the prequalified bidder has not been convicted of violating N.C.G.S. §133-24 within the last three years, and that the prequalified bidder intends to do the work with his own bonafide employees or subcontractors and will not bid for the benefit of another contractor.

By submitting this non-collusion, debarment and gift ban certification, the Contractor is attesting his status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

N.C.G.S. §133-32 and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

---

## DEBARMENT CERTIFICATION OF PREQUALIFIED BIDDER

Conditions for certification:

1. The prequalified bidder shall provide immediate written notice to the Department if at any time the bidder learns that his certification was erroneous when he submitted his debarment certification or explanation that is file with the Department, or has become erroneous because of changed circumstances.
2. The terms covered transaction, debarred, suspended, ineligible, lower tier covered transaction, participant, person, primary covered transaction, principal, proposal, and voluntarily excluded, as

used in this provision, have the meanings set out in the Definitions and Coverage sections of the rules implementing Executive Order 12549. A copy of the Federal Rules requiring this certification and detailing the definitions and coverages may be obtained from the Contract Officer of the Department.

3. The prequalified bidder agrees by submitting this form, that he will not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in NCDOT contracts, unless authorized by the Department.
4. For Federal Aid projects, the prequalified bidder further agrees that by submitting this form he will include the Federal-Aid Provision titled Required Contract Provisions Federal-Aid Construction Contract (Form FHWA PR 1273) provided by the Department, without subsequent modification, in all lower tier covered transactions.
5. The prequalified bidder may rely upon a certification of a participant in a lower tier covered transaction that he is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless he knows that the certification is erroneous. The bidder may decide the method and frequency by which he will determine the eligibility of his subcontractors.
6. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this provision. The knowledge and information of a participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
7. Except as authorized in paragraph 6 herein, the Department may terminate any contract if the bidder knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available by the Federal Government.

---

### **DEBARMENT CERTIFICATION**

The prequalified bidder certifies to the best of his knowledge and belief, that he and his principals:

- a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
- b. Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records; making false statements; or receiving stolen property;
- c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph b. of this certification; and

- d. Have not within a three-year period preceding this proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- e. Will submit a revised Debarment Certification immediately if his status changes and will show in his bid proposal an explanation for the change in status.

If the prequalified bidder cannot certify that he is not debarred, he shall provide an explanation with this submittal. An explanation will not necessarily result in denial of participation in a contract.

Failure to submit a non-collusion and debarment certification will result in the prequalified bidder's bid being considered non-responsive.

#### Explanation

---

### AWARD LIMITS ON MULTIPLE PROJECTS

A bidder who desires to bid on more than one project on which bids are to be opened on the same date, and who also desires to avoid receiving an award of more projects than he is equipped to handle, may bid on any number of projects but may limit the total amount of work awarded to him on selected projects by completing the AWARD LIMITS ON MULTIPLE PROJECTS.

-  The Award Limits on Multiple Projects must be filled in on each project bid for which the Bidder desires protection.

**\* Use Award Limits for Multiple Projects for this Letting?**

☐ Yes ☒ No

# Attachments

Failure to complete and attach the Fuel Usage Factor Adjustment Form will result in using 2.90 gallons per ton as the Fuel Usage Factor for Diesel for the asphalt items included on the form. The contractor will not be permitted to change the option after the bids are submitted.

## Attachment

 Upload file



+ Add another

# Bid bond

## WRIGHT BROTHERS CIVIL CONSTRUCTION LLC

P.O. Box 437  
CHARLESTON, TN 37310

\*  
**Bond type**

Electronic verification

\*  
**Registry**



Surety2000



Tinubu

\*  
**Bond ID**

SNC0807789023



Changing the Bidder after verification will reset this form.

**Bond verification details:**

|                |                                                           |                                  |                                                |
|----------------|-----------------------------------------------------------|----------------------------------|------------------------------------------------|
| Bond percent   | 5%                                                        | Executed by                      | Gicelle Pajon<br>(305) 588-5875<br>Aug 7, 2026 |
| Max. amount    | No data                                                   |                                  |                                                |
| Bond form      | Bid Bond in Accordance<br>with Contract<br>Specifications | Surety                           | Liberty Mutual Insurance<br>Company<br>23043   |
| Agent name     | Marsh USA LLC (Salt Lake<br>City, UT)                     | Surety address                   | 7900 Windrose Ave<br>Plano, TX 75024           |
| Agency address | 15 W South Temple Ste<br>700<br>Salt Lake City, UT 84101  | Surety state of<br>incorporation | No data                                        |
| Agency contact | Tina Davis<br>(801) 533-3624                              |                                  |                                                |

Within 14 calendar days of the receipt of the award letter, the successful bidder shall submit a fully executed Non-Collusion, Debarment, and Gift Ban Certification and shall submit payment and performance bonds. If the complete submittals have not been made within 14 calendar days of the receipt of the award letter, the bid bond shall be paid immediately to the Department as liquidated damages.

| Line #               | ItemNumber   | Sec # | Description                                                              | Quantity Unit | Unit Bid Price | Amount Bid   |
|----------------------|--------------|-------|--------------------------------------------------------------------------|---------------|----------------|--------------|
| <b>ROADWAY ITEMS</b> |              |       |                                                                          |               |                |              |
| 0001                 | 0000100000-N | 800   | MOBILIZATION                                                             | LUMP SUM      | 1,140,000.00   | 1,140,000.00 |
| 0002                 | 0000400000-N | 801   | CONSTRUCTION SURVEYING                                                   | LUMP SUM      | 278,100.00     | 278,100.00   |
| 0003                 | 0036000000-E | 225   | UNDERCUT EXCAVATION                                                      | 1,000 CY      | 33.00          | 33,000.00    |
| 0004                 | 0043000000-N | 226   | GRADING                                                                  | LUMP SUM      | 3,118,620.00   | 3,118,620.00 |
| 0005                 | 0050000000-E | 226   | SUPPLEMENTARY CLEARING & GRUBBING                                        | 1 ACR         | 29,400.00      | 29,400.00    |
| 0006                 | 0195000000-E | 265   | SELECT GRANULAR MATERIAL                                                 | 700 CY        | 85.00          | 59,500.00    |
| 0007                 | 0196000000-E | 270   | GEOTEXTILE FOR SOIL STABILIZATION                                        | 1,000 SY      | 7.65           | 7,650.00     |
| 0008                 | 0255000000-E | SP    | GENERIC GRADING ITEM HAULING AND DISPOSAL OF PETROLEUM CONTAMINATED SOIL | 50 TON        | 150.00         | 7,500.00     |
| 0009                 | 0318000000-E | 300   | FOUNDATION CONDITIONING MATERIAL, MINOR STRUCTURES                       | 850 TON       | 77.75          | 66,087.50    |
| 0010                 | 0321000000-E | 300   | FOUNDATION CONDITIONING GEOTEXTILE                                       | 2,700 SY      | 8.00           | 21,600.00    |
| 0011                 | 0335200000-E | 305   | 15" DRAINAGE PIPE                                                        | 160 LF        | 156.00         | 24,960.00    |
| 0012                 | 0335300000-E | 305   | 18" DRAINAGE PIPE                                                        | 8 LF          | 224.00         | 1,792.00     |
| 0013                 | 0335400000-E | 305   | 24" DRAINAGE PIPE                                                        | 12 LF         | 267.00         | 3,204.00     |
| 0014                 | 0448200000-E | 310   | 15" RC PIPE CULVERTS, CLASS IV                                           | 4,048 LF      | 138.00         | 558,624.00   |
| 0015                 | 0448300000-E | 310   | 18" RC PIPE CULVERTS, CLASS IV                                           | 3,156 LF      | 151.00         | 476,556.00   |
| 0016                 | 0448400000-E | 310   | 24" RC PIPE CULVERTS, CLASS IV                                           | 488 LF        | 193.00         | 94,184.00    |
| 0017                 | 0448500000-E | 310   | 30" RC PIPE CULVERTS, CLASS IV                                           | 56 LF         | 248.00         | 13,888.00    |
| 0018                 | 0588000000-E | 310   | 18" CS PIPE CULVERTS, 0.064" THICK                                       | 28 LF         | 175.00         | 4,900.00     |
| 0019                 | 0995000000-E | 340   | PIPE REMOVAL                                                             | 2,194 LF      | 94.25          | 206,784.50   |
| 0020                 | 1099500000-E | 505   | SHALLOW UNDERCUT                                                         | 3,770 CY      | 33.00          | 124,410.00   |
| 0021                 | 1099700000-E | 505   | CLASS IV SUBGRADE STABILIZATION                                          | 7,160 TON     | 55.00          | 393,800.00   |
| 0022                 | 1110000000-E | 510   | STABILIZER AGGREGATE                                                     | 400 TON       | 55.00          | 22,000.00    |

## Contract Item Sheets For C205219

| Line #        | ItemNumber   | Sec # | Description                                                 | Quantity Unit | Unit Bid Price | Amount Bid   |
|---------------|--------------|-------|-------------------------------------------------------------|---------------|----------------|--------------|
| ROADWAY ITEMS |              |       |                                                             |               |                |              |
| 0023          | 1112000000-E | 505   | GEOTEXTILE FOR SUBGRADE STABILIZATION                       | 11,070 SY     | 7.40           | 81,918.00    |
| 0024          | 1121000000-E | 520   | AGGREGATE BASE COURSE                                       | 1,120 TON     | 70.00          | 78,400.00    |
| 0025          | 1220000000-E | 545   | INCIDENTAL STONE BASE                                       | 1,000 TON     | 80.00          | 80,000.00    |
| 0026          | 1297000000-E | 607   | MILLING ASPHALT PAVEMENT, ****<br>DEPTH (1-1/2")            | 41,000 SY     | 4.80           | 196,800.00   |
| 0027          | 1330000000-E | 607   | INCIDENTAL MILLING                                          | 3,600 SY      | 11.30          | 40,680.00    |
| 0028          | 1491000000-E | 610   | ASPHALT CONC BASE COURSE, TYPE B25.0C                       | 4,320 TON     | 156.00         | 673,920.00   |
| 0029          | 1503000000-E | 610   | ASPHALT CONC INTERMEDIATE COURSE, TYPE I19.0C               | 3,080 TON     | 151.00         | 465,080.00   |
| 0030          | 1519000000-E | 610   | ASPHALT CONC SURFACE COURSE, TYPE S9.5B                     | 6,410 TON     | 169.00         | 1,083,290.00 |
| 0031          | 1523000000-E | 610   | ASPHALT CONC SURFACE COURSE, TYPE S9.5C                     | 810 TON       | 169.00         | 136,890.00   |
| 0032          | 1575000000-E | 620   | ASPHALT BINDER FOR PLANT MIX                                | 890 TON       | 790.00         | 703,100.00   |
| 0033          | 1693000000-E | 654   | ASPHALT PLANT MIX, PAVEMENT REPAIR                          | 710 TON       | 400.00         | 284,000.00   |
| 0034          | 1891000000-E | SP    | GENERIC PAVING ITEM<br>4" CONCRETE SIDE PATH                | 6,550 SY      | 80.00          | 524,000.00   |
| 0035          | 1891500000-N | SP    | GENERIC PAVING ITEM<br>STAMPED CONCRETE                     | LUMP SUM      | 34,200.00      | 34,200.00    |
| 0036          | 2022000000-E | 815   | SUBDRAIN EXCAVATION                                         | 112 CY        | 58.50          | 6,552.00     |
| 0037          | 2026000000-E | 815   | GEOTEXTILE FOR SUBSURFACE DRAINS                            | 500 SY        | 6.45           | 3,225.00     |
| 0038          | 2036000000-E | 815   | SUBDRAIN COARSE AGGREGATE                                   | 84 CY         | 111.00         | 9,324.00     |
| 0039          | 2044000000-E | 815   | 6" PERFORATED SUBDRAIN PIPE                                 | 500 LF        | 16.05          | 8,025.00     |
| 0040          | 2070000000-N | 815   | SUBDRAIN PIPE OUTLET                                        | 6 EA          | 1,000.00       | 6,000.00     |
| 0041          | 2077000000-E | 815   | 6" OUTLET PIPE                                              | 1 LF          | 670.00         | 670.00       |
| 0042          | 2190000000-N | 828   | TEMPORARY STEEL PLATE COVERS FOR MASONRY DRAINAGE STRUCTURE | 10 EA         | 6,500.00       | 65,000.00    |
| 0043          | 2253000000-E | 840   | PIPE COLLARS                                                | 0.89 CY       | 2,800.00       | 2,500.40     |



## Contract Item Sheets For C205219

| Line #        | ItemNumber   | Sec # | Description                                                     | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|-----------------------------------------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                                                 |               |                |            |
| 0044          | 2275000000-E | SP    | FLOWABLE FILL                                                   | 4 CY          | 760.00         | 3,040.00   |
| 0045          | 2286000000-N | 840   | MASONRY DRAINAGE STRUCTURES                                     | 150 EA        | 6,015.00       | 902,250.00 |
| 0046          | 2308000000-E | 840   | MASONRY DRAINAGE STRUCTURES                                     | 57.4 LF       | 905.00         | 51,947.00  |
| 0047          | 2364000000-N | 840   | FRAME WITH TWO GRATES, STD 840.16                               | 12 EA         | 1,900.00       | 22,800.00  |
| 0048          | 2367000000-N | 840   | FRAME WITH TWO GRATES, STD 840.29                               | 23 EA         | 1,775.00       | 40,825.00  |
| 0049          | 2374000000-N | 840   | FRAME WITH GRATE & HOOD, STD 840.03, TYPE ** (E)                | 17 EA         | 1,900.00       | 32,300.00  |
| 0050          | 2374000000-N | 840   | FRAME WITH GRATE & HOOD, STD 840.03, TYPE ** (F)                | 45 EA         | 2,000.00       | 90,000.00  |
| 0051          | 2374000000-N | 840   | FRAME WITH GRATE & HOOD, STD 840.03, TYPE ** (G)                | 52 EA         | 2,000.00       | 104,000.00 |
| 0052          | 2396000000-N | 840   | FRAME WITH COVER, STD 840.54                                    | 12 EA         | 1,375.00       | 16,500.00  |
| 0053          | 2418000000-E | SP    | FRAME WITH GRATES, DRIVEWAY DROP INLET                          | 93 LF         | 1,050.00       | 97,650.00  |
| 0054          | 2451000000-N | 852   | CONCRETE TRANSITIONAL SECTION FOR DROP INLET                    | 5 EA          | 1,800.00       | 9,000.00   |
| 0055          | 2535000000-E | 846   | *** X *** CONCRETE CURB (9" X 12")                              | 800 LF        | 35.90          | 28,720.00  |
| 0056          | 2535000000-E | 846   | *** X *** CONCRETE CURB (9" X 18")                              | 310 LF        | 35.90          | 11,129.00  |
| 0057          | 2542000000-E | 846   | 1'-6" CONCRETE CURB & GUTTER                                    | 165 LF        | 51.00          | 8,415.00   |
| 0058          | 2549000000-E | 846   | 2'-6" CONCRETE CURB & GUTTER                                    | 17,190 LF     | 51.75          | 889,582.50 |
| 0059          | 2591000000-E | 848   | 4" CONCRETE SIDEWALK                                            | 2,500 SY      | 91.25          | 228,125.00 |
| 0060          | 2605000000-N | 848   | CONCRETE CURB RAMPS                                             | 120 EA        | 4,000.00       | 480,000.00 |
| 0061          | 2612000000-E | 848   | 6" CONCRETE DRIVEWAY                                            | 740 SY        | 114.00         | 84,360.00  |
| 0062          | 2655000000-E | 852   | 5" MONOLITHIC CONCRETE ISLANDS (KEYED IN)                       | 1,890 SY      | 108.00         | 204,120.00 |
| 0063          | 2738000000-E | SP    | GENERIC PAVING ITEM 12" CONCRETE TRUCK APRON, CLASS AA CONCRETE | 470 SY        | 257.00         | 120,790.00 |

## Contract Item Sheets For C205219

| Line #        | ItemNumber   | Sec # | Description                                                                 | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|-----------------------------------------------------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                                                             |               |                |            |
| 0064          | 2752000000-E | SP    | GENERIC PAVING ITEM<br>1'-6" CONCRETE CURB AND GUTTER,<br>CLASS AA CONCRETE | 395<br>LF     | 56.50          | 22,317.50  |
| 0065          | 2761000000-E | 848   | GENERIC PAVING ITEM<br>6" CONCRETE SIDEWALK                                 | 130<br>SY     | 124.00         | 16,120.00  |
| 0066          | 2800000000-N | 858   | ADJUSTMENT OF CATCH BASINS                                                  | 1<br>EA       | 1,000.00       | 1,000.00   |
| 0067          | 2830000000-N | 858   | ADJUSTMENT OF MANHOLES                                                      | 1<br>EA       | 1,450.00       | 1,450.00   |
| 0068          | 2893000000-N | 859   | CONVERT EXISTING CATCH BASIN TO<br>JUNCTION BOX WITH MANHOLE                | 7<br>EA       | 3,100.00       | 21,700.00  |
| 0069          | 2920000000-N | 859   | CONVERT EXISTING DROP INLET TO<br>CATCH BASIN                               | 1<br>EA       | 3,200.00       | 3,200.00   |
| 0070          | 2938000000-N | 859   | CONVERT EXISTING DROP INLET TO<br>JUNCTION BOX WITH MANHOLE                 | 2<br>EA       | 3,200.00       | 6,400.00   |
| 0071          | 2965000000-N | 859   | CONVERT EXISTING JUNCTION BOX<br>TO CATCH BASIN                             | 1<br>EA       | 3,200.00       | 3,200.00   |
| 0072          | 3030000000-E | 862   | STEEL BEAM GUARDRAIL                                                        | 700<br>LF     | 28.20          | 19,740.00  |
| 0073          | 3045000000-E | 862   | STEEL BEAM GUARDRAIL, SHOP<br>CURVED                                        | 75<br>LF      | 29.40          | 2,205.00   |
| 0074          | 3105000000-N | 862   | STEEL BEAM GUARDRAIL TERMINAL<br>SECTIONS                                   | 2<br>EA       | 125.00         | 250.00     |
| 0075          | 3150000000-N | 862   | ADDITIONAL GUARDRAIL POSTS                                                  | 10<br>EA      | 12.45          | 124.50     |
| 0076          | 3210000000-N | 862   | GUARDRAIL END UNITS, TYPE CAT-1                                             | 7<br>EA       | 1,075.00       | 7,525.00   |
| 0077          | 3287000000-N | 862   | GUARDRAIL END UNITS, TYPE TL-3                                              | 3<br>EA       | 3,600.00       | 10,800.00  |
| 0078          | 3288000000-N | 862   | GUARDRAIL END UNITS, TYPE TL-2                                              | 1<br>EA       | 3,500.00       | 3,500.00   |
| 0079          | 3360000000-E | 863   | REMOVE EXISTING GUARDRAIL                                                   | 850<br>LF     | 1.15           | 977.50     |
| 0080          | 3533000000-E | 866   | CHAIN LINK FENCE, *** FABRIC<br>(72")                                       | 200<br>LF     | 20.90          | 4,180.00   |
| 0081          | 3539000000-E | 866   | METAL LINE POSTS FOR *** CHAIN<br>LINK FENCE<br>(72")                       | 16<br>EA      | 141.00         | 2,256.00   |
| 0082          | 3545000000-E | 866   | METAL TERMINAL POSTS FOR ***<br>CHAIN LINK FENCE<br>(72")                   | 5<br>EA       | 395.00         | 1,975.00   |
| 0083          | 3559000000-E | 866   | ** STRAND BARBED WIRE FENCE<br>WITH POSTS<br>(3)                            | 200<br>LF     | 14.10          | 2,820.00   |

| Line #        | ItemNumber   | Sec # | Description                                                  | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|--------------------------------------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                                              |               |                |            |
| 0084          | 3575000000-E | SP    | GENERIC FENCING ITEM<br>BICYCLE/PEDESTRIAN SAFETY RAIL       | 400<br>LF     | 311.00         | 124,400.00 |
| 0085          | 3649000000-E | 876   | RIP RAP, CLASS B                                             | 100<br>TON    | 194.00         | 19,400.00  |
| 0086          | 3656000000-E | 876   | GEOTEXTILE FOR DRAINAGE                                      | 5,685<br>SY   | 5.45           | 30,983.25  |
| 0087          | 4048000000-E | 902   | REINFORCED CONCRETE SIGN<br>FOUNDATIONS                      | 3<br>CY       | 1,300.00       | 3,900.00   |
| 0088          | 4060000000-E | 903   | SUPPORTS, BREAKAWAY STEEL<br>BEAM                            | 2,802<br>LB   | 10.55          | 29,561.10  |
| 0089          | 4072000000-E | 903   | SUPPORTS, 3-LB STEEL U-CHANNEL                               | 2,449<br>LF   | 11.75          | 28,775.75  |
| 0090          | 4096000000-N | 904   | SIGN ERECTION, TYPE D                                        | 2<br>EA       | 115.00         | 230.00     |
| 0091          | 4102000000-N | 904   | SIGN ERECTION, TYPE E                                        | 147<br>EA     | 103.00         | 15,141.00  |
| 0092          | 4108000000-N | 904   | SIGN ERECTION, TYPE F                                        | 27<br>EA      | 91.75          | 2,477.25   |
| 0093          | 4110000000-N | 904   | SIGN ERECTION, TYPE *** (GROUND<br>MOUNTED)<br>(A)           | 4<br>EA       | 1,400.00       | 5,600.00   |
| 0094          | 4116100000-N | 904   | SIGN ERECTION, RELOCATE TYPE ****<br>(GROUND MOUNTED)<br>(D) | 2<br>EA       | 166.00         | 332.00     |
| 0095          | 4116100000-N | 904   | SIGN ERECTION, RELOCATE TYPE ****<br>(GROUND MOUNTED)<br>(E) | 6<br>EA       | 155.00         | 930.00     |
| 0096          | 4116100000-N | 904   | SIGN ERECTION, RELOCATE TYPE ****<br>(GROUND MOUNTED)<br>(F) | 1<br>EA       | 143.00         | 143.00     |
| 0097          | 4155000000-N | 907   | DISPOSAL OF SIGN SYSTEM, U-<br>CHANNEL                       | 104<br>EA     | 25.20          | 2,620.80   |
| 0098          | 4158000000-N | 907   | DISPOSAL OF SIGN SYSTEM, WOOD                                | 9<br>EA       | 25.20          | 226.80     |
| 0099          | 4192000000-N | 907   | DISPOSAL OF SUPPORT, U-CHANNEL                               | 20<br>EA      | 25.20          | 504.00     |
| 0100          | 4237000000-N | 907   | STOCKPILE SIGN, D, E OR F                                    | 5<br>EA       | 172.00         | 860.00     |
| 0101          | 4238000000-N | 907   | DISPOSAL OF SIGN, D, E OR F                                  | 32<br>EA      | 27.50          | 880.00     |
| 0102          | 4360000000-N | SP    | GENERIC SIGNING ITEM<br>RELOCATE WAYFINDING ASSEMBLY         | 7<br>EA       | 2,775.00       | 19,425.00  |
| 0103          | 4400000000-E | 1110  | WORK ZONE SIGNS (STATIONARY)                                 | 1,282<br>SF   | 7.65           | 9,807.30   |

| Line #        | ItemNumber   | Sec # | Description                                               | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|-----------------------------------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                                           |               |                |            |
| 0104          | 4405000000-E | 1110  | WORK ZONE SIGNS (PORTABLE)                                | 1,652 SF      | 37.40          | 61,784.80  |
| 0105          | 4410000000-E | 1110  | WORK ZONE SIGNS (BARRICADE MOUNTED)                       | 32 SF         | 8.60           | 275.20     |
| 0106          | 4415000000-N | 1115  | FLASHING ARROW BOARD                                      | 6 EA          | 6,250.00       | 37,500.00  |
| 0107          | 4420000000-N | 1120  | PORTABLE CHANGEABLE MESSAGE SIGN                          | 2 EA          | 31,400.00      | 62,800.00  |
| 0108          | 4430000000-N | 1130  | DRUMS                                                     | 823 EA        | 68.00          | 55,964.00  |
| 0109          | 4435000000-N | 1135  | CONES                                                     | 935 EA        | 39.60          | 37,026.00  |
| 0110          | 4445000000-E | 1145  | BARRICADES (TYPE III)                                     | 48 LF         | 44.00          | 2,112.00   |
| 0111          | 4447000000-E | SP    | PEDESTRIAN CHANNELIZING DEVICES                           | 885 LF        | 38.50          | 34,072.50  |
| 0112          | 4455000000-N | 1150  | FLAGGER                                                   | 49 DAY        | 1,600.00       | 78,400.00  |
| 0113          | 4480000000-N | 1165  | TMA                                                       | 2 EA          | 158,600.00     | 317,200.00 |
| 0114          | 4507000000-E | 1170  | WATER FILLED BARRIER                                      | 500 LF        | 106.00         | 53,000.00  |
| 0115          | 4510000000-N | 1190  | LAW ENFORCEMENT                                           | 98 HR         | 100.00         | 9,800.00   |
| 0116          | 4516000000-N | 1180  | SKINNY DRUM                                               | 92 EA         | 46.70          | 4,296.40   |
| 0117          | 4600000000-N | SP    | GENERIC TRAFFIC CONTROL ITEM AUDIBLE WARNING DEVICES      | 77 EA         | 1,100.00       | 84,700.00  |
| 0118          | 4600000000-N | SP    | GENERIC TRAFFIC CONTROL ITEM PEDESTRIAN TRANSPORT SERVICE | 350 EA        | 47.60          | 16,660.00  |
| 0119          | 4600000000-N | SP    | GENERIC TRAFFIC CONTROL ITEM TEMPORARY CURB RAMPS         | 22 EA         | 350.00         | 7,700.00   |
| 0120          | 4650000000-N | 1251  | TEMPORARY RAISED PAVEMENT MARKERS                         | 96 EA         | 16.30          | 1,564.80   |
| 0121          | 4685000000-E | 1205  | THERMOPLASTIC PAVEMENT MARKING LINES (4", 90 MILS)        | 35,203 LF     | 1.45           | 51,044.35  |
| 0122          | 4695000000-E | 1205  | THERMOPLASTIC PAVEMENT MARKING LINES (8", 90 MILS)        | 4,700 LF      | 3.65           | 17,155.00  |
| 0123          | 4709000000-E | 1205  | THERMOPLASTIC PAVEMENT MARKING LINES (24", 90 MILS)       | 1,972 LF      | 16.00          | 31,552.00  |
| 0124          | 4720000000-E | 1205  | THERMOPLASTIC PAVEMENT MARKING CHARACTER (90 MILS)        | 19 EA         | 197.00         | 3,743.00   |
| 0125          | 4725000000-E | 1205  | THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS)           | 119 EA        | 225.00         | 26,775.00  |

## Contract Item Sheets For C205219

| Line #        | ItemNumber   | Sec # | Description                                                                            | Quantity Unit | Unit Bid Price | Amount Bid   |
|---------------|--------------|-------|----------------------------------------------------------------------------------------|---------------|----------------|--------------|
| ROADWAY ITEMS |              |       |                                                                                        |               |                |              |
| 0126          | 4726110000-E | 1205  | HEATED-IN-PLACE THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS)                        | 1 EA          | 505.00         | 505.00       |
| 0127          | 4770000000-E | 1205  | COLD APPLIED PLASTIC PAVEMENT MARKING LINES, TYPE ** (4") (IV)                         | 270 LF        | 7.30           | 1,971.00     |
| 0128          | 4810000000-E | 1205  | PAINT PAVEMENT MARKING LINES (4")                                                      | 101,528 LF    | 0.40           | 40,611.20    |
| 0129          | 4820000000-E | 1205  | PAINT PAVEMENT MARKING LINES (8")                                                      | 9,998 LF      | 1.40           | 13,997.20    |
| 0130          | 4835000000-E | 1205  | PAINT PAVEMENT MARKING LINES (24")                                                     | 2,352 LF      | 5.90           | 13,876.80    |
| 0131          | 4840000000-N | 1205  | PAINT PAVEMENT MARKING CHARACTER                                                       | 4 EA          | 95.50          | 382.00       |
| 0132          | 4845000000-N | 1205  | PAINT PAVEMENT MARKING SYMBOL                                                          | 75 EA         | 112.00         | 8,400.00     |
| 0133          | 4850000000-E | 1205  | REMOVAL OF PAVEMENT MARKING LINES (4")                                                 | 20,078 LF     | 0.85           | 17,066.30    |
| 0134          | 4860000000-E | 1205  | REMOVAL OF PAVEMENT MARKING LINES (8")                                                 | 1,801 LF      | 1.40           | 2,521.40     |
| 0135          | 4870000000-E | 1205  | REMOVAL OF PAVEMENT MARKING LINES (24")                                                | 1,088 LF      | 3.35           | 3,644.80     |
| 0136          | 4875000000-N | 1205  | REMOVAL OF PAVEMENT MARKING SYMBOLS & CHARACTERS                                       | 84 EA         | 101.00         | 8,484.00     |
| 0137          | 4890000000-E | SP    | GENERIC PAVEMENT MARKING ITEM YIELD LINE PAINT PAVEMENT MARKING (24")                  | 392 LF        | 7.30           | 2,861.60     |
| 0138          | 4890000000-E | SP    | GENERIC PAVEMENT MARKING ITEM YIELD LINE THERMOPLASTIC PAVEMENT MARKING (24", 90 MILS) | 163 LF        | 18.55          | 3,023.65     |
| 0139          | 4895000000-N | SP    | GENERIC PAVEMENT MARKING ITEM POLYCARBONATE H-SHAPED MARKERS                           | 654 EA        | 52.00          | 34,008.00    |
| 0140          | 5325200000-E | 1510  | 2" WATER LINE                                                                          | 40 LF         | 96.00          | 3,840.00     |
| 0141          | 5325600000-E | 1510  | 6" WATER LINE                                                                          | 2,160 LF      | 141.00         | 304,560.00   |
| 0142          | 5325800000-E | 1510  | 8" WATER LINE                                                                          | 8,060 LF      | 152.00         | 1,225,120.00 |
| 0143          | 5326200000-E | 1510  | 12" WATER LINE                                                                         | 1,105 LF      | 226.00         | 249,730.00   |
| 0144          | 5326600000-E | 1510  | 16" WATER LINE                                                                         | 860 LF        | 339.00         | 291,540.00   |
| 0145          | 5329000000-E | 1510  | DUCTILE IRON WATER PIPE FITTINGS                                                       | 4,300 LB      | 22.60          | 97,180.00    |

| Line #        | ItemNumber   | Sec # | Description                                                  | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|--------------------------------------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                                              |               |                |            |
| 0146          | 5536000000-E | 1515  | 2" VALVE                                                     | 2<br>EA       | 2,825.00       | 5,650.00   |
| 0147          | 5540000000-E | 1515  | 6" VALVE                                                     | 20<br>EA      | 3,025.00       | 60,500.00  |
| 0148          | 5546000000-E | 1515  | 8" VALVE                                                     | 26<br>EA      | 4,275.00       | 111,150.00 |
| 0149          | 5558000000-E | 1515  | 12" VALVE                                                    | 2<br>EA       | 11,050.00      | 22,100.00  |
| 0150          | 5558600000-E | 1515  | 16" VALVE                                                    | 4<br>EA       | 14,200.00      | 56,800.00  |
| 0151          | 5648000000-N | 1515  | RELOCATE WATER METER                                         | 11<br>EA      | 4,500.00       | 49,500.00  |
| 0152          | 5649000000-N | 1515  | RECONNECT WATER METER                                        | 64<br>EA      | 2,250.00       | 144,000.00 |
| 0153          | 5666000000-N | 1515  | FIRE HYDRANT                                                 | 10<br>EA      | 15,800.00      | 158,000.00 |
| 0154          | 5673000000-E | 1515  | FIRE HYDRANT LEG                                             | 196<br>LF     | 113.00         | 22,148.00  |
| 0155          | 5686500000-E | 1515  | WATER SERVICE LINE                                           | 1,640<br>LF   | 67.75          | 111,110.00 |
| 0156          | 5691300000-E | 1520  | 8" SANITARY GRAVITY SEWER                                    | 5,880<br>LF   | 169.00         | 993,720.00 |
| 0157          | 5775000000-E | 1525  | 4' DIA UTILITY MANHOLE                                       | 31<br>EA      | 11,300.00      | 350,300.00 |
| 0158          | 5781000000-E | 1525  | UTILITY MANHOLE WALL 4' DIA                                  | 25<br>LF      | 1,125.00       | 28,125.00  |
| 0159          | 5801000000-E | 1530  | ABANDON 8" UTILITY PIPE                                      | 1,126<br>LF   | 11.30          | 12,723.80  |
| 0160          | 5804000000-E | 1530  | ABANDON 12" UTILITY PIPE                                     | 1,105<br>LF   | 16.95          | 18,729.75  |
| 0161          | 5810000000-E | 1530  | ABANDON 16" UTILITY PIPE                                     | 795<br>LF     | 33.90          | 26,950.50  |
| 0162          | 5828000000-N | 1530  | REMOVE UTILITY MANHOLE                                       | 5<br>EA       | 3,400.00       | 17,000.00  |
| 0163          | 5882000000-N | SP    | GENERIC UTILITY ITEM<br>REMOVE AND STOCKPILE FIRE<br>HYDRANT | 11<br>EA      | 1,125.00       | 12,375.00  |
| 0164          | 6000000000-E | 1605  | TEMPORARY SILT FENCE                                         | 13,250<br>LF  | 3.65           | 48,362.50  |
| 0165          | 6006000000-E | 1610  | STONE FOR EROSION CONTROL,<br>CLASS A                        | 1,280<br>TON  | 69.00          | 88,320.00  |
| 0166          | 6009000000-E | 1610  | STONE FOR EROSION CONTROL,<br>CLASS B                        | 390<br>TON    | 69.00          | 26,910.00  |
| 0167          | 6012000000-E | 1610  | SEDIMENT CONTROL STONE                                       | 1,835<br>TON  | 69.00          | 126,615.00 |

## Contract Item Sheets For C205219

| Line #        | ItemNumber   | Sec # | Description                      | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|----------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                  |               |                |            |
| 0168          | 6015000000-E | 1615  | TEMPORARY MULCHING               | 21<br>ACR     | 1,400.00       | 29,400.00  |
| 0169          | 6018000000-E | 1620  | SEED FOR TEMPORARY SEEDING       | 1,200<br>LB   | 3.65           | 4,380.00   |
| 0170          | 6021000000-E | 1620  | FERTILIZER FOR TEMPORARY SEEDING | 6<br>TON      | 2,000.00       | 12,000.00  |
| 0171          | 6024000000-E | 1622  | TEMPORARY SLOPE DRAINS           | 200<br>LF     | 30.00          | 6,000.00   |
| 0172          | 6029000000-E | SP    | SAFETY FENCE                     | 500<br>LF     | 3.40           | 1,700.00   |
| 0173          | 6030000000-E | 1630  | SILT EXCAVATION                  | 1,140<br>CY   | 0.01           | 11.40      |
| 0174          | 6036000000-E | 1631  | MATting FOR EROSION CONTROL      | 32,000<br>SY  | 1.70           | 54,400.00  |
| 0175          | 6037000000-E | 1629  | COIR FIBER MAT                   | 100<br>SY     | 11.30          | 1,130.00   |
| 0176          | 6042000000-E | 1632  | 1/4" HARDWARE CLOTH              | 6,620<br>LF   | 10.10          | 66,862.00  |
| 0177          | 6070000000-N | 1639  | SPECIAL STILLING BASINS          | 1<br>EA       | 1,200.00       | 1,200.00   |
| 0178          | 6071002000-E | 1642  | FLOCCULANT                       | 220<br>LB     | 28.20          | 6,204.00   |
| 0179          | 6071012000-E | 1642  | COIR FIBER WATTLE                | 280<br>LF     | 13.55          | 3,794.00   |
| 0180          | 6084000000-E | 1660  | SEEDING & MULCHING               | 21<br>ACR     | 3,400.00       | 71,400.00  |
| 0181          | 6087000000-E | 1660  | MOWING                           | 11<br>ACR     | 113.00         | 1,243.00   |
| 0182          | 6090000000-E | 1661  | SEED FOR REPAIR SEEDING          | 300<br>LB     | 5.65           | 1,695.00   |
| 0183          | 6093000000-E | 1661  | FERTILIZER FOR REPAIR SEEDING    | 0.75<br>TON   | 1,100.00       | 825.00     |
| 0184          | 6096000000-E | 1662  | SEED FOR SUPPLEMENTAL SEEDING    | 400<br>LB     | 11.30          | 4,520.00   |
| 0185          | 6108000000-E | 1665  | FERTILIZER TOPDRESSING           | 12<br>TON     | 2,000.00       | 24,000.00  |
| 0186          | 6114500000-N | 1667  | SPECIALIZED HAND MOWING          | 7<br>MHR      | 113.00         | 791.00     |
| 0187          | 6114800000-N | SP    | MANUAL LITTER REMOVAL            | 9<br>MHR      | 113.00         | 1,017.00   |
| 0188          | 6114900000-E | SP    | LITTER DISPOSAL                  | 4<br>TON      | 560.00         | 2,240.00   |
| 0189          | 6117000000-N | 1675  | RESPONSE FOR EROSION CONTROL     | 50<br>EA      | 282.00         | 14,100.00  |

## Contract Item Sheets For C205219

| Line #        | ItemNumber   | Sec # | Description                                                          | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|----------------------------------------------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                                                      |               |                |            |
| 0190          | 6117500000-N | SP    | CONCRETE WASHOUT STRUCTURE                                           | 5 EA          | 2,100.00       | 10,500.00  |
| 0191          | 6132000000-N | SP    | GENERIC EROSION CONTROL ITEM FABRIC INSERT INLET PROTECTION CLEANOUT | 366 EA        | 239.00         | 87,474.00  |
| 0192          | 6132000000-N | SP    | GENERIC EROSION CONTROL ITEM FABRIC INSERT INLET PROTECTION, TYPE 1  | 122 EA        | 188.00         | 22,936.00  |
| 0193          | 6132000000-N | SP    | GENERIC EROSION CONTROL ITEM PREFABRICATED CONCRETE WASHOUT          | 20 EA         | 1,200.00       | 24,000.00  |
| 0194          | 6215000000-N | 1670  | ACER SACCHARUM, SUGAR MAPLE, (30 GAL, 8'-10' HT, 2" CAL)             | 11 EA         | 560.00         | 6,160.00   |
| 0195          | 6260000000-N | 1670  | CORNUS FLORIDA, FLOWERING DOGWOOD, (25 GAL, 6'-8' HT)                | 1 EA          | 361.00         | 361.00     |
| 0196          | 6390000000-N | 1670  | ILEX VOMITORIA, YAUPON HOLLY, (5 GAL, 15"-18", 4' OC)                | 48 EA         | 103.00         | 4,944.00   |
| 0197          | 6400000000-N | 1670  | ITEA VIRGINICA, VIRGINIA SWEETSPIRE, (3 GAL, 18"-24", 3' OC)         | 23 EA         | 66.75          | 1,535.25   |
| 0198          | 6410000000-N | 1670  | JUNIPERUS VIRGINIANA, EASTERN RED CEDAR, (25 GAL, 6'-8' HT)          | 8 EA          | 497.00         | 3,976.00   |
| 0199          | 6640000000-N | 1670  | GENERIC PLANTING ITEM ECHINACEA PURPUREA, EASTERN PURPLE CONEFLOWER  | 9 EA          | 49.70          | 447.30     |
| 0200          | 6640000000-N | 1670  | GENERIC PLANTING ITEM IRIS VERNA, DWARF FLAG IRIS                    | 120 EA        | 36.70          | 4,404.00   |
| 0201          | 6640000000-N | 1670  | GENERIC PLANTING ITEM MUHLENBERGIA CAPILLARIS, PINK MUHLY GRASS      | 127 EA        | 56.50          | 7,175.50   |
| 0202          | 6640000000-N | 1670  | GENERIC PLANTING ITEM RUDBECKIA HIRTA, BLACK EYED SUSAN              | 1,071 EA      | 30.20          | 32,344.20  |
| 0203          | 6645000000-N | SP    | GENERIC PLANTING ITEM MONTHLY ESTABLISHMENT                          | 12 EA         | 2,250.00       | 27,000.00  |
| 0204          | 6650000000-E | 1670  | MULCH FOR PLANTING                                                   | 150 CY        | 105.00         | 15,750.00  |
| 0205          | 6655000000-E | 1670  | WATER FOR PLANTING                                                   | 1 M/G         | 1,100.00       | 1,100.00   |
| 0206          | 6665000000-E | 1670  | POSTEMERGENT HERBICIDAL TREATMENT FOR PLANT BEDS                     | 1,350 SY      | 0.55           | 742.50     |
| 0207          | 6670000000-E | 1670  | PREEMERGENT HERBICIDAL TREATMENT FOR PLANT BEDS                      | 1,350 SY      | 0.55           | 742.50     |



| Line #        | ItemNumber   | Sec # | Description                                         | Quantity Unit | Unit Bid Price | Amount Bid |
|---------------|--------------|-------|-----------------------------------------------------|---------------|----------------|------------|
| ROADWAY ITEMS |              |       |                                                     |               |                |            |
| 0208          | 6674000000-N | SP    | GENERIC PLANTING ITEM (LS) IRRIGATION               | LUMP SUM      | 52,400.00      | 52,400.00  |
| 0209          | 6675000000-E | SP    | GENERIC PLANTING ITEM SOD (ZOYSIA)                  | 1,936 SY      | 24.90          | 48,206.40  |
| 0210          | 6900000000-E | SP    | TOPSOIL                                             | 150 CY        | 115.00         | 17,250.00  |
| 0211          | 7048500000-E | 1705  | PEDESTRIAN SIGNAL HEAD (16", 1 SECTION W/COUNTDOWN) | 37 EA         | 1,150.00       | 42,550.00  |
| 0212          | 7060000000-E | 1705  | SIGNAL CABLE                                        | 12,500 LF     | 6.90           | 86,250.00  |
| 0213          | 7120000000-E | 1705  | VEHICLE SIGNAL HEAD (12", 3 SECTION)                | 60 EA         | 1,825.00       | 109,500.00 |
| 0214          | 7132000000-E | 1705  | VEHICLE SIGNAL HEAD (12", 4 SECTION)                | 15 EA         | 2,050.00       | 30,750.00  |
| 0215          | 7144000000-E | 1705  | VEHICLE SIGNAL HEAD (12", 5 SECTION)                | 1 EA          | 2,850.00       | 2,850.00   |
| 0216          | 7264000000-E | 1710  | MESSENGER CABLE (3/8")                              | 1,850 LF      | 6.90           | 12,765.00  |
| 0217          | 7300000000-E | 1715  | UNPAVED TRENCHING (*****)(1, 2")                    | 125 LF        | 13.75          | 1,718.75   |
| 0218          | 7300000000-E | 1715  | UNPAVED TRENCHING (*****)(2, 2")                    | 200 LF        | 17.20          | 3,440.00   |
| 0219          | 7300000000-E | 1715  | UNPAVED TRENCHING (*****)(4, 2")                    | 40 LF         | 34.40          | 1,376.00   |
| 0220          | 7301000000-E | 1715  | DIRECTIONAL DRILL (*****)(1, 2")                    | 475 LF        | 34.40          | 16,340.00  |
| 0221          | 7301000000-E | 1715  | DIRECTIONAL DRILL (*****)(2, 2")                    | 225 LF        | 45.90          | 10,327.50  |
| 0222          | 7324000000-N | 1716  | JUNCTION BOX (STANDARD SIZE)                        | 24 EA         | 1,125.00       | 27,000.00  |
| 0223          | 7348000000-N | 1716  | JUNCTION BOX (OVER-SIZED, HEAVY DUTY)               | 5 EA          | 1,700.00       | 8,500.00   |
| 0224          | 7360000000-N | 1720  | WOOD POLE                                           | 20 EA         | 1,375.00       | 27,500.00  |
| 0225          | 7372000000-N | 1721  | GUY ASSEMBLY                                        | 39 EA         | 1,075.00       | 41,925.00  |
| 0226          | 7420000000-E | 1722  | 2" RISER WITH WEATHERHEAD                           | 31 EA         | 1,125.00       | 34,875.00  |
| 0227          | 7444000000-E | 1725  | INDUCTIVE LOOP SAWCUT                               | 850 LF        | 25.20          | 21,420.00  |
| 0228          | 7456100000-E | 1726  | LEAD-IN CABLE (14-2)                                | 6,025 LF      | 6.90           | 41,572.50  |
| 0229          | 7575142010-N | 1736  | 900MHZ SERIAL/ETHERNET SPREAD SPECTRUM RADIO        | 1 EA          | 5,400.00       | 5,400.00   |

| Line #                                 | ItemNumber   | Sec # | Description                                                                       | Quantity Unit | Unit Bid Price | Amount Bid      |
|----------------------------------------|--------------|-------|-----------------------------------------------------------------------------------|---------------|----------------|-----------------|
| ROADWAY ITEMS                          |              |       |                                                                                   |               |                |                 |
| 0230                                   | 7575142060-N | 1737  | MODIFY RADIO INSTALLATION                                                         | 3<br>EA       | 344.00         | 1,032.00        |
| 0231                                   | 7636000000-N | 1745  | SIGN FOR SIGNALS                                                                  | 29<br>EA      | 690.00         | 20,010.00       |
| 0232                                   | 7642100000-N | 1743  | TYPE I POST WITH FOUNDATION                                                       | 15<br>EA      | 2,900.00       | 43,500.00       |
| 0233                                   | 7642200000-N | 1743  | TYPE II PEDESTAL WITH FOUNDATION                                                  | 16<br>EA      | 4,300.00       | 68,800.00       |
| 0234                                   | 7648000000-N | 1746  | RELOCATE EXISTING SIGN                                                            | 10<br>EA      | 920.00         | 9,200.00        |
| 0235                                   | 7684000000-N | 1750  | SIGNAL CABINET FOUNDATION                                                         | 4<br>EA       | 3,150.00       | 12,600.00       |
| 0236                                   | 7696000000-N | 1751  | CONTROLLERS WITH CABINET<br>(*****)<br>(2070LX, BASE MOUNTED)                     | 5<br>EA       | 27,000.00      | 135,000.00      |
| 0237                                   | 7744000000-N | 1751  | DETECTOR CARD (TYPE 170)                                                          | 5<br>EA       | 459.00         | 2,295.00        |
| 0238                                   | 7901000000-N | 1753  | CABINET BASE EXTENDER                                                             | 5<br>EA       | 1,375.00       | 6,875.00        |
| 0239                                   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>CONTROLLER (2070LX)                                        | 1<br>EA       | 6,875.00       | 6,875.00        |
| 0240                                   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>ETHERNET EDGE SWITCH                                       | 4<br>EA       | 3,150.00       | 12,600.00       |
| 0241                                   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>GPS EMERGENCY VEHICLE<br>PREEMPTION SYSTEM                 | 2<br>EA       | 9,175.00       | 18,350.00       |
| 0242                                   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>MICROWAVE VEHICLE DETECTORS -<br>MULTIPLE ZONES (APPROACH) | 10<br>EA      | 19,200.00      | 192,000.00      |
| 0243                                   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>MICROWAVE VEHICLE DETECTORS -<br>MULTIPLE ZONES (PRESENCE) | 9<br>EA       | 18,900.00      | 170,100.00      |
| 0244                                   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>RECTANGULAR RAPID FLASHING<br>BEACON ASSEMBLY              | 12<br>EA      | 8,600.00       | 103,200.00      |
| 0245                                   | 7980000000-N | SP    | GENERIC SIGNAL ITEM<br>TRANSFER SWITCH                                            | 7<br>EA       | 4,000.00       | 28,000.00       |
| TOTAL AMOUNT OF BID FOR ENTIRE PROJECT |              |       |                                                                                   |               |                | \$22,868,021.00 |

Instructions: This form shall be completed in accordance with the Special Provision. If you choose to have Steel Price Adjustments applied to any of the items listed below, select the word "Yes" in the "Option" column corresponding to the item. The form must be signed, dated, and submitted to the Contract Engineer within the timeframe required by the Special Provision.

[illegible]

Contract No. C205219  
County Rutherford

Rev. 10-31-24

**EXECUTION OF CONTRACT  
NON-COLLUSION, DEBARMENT AND GIFT BAN CERTIFICATION**

**LIMITED LIABILITY COMPANY**

The Contractor declares (or certifies, verifies, or states) under penalty of perjury under the laws of the United States that neither he, nor any official, agent or employee has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with this Contract, that the Contractor has not been convicted of violating *N.C.G.S. § 133-24* within the last three years, and that the Contractor intends to do the work with its own bona fide employees or subcontractors and did not bid for the benefit of another contractor.

By submitting this Execution of Contract, non-collusion, debarment and gift ban certification, the Contractor is certifying his status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

*N.C.G.S. § 133-32* and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

**SIGNATURE OF CONTRACTOR**

**Wright Brothers Civil Construction, LLC**

Full Name of Firm

**P.O. Box 437, Charleston, TN 37310**

Address as prequalified

  
Signature of Witness

**Penny W. Ragland, Secretary**

Print or type Signer's name

  
Signature of Member, Manager, Authorized Agent  
Select appropriate title

**J. Mitchell Simpson, President/ CEO**

Print or type Signer's Name



## DEBARMENT CERTIFICATION

### Conditions for certification:

1. The prequalified bidder shall provide immediate written notice to the Department if at any time the bidder learns that his certification was erroneous when he submitted his debarment certification or explanation filed with the Department, or has become erroneous because of changed circumstances.
2. The terms *covered transaction, debarred, suspended, ineligible, lower tier covered transaction, participant, person, primary covered transaction, principal, proposal, and voluntarily excluded*, as used in this provision, have the meanings set out in the Definitions and Coverage sections of the rules implementing Executive Order 12549. A copy of the Federal Rules requiring this certification and detailing the definitions and coverages may be obtained from the Contract Officer of the Department.
3. The prequalified bidder agrees by submitting this form, that he will not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in NCDOT contracts, unless authorized by the Department.
4. For Federal Aid projects, the prequalified bidder further agrees that by submitting this form he will include the Federal-Aid Provision titled *Required Contract Provisions Federal-Aid Construction Contract (Form FHWA PR 1273)* provided by the Department, without subsequent modification, in all lower tier covered transactions.
5. The prequalified bidder may rely upon a certification of a participant in a lower tier covered transaction that he is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless he knows that the certification is erroneous. The bidder may decide the method and frequency by which he will determine the eligibility of his subcontractors.
6. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this provision. The knowledge and information of a participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
7. Except as authorized in paragraph 6 herein, the Department may terminate any contract if the bidder knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available by the Federal Government.

### DEBARMENT CERTIFICATION

The prequalified bidder certifies to the best of his knowledge and belief, that he and his principals:

- a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
- b. Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records; making false statements; or receiving stolen property;
- c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph b. of this certification; and
- d. Have not within a three-year period preceding this proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- e. Will submit a revised Debarment Certification immediately if his status changes and will show in his bid proposal an explanation for the change in status.

If the prequalified bidder cannot certify that he is not debarred, he shall provide an explanation with this submittal. An explanation will not necessarily result in denial of participation in a contract.

Failure to submit a non-collusion and debarment certification will result in the prequalified bidder's bid being considered non-responsive.

☐

Check here if an explanation is attached to this certification.

Contract No. C205219

County (ies): Rutherford

ACCEPTED BY THE  
DEPARTMENT OF TRANSPORTATION

Signed by:

*Jon Weathersbee*

E45DA45396074A0...

Contract Officer

09/22/2026

Date

Execution of Contract and Bonds  
Approved as to Form:

Signed by:

*Kristin Peebles*

CC5C8B27A36E407...

Attorney General

09/22/2026

Date

Signature Sheet (Bid - Acceptance by Department)

Contract No.  
County

**C205219**

Rutherford

Bond Number: 018246263

Rev. 10-31-24

**CONTRACT PAYMENT BOND**

Date of Payment Bond Execution September 1<sup>st</sup> 2026  
Name of Principal Contractor Wright Brothers Civil Construction, LLC  
Name of Surety: Liberty Mutual Insurance Company  
Name of Contracting Body: North Carolina Department of Transportation  
Raleigh, North Carolina  
Amount of Bond: \$22,868,021.00  
Contract ID No.: C205219  
County Name: Rutherford

KNOW ALL MEN BY THESE PRESENTS, That we, the PRINCIPAL CONTRACTOR (hereafter, PRINCIPAL) and SURETY above named, are held and firmly bound unto the above named Contracting Body, hereinafter called the Contracting Body, in the penal sum of the amount stated above for the payment of which sum well and truly to be made, we bind ourselves, our heirs, executors, administrators, and successors, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH, that whereas the principal entered into a certain contract with the Contracting Body, numbered as shown above and hereto attached:

NOW THEREFORE, if the principal shall promptly make payment to all persons supplying labor and material in the prosecution of the work provided for in said contract, and any and all duly authorized modifications of said contract that may hereafter be made, notice of which modifications to the surety being hereby waived, then this obligation to be void; otherwise to remain in full force and virtue.

IN WITNESS WHEREOF, the above-bound parties have executed this instrument under their several seals on the date indicated above, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.



Contract No.  
County


**C205219**

Rutherford

Rev. 10-31-24

**CONTRACT PAYMENT BOND**

*Affix Seal of Surety Company*

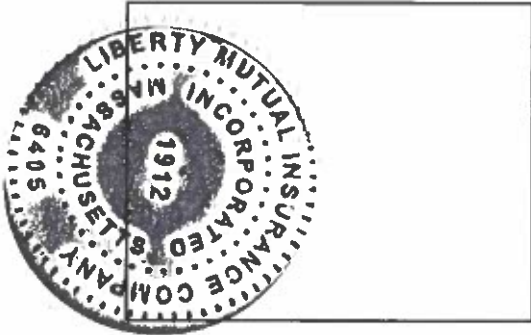

**Liberty Mutual Insurance Company**

Print or type Surety Company Name      NAIC #

By **Gicelle Pajon**

Print, stamp or type name of Attorney-in-Fact

A blue ink signature, appearing to be "G. Pajon", written over a horizontal line.

Signature of Attorney-in-Fact

A blue ink signature, appearing to be "Olga Iglesias", written over a horizontal line.

Signature of Witness

**Olga Iglesias**

Print or type Signer's name

**175 Berkeley Street, Boston, MA 02116**

Address of Attorney-in-Fact

Contract No.  
County

**C205219**

Rutherford

Rev. 10-31-24

**CONTRACT PAYMENT BOND**

**LIMITED LIABILITY COMPANY**

SIGNATURE OF CONTRACTOR (Principal)

Name of Contractor

**Wright Brothers Civil Construction, LLC**

Full name of Firm

**P.O. Box 437, Charleston, TN 37310**

Address as prequalified

By:

  
Signature of Member, Manager, Authorized Agent  
Select appropriate title

**J. Mitchell Simpson**  
**President / CEO**

Print or type Signer's name



Contract No.  
County

**C205219**

**Rutherford**

Bond Number: 018246263

Rev. 10-31-24

**CONTRACT PERFORMANCE BOND**

Date of Performance Bond Execution: September 1<sup>st</sup>, 2026  
Name of Principal Contractor: Wright Brothers Civil Construction, LLC  
Name of Surety: Liberty Mutual Insurance Company  
Name of Contracting Body: North Carolina Department of Transportation  
Raleigh, North Carolina  
Amount of Bond: \$22,868,021.00  
Contract ID No.: C205219  
County Name: Rutherford

KNOW ALL MEN BY THESE PRESENTS, That we, the PRINCIPAL CONTRACTOR (hereafter, PRINCIPAL) and SURETY above named, are held and firmly bound unto the above named Contracting Body, hereinafter called the Contracting Body, in the penal sum of the amount stated above for the payment of which sum well and truly to be made, we bind ourselves, our heirs, executors, administrators, and successors, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH, that whereas the principal entered into a certain contract with the Contracting Body, numbered as shown above and hereto attached:

NOW THEREFORE, if the principal shall well and truly perform and fulfill all the undertakings, covenants, terms, conditions, and agreements of said contract during the original term of said contract and any extensions thereof that may be granted by the Contracting Body, with or without notice to the Surety, and during the life of any guaranty required under the contract, and shall also well and truly perform and fulfill all the undertakings, covenants, terms, conditions, and agreements of any and all duly authorized modifications of said contract that may hereafter be made, notice of which modifications to the surety being hereby waived, then this obligation to be void; otherwise to remain in full force and virtue.

IN WITNESS WHEREOF, the above-bound parties have executed this instrument under their several seals on the date indicated above, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

Contract No  
County

C205219

Rutherford

Rev. 10-31-24

CONTRACT PERFORMANCE BOND

*Affix Seal of Surety Company*



Liberty Mutual Insurance Company

Print or type Surety Company Name      NAIC #

By **Gicelle Pajon**

Print, stamp or type name of Attorney-in-Fact

A handwritten signature in blue ink, appearing to read "Gicelle Pajon", written over a horizontal line.

Signature of Attorney-in-Fact

A handwritten signature in blue ink, appearing to read "Olga Iglesias", written over a horizontal line.

Signature of Witness

**Olga Iglesias**

Print or type Signer's name

175 Berkeley Street, Boston, MA 02116

Address of Attorney-in-Fact

Contract No.  
County

**C205219**

Rutherford

Rev. 10-31-24

**CONTRACT PERFORMANCE BOND**

**LIMITED LIABILITY COMPANY**

SIGNATURE OF CONTRACTOR (Principal)

Name of Contractor

**Wright Brothers Civil Construction, LLC**

Full name of Firm

**P.O. Box 437, Charleston, TN 37310**

Address as prequalified



By:

  
Signature of Member, Manager, Authorized Agent  
*Select appropriate title*

**J. Mitchell Simpson  
President / CEO**

Print or type Signer's name



**Liberty  
Mutual.**  
SURETY

## POWER OF ATTORNEY

Certificate No: 8204866

Liberty Mutual Insurance Company  
The Ohio Casualty Insurance Company  
West American Insurance Company

**KNOWN ALL PERSONS BY THESE PRESENTS:** That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Gicelle Paion

all of the city of Miami, state of FL each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

**IN WITNESS WHEREOF,** this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 1st day of July, 2024.



Liberty Mutual Insurance Company  
The Ohio Casualty Insurance Company  
West American Insurance Company

By:

Nathan J. Zangerle  
Nathan J. Zangerle, Assistant Secretary

STATE OF PENNSYLVANIA ss  
COUNTY OF MONTGOMERY

On this 1st day of July, 2024, before me personally appeared Nathan J. Zangerle, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

**IN WITNESS WHEREOF,** I have hereunto subscribed my name and affixed my notarial seal at Plymouth Meeting, Pennsylvania, on the day and year first above written



Commonwealth of Pennsylvania - Notary Seal  
Teresa Pastella, Notary Public  
Montgomery County  
My commission expires March 28, 2029  
Commission number 1126044  
Member, Pennsylvania Association of Notaries

By:

Teresa Pastella  
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

### ARTICLE IV - OFFICERS: Section 12. Power of Attorney.

Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

### ARTICLE XIII - Execution of Contracts: Section 5. Surety Bonds and Undertakings.

Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

**Certificate of Designation** - The President of the Company, acting pursuant to the Bylaws of the Company, authorizes Nathan J. Zangerle, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

**Authorization** - By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, of Liberty Mutual Insurance Company, The Ohio Casualty Insurance Company, and West American Insurance Company do hereby certify that this power of attorney executed by said Companies is in full force and effect and has not been revoked.

**IN TESTIMONY WHEREOF,** I have hereunto set my hand and affixed the seals of said Companies this 1st day of September 2026



By:

Renee C. Llewellyn  
Renee C. Llewellyn, Assistant Secretary