



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

JOSH STEIN
GOVERNOR

J.R. "JOEY" HOPKINS
SECRETARY

September 08, 2025

Addendum No. 1

RE: Contract # C205033

WBS # 51831.3.1

FEDERAL-AID NO. 5183101

Bertie County (BR-0153)

BRIDGE #070024 OVER CASHIE RIVER ON NC-11

September 16, 2025 Letting

To Whom It May Concern:

Reference is made to the plans and proposal furnished to you on this project.

The following revisions have been made to the Roadway Plans.

Sheet No.	Revision
3B-1	Revised PAVEMENT REMOVAL SUMMARY to reflect pay item addition shown below
5	Revised notes for existing pipe and paved ditch.

Please void the above listed Sheets in your plans and staple the revised Sheets thereto.

The following revisions have been made to the proposal.

Page No.	Revision
Proposal Cover	Note added that reads "Includes Addendum No. 1 Dated 09-08-2025".

Please void the above listed Page in your proposal and staple the revised Page thereto.

Mailing Address:
NC DEPARTMENT OF TRANSPORTATION
CONTRACT STANDARDS AND DEVELOPMENT
1591 MAIL SERVICE CENTER
RALEIGH, NC 27699-1591

Telephone: (919) 707-6900
Fax: (919) 250-4127
Customer Service: 1-877-368-4968

Website: www.ncdot.gov

Location:
1020 BIRCH RIDGE DR.
RALEIGH, NC 27610

On the item sheets the following pay item revision has been made:

<u>Item</u>	<u>Description</u>	<u>Old Quantity</u>	<u>New Quantity</u>
0118-0177000000-E 250	BREAKING OF EXISTING ASPHALT PAVEMENT	NEW ITEM	3,570 SY

The Contractor's bid must include this pay item revision.

The electronic bidding file has been updated to reflect this revision. Please download the Addendum File and follow the instructions for applying the addendum. Bid Express will not accept your bid unless the addendum has been applied.

The contract will be prepared accordingly.

Sincerely,

Signed by:

52C46046381F443...

Ronald E. Davenport, Jr., PE
State Contract Officer

RED/jjr
Attachments

cc:	Mr. Wiley W. Jones III, PE	Mr. Forrest Dungan, PE
	Mr. C. W. "Win" Bridgers, PE	Ms. Jaci Kincaid
	Mr. Ken Kennedy, PE	Mr. Jon Weathersbee, PE
	Mr. Malcolm Bell	Project File (2)

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH, N.C.

PROPOSAL

INCLUDES ADDENDUM No. 1 DATED 09-08-2025

DATE AND TIME OF BID OPENING: **Sep 16, 2025 AT 02:00 PM**

CONTRACT ID C205033
WBS 51831.3.1

FEDERAL-AID NO. 5183101
COUNTY BERTIE
T.I.P NO. BR-0153
MILES 0.455
ROUTE NO. NC-11
LOCATION BRIDGE #070024 OVER CASHIE RIVER ON NC-11.

TYPE OF WORK GRADING, DRAINAGE, PAVING, AND STRUCTURE.

NOTICE:

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE N.C. LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$30,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA. NOTWITHSTANDING THESE LIMITATIONS ON BIDDING, THE BIDDER WHO IS AWARDED ANY FEDERAL - AID FUNDED PROJECT SHALL COMPLY WITH CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA FOR LICENSING REQUIREMENTS WITHIN 60 CALENDAR DAYS OF BID OPENING.

BIDS WILL BE RECEIVED AS SHOWN BELOW:

THIS IS A ROADWAY & STRUCTURE PROPOSAL

5% BID BOND OR BID DEPOSIT REQUIRED

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
ROADWAY ITEMS						
0001	0000100000-N	800	MOBILIZATION	Lump Sum	L.S.	
0002	0000400000-N	801	CONSTRUCTION SURVEYING	Lump Sum	L.S.	
0003	0001000000-E	200	CLEARING & GRUBBING .. ACRE(S)	Lump Sum	L.S.	
0004	0008000000-E	200	SUPPLEMENTARY CLEARING & GRUBBING	1 ACR		
0005	0022000000-E	225	UNCLASSIFIED EXCAVATION	3,800 CY		
0006	0036000000-E	225	UNDERCUT EXCAVATION	300 CY		
0007	0106000000-E	230	BORROW EXCAVATION	15,300 CY		
0008	0134000000-E	240	DRAINAGE DITCH EXCAVATION	20 CY		
0009	0156000000-E	250	REMOVAL OF EXISTING ASPHALT PAVEMENT	5,360 SY		
0010	0195000000-E	265	SELECT GRANULAR MATERIAL	300 CY		
0011	0196000000-E	270	GEOTEXTILE FOR SOIL STABILIZATION	300 SY		
0012	0248000000-N	SP	GENERIC GRADING ITEM TYPE 1 BRIDGE APPROACH FILL, STATION 26+83.00 -L-	Lump Sum	L.S.	
0013	0318000000-E	300	FOUNDATION CONDITIONING MATERIAL, MINOR STRUCTURES	730 TON		
0014	0321000000-E	300	FOUNDATION CONDITIONING GEOTEXTILE	680 SY		
0015	0342000000-E	310	*** SIDE DRAIN PIPE (30")	72 LF		
0016	0343000000-E	310	15" SIDE DRAIN PIPE	20 LF		
0017	0366000000-E	310	15" RC PIPE CULVERTS, CLASS III	100 LF		

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0018	0995000000-E	340	PIPE REMOVAL	84 LF		
0019	1011000000-N	500	FINE GRADING	Lump Sum	L.S.	
0020	1121000000-E	520	AGGREGATE BASE COURSE	2,914 TON		
0021	1220000000-E	545	INCIDENTAL STONE BASE	100 TON		
0022	1275000000-E	600	PRIME COAT	2,160 GAL		
0023	1330000000-E	607	INCIDENTAL MILLING	320 SY		
0024	1491000000-E	610	ASPHALT CONC BASE COURSE, TYPE B25.0C	1,110 TON		
0025	1503000000-E	610	ASPHALT CONC INTERMEDIATE COURSE, TYPE I19.0C	1,100 TON		
0026	1523000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5C	2,200 TON		
0027	1575000000-E	620	ASPHALT BINDER FOR PLANT MIX	235 TON		
0028	1881000000-E	SP	GENERIC PAVING ITEM SINUSOIDAL MILLED RUMBLE STRIPS, (14")	13,290 LF		
0029	2022000000-E	815	SUBDRAIN EXCAVATION	45 CY		
0030	2026000000-E	815	GEOTEXTILE FOR SUBSURFACE DRAINS	200 SY		
0031	2036000000-E	815	SUBDRAIN COARSE AGGREGATE	34 CY		
0032	2044000000-E	815	6" PERFORATED SUBDRAIN PIPE	200 LF		
0033	2070000000-N	815	SUBDRAIN PIPE OUTLET	1 EA		
0034	2077000000-E	815	6" OUTLET PIPE	6 LF		

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0035	2286000000-N	840	MASONRY DRAINAGE STRUCTURES	4 EA		
0036	2308000000-E	840	MASONRY DRAINAGE STRUCTURES	1.6 LF		
0037	2367000000-N	840	FRAME WITH TWO GRATES, STD 840.29	4 EA		
0038	2556000000-E	846	SHOULDER BERM GUTTER	90 LF		
0039	3030000000-E	862	STEEL BEAM GUARDRAIL	612.5 LF		
0040	3150000000-N	862	ADDITIONAL GUARDRAIL POSTS	5 EA		
0041	3287000000-N	862	GUARDRAIL END UNITS, TYPE TL-3	4 EA		
0042	3317000000-N	862	GUARDRAIL ANCHOR UNITS, TYPE B- 77	4 EA		
0043	3360000000-E	863	REMOVE EXISTING GUARDRAIL	890 LF		
0044	3380000000-E	862	TEMPORARY STEEL BEAM GUARDRAIL	425 LF		
0045	3387000000-N	862	TEMPORARY GUARDRAIL ANCHOR UNITS, TYPE ***** (B-77)	4 EA		
0046	3389150000-N	862	TEMPORARY GUARDRAIL END UNITS, TYPE ***** (TL-3)	4 EA		
0047	3389160000-N	862	TEMPORARY ADDITIONAL GUARDRAIL POSTS	5 EA		
0048	3566000000-E	867	WOVEN WIRE FENCE RESET	535 LF		
0049	3635000000-E	876	RIP RAP, CLASS II	70 TON		
0050	3649000000-E	876	RIP RAP, CLASS B	280 TON		
0051	3656000000-E	876	GEOTEXTILE FOR DRAINAGE	1,365 SY		

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0052	4400000000-E	1110	WORK ZONE SIGNS (STATIONARY)	128 SF		
0053	4405000000-E	1110	WORK ZONE SIGNS (PORTABLE)	96 SF		
0054	4410000000-E	1110	WORK ZONE SIGNS (BARRICADE MOUNTED)	36 SF		
0055	4430000000-N	1130	DRUMS	34 EA		
0056	4445000000-E	1145	BARRICADES (TYPE III)	48 LF		
0057	4455000000-N	1150	FLAGGER	40 DAY		
0058	4516000000-N	1180	SKINNY DRUM	82 EA		
0059	4650000000-N	1251	TEMPORARY RAISED PAVEMENT MARKERS	167 EA		
0060	4688000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (6", 90 MILS)	8,000 LF		
0061	4815000000-E	1205	PAINT PAVEMENT MARKING LINES (6")	18,264 LF		
0062	4895000000-N	SP	GENERIC PAVEMENT MARKING ITEM POLYCARBONATE H-SHAPED MARKERS	30 EA		
0063	5326000000-E	1510	10" WATER LINE	1,785 LF		
0064	5329000000-E	1510	DUCTILE IRON WATER PIPE FITTINGS	600 LB		
0065	5552000000-E	1515	10" VALVE	2 EA		
0066	5686500000-E	1515	WATER SERVICE LINE	6 LF		
0067	5802000000-E	1530	ABANDON 10" UTILITY PIPE	1,734 LF		
0068	5872600000-E	1550	DIRECTIONAL DRILLING OF *** (10")	871 LF		

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0069	6000000000-E	1605	TEMPORARY SILT FENCE	1,830 LF		
0070	6006000000-E	1610	STONE FOR EROSION CONTROL, CLASS A	105 TON		
0071	6009000000-E	1610	STONE FOR EROSION CONTROL, CLASS B	190 TON		
0072	6012000000-E	1610	SEDIMENT CONTROL STONE	255 TON		
0073	6015000000-E	1615	TEMPORARY MULCHING	4.5 ACR		
0074	6018000000-E	1620	SEED FOR TEMPORARY SEEDING	300 LB		
0075	6021000000-E	1620	FERTILIZER FOR TEMPORARY SEEDING	1.5 TON		
0076	6024000000-E	1622	TEMPORARY SLOPE DRAINS	200 LF		
0077	6029000000-E	SP	SAFETY FENCE	2,700 LF		
0078	6030000000-E	1630	SILT EXCAVATION	240 CY		
0079	6036000000-E	1631	MATTING FOR EROSION CONTROL	20,500 SY		
0080	6037000000-E	1629	COIR FIBER MAT	1,550 SY		
0081	6042000000-E	1632	1/4" HARDWARE CLOTH	950 LF		
0082	6048000000-E	SP	FLOATING TURBIDITY CURTAIN	200 SY		
0083	6071002000-E	1642	FLOCCULANT	35 LB		
0084	6071012000-E	1642	COIR FIBER WATTLE	1,250 LF		
0085	6071030000-E	1640	COIR FIBER BAFFLE	50 LF		

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0086	6084000000-E	1660	SEEDING & MULCHING	6 ACR		
0087	6087000000-E	1660	MOWING	3 ACR		
0088	6090000000-E	1661	SEED FOR REPAIR SEEDING	50 LB		
0089	6093000000-E	1661	FERTILIZER FOR REPAIR SEEDING	0.25 TON		
0090	6096000000-E	1662	SEED FOR SUPPLEMENTAL SEEDING	125 LB		
0091	6108000000-E	1665	FERTILIZER TOPDRESSING	3.5 TON		
0092	6114500000-N	1667	SPECIALIZED HAND MOWING	10 MHR		
0093	6114800000-N	SP	MANUAL LITTER REMOVAL	2 MHR		
0094	6114900000-E	SP	LITTER DISPOSAL	1 TON		
0095	6117000000-N	1675	RESPONSE FOR EROSION CONTROL	25 EA		
0096	6117500000-N	SP	CONCRETE WASHOUT STRUCTURE	2 EA		
0097	6132000000-N	SP	GENERIC EROSION CONTROL ITEM PREFABRICATED CONCRETE WASHOUT	1 EA		
0118	0177000000-E	250	BREAKING OF EXISTING ASPHALT PAVEMENT	3,570 SY		
STRUCTURE ITEMS						
0098	8007000000-N	400	CONSTRUCTION, MAINTENANCE, & REMOVAL OF TEMP STRUCTURE AT STA ***** (26+83.00 -L-)	Lump Sum	L.S.	
0099	8035000000-N	402	REMOVAL OF EXISTING STRUCTURE AT STATION ***** (26+83.00 -L-)	Lump Sum	L.S.	
0100	8065000000-N	SP	ASBESTOS ASSESSMENT	Lump Sum	L.S.	

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0101	8121000000-N	412	UNCLASSIFIED STRUCTURE EXCAVATION AT STATION ***** (26+83.00 -L-)	Lump Sum	L.S.	
0102	8147000000-E	420	REINFORCED CONCRETE DECK SLAB	5,551 SF		
0103	8161000000-E	420	GROOVING BRIDGE FLOORS	6,549 SF		
0104	8182000000-E	420	CLASS A CONCRETE (BRIDGE)	80.6 CY		
0105	8210000000-N	422	BRIDGE APPROACH SLABS, STATION ***** (26+83.00 -L-)	Lump Sum	L.S.	
0106	8217000000-E	425	REINFORCING STEEL (BRIDGE)	10,713 LB		
0107	8278000000-E	430	FIB *** PRESTRESSED CONCRETE GIRDERS (36")	511.33 LF		
0108	8328000000-E	450	PILE DRIVING EQUIPMENT SETUP FOR *** PRESTRESSED CONCRETE PILES (24")	7 EA		
0109	8328200000-E	450	PILE DRIVING EQUIPMENT SETUP FOR *** STEEL PILES (HP 12 X 53)	14 EA		
0110	8350000000-E	450	24" PRESTRESSED CONCRETE PILES	560 LF		
0111	8364000000-E	450	HP 12 X 53 STEEL PILES	1,260 LF		
0112	8393000000-N	450	PILE REDRIVES	12 EA		
0113	8394000000-N	450	DYNAMIC PILE TESTING	4 EA		
0114	8503000000-E	460	CONCRETE BARRIER RAIL	256.67 LF		
0115	8608000000-E	876	RIP RAP CLASS II (2'-0" THICK)	294 TON		
0116	8622000000-E	876	GEOTEXTILE FOR DRAINAGE	325 SY		

County: BERTIE

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0117	8657000000-N	430	ELASTOMERIC BEARINGS	Lump Sum	L.S.	

1126/Sep08/Q147516.35/D509337854000/E118

Total Amount Of Bid For Entire Project :

PROJECT NO.	SHEET NO.
BR-0153	3B-1

STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

PAVEMENT REMOVAL SUMMARY	
	IN SQUARE YARDS

SURVEY LINE	Station	Station	LOCATION LT/RT/CL	ASPHALT REMOVAL	ASPHALT BREAKUP	CONCRETE REMOVAL	CONCRETE BREAKUP
-LDET-	10+00	18+51	CL	1939.04			
-LDET-	20+01	30+26	CL	2699.14			
-L-	15+00	21+20	RT	89.03			
-L-	15+00	24+29	LT	299.43			
-L-	21+75	25+93	RT	10.24			
-L-	28+41	39+00	RT	129.82			
-L-	31+02	39+00	LT	189.79			
-L-	22+50	EXIST BRIDGE	CL		1411.97		
-L-	EXIST BRIDGE	33+40	CL		2155.34		
		TOTAL:		5356.51	3567.31		
		SAY:		5360	3570		

SHOULDER BERM GUTTER SUMMARY

SURVEY LINE	Station	Station	LOCATION LT/RT/CL	LENGTH			
-L-	27+73.00	27+96.46	LT	23.5			
-L-	27+73.00	27+96.46	RT	23.5			
-LDET-	20+16.00	20+34.00	LT	18			
-LDET-	20+16.00	20+34.00	RT	18			
		TOTAL:		83			
		SAY:		90			

SUMMARY OF EARTHWORK

Station	Station	Uncl. Excav.	Embank.	Borrow	Waste
-LDET- STA. 12+49.97	-LDET- STA. 18+91.00	306	3,238	2,932	
-LDET- STA. 19+91.00	-LDET- STA. 27+99.73	193	2,158	1,965	
Phase I Subtotals:		499	5,395	4,896	0
-L- STA. 15+00.00	-L- STA. 26+18.00	511	3,581	3,070	
-L- STA. 27+48.00	-L- STA. 40+00.00	260	5,515	5,255	
Phase II Subtotals:		771	9,096	8,325	0
-L- STA. 15+00.00	-L- STA. 26+45.04	973	386	0	587
-L- STA. 27+45.04	-L- STA. 40+00.00	687	701	14	
ADDITIONAL DETOUR EXCAVATION		767	6	0	761
Phase III Subtotals:		2,427	1,093	14	1,348
SUBTOTALS:		3,697	15,584	13,235	1,348
Material for Shoulder Construction			1275	1275	
Waste in Lieu of Borrow				-14	-14
Est. 5% To Replace Top Soil on Borrow Pit				725	
PROJECT TOTALS:		3,697	16,859	15,221	1,334
PROJECT TOTALS:		3,697	16,859	15,221	1,334
SAY:		3,800		15,300	

Note: Earthwork quantities are calculated by Benesch. These earthwork quantities are based in part on subsurface data provided by the Geotechnical Engineering Unit.

ADDITIONAL UNDERCUT (CONTINGENCY) = 300 CY
SELECT GRANULAR MATERIAL (CONTINGENCY) = 300 CY
GEOTEXTILE FOR SOIL STABILIZATION (CONTINGENCY) = 300 SY

COMPUTED BY:		JM		DATE:		4/9/2024	
CHECKED BY:				DATE:			

DIVISION OF HIGHWAYS
STATE OF NORTH CAROLINA
GUARDRAIL SUMMARY

G = GATING IMPACT ATTENUATOR TYPE 350
NG = NON-GATING IMPACT ATTENUATOR TYPE 350

[illegible]


5/14/2025

\\fs01\proj\2025\25000613067CD\25000613067CD.dgn

20


MATCH LINE -L- STA. 20+00
SEE SHEET 4

-L-
PI Sta 20+70.30
 $\Delta = 18^\circ 23' 20.0''$ (RT)
 $D = 2' 14' 48.8''$
 $L = 818.41'$
 $T = 412.76'$
 $R = 2,550.00'$
 $Super = 0.05$
 $LR = 135'$
 $DS = 60'$

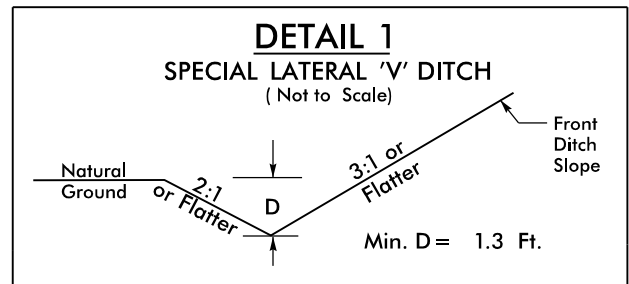



FROM STA. 24+00 TO STA. 26+38 -L- LT
FROM STA. 24+50 TO STA. 26+50 -L- RT
FROM STA. 27+20 TO STA. 31+50 -L- LT
FROM STA. 27+30 TO STA. 31+00 -L- RT

25

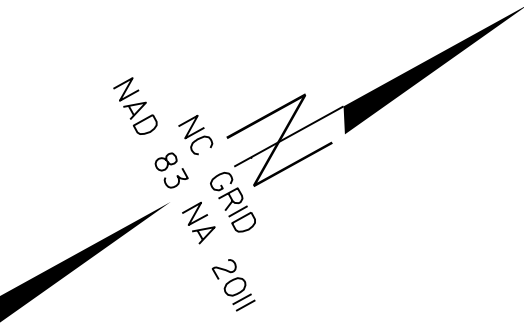


30

PROJECT REFERENCE NO.		SHEET NO.
BR-0153		5
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER	
		
Eric Spaulding 9/5/2025	Brian A. Talbot 9/5/2025	
		NC FIRM LICENSE No: F-1320 8000 REGENCY PARKWAY, STE 175 CARY, NC 27513 (919) 275-2490
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED		

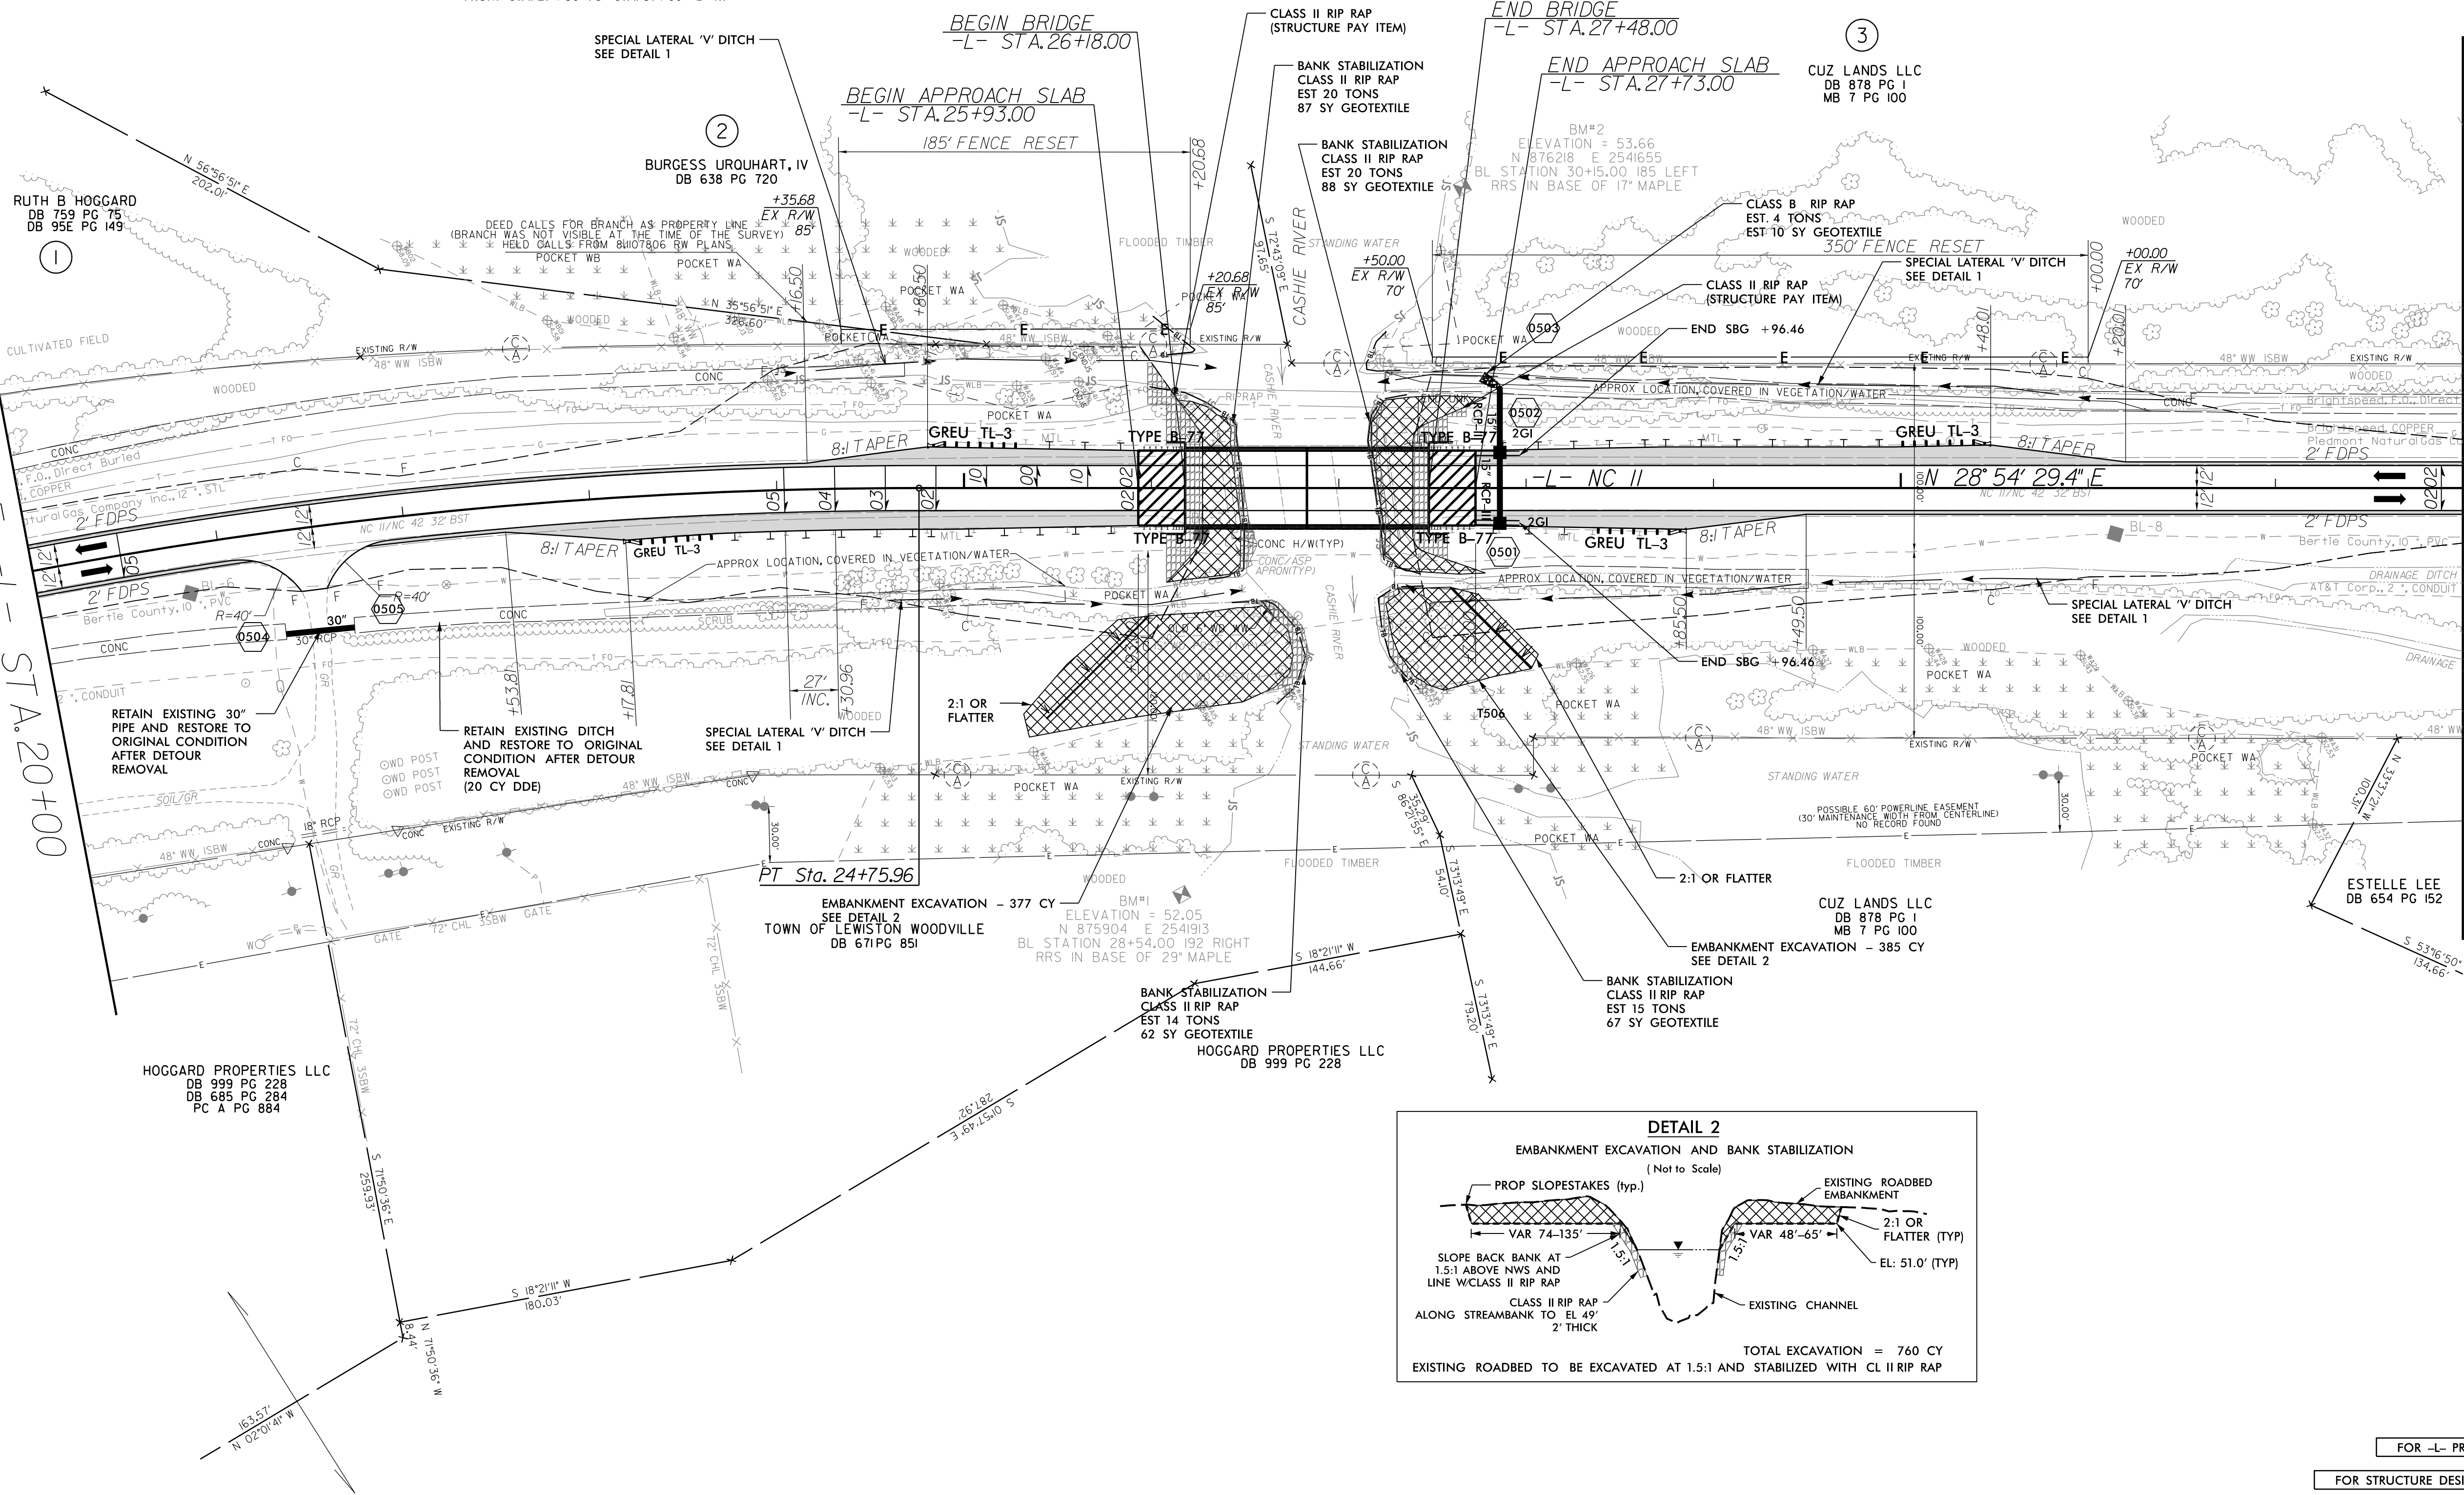

MATCH LINE -L- STA. 33+00
SEE SHEET 6

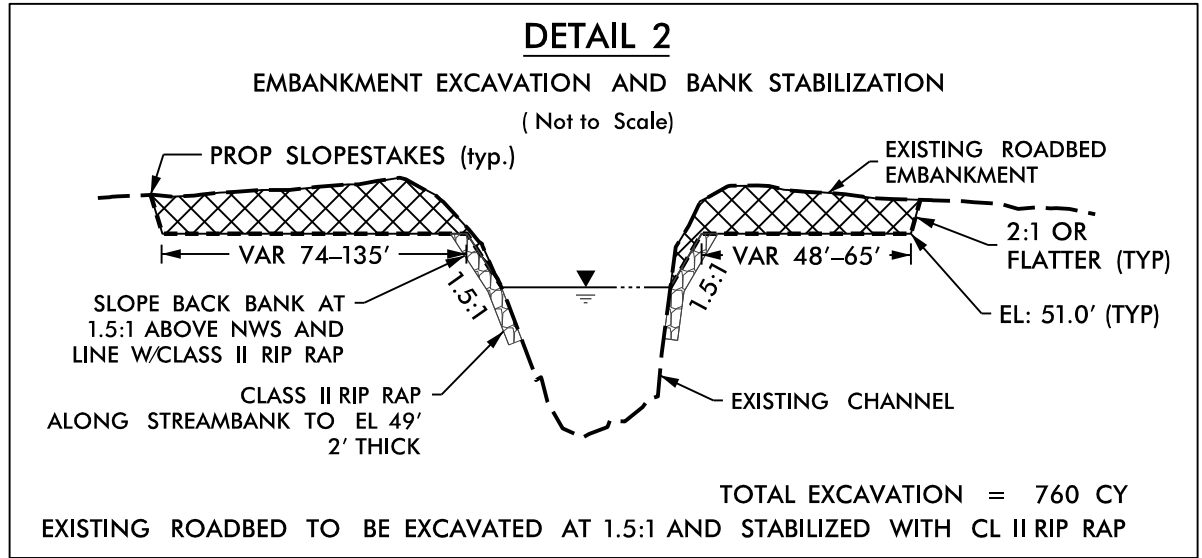

FOR -L- PROFILE, SEE SHEET NO. 7

FOR STRUCTURE DESIGN, SEE S-1 THRU S-32