



STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION

ROY COOPER  
GOVERNOR

J.R. "JOEY" HOPKINS  
SECRETARY

November 04, 2024

**Addendum No. 1**

RE: Contract # C205009 (previously C204448)

WBS # 15BPR.126.3, 6B.102611

STATE FUNDED

**Cumberland County**

BRIDGE #250053 OVER SR-1007 ON US-401 AND BRIDGE #250230 OVER SR-1007 ON ABANDONED RAILROAD

**November 19, 2024 Letting**

To Whom It May Concern:

Reference is made to the plans and proposal furnished to you on this project.

The following revisions have been made to the Structure Plans.

Sheet No.	Revision
1 (Title Sheet)	Revised with correct contract number
1A	Revised with correct contract number

Please void the above listed Sheets in your Plans and staple the revised Sheets thereto.

The following revisions have been made to the proposal.

Page No.	Revision
Proposal Cover	Note added that reads "Includes Addendum No. 1 Dated 11-04-2024". Revised with correct contract number
All subsequent pages through SSP-19	Revised with correct contract number
Item Sheets	Revised with correct contract number

Due to the extensive nature of the revisions, please replace your entire proposal.

Mailing Address:  
NC DEPARTMENT OF TRANSPORTATION  
CONTRACT STANDARDS AND DEVELOPMENT  
1591 MAIL SERVICE CENTER  
RALEIGH, NC 27699-1591

Telephone: (919) 707-6900  
Fax: (919) 250-4127  
Customer Service: 1-877-368-4968

Location:  
1020 BIRCH RIDGE DR.  
RALEIGH, NC 27610

Website: [www.ncdot.gov](http://www.ncdot.gov)

The contract will be prepared accordingly.

This revision requires that you delete the old EBSX file and download the new EBSX file.

Delete old file: 008NOV19.EBSX

Download new file: 014NOV19.EBSX

Bid Express will not accept your bid unless the new EBSX file is downloaded.

Sincerely,

Signed by:  
  
52C46046381F443...

Ronald E. Davenport, Jr., PE  
State Contract Officer

RED/jjr  
Attachments

cc: Mr. Wiley W. Jones III, PE  
Mr. Wallace Jernigan, Jr., PE  
Mr. Ken Kennedy, PE  
Mr. Malcolm Bell

Mr. Forrest Dungan, PE  
Ms. Jaci Kincaid  
Mr. Jon Weathersbee, PE  
Project File (2)

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH, N.C.

PROPOSAL

**INCLUDES ADDENDUM No.1 DATED 11-04-2024**

DATE AND TIME OF BID OPENING: **Nov 19, 2024 AT 02:00 PM**

CONTRACT ID C205009  
WBS 15BPR.126.3, 6B.102611

FEDERAL-AID NO. STATE FUNDED

COUNTY CUMBERLAND

T.I.P NO.

MILES 0.080

ROUTE NO.

LOCATION BRIDGE #250053 OVER SR-1007 ON US-401 AND BRIDGE #250230 OVER SR-1007 ON ABANDONED RAILROAD.

TYPE OF WORK BRIDGE PRESERVATION.

**NOTICE:**

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE N.C. LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$30,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA. NOTWITHSTANDING THESE LIMITATIONS ON BIDDING, THE BIDDER WHO IS AWARDED ANY FEDERAL - AID FUNDED PROJECT SHALL COMPLY WITH CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA FOR LICENSING REQUIREMENTS WITHIN 60 CALENDAR DAYS OF BID OPENING.

**BIDS WILL BE RECEIVED AS SHOWN BELOW:**

**THIS IS A STRUCTURE PROPOSAL**

**5% BID BOND OR BID DEPOSIT REQUIRED**

---

County: CUMBERLAND

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
<b>ROADWAY ITEMS</b>						
0001	0000100000-N	800	MOBILIZATION	Lump Sum	L.S.	
0002	1330000000-E	607	INCIDENTAL MILLING	1,093 SY		
0003	1523000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5C	92 TON		
0004	1575000000-E	620	ASPHALT BINDER FOR PLANT MIX	6 TON		
0005	2752000000-E	SP	GENERIC PAVING ITEM REMOVE AND REPLACE 2'-6" CURB AND GUTTER	46 LF		
0006	4400000000-E	1110	WORK ZONE SIGNS (STATIONARY)	96 SF		
0007	4405000000-E	1110	WORK ZONE SIGNS (PORTABLE)	871 SF		
0008	4410000000-E	1110	WORK ZONE SIGNS (BARRICADE MOUNTED)	158 SF		
0009	4415000000-N	1115	FLASHING ARROW BOARD	10 EA		
0010	4420000000-N	1120	PORTABLE CHANGEABLE MESSAGE SIGN	20 EA		
0011	4430000000-N	1130	DRUMS	326 EA		
0012	4434000000-N	1140	SEQUENTIAL FLASHING WARNING LIGHTS	72 EA		
0013	4445000000-E	1145	BARRICADES (TYPE III)	96 LF		
0014	4447000000-E	SP	PEDESTRIAN CHANNELIZING DEVICES	8 LF		
0015	4480000000-N	1165	TMA	12 EA		
0016	4510000000-N	1190	LAW ENFORCEMENT	500 HR		
0017	4516000000-N	1180	SKINNY DRUM	87 EA		

County: CUMBERLAND

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0018	4600000000-N	SP	GENERIC TRAFFIC CONTROL ITEM AUDIBLE WARNING DEVICES	2 EA		
0019	4600000000-N	SP	GENERIC TRAFFIC CONTROL ITEM PEDESTRIAN TRANSPORT SERVICE	10 EA		
0020	4600000000-N	SP	GENERIC TRAFFIC CONTROL ITEM TEMPORARY CURB RAMPS	2 EA		
0021	4815000000-E	1205	PAINT PAVEMENT MARKING LINES (6")	1,605 LF		
0022	4820000000-E	1205	PAINT PAVEMENT MARKING LINES (8")	55 LF		
0023	4840000000-N	1205	PAINT PAVEMENT MARKING CHARACTER	4 EA		
0024	4845000000-N	1205	PAINT PAVEMENT MARKING SYMBOL	1 EA		
0025	4900000000-N	1251	PERMANENT RAISED PAVEMENT MARKERS	38 EA		
0026	5255000000-N	1413	PORTABLE LIGHTING	Lump Sum	L.S.	
<b>STRUCTURE ITEMS</b>						
0027	8161000000-E	420	GROOVING BRIDGE FLOORS	28,477 SF		
0028	8296000000-N	442	POLLUTION CONTROL	Lump Sum	L.S.	
0029	8559000000-E	SP	CLASS II, SURFACE PREPARATION	82.4 SY		
0030	8660000000-E	SP	CONCRETE REPAIRS	11.2 CF		
0031	8664000000-E	SP	SHOTCRETE REPAIRS	36.2 CF		
0032	8678000000-E	SP	EPOXY RESIN INJECTION	13 LF		
0033	8860000000-N	SP	GENERIC STRUCTURE ITEM CLEANING AND REPAINTING OF BRIDGE #250053	Lump Sum	L.S.	
0034	8860000000-N	SP	GENERIC STRUCTURE ITEM FIELD MEASURING	Lump Sum	L.S.	

County: CUMBERLAND

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0035	8860000000-N	SP	GENERIC STRUCTURE ITEM PAINTING CONTAINMENT FOR BRIDGE #250053	Lump Sum	L.S.	
0036	8860000000-N	SP	GENERIC STRUCTURE ITEM PAINTING CONTAINMENT FOR ZONE PAINTING	Lump Sum	L.S.	
0037	8860000000-N	SP	GENERIC STRUCTURE ITEM ZONE PAINTING OF EXISTING STRUCTURE	Lump Sum	L.S.	
0038	8867000000-E	SP	GENERIC STRUCTURE ITEM FOAM JOINT SEALS FOR PRESERVATION	551 LF		
0039	8892000000-E	SP	GENERIC STRUCTURE ITEM EPOXY COATING	1,053 SF		
0040	8893000000-E	SP	GENERIC STRUCTURE ITEM CONCRETE DECK REPAIR FOR POLYMER CONCRETE OVERLAY	76.6 SY		
0041	8893000000-E	SP	GENERIC STRUCTURE ITEM PLACING & FINISHING POLYMER CONCRETE OVERLAY	3,336 SY		
0042	8893000000-E	SP	GENERIC STRUCTURE ITEM SCARIFYING BRIDGE DECK	3,336 SY		
0043	8893000000-E	SP	GENERIC STRUCTURE ITEM SHOTBLASTING BRIDGE DECK	3,336 SY		
0044	8897000000-N	SP	GENERIC STRUCTURE ITEM ELASTOMERIC BEARING, MODIFIED	90 EA		
0045	8897000000-N	SP	GENERIC STRUCTURE ITEM TYPE I BRIDGE JACKING BRIDGE NO 250053	90 EA		

\*\*\*\*\* BEGIN SCHEDULE AA \*\*\*\*\*  
\*\*\*\*\* ( 2 ALTERNATES ) \*\*\*\*\*


0046 AA1	8881000000-E	SP	GENERIC STRUCTURE ITEM POLYESTER POLYMER CONCRETE MATERIALS	104.3 CY		
-------------	--------------	----	---	-------------	--	--

\*\*\* OR \*\*\*

0047 AA2	8881000000-E	SP	GENERIC STRUCTURE ITEM EPOXY POLYMER CONCRETE MATERIALS	104.3 CY		
-------------	--------------	----	---	-------------	--	--

\*\*\*\*\* END SCHEDULE AA \*\*\*\*\*

**CONTRACT NO: C205009 PROJECT: 15BPR.126.3/6B.102611**

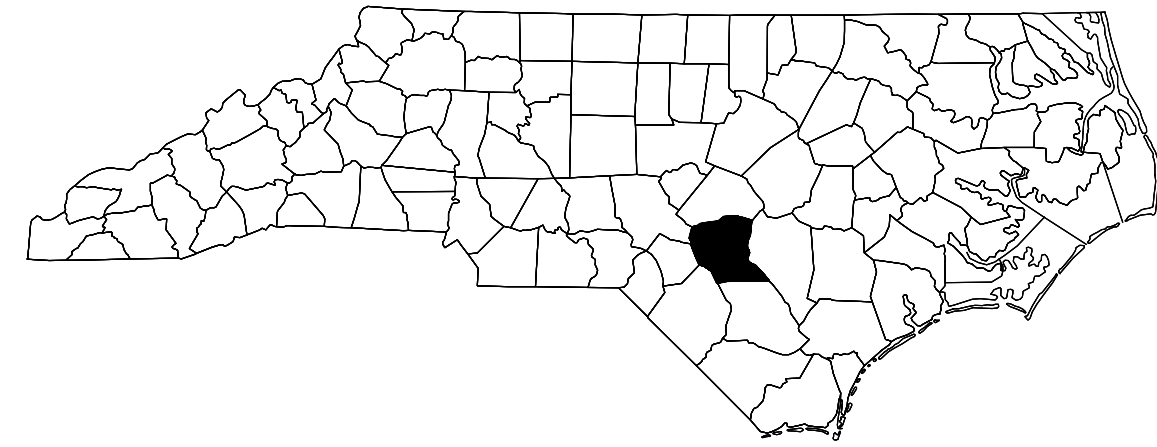


STATE OF NORTH CAROLINA  
 DIVISION OF HIGHWAYS

CUMBERLAND COUNTY


STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	15BPR.126.3 / 6B.102611	1	20
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	
15BPR.126.1	-	P.E.	
15BPR.126.3	-	CONST.	
6B.102611	-	P.E.	
6B.102611	-	CONST.	

**LOCATION:** 15BPR.126.3 - BRIDGE #250053 ON US 401 BYPASS (SKIBO ROAD) OVER SR 1007 (ALL AMERICAN FREEWAY).  
 6B.102611 - BRIDGE #250230 CARRYING ABANDONED RR OVER SR 1007 (ALL AMERICAN FREEWAY).

**TYPE OF WORK:** BRIDGE REHABILITATION - DECK REPAIRS, POLYMER CONCRETE OVERLAY, JOINT REPLACEMENTS, BEARING REPLACEMENTS, SUBSTRUCTURE REPAIR, CLEANING AND ZONE PAINTING AND PAINTING OF EXISTING STEEL BRIDGE STRUCTURE.

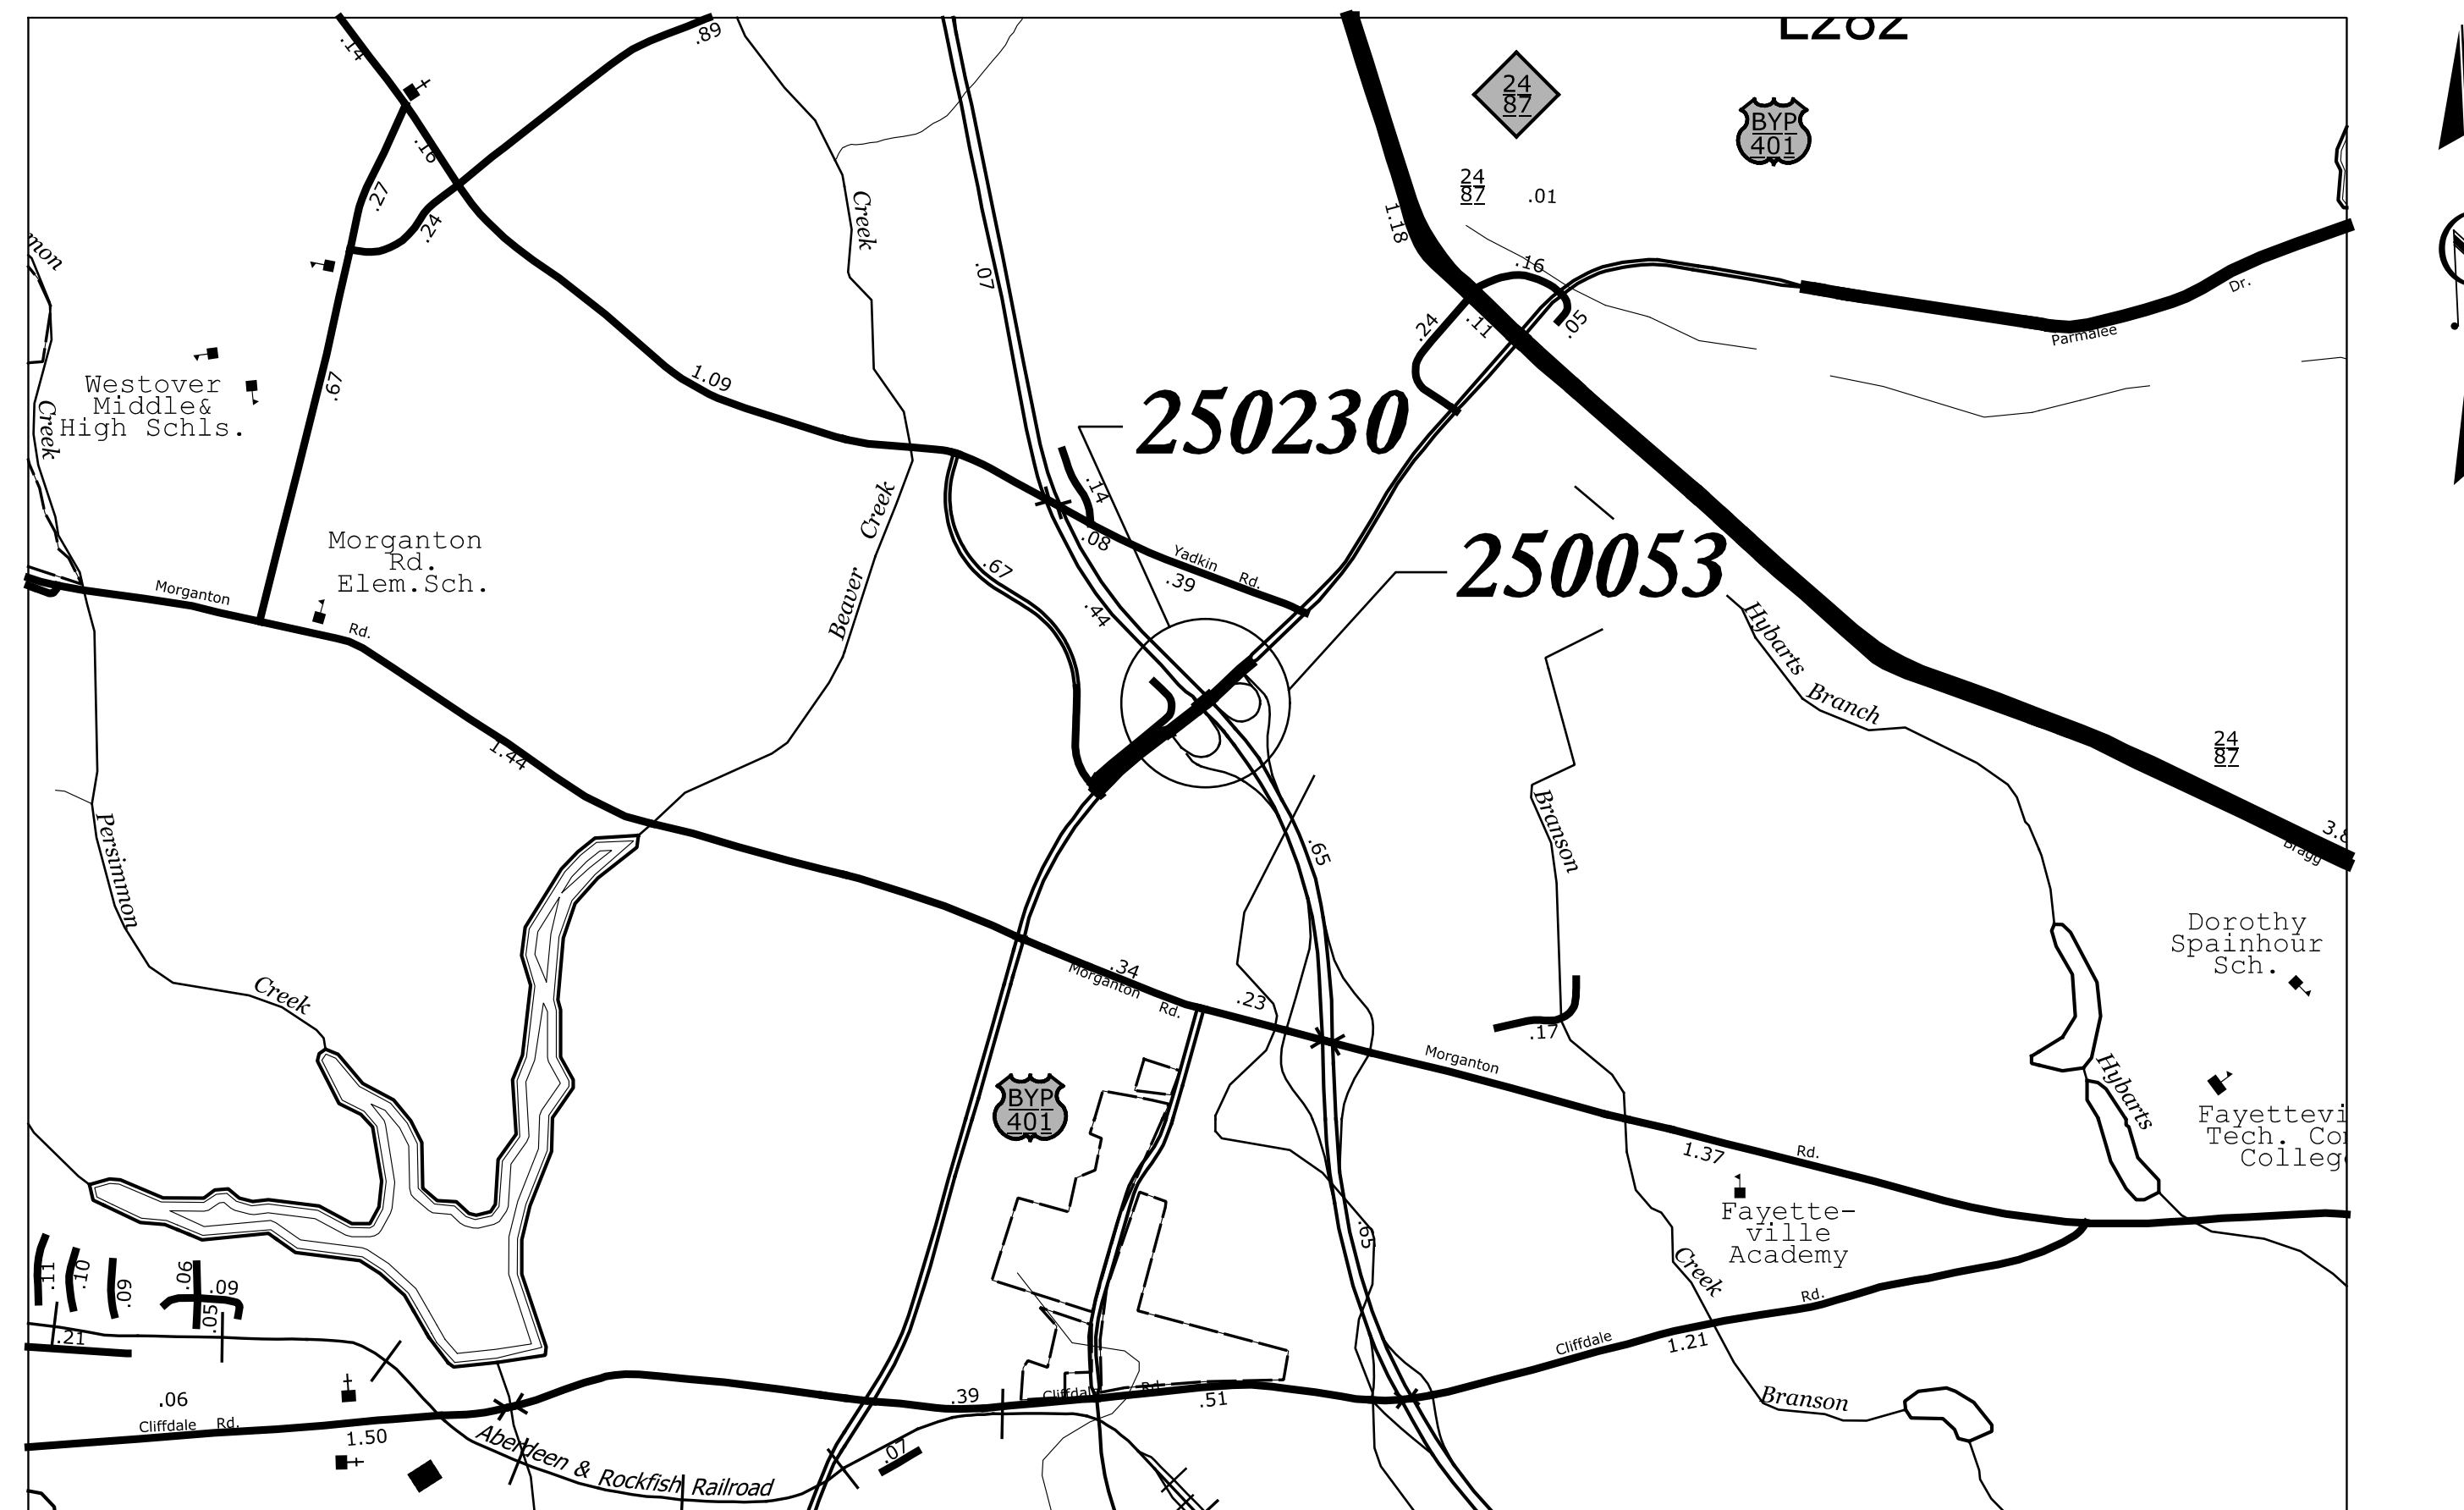

**VICINITY MAP - CUMBERLAND COUNTY**

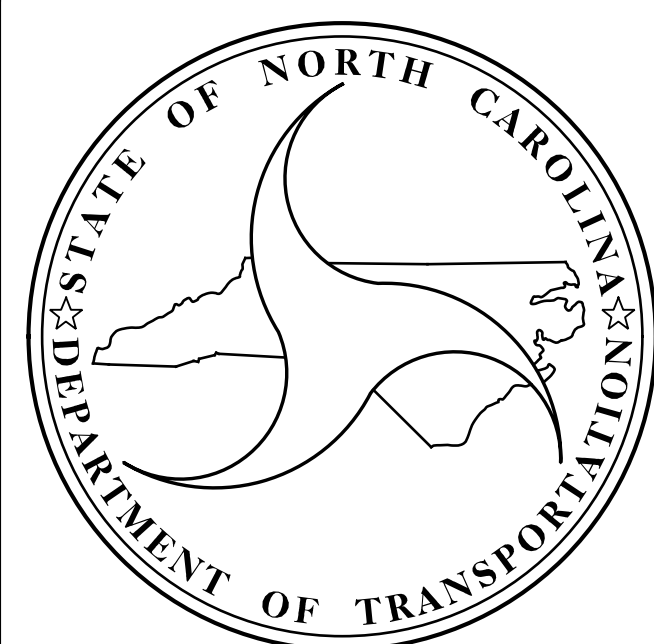

**DESIGN DATA**  
 CUMBERLAND COUNTY  
 #250053 ADT 2021 = 53,000

**PROJECT LENGTH**  
 CUMBERLAND COUNTY  
 #250053 = 0.04 MILE  
 #250230 = 0.04 MILE



One Glenwood Avenue  
 Suite 900  
 Raleigh, NC 27603  
 (919) 420-7660  
 NC Lic. No. F-0270

**TIMOTHY M. SHERRILL, P.E.**  
 NCDOT PROJECT ENGINEER


2024 STANDARD SPECIFICATIONS

**LETTING DATE:**  
 NOVEMBER 19, 2024



Documented by:  
*Eric B. Nelson, Jr.*  
 AC58062119074CD  
 10/29/2024  
**RICK NELSON, P.E.**  
 PROJECT DESIGN ENGINEER

CONTRACT NO: C205009 PROJECT: 15BPR.126.3/6B.102611

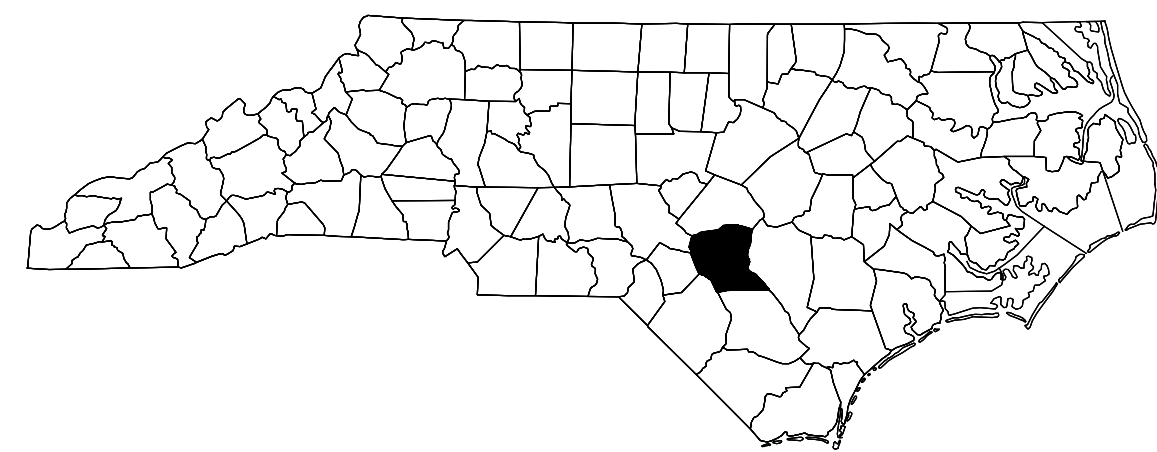

STATE OF NORTH CAROLINA  
DIVISION OF HIGHWAYS

**CUMBERLAND COUNTY**

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	15BPR.126.3 / 6B.102611	1A	20
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	
15BPR.126.1	-	P.E.	
15BPR.126.3	-	CONST.	
6B.102611	-	P.E.	
6B.102611	-	CONST.	

**LOCATION:** 15BPR.126.3 - BRIDGE #250053 ON US 401 BYPASS (SKIBO ROAD) OVER SR 1007 (ALL AMERICAN FREEWAY).  
6B.102611 - BRIDGE #250230 CARRYING ABANDONED RR OVER SR 1007 (ALL AMERICAN FREEWAY).

**TYPE OF WORK:** BRIDGE REHABILITATION - DECK REPAIRS, POLYMER CONCRETE OVERLAY, JOINT REPLACEMENTS, BEARING REPLACEMENTS, SUBSTRUCTURE REPAIR, CLEANING AND ZONE PAINTING AND PAINTING OF EXISTING STEEL BRIDGE STRUCTURE.

INDEX OF DRAWINGS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
1A	INDEX OF DRAWINGS
S-1	TOTAL BILL OF MATERIAL
SI-1 TO SI-2	GENERAL DRAWING 250053
SI-3	TYPICAL SECTION AND SURFACE PREPARATION DETAILS
SI-4 TO SI-5	DECK REPAIRS
SI-6	JOINT DETAILS
SI-7 TO SI-8	BEARING DETAILS
SI-9	SUBSTRUCTURE REPAIRS - END BENT 1 & 2
SI-10 TO SI-11	SUBSTRUCTURE REPAIRS - BENT 1
SI-12 TO SI-13	SUBSTRUCTURE REPAIRS - BENT 2
SI-14 TO SI-15	SUBSTRUCTURE REPAIRS - BENT 3
SI-16	APPROACH MILLING AND TYPICAL ROADWAY SECTIONS
SI-17	TYPICAL CAP AND COLUMN REPAIR DETAILS
SI-18	OVERHANG, DIAPHRAGM AND CURB AND GUTTER REPAIR DETAILS
SI-19	BRIDGE JACKING DETAILS
S2-1	GENERAL DRAWING 250230
SN	STANDARD NOTES