



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

JOSH STEIN
GOVERNOR

J.R. "JOEY" HOPKINS
SECRETARY

April 11, 2025

Addendum No. 1

Contract No.: DA00617

WBS Element: 2025CPT.01.09.10081 & 2025CPT.01.09.10581

Milling, Widening, Resurfacing, Shoulder Reconstruction, Sinusoidal Rumble Strips, & Pavement Markings on NC-11 & NC-903 in Bertie & Martin Counties

To Whom It May Concern:

Reference is made to the proposal and plans previously furnished for this project.

The following revisions have been made to the proposal and plans:

Plan Sheet No. 2 has been revised to add a Sequence of Operations for maps associated with Typical Section No. 1. Please replace the original Plan Sheet No. 2 with the attached revised Plan Sheet No. 2.


Plan Sheet No. 8 "Summary of Quantities" has been revised. The quantity for "*Shoulder Reconstruction*" and "*Milling Asphalt Pavement (1-1/2)*" have been updated. Please replace the original Plan Sheet No. 8 with the attached revised Plan Sheet No. 8.

Plan Sheet No. 9 "Summary of Quantities" has been revised. The quantity for "*Paint Pavement Marking Lines (4'') Yellow*" has been updated. Please replace the original Plan Sheet No. 9 with the attached revised Plan Sheet No. 9.

Proposal Pages 95 & 96, "Bid Form" have been revised. The quantity for "*Shoulder Reconstruction*", "*Milling Asphalt Pavement (1-1/2)*", and "*Paint Pavement Marking Lines (4'') Yellow*" has been updated. Please replace the original Pages 95 & 96 "Bid Form" with the attached revised Pages 95 & 96 "Bid Form".

The amended EBS File (DA00617.001x) has been updated.

Sincerely,

DocuSigned by:

37ED002D8DDF4B4...

Mark S. Winslow
Division Contract Engineer

Cc: C. W. Bridgers, Jr., PE
R. K. Sawyer, PE
R. W. Midgett, PE
M. B. Gill, PE
B. N. Braswell, PE
D. B. Otts, PE
E. S. Sedlacek
G. E. Mombaerts

County: BERTIE, MARTIN

REVISED 4/11/2025

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
ROADWAY ITEMS						
0001	0000100000-N	800	MOBILIZATION	Lump Sum	L.S.	
0002	1220000000-E	545	INCIDENTAL STONE BASE	267 TON		
0003	1245000000-E	SP	SHOULDER RECONSTRUCTION	14.52 SMI		
0004	1297000000-E	607	MILLING ASPHALT PAVEMENT, **** DEPTH (1-1/2")	218,234 SY		
0005	1330000000-E	607	INCIDENTAL MILLING	4,276 SY		
0006	1491000000-E	610	ASPHALT CONC BASE COURSE, TYPE B25.0C	5,873 TON		
0007	1523000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5C	21,809 TON		
0008	1575000000-E	620	ASPHALT BINDER FOR PLANT MIX	1,554 TON		
0009	1705000000-E	SP	PATCHING EXISTING PAVEMENT (FULL DEPTH)	72 TON		
0010	1881000000-E	SP	GENERIC PAVING ITEM SINUSOIDAL MILLED RUMBLE STRIPS, (18")	38,327 LF		
0011	1881000000-E	SP	GENERIC PAVING ITEM SINUSOIDAL MILLED RUMBLE STRIPS, (8")	76,655 LF		
0012	4413000000-E	SP	WORK ZONE ADVANCE/GENERAL WARNING SIGNING	668 SF		
0013	4457000000-N	SP	TEMPORARY TRAFFIC CONTROL	Lump Sum	L.S.	
0014	4687000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (4", 240 MILS)	216 LF		
0015	4688000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (6", 90 MILS)	264,269 LF		
0016	4700000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (12", 90 MILS)	161 LF		

County: BERTIE, MARTIN

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0017	4709000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (24", 90 MILS)	50 LF		
0018	4725000000-E	1205	THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS)	1 EA		
0019	4810000000-E	1205	PAINT PAVEMENT MARKING LINES (4")	312,185 LF		
0020	4825000000-E	1205	PAINT PAVEMENT MARKING LINES (12")	161 LF		
0021	4835000000-E	1205	PAINT PAVEMENT MARKING LINES (24")	50 LF		
0022	4845000000-N	1205	PAINT PAVEMENT MARKING SYMBOL	1 EA		
0023	4895000000-N	SP	GENERIC PAVEMENT MARKING ITEM POLYCARBONATE H-SHAPED MARKERS	1,001 EA		
0024	6000000000-E	1605	TEMPORARY SILT FENCE	250 LF		
0025	6071012000-E	1642	COIR FIBER WATTLE	297 LF		
0026	6084000000-E	1660	SEEDING & MULCHING	7 ACR		
0027	6117000000-N	1675	RESPONSE FOR EROSION CONTROL	2 EA		

1451/Apr11/Q946402.52/D96009112000/E27

Total Amount Of Bid For Entire Project :

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
V1	INCIDENTAL MILLING
V2	MILLING ASPHALT PAVEMENT, 1.50" DEPTH
M1	PROP. APPROX. 18" SINUSOIDAL RUMBLE STRIPS (CENTERLINE)
M2	PROP. APPROX. 8" SINUSOIDAL RUMBLE STRIPS (EDGE LINES)
T	SHOULDER RECONSTRUCTION
U	EXISTING PAVEMENT


NOTES: REVISED 4/11/2025

PROJECT REFERENCE NO.	SHEET NO.
2025CPT.01.09.10081, ETC.	2

- * ALL INTERSECTING ROADS ARE TO BE RESURFACED TO THE ENDS OF THEIR RADII, THE MAIN LINE RIGHT OF WAY OR AS DIRECTED BY THE ENGINEER. THIS SHALL INCLUDE ANY TAPERS AND TURN LANES LOCATED BOTH ON THE MAIN LINE OR INTERSECTING PAVED ROADWAY.
- * EDGES, PAVEMENT WIDENING, INTERSECTIONS AND BRIDGE FLARES ARE INCLUDED IN THE SUMMARY OF QUANTITIES.
- * CONTRACTOR SHALL PERFORM PATCHING EXISTING PAVEMENT, FULL DEPTH BEFORE APPLICATION OF 1.5" OF S9.5C
- * CONTRACTOR SHALL INSTALL SINUSOIDAL RUMBLE STRIPS ON CENTERLINE AND EDGE LINES OF MAPS 1 & 2
- * SHOULDER WEDGE SHALL BE USED ON ALL ROADS 22' OR WIDER OR AS DIRECTED BY THE ENGINEER

SEQUENCE OF OPERATIONS


- * MILL ENTIRE WIDTH OF EXISTING ROADWAY (1.5" MILLING)
- * WIDEN ROADWAY 2 FEET ON EACH SIDE (FINAL B25.0C LAYER IS TO BE FLUSH WITH MILLED SURFACE)
- * RESURFACE ENTIRE WIDTH OF ROADWAY, INCLUDING WIDENING, IN ONE CONTINUOUS LAYER (1.5")

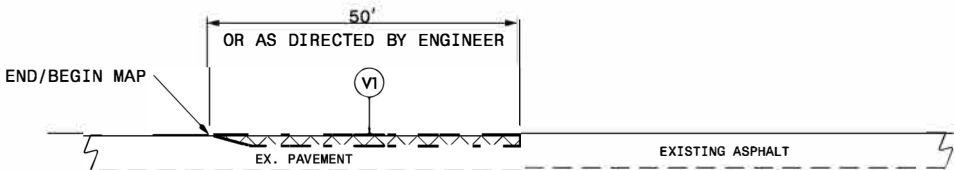


DETAIL 1

MAIN LINE MILLING

- NOTE:
1. INCLUDES INCIDENTAL MILLING AT THE ENDS OF MAIN LINE SECTIONS, OR AS DIRECTED BY THE ENGINEER.
 2. PAVE TO THE END OF THE MILLED SURFACE TO CREATE A SMOOTH TRANSITION.

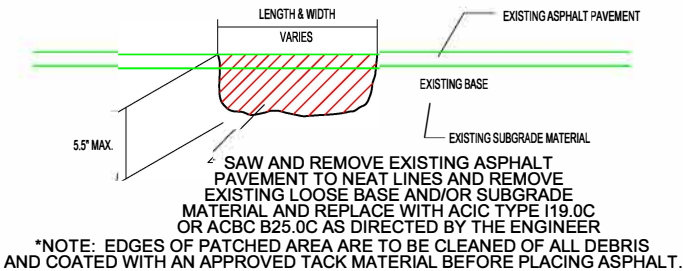

PATCHING EXISTING PAVEMENT (FULL DEPTH)

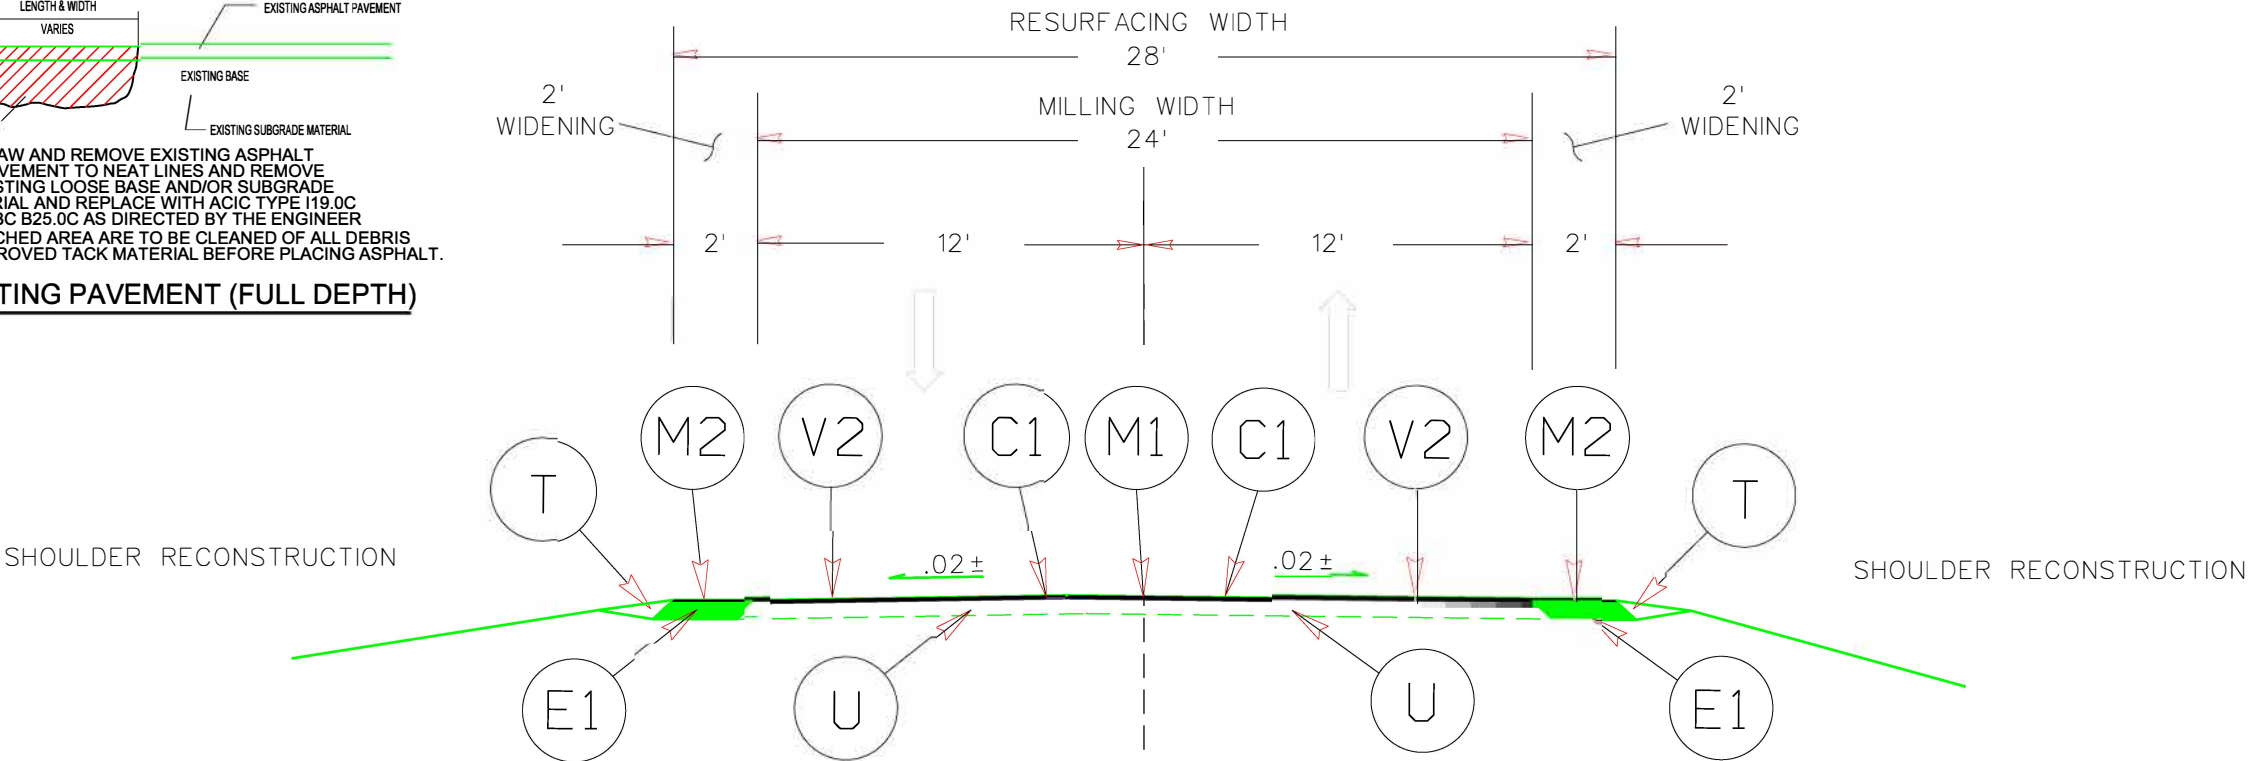

TYPICAL SECTION NO. 1

USE WITH MAPS 1 & 2

PROJECT NO.	SHEET NO.	TOTAL NO.
2025CPT.01.09.10081, ETC.	8	

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	LENGTH	EXISTING WIDTH	PROPOSED WIDTH	BEGIN MP	END MP	MATERIAL TRANSFER VEHICLE REQUIRED	0000100000-N MOBILIZATION	1220000000-E INCIDENTAL STONE BASE	1245000000-E SHOULDER RECONSTRUCTION	1297000000-E MILLING ASPHALT PAVEMENT (1½")	1330000000-E INCIDENTAL MILLING	1491000000-E ASPHALT CONC BASE COURSE, B25.0C	1523000000-E ASPHALT CONC SURFACE COURSE, S9.5C
								MI	FT	FT				LS	TONS	SMI	SY	SY	TONS	TONS
2025CPT.01.09.10081	Bertie	1	NC-11 N / NC 11 HWY S	FROM MARTIN CO TO SR 1108 (INDIAN WOODS RD.)	1	2	2WU	4.89	24	28	0	4.89	YES	1	48	9.78	68,851	1,593	3,973	7,455
TOTAL FOR PROJ NO. 2025CPT.01.09.10081								4.89							48	9.78	68,851	1,593	3,973	7,455
2025CPT.01.09.10581	Martin	2	NC-11 N / NC 11	FROM NC 903 TO MARTIN CO	1	2	2WU	2.369	24	28	12.76	15.129	YES	*	10	4.74	33,370	965	1,900	3,421
2025CPT.01.09.10581	Martin	3	NC-903	FROM NC 11 TO HALIFAX CO	2	2	2WU	7.91	25	25	19.24	27.15	YES	*	209		116,013	1,718		10,933
TOTAL FOR PROJ NO. 2025CPT.01.09.10581								10.279							219	4.74	149,383	2,683	1,900	14,354
GRAND TOTAL								15.169						1	267	14.52	218,234	4,276	5,873	21,809

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	LENGTH	EXISTING WIDTH	PROPOSED WIDTH	BEGIN MP	END MP	1575000000-E ASPHALT BINDER FOR PLANT MIX	1705000000-E PATCHING EXISTING PAVEMENT (FULL DEPTH)	1881000000-E GENERIC PAVING ITEM (SINUSOIDAL MILLED RUMBLE STRIPS, 18")	1881000000-E GENERIC PAVING ITEM (SINUSOIDAL MILLED RUMBLE STRIPS, 8")	6000000000-E TEMPORARY SILT FENCE	6071012000-E COIR FIBER WATTLE	6084000000-E SEEDING & MULCHING	6117000000-N RESPONSE FOR EROSION CONTROL
								MI	FT	FT			TONS	TON	LF	LF	LF	LF	ACR	EA
2025CPT.01.09.10081	Bertie	1	NC-11 N / NC 11 HWY S	FROM MARTIN CO TO SR 1108 (INDIAN WOODS RD.)	1	2	2WU	4.89	24	28	0	4.89	619	16	25,819	51,638	100	60	4.7	1
TOTAL FOR PROJ NO. 2025CPT.01.09.10081								4.89					619	16	25,819	51,638	100	60	4.7	1
2025CPT.01.09.10581	Martin	2	NC-11 N / NC 11	FROM NC 903 TO MARTIN CO	1	2	2WU	2.369	24	28	12.76	15.129	288	16	12,508	25,017	150	237	2.3	1
2025CPT.01.09.10581	Martin	3	NC-903	FROM NC 11 TO HALIFAX CO	2	2	2WU	7.91	25	25	19.24	27.15	647	40						
TOTAL FOR PROJ NO. 2025CPT.01.09.10581								10.279					935	56	12,508	25,017	150	237	2.3	1
GRAND TOTAL								15.169					1,554	72	38,327	76,655	250	297	7.0	2

PROJECT NO.	SHEET NO.	TOTAL NO.
2025CPT.01.09.10081, ETC.	9	

THERMOPLASTIC AND PAINT QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	LENGTH	WIDTH	BEGIN MP	END MP	4413000000-E WORK ZONE ADVANCE / GENERAL WARNING SIGNING	4457000000-N TEMPORARY TRAFFIC CONTROL (SP)	4687000000-E THERMOPLASTIC PAVEMENT MARKING LINES (4", 240 MILS)	4688000000-E		4700000000-E THERMOPLASTIC PAVEMENT MARKING LINES (12", 90 MILS)	4709000000-E THERMOPLASTIC PAVEMENT MARKING LINES (24" 90 MILS)
								MI	FT			SF	LS	LF	LF	LF	LF	LF
2025CPT.01.09.10081	Bertie	1	NC-11 N / NC 11 HWY S	FROM MARTIN CO TO SR 1108 (INDIAN WOODS RD.)	1	2	2WU	4.89	24	0	4.89	211	1		51,638	32,274		
TOTAL FOR PROJ NO. 2025CPT.01.09.10081								4.89				211			51,638	32,274		
															83,912			
2025CPT.01.09.10581	Martin	2	NC-11 N / NC 11	FROM NC 903 TO MARTIN CO	1	2	2WU	2.369	24	12.76	15.129	147	*		25,017	18,604	161	30
2025CPT.01.09.10581	Martin	3	NC-903	FROM NC 11 TO HALIFAX CO	2	2	2WU	7.91	25	19.24	27.15	310	*	216.00	83,530	53,206		20
TOTAL FOR PROJ NO. 2025CPT.01.09.10581								10.279				457		216	108,547	71,810	161	50
															180,357			
GRAND TOTAL								15.169				668	1	216	160,185	104,084	161	50
															264,269			

THERMOPLASTIC AND PAINT QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	LENGTH	WIDTH	BEGIN MP	END MP	4725000000-E THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS), LT ARROW	4810000000-E		4825000000-E PAINT PAVEMENT MARKING LINES (12")	4835000000-E PAINT PAVEMENT MARKING LINES (24")	4845000000-N PAINT PAVEMENT MARKING SYMBOL (LT ARROW)	4895000000-N GENERIC PAVEMENT MARKING ITEM (POLYCARBONATE H- SHAPED MARKERS)
								MI	FT			EA	LF	LF	LF	LF	EA	EA
2025CPT.01.09.10081	Bertie	1	NC-11 N / NC 11 HWY S	FROM MARTIN CO TO SR 1108 (INDIAN WOODS RD.)	1	2	2WU	4.89	24	0	4.89		51,638	64,548				323
TOTAL FOR PROJ NO. 2025CPT.01.09.10081								4.89					51,638	64,548				323
													116,186					
2025CPT.01.09.10581	Martin	2	NC-11 N / NC 11	FROM NC 903 TO MARTIN CO	1	2	2WU	2.369	24	12.76	15.129	1	25,017	34,246	161	30	1	156
2025CPT.01.09.10581	Martin	3	NC-903	FROM NC 11 TO HALIFAX CO	2	2	2WU	7.91	25	19.24	27.15		83,530	53,206		20		522
TOTAL FOR PROJ NO. 2025CPT.01.09.10581								10.279				1	108,547	87,452	161	50	1	678
													195,999					
GRAND TOTAL								15.169				1	160,185	152,000	161	50	1	1,001
													312,185					