**NOTES:**

- EXISTING WATER BOX TO BE RELOCATED BY CONTRACTOR. LOCATION SHOWN IN PLAN IS INDICATIVE AND FOR REFERENCE ONLY. FINAL LOCATION TO BE COORDINATED WITH NCDOT BY THE CONTRACTOR. WATER BOX RELOCATION WORK SHALL INCLUDE RELOCATION OF EXISTING ITEMS AND CONSTRUCTION OF NEW ITEMS THAT ARE NEEDED TO REPLACE THOSE THAT CANNOT BE RELOCATED. WORK RELATED TO NEW ITEMS INCLUDES: EXCAVATION AND CONSTRUCTION OF NEW CONCRETE FOOTINGS, NEW WOOD POSTS TO REPLACE EXISTING POSTS, NEW WATER CONNECTION AND EXTENSION OF SUPPLY PIPE TO NEW LOCATION SLAB ON GRADE TO REPLACE REQUIRED DEMOLITION OF AREA, AND NEW STAIRS. RECONSTRUCTION OF NEW ITEMS SHALL BE IN KIND FOR FOOTING DETAILS SEE SHEET M-505.
- COMPOSITE LUMBER DECKING SHALL BE 2"x6" WEARDECK COMPOSITE LUMBER DECKING BY OWENS CORNING OR EQUAL.
- CONTOURS SHOWN ARE FOR EXISTING MUDLINE DEPTHS.


1 MARINE OVERALL SITE - PLAN

1" = 10'-0"

MOTT MACDONALD
 930 Main Campus Drive,
 Suite 200
 Raleigh, NC 27606
 License No. F-0669
 T +1 (919) 552 2253
 F +1 (919) 552 2254
 www.mottmacamericas.com

GRAPHIC SCALE
 0 5' 10' 20'
 SCALE: 1" = 10'-0"

PROJECT ENGINEER

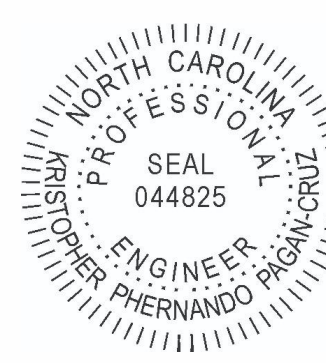

Designed By	JAVIER QUIROS	County	DARE COUNTY		
Entered By	VICTOR PADILLA	Division	FERRY DIVISION		
Project Engineer	KRISTOPHER PAGAN	Plan Date	1-14-26		
Project Manager	ALLISON THORBURN				
A	04/08/26	VP	BID CLARIFICATIONS	JQ	KP
Rev.	Date	Drawn	Description	Ch'kd	App'd

**NCDOT HATTERAS FERRY DOCK
REPLACEMENT**

M-101 MARINE OVERALL SITE PLAN