

STATE OF NORTH CAROLINA


DIVISION OF HIGHWAYS

DARE

STATE	STATE PROJECT REFERENCE NUMBER	SHEET NO.
NC	HS-2401I	1
STATE PROJECT NUMBER		DESCRIPTION
50973.1.10		P.E.
50973.3.10		CONST.

TYPE OF WORK: CURB & GUTTER, CURB RAMPS, & CROSS WALKS

MAP	ROUTE	INTERSECTION
1	US 158 (Caratoke Hwy)	SR 1206 (The Woods Rd)

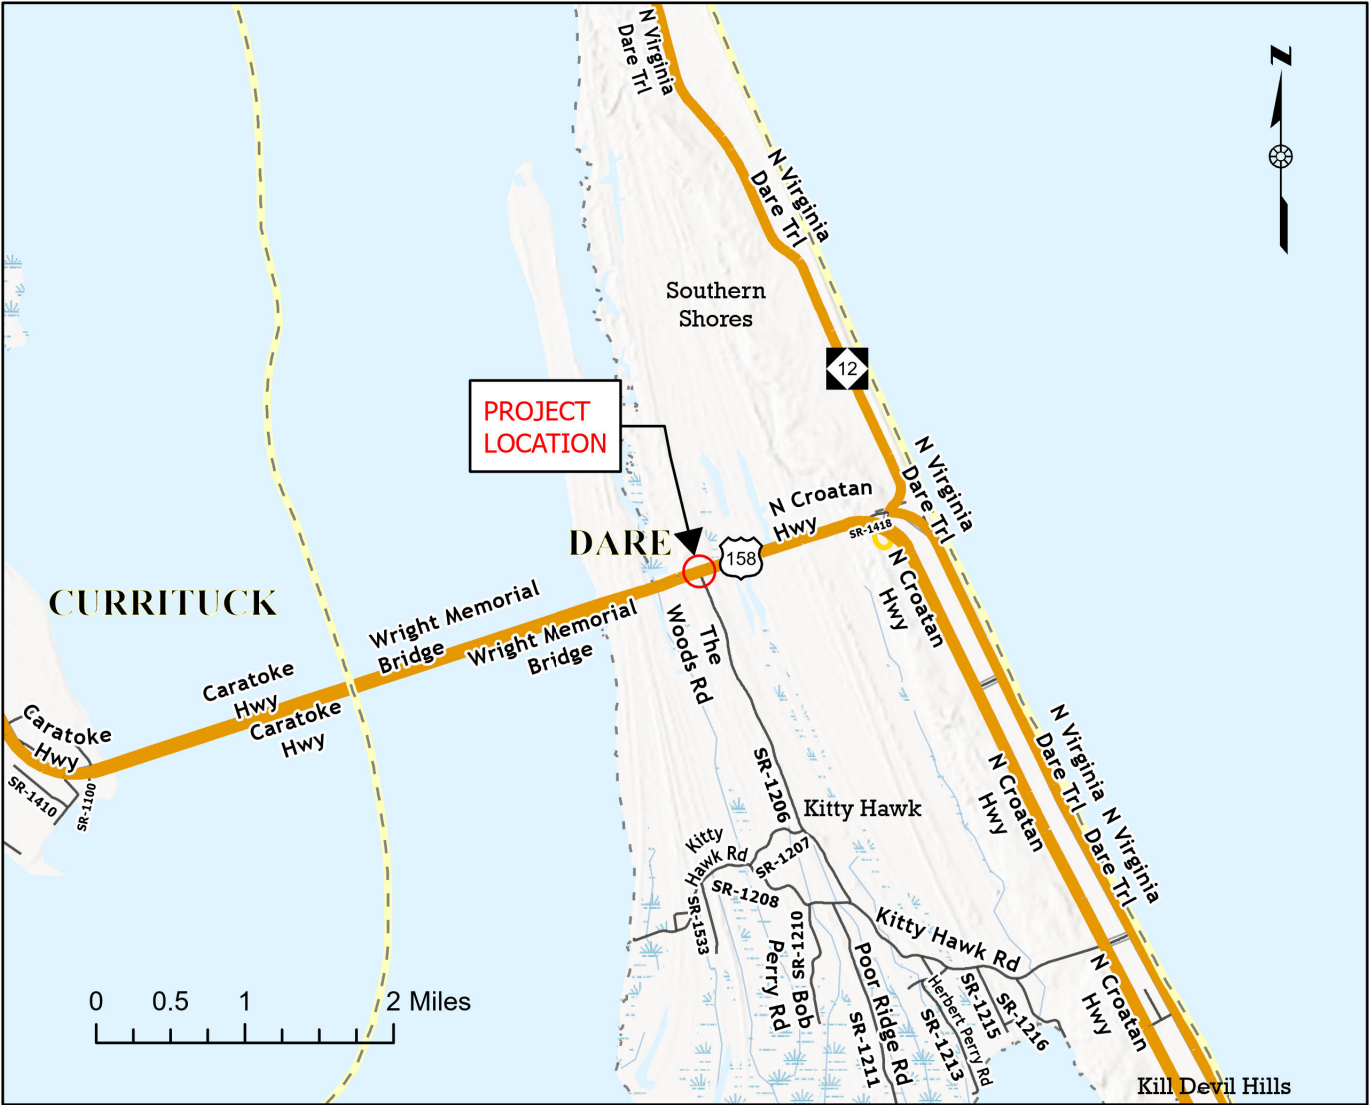

PROJECT LENGTH

MAP	MILES
1	N/A

Prepared in the Office of:
DIVISION OF HIGHWAYS
113 AIRPORT DR., EDENTON, NC 27932

B. N. BRASWELL, PE
DIV. PROJ. DEVELOPMENT ENGINEER

M. S. WINSLOW
DIVISION CONTRACT ENGINEER

J. S. ABEL, JR.
DIVISION PROJECT TEAM LEAD

D. H. STALLINGS
DIVISION DESIGN ENGINEER



US 158 & Woods Road - Dare County



General Notes:

Ramps #1, 2, 3 & 4

Remove existing asphalt to accommodate curb & gutter

Install curb & gutter as shown in yellow & patch asphalt as required

Green - Remove old stop bars and install new stop bars

Red - Remove old crosswalks and install new crosswalks

Blue - Install Sidewalk


Ramp #1 - Type 1D, Ramp #2 & #3 - Type 2A Mod, Ramp #4 - Type 1 Modified

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS
CURRITUCK

STATE	STATE PROJECT REFERENCE NUMBER	SHEET NO.
NC	HS-2401J	2
STATE PROJECT NUMBER		DESCRIPTION
50973.1.11		P.E.
50973.3.11		CONST.

TYPE OF WORK: PEDESTRIAN SIGNAL HEADS, CURB & GUTTER, CURB RAMPS, SIDEWALK, & CROSS WALKS

MAP	ROUTE	INTERSECTIONS
2	US 158 (Caratoke Hwy)	SR 1131 (Poplar Branch Rd)
		SR 1186 (Walnut Island Blvd)

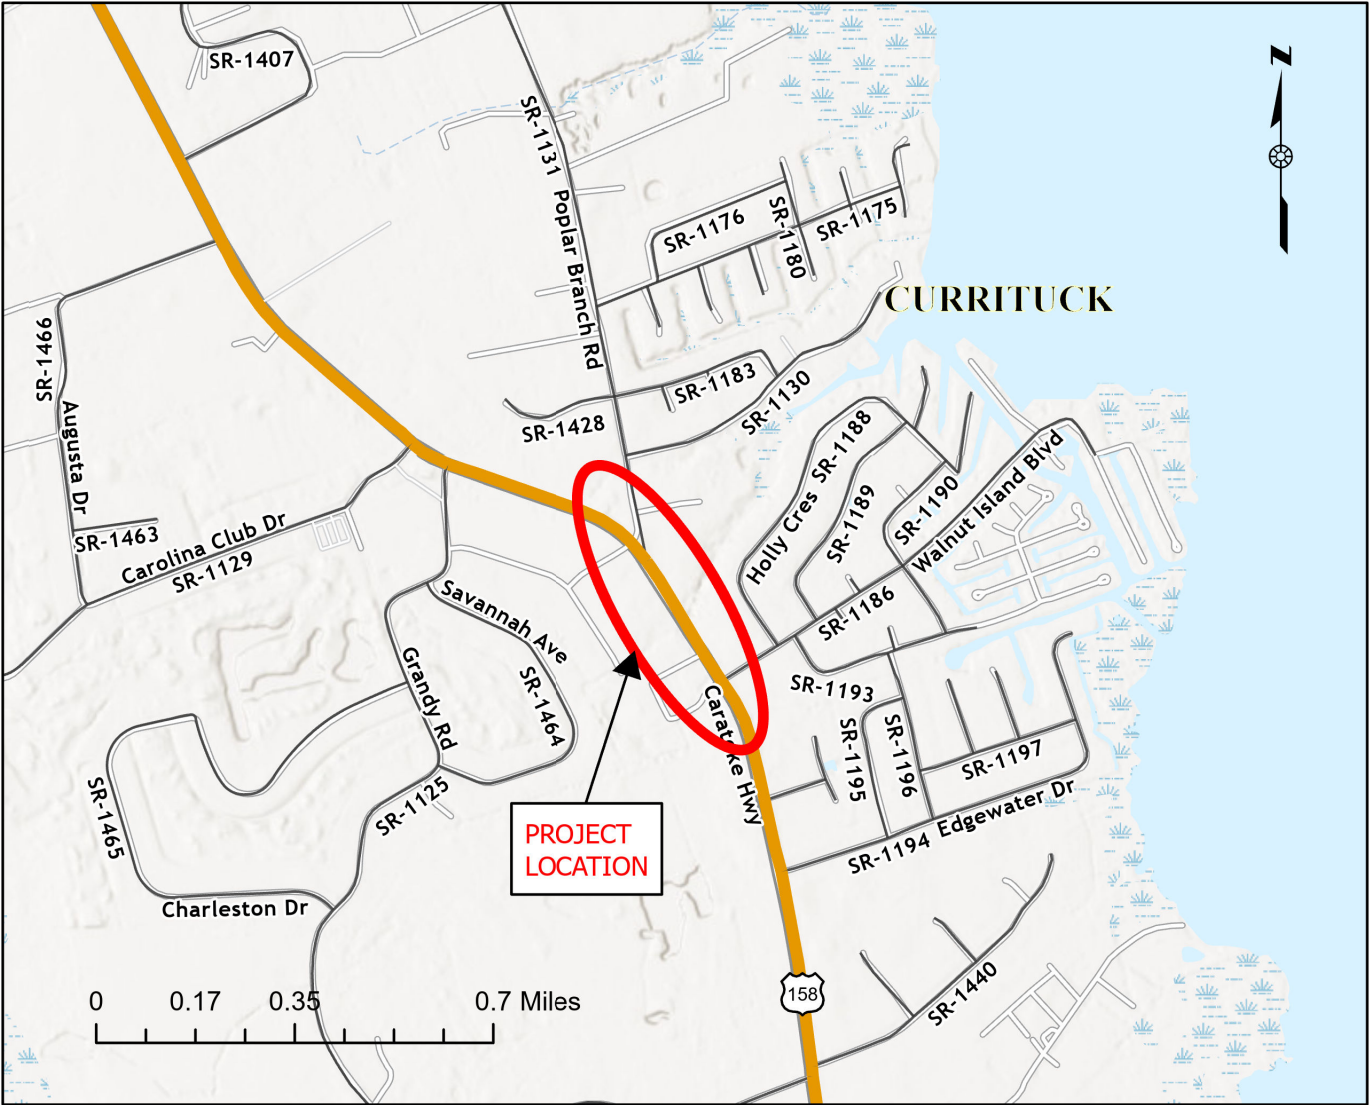

PROJECT LENGTH

MAP	MILES
2	N/A

Prepared in the Office of:
DIVISION OF HIGHWAYS
113 AIRPORT DR., EDENTON, NC 27932

B. N. BRASWELL, PE
DIV. PROJ. DEVELOPMENT ENGINEER

M. S. WINSLOW
DIVISION CONTRACT ENGINEER

J. S. ABEL, JR.
DIVISION PROJECT TEAM LEAD

D. H. STALLINGS
DIVISION DESIGN ENGINEER



PLAN VIEW DETAILED DRAWING

PROJECT REFERENCE NO.	SHEET NO.
HS-2401J	1


W & J LAND DEVELOPMENT, LLC
C/O BILL TAYLOR
P.O. BOX 709
ELIZABETH CITY, NC 27907
1559 / 358

PROPOSED SIDEWALK
(APPROX. 265 S.Y.)

W & J LAND DEVELOPMENT, LLC
C/O WHIT SESSOMS
109 43RD STREET
VIRGINIA BEACH, VA 23451
1559 / 358

PROPOSED SIDEWALK
(APPROX. 235 S.Y.)

6' EASEMENT
1,272.76 SQ FT

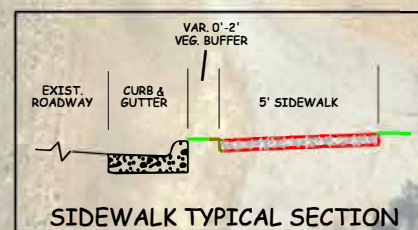

1" = 60 FT

*PROPERTY DATA SOURCE IS CURRITUCK COUNTY GIS, REFERENCE PLAT CABINET L, PAGE 66

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION 1
113 AIRPORT DR.
EDENTON, NC 27932 (252) 482-1850



PLAN VIEW DETAILED DRAWING

PROJECT REFERENCE NO.	SHEET NO.
HS-2401J	2

BNE RESTAURANT GROUP II
C/O DUFF & PHELPS
P.O. BOX 2629
ADDISON, TX 75001
402 / 001

BNE RESTAURANT GROUP II
C/O DUFF & PHELPS
P.O. BOX 2629
ADDISON, TX 75001
402 / 001

TWO FARMS, INC.
3611 ROLAND AVE
BALTIMORE, MD 21211
1676 / 566

PROPOSED SIDEWALK
(APPROX. 45 S.Y.)

PROPOSED SIDEWALK
(APPROX. 75 S.Y.)

PROPOSED SIDEWALK
(APPROX. 66 S.Y.)

EXIST. R/W

SEE PAGE 1

18+00 19+00 20+00 21+00 22+00 23+00 24+00 25+00 26+00 27+00
-L- US HWY 158

PROPOSED 6" DRIVEWAY
(APPROX. 91 S.Y.)

HI-VISIBILITY CROSSWALK

EXIST SIDEWALK


EXIST. R/W

EXIST. R/W

EXIST. R/W

FORBES LOOP


FORBES LOOP

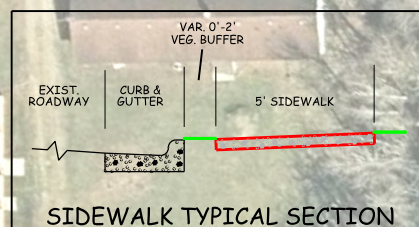

1" = 60 FT

*PROPERTY DATA SOURCE IS CURRITUCK COUNTY GIS, REFERENCE PLAT CABINET R, PAGE 242

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION 1
113 AIRPORT DR.
EDENTON, NC 27932 (252) 482-1850



STATE OF NORTH CAROLINA


DIVISION OF HIGHWAYS

DARE

STATE	STATE PROJECT REFERENCE NUMBER	SHEET NO.
NC	HS-2401L	3
STATE PROJECT NUMBER		DESCRIPTION
50973.1.13		P.E.
50973.3.13		CONST.

TYPE OF WORK: PEDESTRIAN SIGNAL HEADS, CURB & GUTTER, CURB RAMPS, SIDEWALK, & CROSS WALKS

MAP	ROUTE	INTERSECTION
3	NC12 (Virginia Dare Trl)	(Neptune Drive)

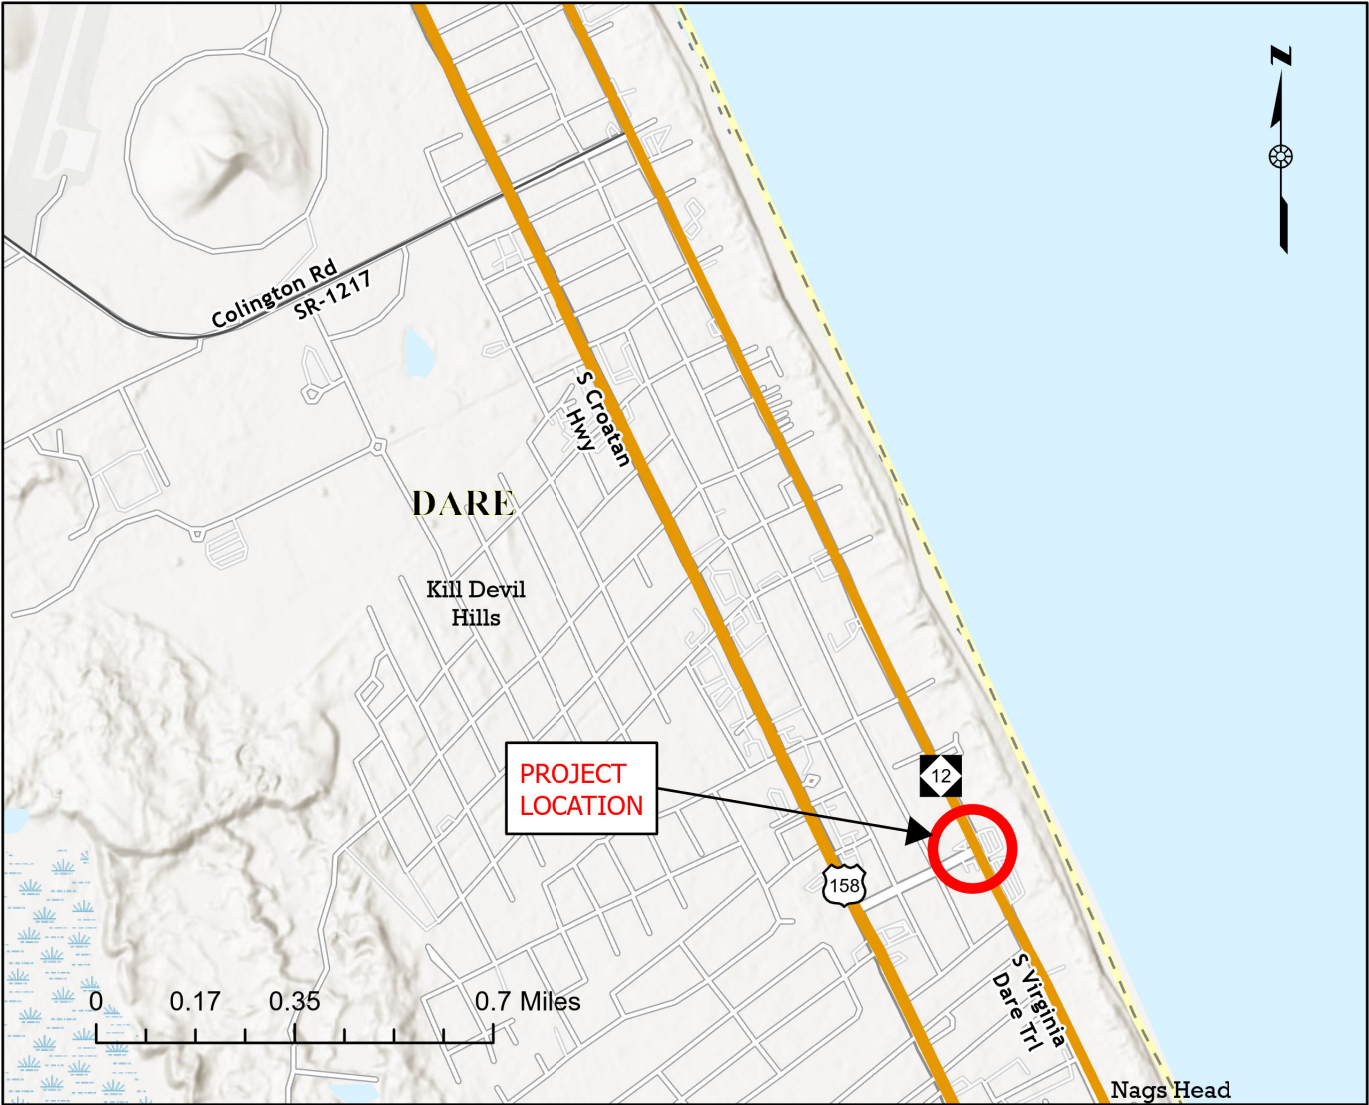

PROJECT LENGTH

MAP	MILES
3	N/A

Prepared in the Office of:
DIVISION OF HIGHWAYS
113 AIRPORT DR., EDENTON, NC 27932

B. N. BRASWELL, PE
DIV. PROJ. DEVELOPMENT ENGINEER

M. S. WINSLOW
DIVISION CONTRACT ENGINEER

J. S. ABEL, JR.
DIVISION PROJECT TEAM LEAD

D. H. STALLINGS
DIVISION DESIGN ENGINEER



NC 12 & Neptune Drive - Dare County

General Notes:

Site #1 - Remove crosswalk

Site #2 - Install concrete pad with detectable warning pad

Site #3 - Remove curb & gutter and install Type 1 Modified

Install Sidewalk from Standard Crosswalk to Type 1 Modified

Remove Existing Crosswalk south of Type 1 Modified

Between #2 & #3 - Install Hi-Visibility Crosswalk

Between #3 & #4 - Install Standard Crosswalk



NOTE: Existing Traffic Signal poles at this intersection will be relocated by the NCDOT under separate contract.

TIP NO: HS-2401M

CONTRACT: DA00643

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS
PASQUOTANK

STATE	STATE PROJECT REFERENCE NUMBER	SHEET NO.
NC	HS-2401M	4
STATE PROJECT NUMBER		DESCRIPTION
50973.1.14		P.E.
50973.3.14		CONST.

TYPE OF WORK: PEDESTRIAN SIGNAL HEADS, CURB & GUTTER, CURB RAMPS, SIDEWALK, & CROSS WALKS

MAP	ROUTE	INTERSECTION
4A	NC 344 (Halstead Blvd)	(Tanglewood Pkwy)
4B	NC 344 (Halstead Blvd)	(Mount Everest Dr.)



PROJECT LENGTH

MAP	MILES
4	N/A

Prepared in the Office of:
DIVISION OF HIGHWAYS
113 AIRPORT DR., EDENTON, NC 27932

B. N. BRASWELL, PE
DIV. PROJ. DEVELOPMENT ENGINEER

M. S. WINSLOW
DIVISION CONTRACT ENGINEER

J. S. ABEL, JR.
DIVISION PROJECT TEAM LEAD

D. H. STALLINGS
DIVISION DESIGN ENGINEER



Halstead Blvd & Tanglewood Pkwy - Pasquotank County

#1

General Notes:

Ramp #1 - Remove old ADA Ramp and Install Type I Modified

Ramp #2 - Remove old curb cut and Install Type 2A & Install Sidewalk to tie to existing

Ramp #3 - Remove old curb cut and Install Type I modified

Between Ramps 1 & 2 - Remove portion of concrete island and patch with asphalt


Between Ramps 2 & 3 - Remove portion of concrete island and Install Type 7

Green - Remove old stop bars and Install New Stop Bars


Red - Install Crosswalk

#2

#3

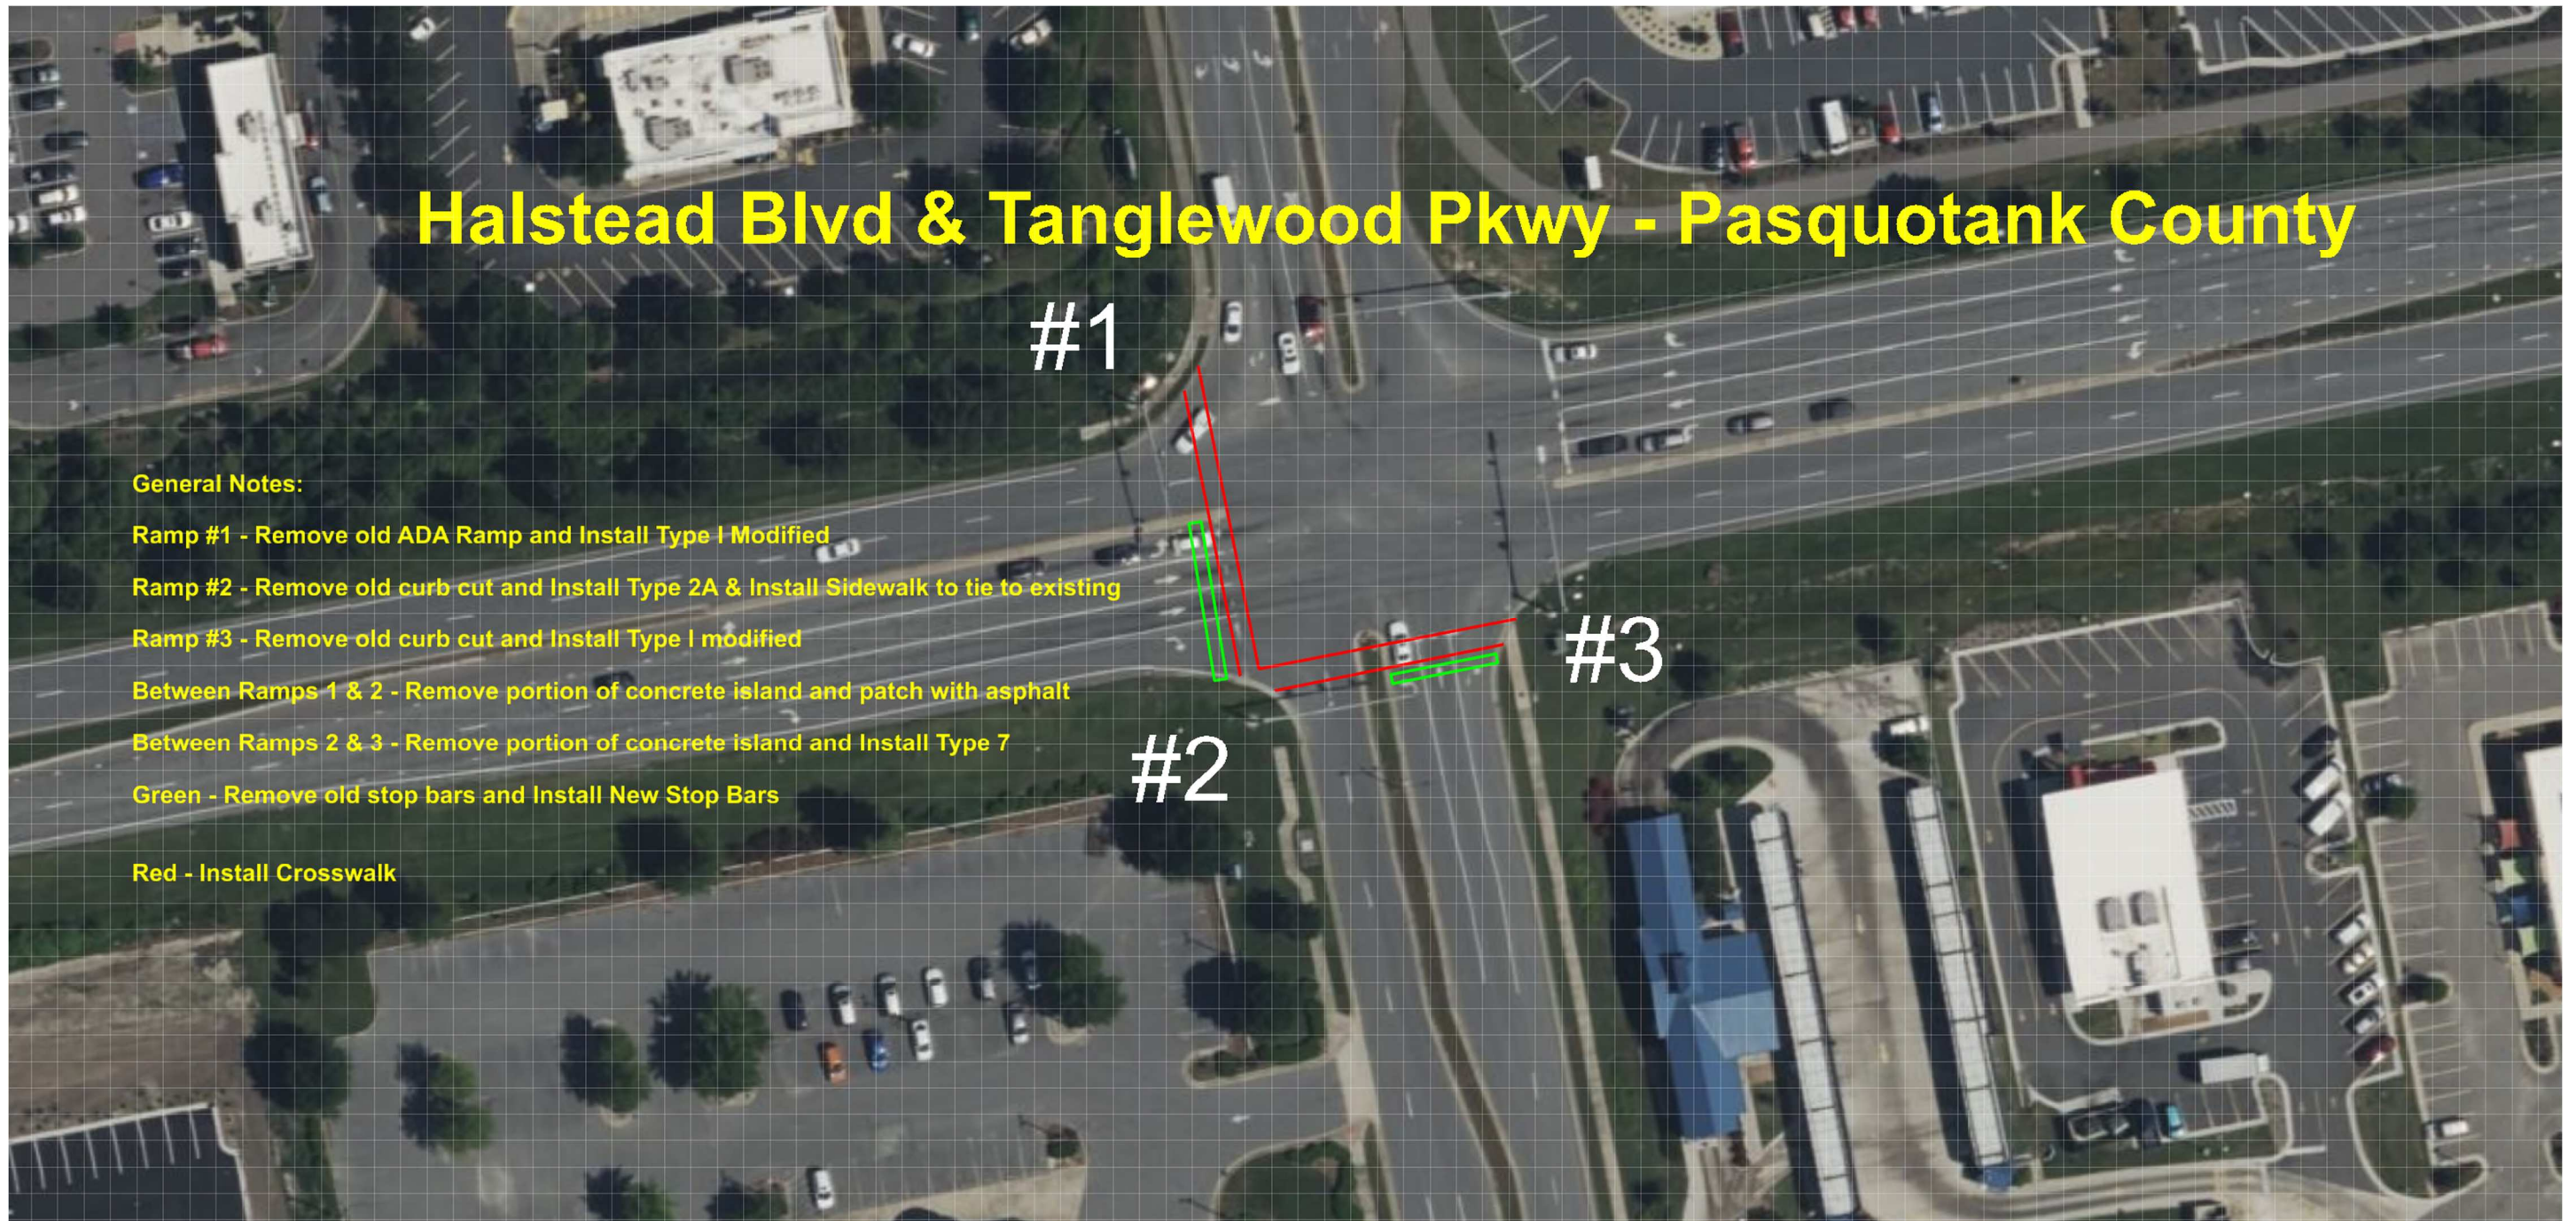

Halstead Blvd & Mount Everest Drive - Pasquotank County

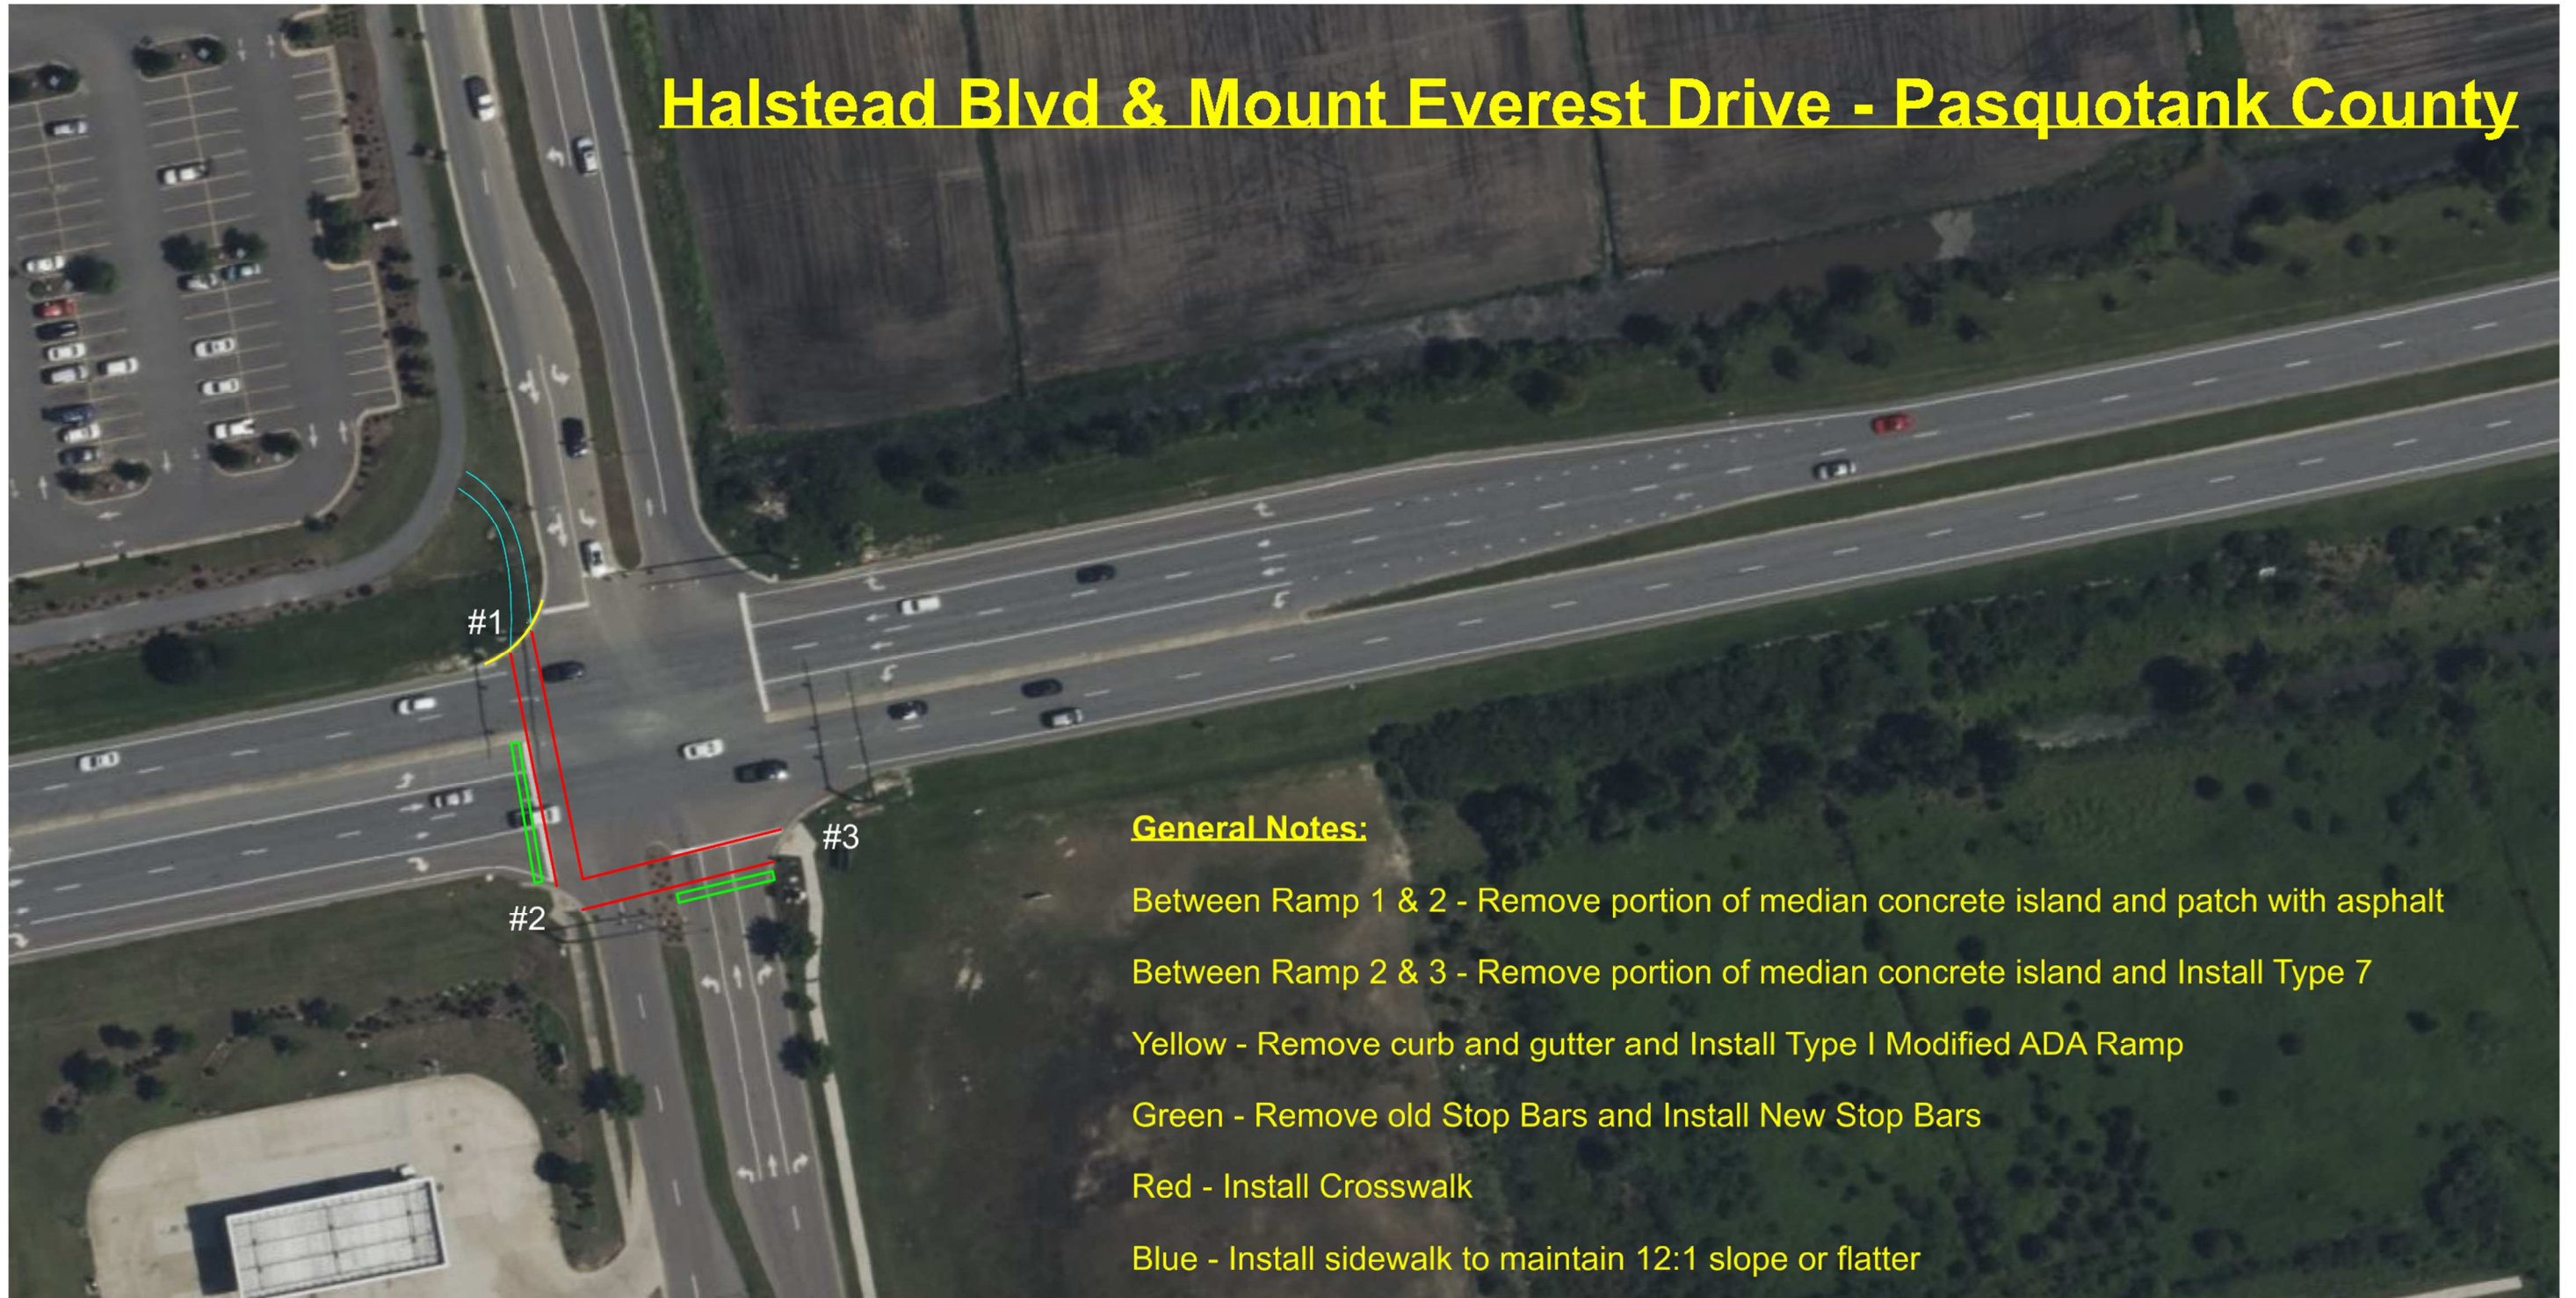

General Notes:

Between Ramp 1 & 2 - Remove portion of median concrete island and patch with asphalt

Between Ramp 2 & 3 - Remove portion of median concrete island and Install Type 7

Yellow - Remove curb and gutter and Install Type I Modified ADA Ramp

Green - Remove old Stop Bars and Install New Stop Bars

Red - Install Crosswalk

Blue - Install sidewalk to maintain 12:1 slope or flatter

PROJECT NO.	SHEET NO.	TOTAL NO.
50973.3.10, ETC.	11	

SUMARY OF QUANTITIES

						0000100000-N	0043000000-N	0262000000-N	1575000000-E	1693000000-E	2549000000-E	2591000000-E	2605000000-N	2612000000-E
PROJECT NO	COUNTY	MAP NO	ROUTE	INTERSECTION	LANES	MOBILIZATION	GRADING	REMOVE CONCRETE CURB RAMP	ASPHALT BINDER FOR PLANT MIX	ASPHALT PLANT MIX, PAVEMENT REPAIR	2'-6" CONCRETE CURB & GUTTER	4" CONCRETE SIDEWALK	CONCRETE CURB RAMPS	6" CONCRETE DRIVEWAY (848)
						LS	LS	EA	TONS	TONS	LF	SY	EA	SY
50973.3.10	Dare	1	NC-158	SR-1206 The Woods Rd.	5	1	1	3	0.35	5.00	280	60	4	
(HS-2401I)	TOTAL FOR PROJ NO. 50973.3.10					*	*	3	0.35	5.00	280	60	4	
50973.3.11	Currituck	2	US-158	SR-1131 (Poplar Branch Rd.) TO SR-1186 (Walnut Island Blvd.)	5	*	*		0.140	2.00	20	690	8	91
(HS-2401J)	TOTAL FOR PROJ NO. 50973.3.11					*	*		0.140	2.00	20	690	8	91
50973.3.13	Dare	3	NC-12	Neptune Drive	2	*	*		0.040	0.50		17	2	
(HS-2401L)	TOTAL FOR PROJ NO. 50973.3.13					*	*		0.040	0.50		17	2	
50973.3.14	Pasquotank	4A	NC-344 (Halstead Blvd)	Tanglewood Pkwy.	4	*	*	1	0.070	1.00	12	12	3	
50973.3.14	Pasquotank	4B	NC-344 (Halstead Blvd)	Mount Everest Dr.	4	*	*		0.070	1.00		45	2	
(HS-2401M)	TOTAL FOR PROJ NO. 50973.3.14					*		1	0.14	2.00	12	57	5	
GRAND TOTAL						1	1	4	0.67	9.50	312	824	19	91

SUMARY OF QUANTITIES

					2612300000-N	2612500000-N	6000000000-E	6009000000-E	6012000000-E	6030000000-E	6071012000-E	6084000000-E	
PROJECT NO	COUNTY	MAP NO	ROUTE	INTERSECTION	LANES	RETROFIT EXISTING CONCRETE CURB RAMPS	REMOVE AND REPLACE CONCRETE CURB RAMPS	TEMPORARY SILT FENCE	STONE FOR EROSION CONTROL, CLASS B	SEDIMENT CONTROL STONE	SILT EXCAVATION	COIR FIBER WATTLE	SEEDING & MULCHING
						EA	EA	LF	TON	TON	CY	LF	ACR
50973.3.10	Dare	1	NC-158	SR-1206 The Woods Rd.	5			300	0.5	0.5		50	0.2
(HS-2401I)	TOTAL FOR PROJ NO. 50973.3.10							300	0.5	0.5		50	0.2
50973.3.11	Currituck	2	US-158	SR-1131 (Poplar Branch Rd.) TO SR-1186 (Walnut Island Blvd.)	5			50	1	1	4	50	0.05
(HS-2401J)	TOTAL FOR PROJ NO. 50973.3.11							50	1	1	4	50	0.05
50973.3.13	Dare	3	NC-12	Neptune Drive	2			50					0.05
(HS-2401L)	TOTAL FOR PROJ NO. 50973.3.13							50					0.05
50973.3.14	Pasquotank	4A	NC-344 (Halstead Blvd)	Tanglewood Pkwy.	4	1	2	50	0.5	0.5		100	0.05
50973.3.14	Pasquotank	4B	NC-344 (Halstead Blvd)	Mount Everest Dr.	4			100	0.5	0.5		100	0.15
(HS-2401M)	TOTAL FOR PROJ NO. 50973.3.14					1	2	150	1.0	1.0		200	0.20
GRAND TOTAL						1	2	550	2.5	2.5	4	300	0.50

THERMOPLASTIC AND PAINT QUANTITIES

					4447000000-E	4457000000-N	4600000000-N	4600000000-N	4685000000-E	4688000000-E	4709000000-E	4725000000-E	4850000000-E	4865000000-E	4870000000-E	4875000000-N	
PROJECT NO	COUNTY	MAP NO	ROUTE	INTERSECTION	LANES	PEDESTRIAN CHANNELIZING DEVICES	TEMPORARY TRAFFIC CONTROL (SP)	AUDIBLE WARNING DEVICES	TEMPORARY CURB RAMPS	THERMOPLASTIC PAVEMENT MARKING LINES (4", 90 MILS) WHITE	THERMOPLASTIC PAVEMENT MARKING LINES (6", 90 MILS) WHITE	THERMO PAVEMENT MARKING LINES (24" 90 MILS) (SP)	THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS), STR ARROW	REMOVAL OF PAVEMENT MARKING LINES (4")	REMOVAL OF PAVEMENT MARKING LINES (12")	REMOVAL OF PAVEMENT MARKING LINES (24")	REMOVAL OF PAVEMENT MARKING SYMBOLS & CHARACTERS
						LF	LS	EA	EA	LF	LF	LF	EA	LF	LF	LF	EA
50973.3.10	Dare	1	NC-158	SR-1206 The Woods Rd.	5	50	1	2	2			440			200	276	
(HS-2401I)	TOTAL FOR PROJ NO. 50973.3.10					50	*	2	2			440			200	276	
50973.3.11	Currituck	2	US-158	SR-1131 (Poplar Branch Rd.) TO SR-1186 (Walnut Island Blvd.)	5		*					282				32	
(HS-2401J)	TOTAL FOR PROJ NO. 50973.3.11						*					282				32	
50973.3.13	Dare	3	NC-12	Neptune Drive	2		*			100	120	90				130	
(HS-2401L)	TOTAL FOR PROJ NO. 50973.3.13						*			100	120	90				130	
50973.3.14	Pasquotank	4A	NC-344 (Halstead Blvd)	Tanglewood Pkwy.	4		*					526	3	60		107	3
50973.3.14	Pasquotank	4B	NC-344 (Halstead Blvd)	Mount Everest Dr.	4		*					485		40		110	
(HS-2401M)	TOTAL FOR PROJ NO. 50973.3.14											1,011	3	100		217	3
GRAND TOTAL						50	1	2	2	100	120	1,823	3	100	200	655	3