





MAIN PANEL FLEXIBLE CONDUIT



FLEXIBLE CONDUIT DISCONNECTED FROM
TWIST-LOCK MARINE RECEPTACLE

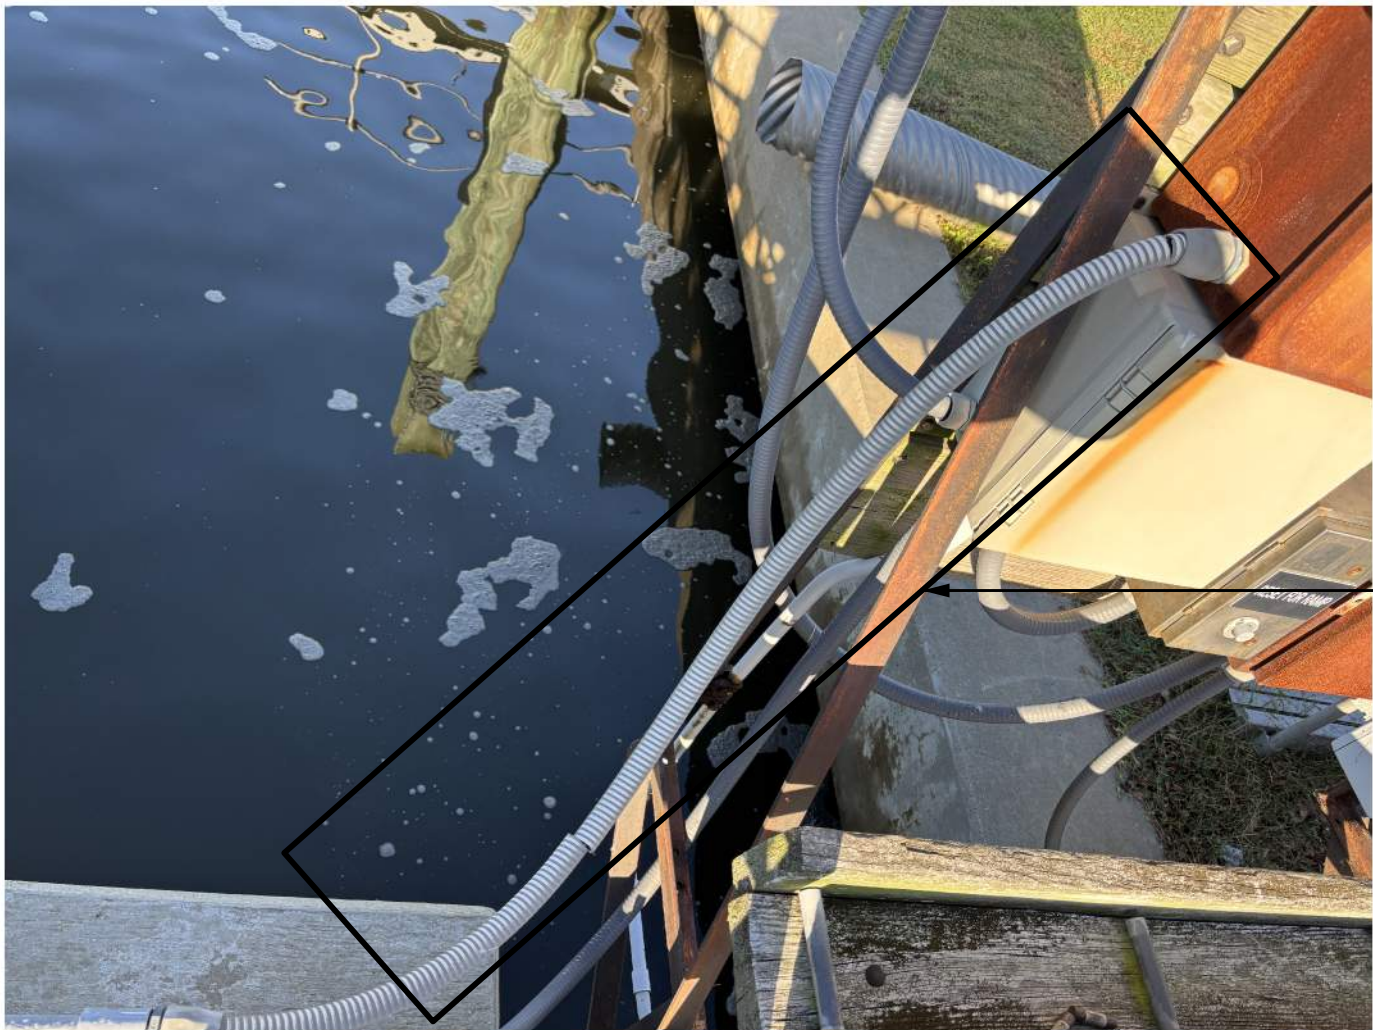

FLEXIBLE CONDUIT FITTING LOOSE ON
LIGHTING JUNCTION BOX

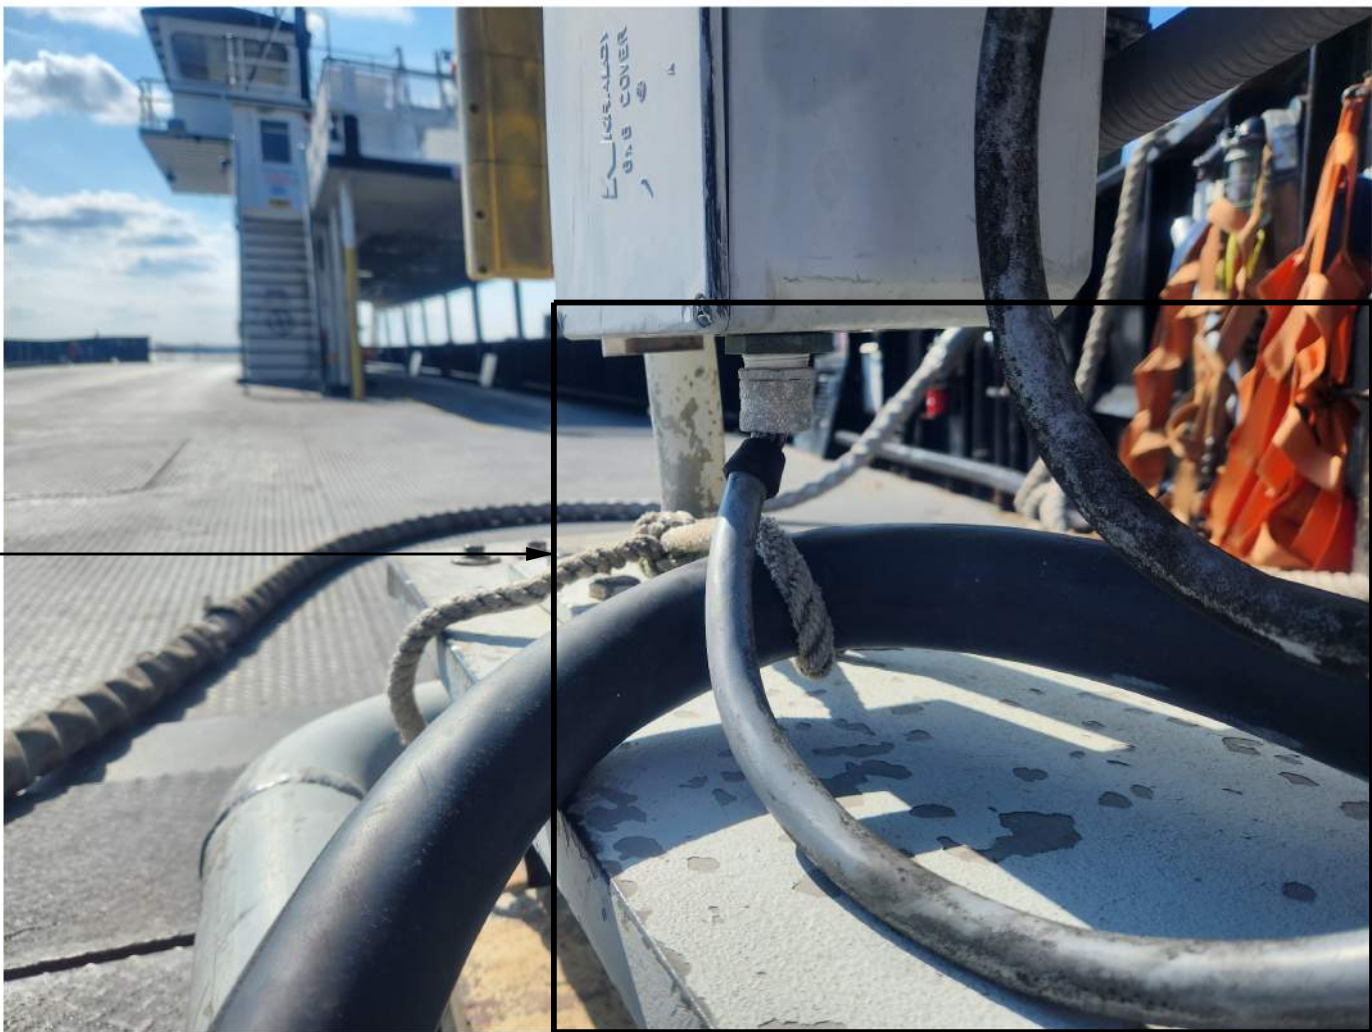

FLEXIBLE CONDUIT PULLED OFF JUNCTION BOX FITTING



BAYVIEW PENDANT SUPPORT

NOTES

1. CONDUITS SHALL BE SUPPORTED A MINIMUM OF EVERY 6'.
2. ALL WELDS TO BE ¼" UNLESS OTHERWISE NOTED. WELDING SHALL CONFORM TO AWS D1.1.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR TEMPORARILY SUPPORTING THE EXISTING FUEL RACEWAY TO REMAIN WHILE REPLACING THE CONDUITS AND RACEWAY SUPPORTS.

KEY NOTES

- 1 THE CONTRACTOR SHALL REMOVE ANY BROKEN/MISSING/UNIFORMLY CORRODED/ZIP-TIED CONDUIT SUPPORTS AND REPLACE WITH STAINLESS STEEL CONDUIT CLAMPS, AS REQUIRED. NEW CONDUIT SUPPORTS SHALL BE INSTALLED, AS REQUIRED.
- 2 THE CONTRACTOR SHALL REPLACE BROKEN/MISSING/CORRODED/DETACHED CONDUIT FITTINGS.
- 3 THE CONTRACTOR SHALL REPLACE BROKEN/DAMAGED CONDUIT WITH LFMC.
- 4 THE CONTRACTOR SHALL REMOVE SO CABLE AND INSTALL LFMC CONDUIT OR APPROVED EQUAL TO CONNECT FERRY RAMP PENDANT TO JUNCTION BOX. THE CONTRACTOR SHALL REPLACE CONDUIT FITTINGS AS REQUIRED. ADDITIONALLY, THE CONTRACTOR SHALL INSTALL NEW CONDUIT SUPPORT CLAMPS AS REQUIRED.
- 5 THE CONTRACTOR SHALL MOUNT THE SHIP TO SHOW RECEPTACLE TO THE EXISTING FERRY RAMP GIRDER. REPLACE RECEPTACLE AS REQUIRED.

PROJECT NO. **15BPR.164**
BEAUFORT COUNTY
TERMINAL: **BAYVIEW**

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

CONDUIT
REPAIR DETAILS



Drake Cole
7/16/2026

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO. E2-03
NO.	BY:	DATE:	NO.	BY:	DATE:	
1	--	--	3	--	--	TOTAL SHEETS
2	--	--	4	--	--	34

DES BY: M. TORRES	DATE : 11/2025	DWG BY: B. PETERSON	DATE : 11/2025
DES CHK: D. COLE	DATE : 11/2025	CHK BY: D. COLE	DATE : 11/2025