



R:\Structures\Drawings\BP1.R021.1.SMU.EIA.570025.dgn
7/6/2026
bgonfa

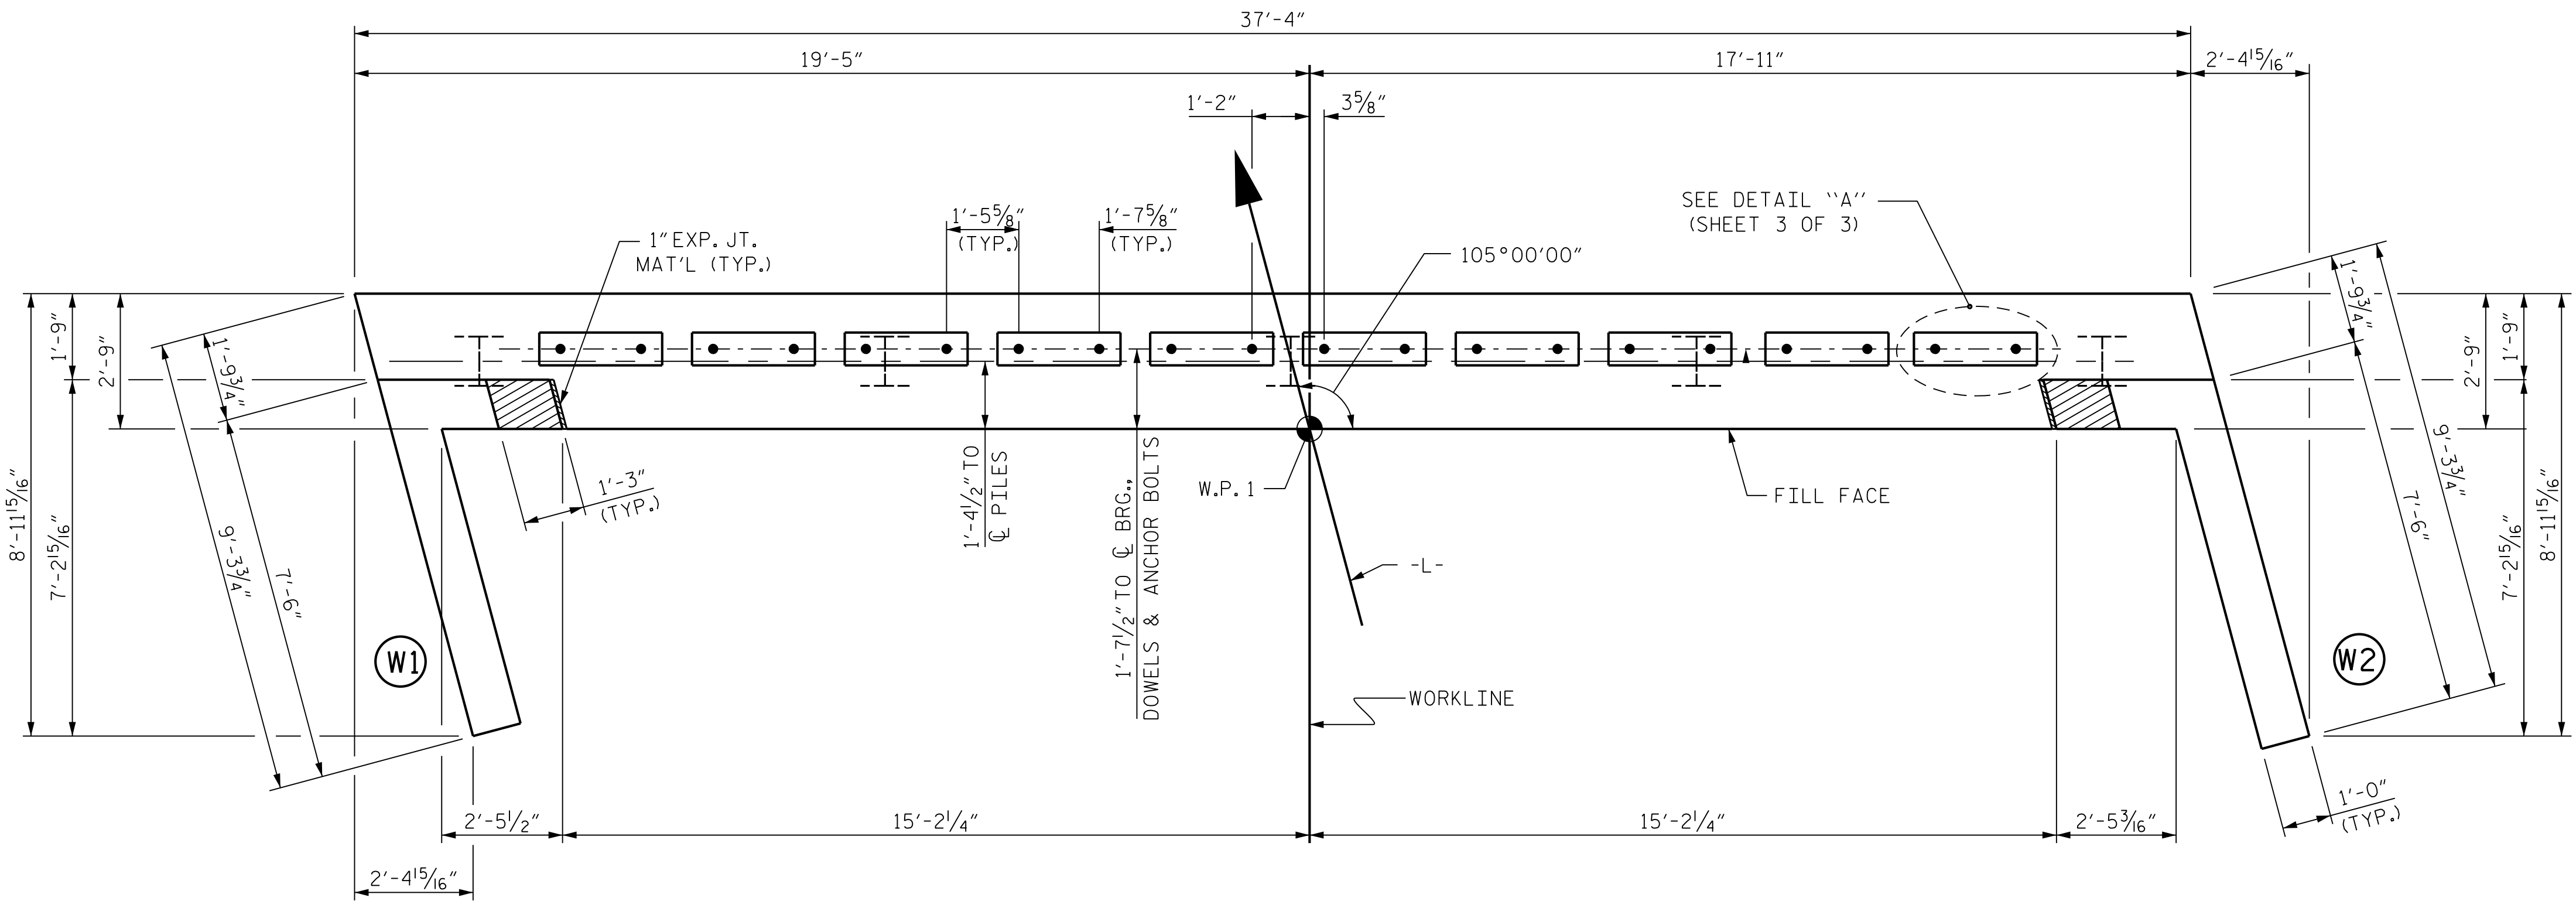

PLAN

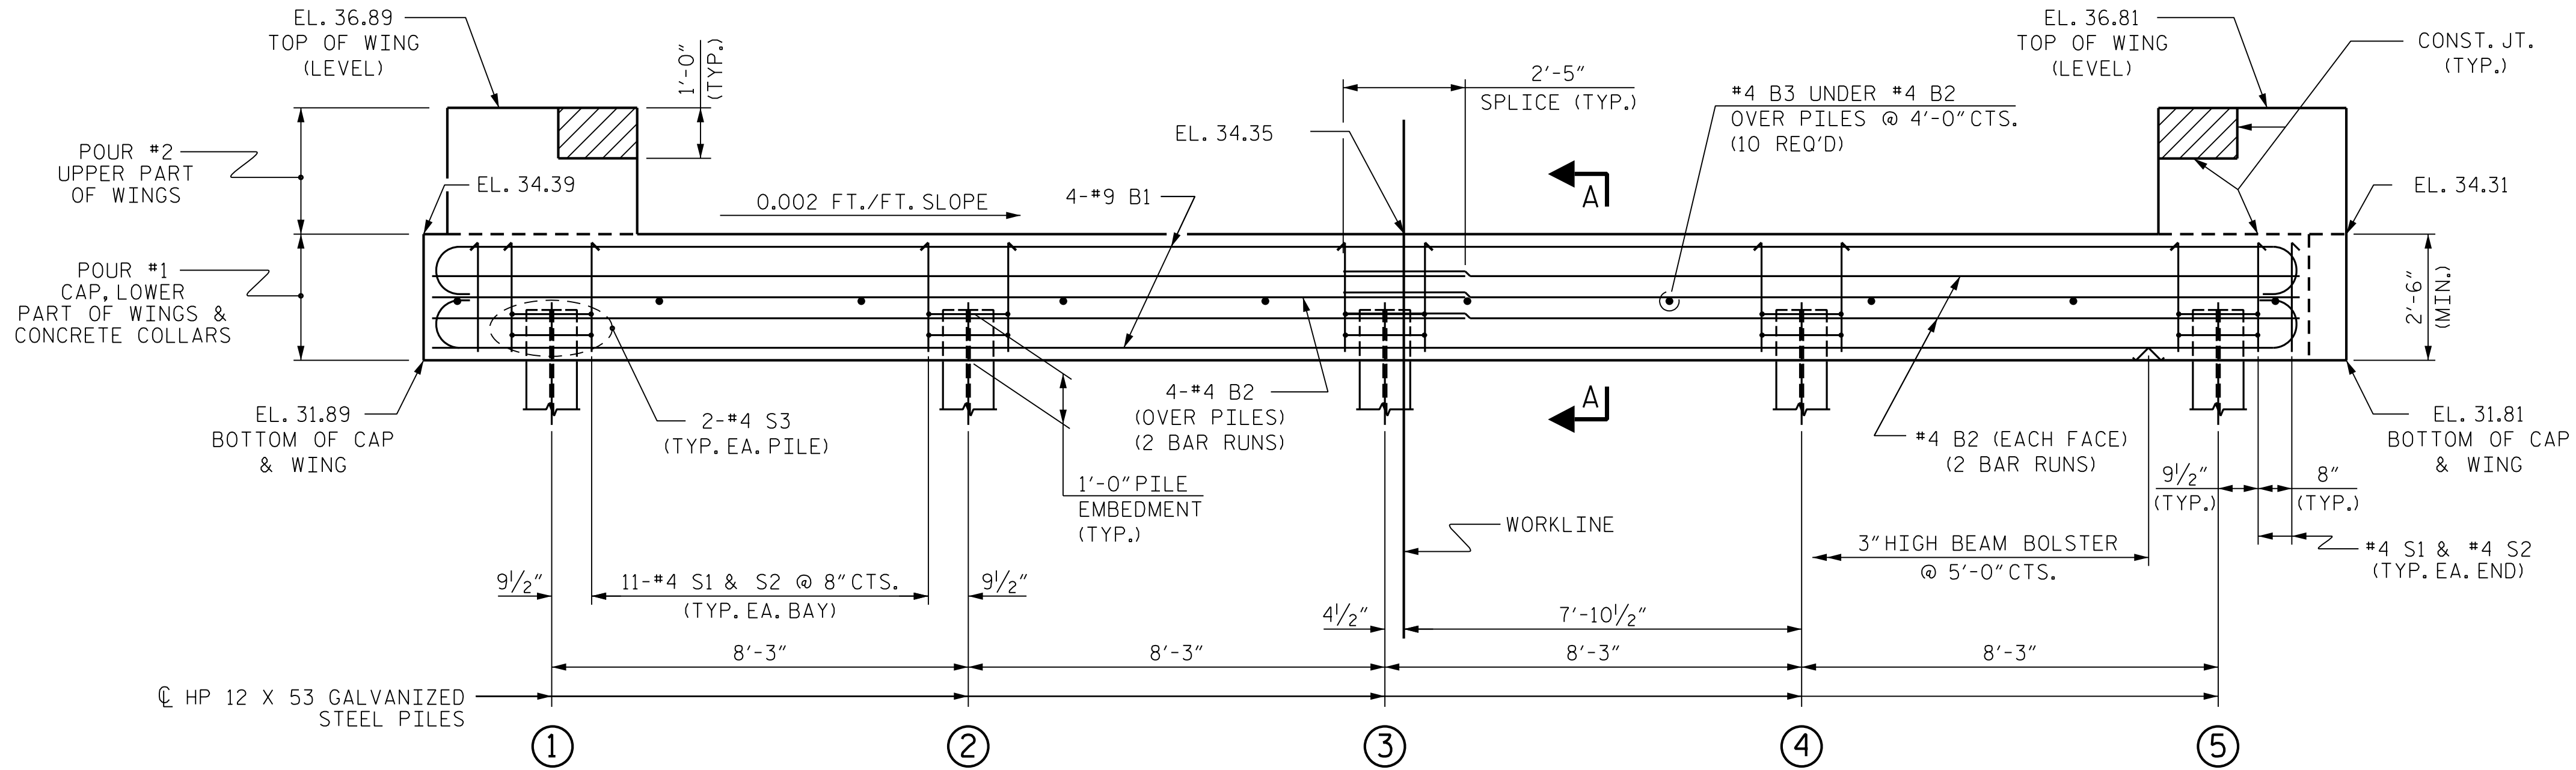

ELEVATION

WINGS NOT SHOWN FOR CLARITY.
FOR SECTION A-A, SEE SHEET 3 OF 3.
CONCRETE COLLARS FOR GALVANIZED STEEL PILES NOT SHOWN IN PLAN AND ELEVATION VIEWS FOR CLARITY.
SEE "CORROSION PROTECTION FOR GALVANIZED STEEL PILES DETAIL", SHEET 3 OF 3.

NOTES:

STIRRUPS IN CAP MAY BE SHIFTED AS NECESSARY TO CLEAR ANCHOR BOLTS.

THE CONCRETE IN THE SHADED AREA OF THE WING SHALL BE POURED AFTER THE VERTICAL CONCRETE BARRIER RAIL IS CAST IF SLIP FORMING IS USED.

FOR PILE SPLICE DETAILS, SEE SHEET 3 OF 3.

FOR WING DETAILS, SEE SHEET 2 OF 3.

GALVANIZE THE FULL LENGTH OF EACH END BENT PILE IN ACCORDANCE WITH SECTION 1076 OF THE STANDARD SPECIFICATIONS.

THE PLATES "P1", ANCHOR BOLTS, NUTS, AND WASHERS SHALL BE INCLUDED IN THE PAY ITEM FOR PRESTRESSED CONCRETE CORED SLAB UNITS.

ANCHOR BOLTS SHALL MEET THE REQUIREMENTS OF ASTM A449. ANCHOR PLATES, WASHERS, PLATES, AND NUTS SHALL BE GALVANIZED AND MEET THE REQUIREMENTS OF THE STANDARD SPECIFICATIONS.


TOP OF PILE ELEVATIONS

①	32.88'
②	32.86'
③	32.85'
④	32.83'
⑤	32.81'

PROJECT NO. BP1.R021.1
MARTIN COUNTY
STATION: 13+33.50 -L-

SHEET 1 OF 3

BRIDGE NO. 570025

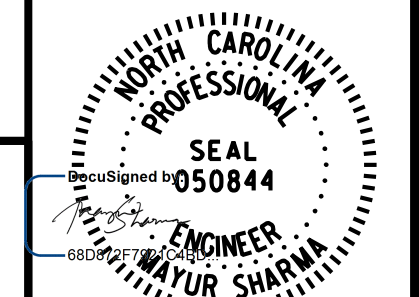

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

SUBSTRUCTURE
END BENT 1

ASSEMBLED BY: B. H. GONFA DATE: MAR 2026
CHECKED BY: M. SHARMA DATE: MAR 2026
DESIGN ENGINEER OF RECORD: M. SHARMA DATE: MAR 2026

DRAWN BY: DGE 01/10
CHECKED BY: MKT 01/10
REV. 4/15 MAA/TMG

RK&K
P: (919) 878-9560
8601 Six Forks Road, Forum 1 Suite 700
Raleigh, North Carolina 27615 | NC License No. F-0112
Engineers | Construction Managers | Planners | Scientists
www.rkk.com
Responsive People | Creative Solutions

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S-9
2			4			
TOTAL SHEETS						16