

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**


**This file or an individual page
shall not be considered a certified document.**

09/28/2019

WBS: 17BP.14.R.122

CONTRACT: DN00290

See Sheet 1A For Index of Sheets
See Sheet 1B For Conventional Symbols

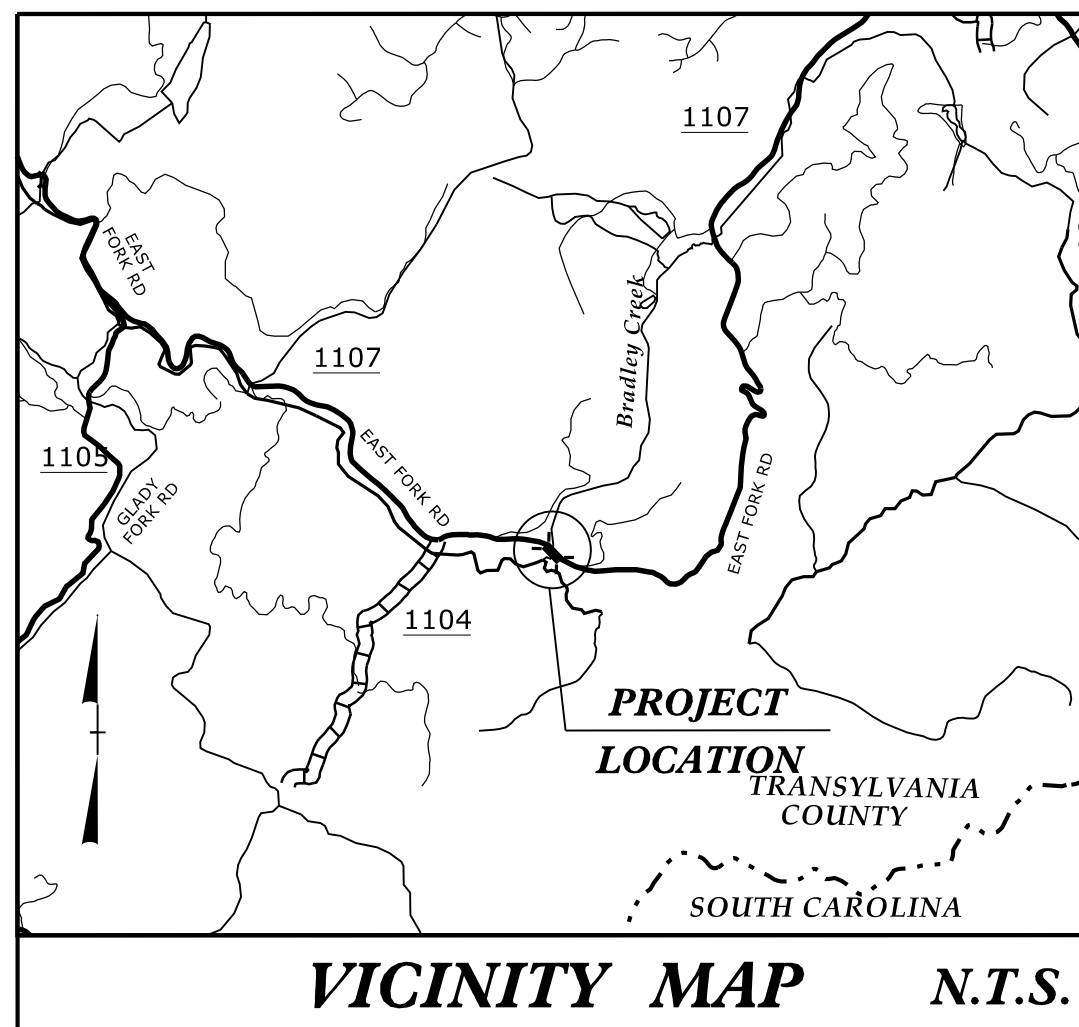


STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

TRANSYLVANIA COUNTY

**LOCATION: BRIDGE No. 137 ON SR 1107 (EAST FORK ROAD)
OVER BRADLEY CREEK**

TYPE OF WORK: GRADING, DRAINAGE, PAVING AND STRUCTURE (CULVERT)


STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	17BP.14.R.122	1	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	
17BP.14.R.122	N/A	PE	
17BP.14.R.122	N/A	ROW	
17BP.14.R.122	N/A	CONST.	

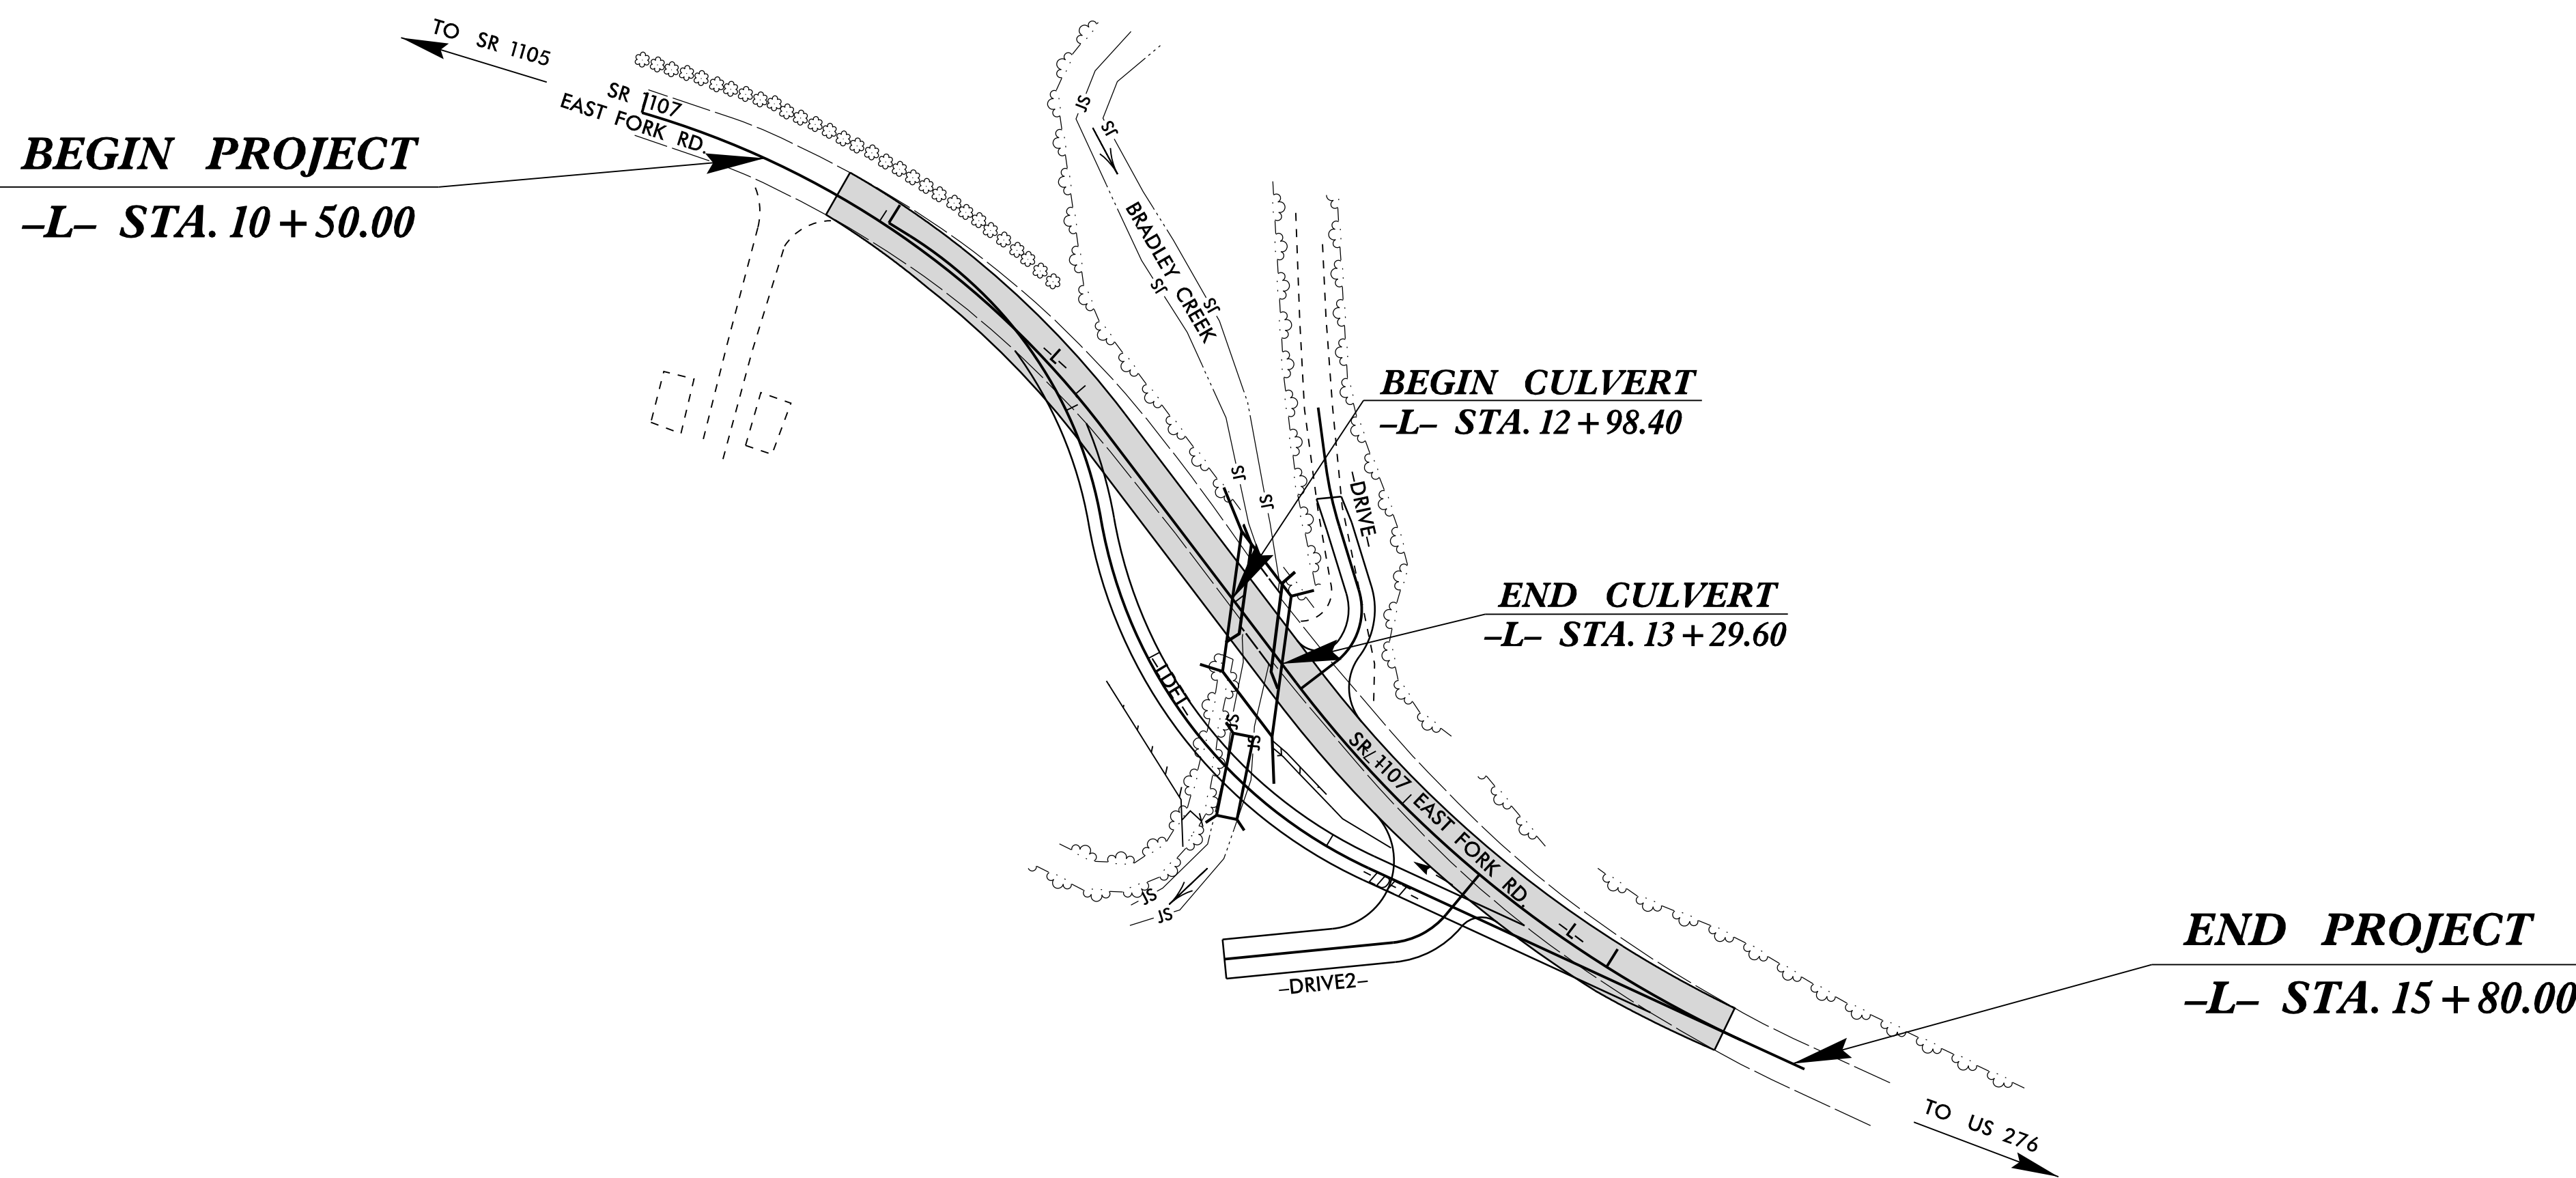

100% ROADWAY PLANS
SUBMITTAL NO: D-010
DATE: JUNE 3, 2016

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

GRAPHIC SCALES

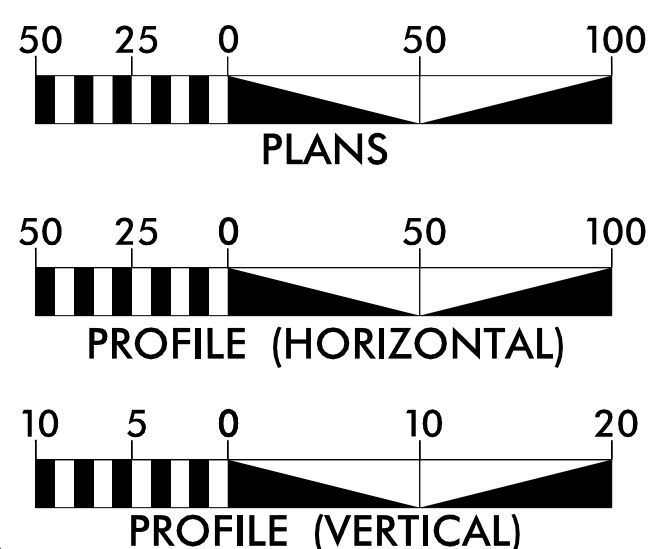

DESIGN DATA

ADT 2011 = 280

T = 6 %
V = 35 MPH

FUNC CLASS =
LOCAL
SUBREGIONAL TIER

PROJECT LENGTH

LENGTH ROADWAY = 0.094 MILES
LENGTH STRUCTURE = 0.006 MILES
TOTAL LENGTH = 0.100 MILES

PLANS PREPARED BY:



1520 SOUTH BOULEVARD, SUITE 200
CHARLOTTE, NC 28203
704-752-0610

FOR THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
2018 STANDARD SPECIFICATIONS


RIGHT OF WAY DATE:
2014

LETTING DATE:


JENNIFER FARINO, PE
PROJECT ENGINEER

SEAN KORTOVICH, PE
PROJECT DESIGNER

JOSH DEYTON, PE
NCDOT CONTACT

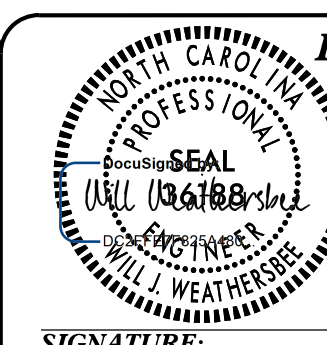

SIGNATURE:

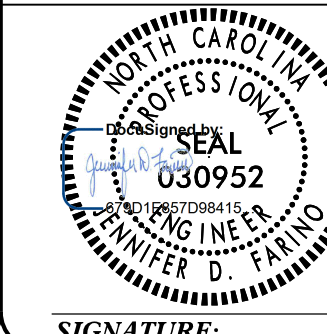


SIGNATURE:

HYDRAULICS ENGINEER

10/31/2018 8:47:00 AM EDT
P.E.


ROADWAY DESIGN ENGINEER

10/31/2018 8:46:45 AM EDT
P.E.

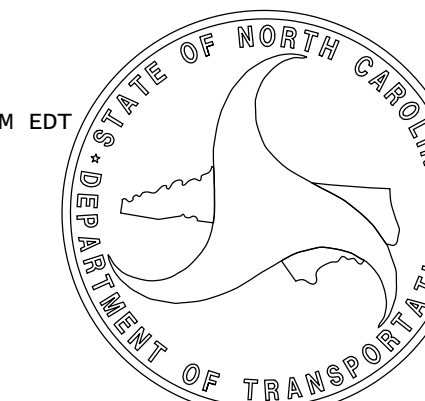

PROJECT REFERENCE NO. <i>17BP14RJ22</i>	SHEET NO. <i>1A</i>
--	------------------------

ROADWAY DESIGN ENGINEER

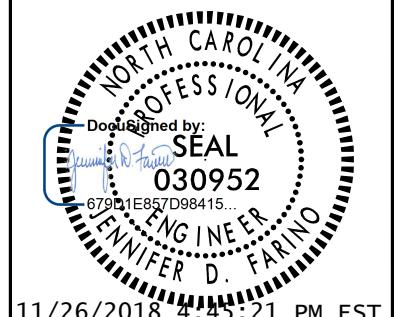

11/26/2018 4:21 PM EST

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

INDEX OF SHEETS

SHEET NUMBER	SHEET
1	TITLE SHEET
1A	INDEX OF SHEETS, GENERAL NOTES, AND LIST OF STANDARD DRAWINGS
1B	CONVENTIONAL SYMBOLS
1C-1	SURVEY CONTROL SHEET
2A-1 THRU 2A-2	PAVEMENT SCHEDULE, TYPICAL SECTIONS, AND WEDGING DETAILS
2B-1	DETOUR PLAN SHEET
2C-1	ARCH REINFORCED SANDBAG HEADWALL DETAIL
2C-2	AT-1 GUARDRAIL DETAIL
2C-3	25' GUARDRAIL CLEAR SPAN DETAIL
3B-1	SUMMARY OF TEMPORARY PIPES, SUMMARY OF GUARDRAIL, SUMMARY OF TEMPORARY GUARDRAIL, EARTHWORK SUMMARY, AND ASPHALT PAVEMENT REMOVAL SUMMARY
4	PLAN AND PROFILE SHEET
TMP-1 THRU TMP-2	TRAFFIC MANAGEMENT PLANS
PMP-1 THRU PMP-2	PAVEMENT MARKING PLANS
EC-1 THRU EC-8	EROSION CONTROL PLANS
UD-1 THRU UD-2	UTILITIES BY OTHERS
X-1A	CROSS SECTION SUMMARY
X-1 THRU X-17	CROSS SECTIONS
C-1 THRU C-3	STRUCTURE PLANS
SN	STRUCTURE STANDARD NOTES

GENERAL NOTES

GENERAL NOTES: 2018 SPECIFICATIONS
EFFECTIVE: 01-16-18
REVISED:

GRADING AND SURFACING OR RESURFACING AND WIDENING:

THE GRADE LINES SHOWN DENOTE THE FINISHED ELEVATION OF THE PROPOSED SURFACING AT GRADE POINTS SHOWN ON THE TYPICAL SECTIONS. WHERE NO GRADE LINES ARE SHOWN, THE PROFILES SHOWN DENOTE THE TOP ELEVATION OF THE EXISTING PAVEMENT ALONG THE CENTER LINE OF SURVEY ON WHICH THE PROPOSED RESURFACING WILL BE PLACED. GRADE LINES MAY BE ADJUSTED BY THE ENGINEER IN ORDER TO SECURE A PROPER TIE-IN.

CLEARING:

CLEARING ON THIS PROJECT SHALL BE PERFORMED TO THE LIMITS ESTABLISHED BY METHOD II.

SUPERELEVATION:

ALL CURVES ON THIS PROJECT SHALL BE SUPERELEVATED IN ACCORDANCE WITH STD. NO. 225.04 USING THE RATE OF SUPERELEVATION AND RUNOFF SHOWN ON THE PLANS. SUPERELEVATION IS TO BE REVOLVED ABOUT THE GRADE POINTS SHOWN ON THE TYPICAL SECTIONS.

SHOULDER CONSTRUCTION:

ASPHALT, EARTH, AND CONCRETE SHOULDER CONSTRUCTION ON THE HIGH SIDE OF SUPERELEVATED CURVES SHALL BE IN ACCORDANCE WITH STD. NO. 560.01.

SIDE ROADS:

THE CONTRACTOR WILL BE REQUIRED TO DO ALL NECESSARY WORK TO PROVIDE SUITABLE CONNECTIONS WITH ALL ROADS, STREETS, AND DRIVES ENTERING THIS PROJECT. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR THE PARTICULAR ITEMS INVOLVED.

GUARDRAIL:

THE GUARDRAIL LOCATIONS SHOWN ON THE PLANS MAY BE ADJUSTED DURING CONSTRUCTION AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHOULD CONSULT WITH THE ENGINEER PRIOR TO ORDERING GUARDRAIL MATERIAL.

UTILITIES:

UTILITY OWNERS ON THIS PROJECT ARE

COMPORIUM COMMUNICATIONS

DUKE ENERGY

ANY RELOCATION OF EXISTING UTILITIES WILL BE ACCOMPLISHED BY OTHERS.

RIGHT-OF-WAY MARKERS:

ALL RIGHT-OF-WAY MARKERS ON THIS PROJECT SHALL BE PLACED BY CONTRACT IN ACCORDANCE WITH SECTION 801 OF THE 2012 NORTH CAROLINA STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES.

STANDARD DRAWINGS

2018 ROADWAY ENGLISH STANDARD DRAWINGS

The following Roadway Standards as appear in "Roadway Standard Drawings" Highway Design Branch - N. C. Department of Transportation - Raleigh, N. C., Dated January, 2018 are applicable to this project and by reference hereby are considered a part of these plans:

STD.NO.	TITLE
DIVISION 2 - EARTHWORK	
200.02	Method of Clearing - Method II
225.02	Guide for Grading Subgrade - Secondary and Local
225.04	Method of Obtaining Superelevation - Two Lane Pavement
DIVISION 3 - PIPE CULVERTS	
300.01	Method of Pipe Installation
310.10	Driveway Pipe Construction
DIVISION 5 - SUBGRADE, BASES AND SHOULDERS	
560.01	Method of Shoulder Construction - High Side of Superelevated Curve - Method I
DIVISION 8 - INCIDENTALS	
862.01	Guardrail Placement
862.02	Guardrail Installation
876.01	Rip Rap in Channels

Note: Not to Scale

*S.U.E. = Subsurface Utility Engineering

STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

CONVENTIONAL PLAN SHEET SYMBOLS

BOUNDARIES AND PROPERTY:

Table listing boundary symbols: State Line, County Line, Township Line, City Line, Reservation Line, Property Line, Existing Iron Pin, Property Corner, Property Monument, Parcel/Sequence Number, Existing Fence Line, Proposed Woven Wire Fence, Proposed Chain Link Fence, Proposed Barbed Wire Fence, Existing Wetland Boundary, Proposed Wetland Boundary, Existing Endangered Animal Boundary, Existing Endangered Plant Boundary, Known Soil Contamination: Area or Site, Potential Soil Contamination: Area or Site.

BUILDINGS AND OTHER CULTURE:

Table listing building and culture symbols: Gas Pump Vent or U/G Tank Cap, Sign, Well, Small Mine, Foundation, Area Outline, Cemetery, Building, School, Church, Dam.

HYDROLOGY:

Table listing hydrology symbols: Stream or Body of Water, Hydro, Pool or Reservoir, Jurisdictional Stream, Buffer Zone 1, Buffer Zone 2, Flow Arrow, Disappearing Stream, Spring, Wetland, Proposed Lateral, Tail, Head Ditch, False Sump.

RAILROADS:

Table listing railroad symbols: Standard Gauge, RR Signal Milepost, Switch, RR Abandoned, RR Dismantled.

RIGHT OF WAY:

Table listing right of way symbols: Baseline Control Point, Existing Right of Way Marker, Existing Right of Way Line, Proposed Right of Way Line, Proposed Right of Way Line with Iron Pin and Cap Marker, Proposed Right of Way Line with Concrete or Granite RW Marker, Proposed Control of Access Line with Concrete CA Marker, Existing Control of Access, Proposed Control of Access, Existing Easement Line, Proposed Temporary Construction Easement, Proposed Temporary Drainage Easement, Proposed Permanent Drainage Easement, Proposed Permanent Drainage / Utility Easement, Proposed Permanent Utility Easement, Proposed Temporary Utility Easement, Proposed Aerial Utility Easement, Proposed Permanent Easement with Iron Pin and Cap Marker.

ROADS AND RELATED FEATURES:

Table listing road and related features symbols: Existing Edge of Pavement, Existing Curb, Proposed Slope Stakes Cut, Proposed Slope Stakes Fill, Proposed Curb Ramp, Existing Metal Guardrail, Proposed Guardrail, Existing Cable Guiderail, Proposed Cable Guiderail, Equality Symbol, Pavement Removal.

VEGETATION:

Table listing vegetation symbols: Single Tree, Single Shrub, Hedge, Woods Line.

Table listing orchard and vineyard symbols: Orchard, Vineyard.

EXISTING STRUCTURES:

Table listing existing structures symbols: MAJOR: Bridge, Tunnel or Box Culvert, Bridge Wing Wall, Head Wall and End Wall; MINOR: Head and End Wall, Pipe Culvert, Footbridge, Drainage Box: Catch Basin, DI or JB, Paved Ditch Gutter, Storm Sewer Manhole, Storm Sewer.

UTILITIES:

Table listing utility symbols: POWER: Existing Power Pole, Proposed Power Pole, Existing Joint Use Pole, Proposed Joint Use Pole, Power Manhole, Power Line Tower, Power Transformer, U/G Power Cable Hand Hole, H-Frame Pole, Recorded U/G Power Line, Designated U/G Power Line (S.U.E.*); TELEPHONE: Existing Telephone Pole, Proposed Telephone Pole, Telephone Manhole, Telephone Booth, Telephone Pedestal, Telephone Cell Tower, U/G Telephone Cable Hand Hole, Recorded U/G Telephone Cable, Designated U/G Telephone Cable (S.U.E.*), Recorded U/G Telephone Conduit, Designated U/G Telephone Conduit (S.U.E.*), Recorded U/G Fiber Optics Cable, Designated U/G Fiber Optics Cable (S.U.E.*).

WATER:

Table listing water symbols: Water Manhole, Water Meter, Water Valve, Water Hydrant, Recorded U/G Water Line, Designated U/G Water Line (S.U.E.*), Above Ground Water Line.

TV:

Table listing TV symbols: TV Satellite Dish, TV Pedestal, TV Tower, U/G TV Cable Hand Hole, Recorded U/G TV Cable, Designated U/G TV Cable (S.U.E.*), Recorded U/G Fiber Optic Cable, Designated U/G Fiber Optic Cable (S.U.E.*).

GAS:

Table listing gas symbols: Gas Valve, Gas Meter, Recorded U/G Gas Line, Designated U/G Gas Line (S.U.E.*), Above Ground Gas Line.

SANITARY SEWER:

Table listing sanitary sewer symbols: Sanitary Sewer Manhole, Sanitary Sewer Cleanout, U/G Sanitary Sewer Line, Above Ground Sanitary Sewer, Recorded SS Forced Main Line, Designated SS Forced Main Line (S.U.E.*).

MISCELLANEOUS:

Table listing miscellaneous symbols: Utility Pole, Utility Pole with Base, Utility Located Object, Utility Traffic Signal Box, Utility Unknown U/G Line, U/G Tank; Water, Gas, Oil, Underground Storage Tank, Approx. Loc., A/G Tank; Water, Gas, Oil, Geoenvironmental Boring, U/G Test Hole (S.U.E.*), Abandoned According to Utility Records, End of Information.

12/05/11

SURVEY CONTROL SHEET 87-0137

- FINAL -


BL	POINT	DESC.	NORTH	EAST	ELEVATION	L STATION	OFFSET
	1	BL-1	515457.0537	883372.7762	2421.29	OUTSIDE PROJECT LIMITS	
	2	BL-2	515598.7640	883185.9824	2406.28	13+73.17	5.04 RT
	3	BL-3	515851.6902	882945.6139	2408.92	10+23.84	13.76 LT

 BM1 ELEVATION = 2412.50
 N 515563 E 883275
 L STATION 14+66.07 28.68' LEFT
 NAIL IN BASE OF 15" PINE

 BM2 ELEVATION = 2403.13
 N 515595 E 883153
 L STATION 13+55.20 32.73' RIGHT
 NAIL IN BASE OF 18" POPLAR

-FINAL- ROW MARKER IRON PIN AND CAP-E

ALIGN	STATION	OFFSET	NORTH	EAST
L	12+68.77	-36.58	515706.5343	883154.6584
L	12+68.77	-43.00	515710.4216	883159.7724
L	13+42.23	-43.00	515652.2190	883204.0303
L	13+42.23	-36.74	515648.3926	883199.0776
L	14+00.00	23.76	515565.7891	883191.3714
L	14+00.00	40.00	515554.2953	883179.8957
L	13+38.70	40.00	515604.5266	883136.0103
L	12+17.35	40.00	515701.1330	883062.5760
L	11+00.00	40.00	515771.2308	882987.0693
L	11+00.00	28.66	515780.7422	882993.2426

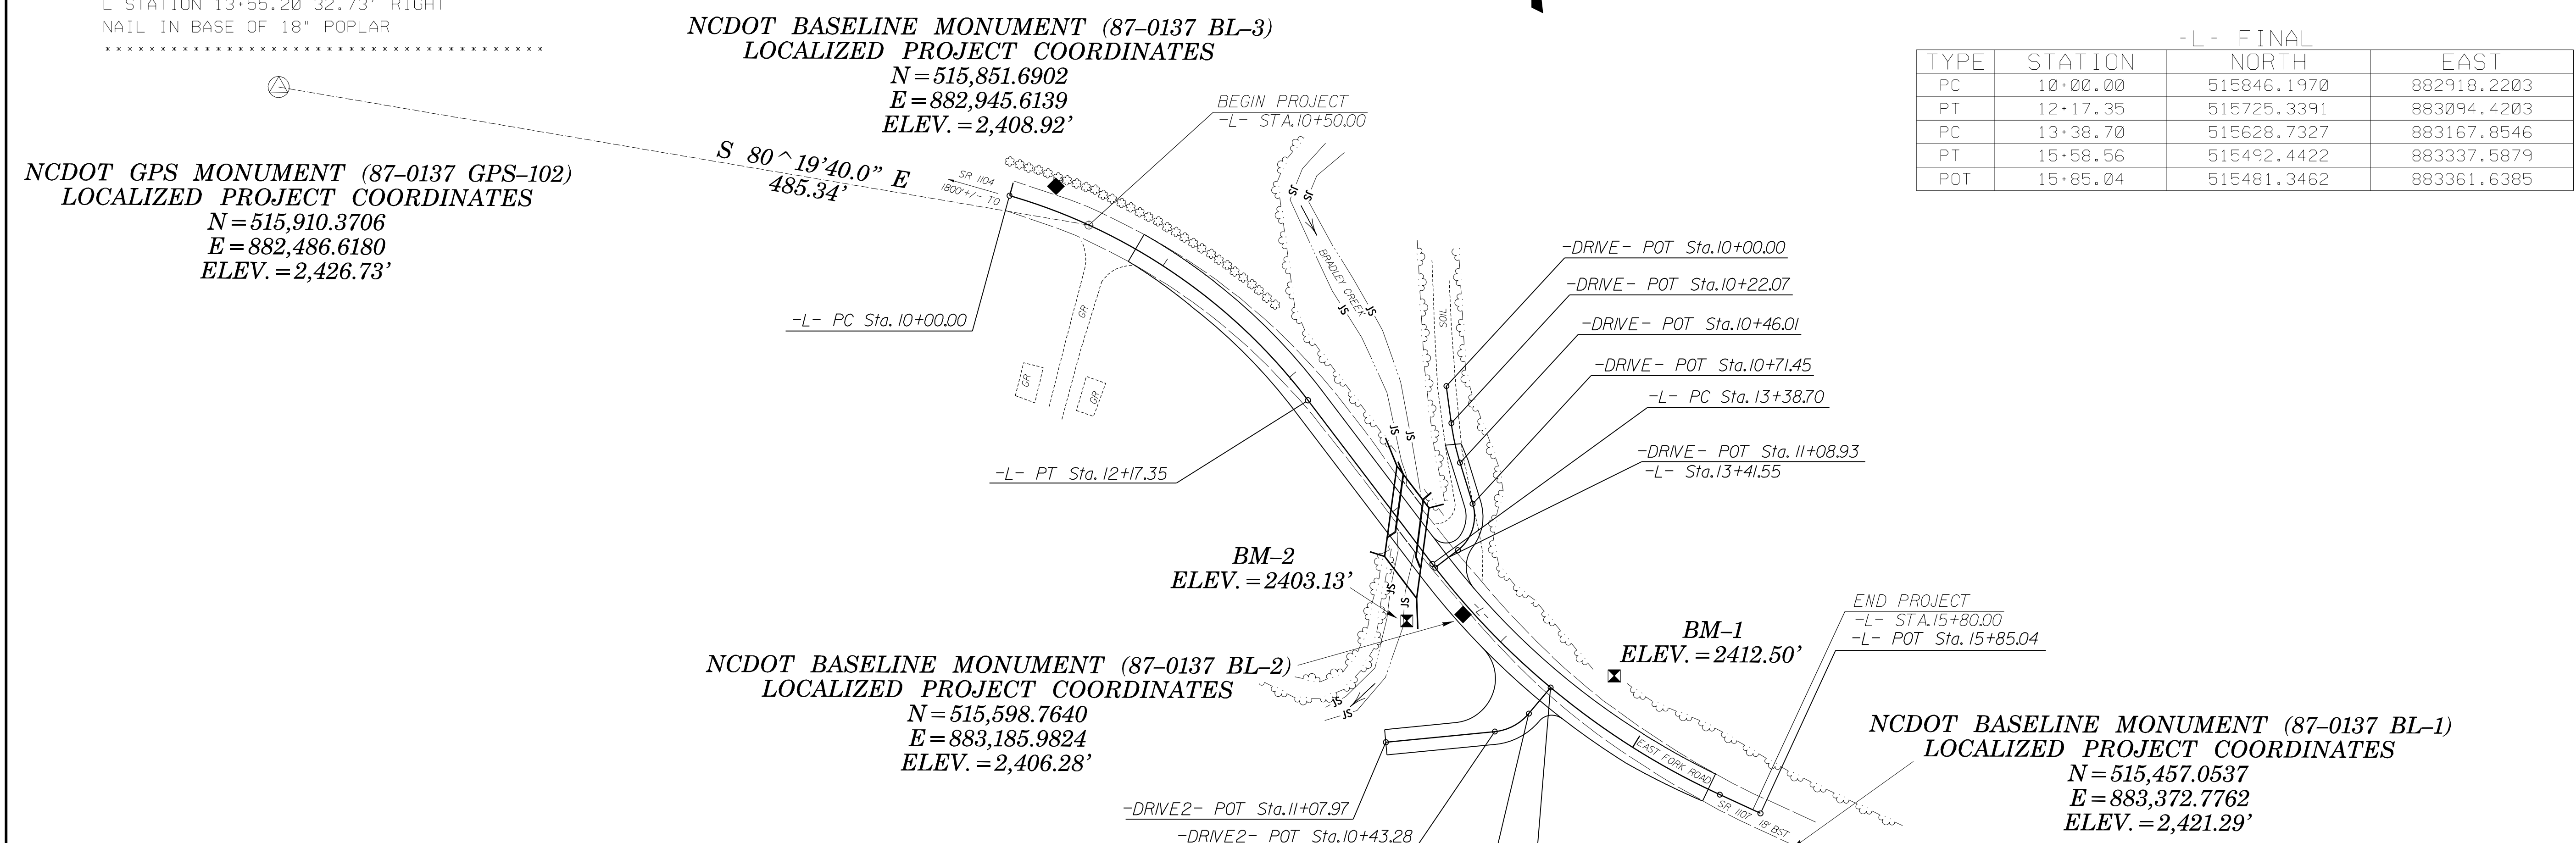

-L- FINAL

TYPE	STATION	NORTH	EAST
PC	10+00.00	515846.1970	882918.2203
PT	12+17.35	515725.3391	883094.4203
PC	13+38.70	515628.7327	883167.8546
PT	15+58.56	515492.4422	883337.5879
POT	15+85.04	515481.3462	883361.6385

DATUM DESCRIPTION

THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY NCDOT FOR MONUMENT "87-0137 GPS-102" WITH NAD 83/NA 2011 STATE PLANE GRID COORDINATES OF NORTHING: 515,910.3706(±) EASTING: 882,486.6180(±) ELEVATION: 2,426.73(±)

THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT (GROUND TO GRID) IS: 0.99976427

THE N.C. LAMBERT GRID BEARING AND LOCALIZED HORIZONTAL GROUND DISTANCE FROM "87-0137 GPS-102" TO -L- STATION 10+50.00 IS
 S 80°19'40.0" E 485.34'

ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES
 VERTICAL DATUM USED IS NAVD 88

NOTES:

- THE CONTROL DATA FOR THIS PROJECT CAN BE FOUND ELECTRONICALLY BY SELECTING PROJECT CONTROL DATA AT:
[HTTPS://CONNECT.NCDOT.GOV/RESOURCES/LOCATION](https://connect.ncdot.gov/resources/location)
 THE FILES TO BE FOUND ARE AS FOLLOWS:
 87-0137_LS_CONTROL.TXT
- SITE CALIBRATION INFORMATION HAS NOT BEEN PROVIDED FOR THIS PROJECT. IF FURTHER INFORMATION IS NEEDED, PLEASE CONTACT THE LOCATION AND SURVEYS UNIT.

⊕ INDICATES GEODETIC CONTROL MONUMENTS USED OR SET FOR HORIZONTAL PROJECT CONTROL BY THE NCDOT LOCATION AND SURVEYS UNIT.
 PROJECT CONTROL ESTABLISHED USING GLOBAL POSITIONING SYSTEM.

GEOID MODEL - G12ANC
 NOTE: DRAWING NOT TO SCALE


6/3/2016 10:11:11 AM P:\033185000\Transportation\17BP Bridges Group 4\1033185137 Bridge 870137\Correspondence and Communication\Client\From NCDOT\20160603_Revise Survey Control Sheet 870137_1s_1c-1.dgn

6/2/09

PAVEMENT SCHEDULE (FINAL PAVEMENT DESIGN)

C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1 1/2" IN DEPTH.
E1	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J1	6" ABC
J2	8" ABC
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAIL)


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.
NOTE: FEATHER ASPHALT 0" TO 3" FROM -L- STA. 10+50.00 TO -L- STA. 10+81.00 AND FROM -L- STA. 15+51.00 TO -L- STA. 15+80.00.

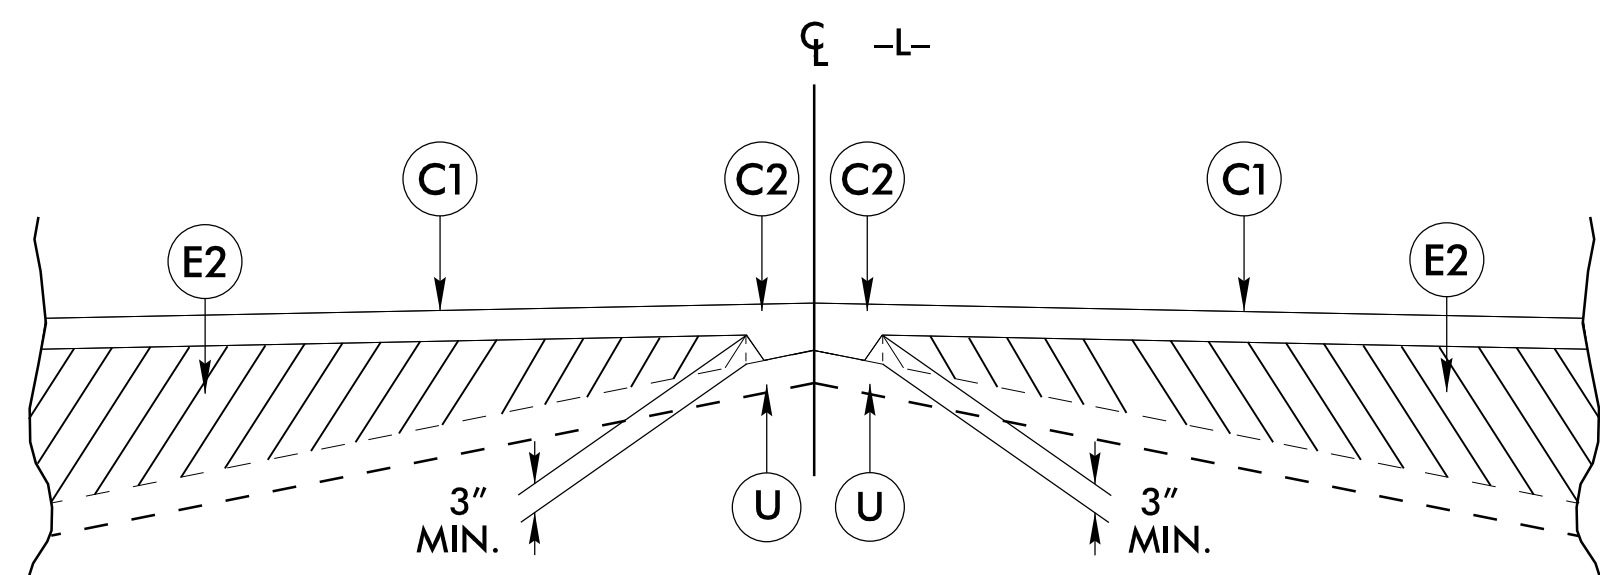

STANDARD WEDGING DETAIL


BRIDGE NO. 137

PROJECT REFERENCE NO. 17BPJ4.R122	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

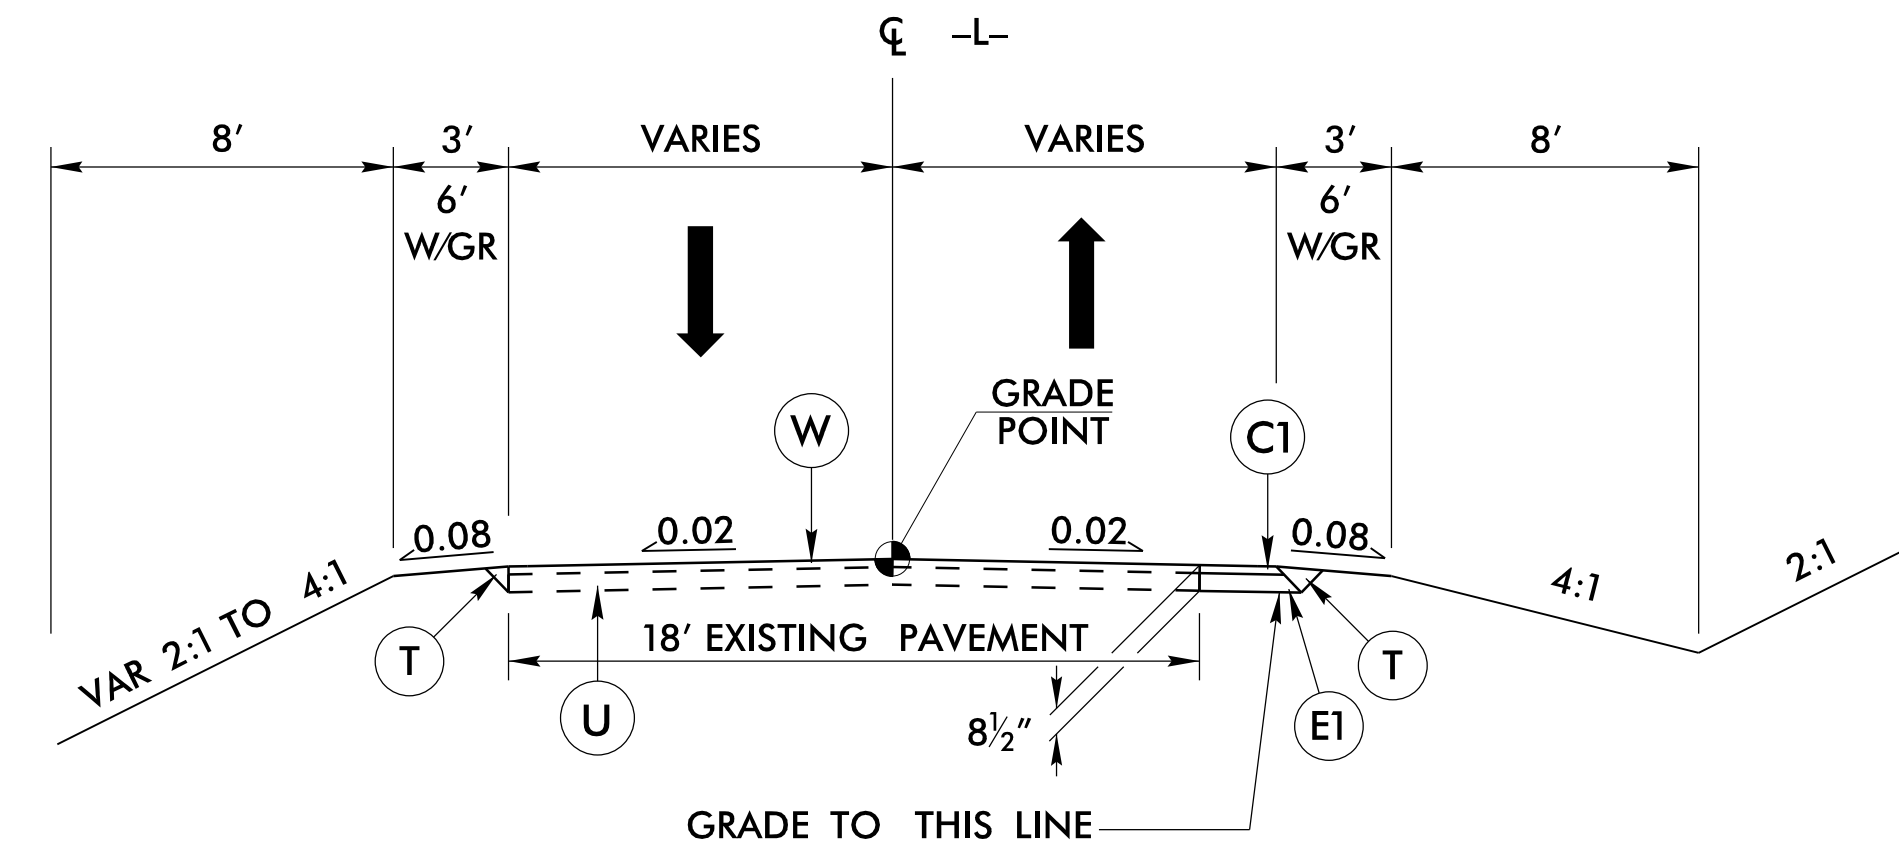


TYPICAL SECTION NO. 1

USE TYPICAL SECTION NO. 1
-L- STA. 10+81.00 TO -L- STA. 11+31.00
-L- STA. 15+01.00 TO -L- STA. 15+51.00

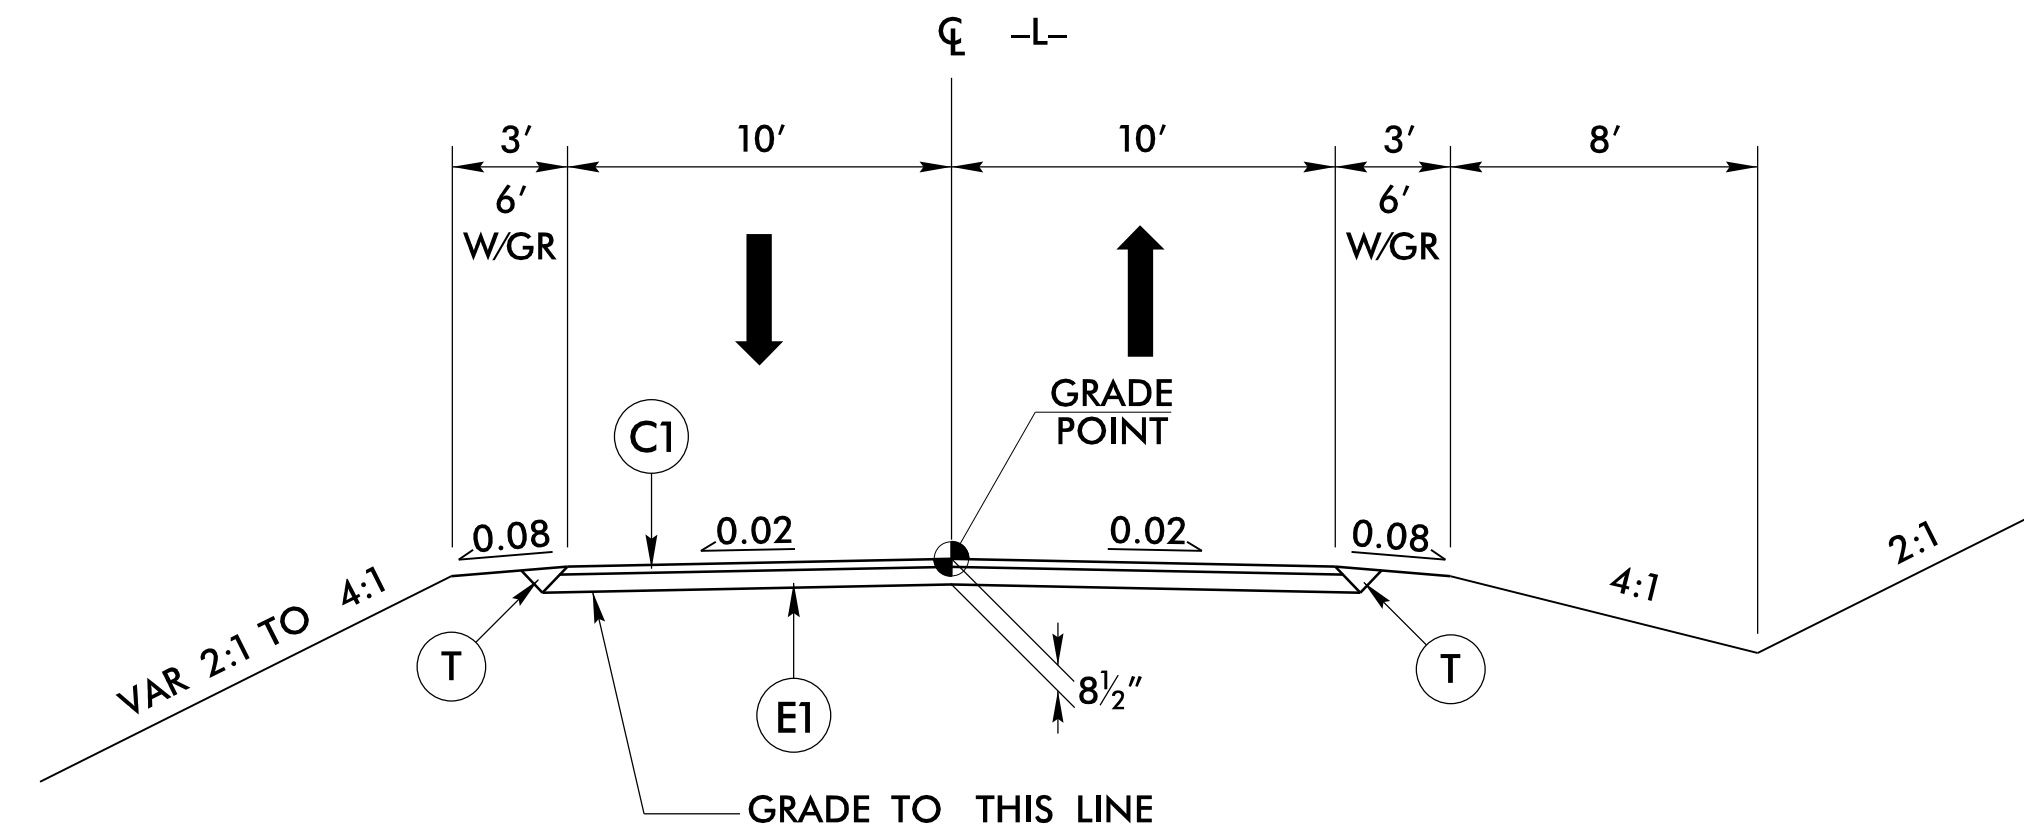

TYPICAL SECTION NO. 2

USE TYPICAL SECTION NO. 2
-L- STA. 11+31.00 TO -L- STA. 15+01.00

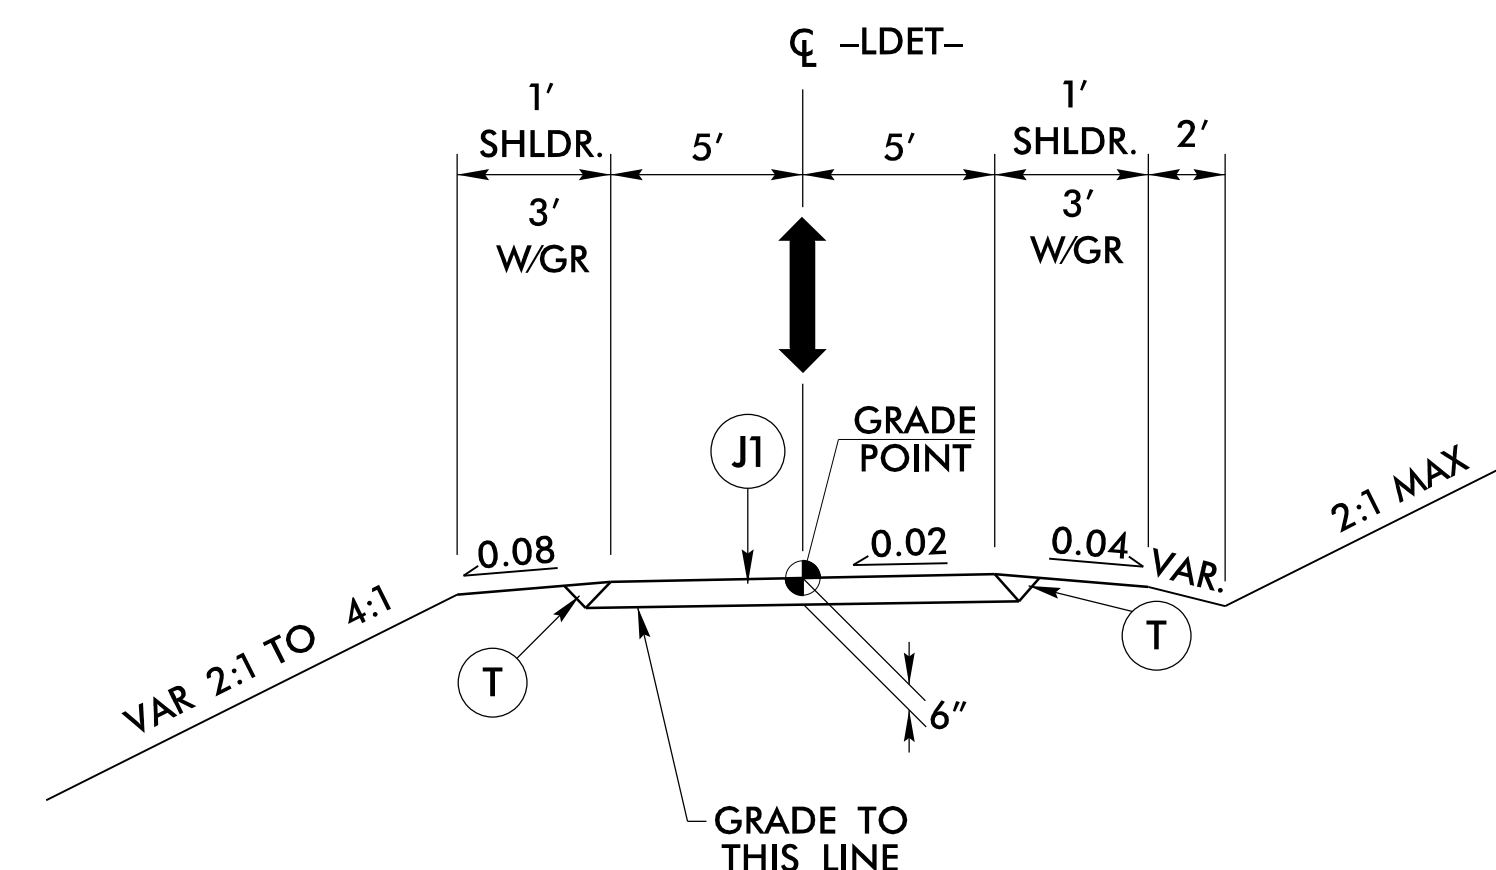

TYPICAL SECTION NO. 3

USE TYPICAL SECTION NO. 3
-LDET- STA. 10+92.03 TO -LDET- STA. 14+05.23

05-FEB-2018 08:30
 R:\V\F\66701137_R\dj_tup.dgn
 \$\$\$\$USERNAME\$\$\$\$

6/2/09


PAVEMENT SCHEDULE (FINAL PAVEMENT DESIGN)

C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1 1/2" IN DEPTH.
E1	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J1	6" ABC
J2	8" ABC
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAIL)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.
 NOTE: FEATHER ASPHALT 0" TO 3" FROM -L- STA. 10+50.00 TO -L- STA. 10+81.00 AND FROM -L- STA. 15+51.00 TO -L- STA. 15+80.00.


BRIDGE NO. 137

PROJECT REFERENCE NO. 17BPJ4.RJ22	SHEET NO. 2A-2
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

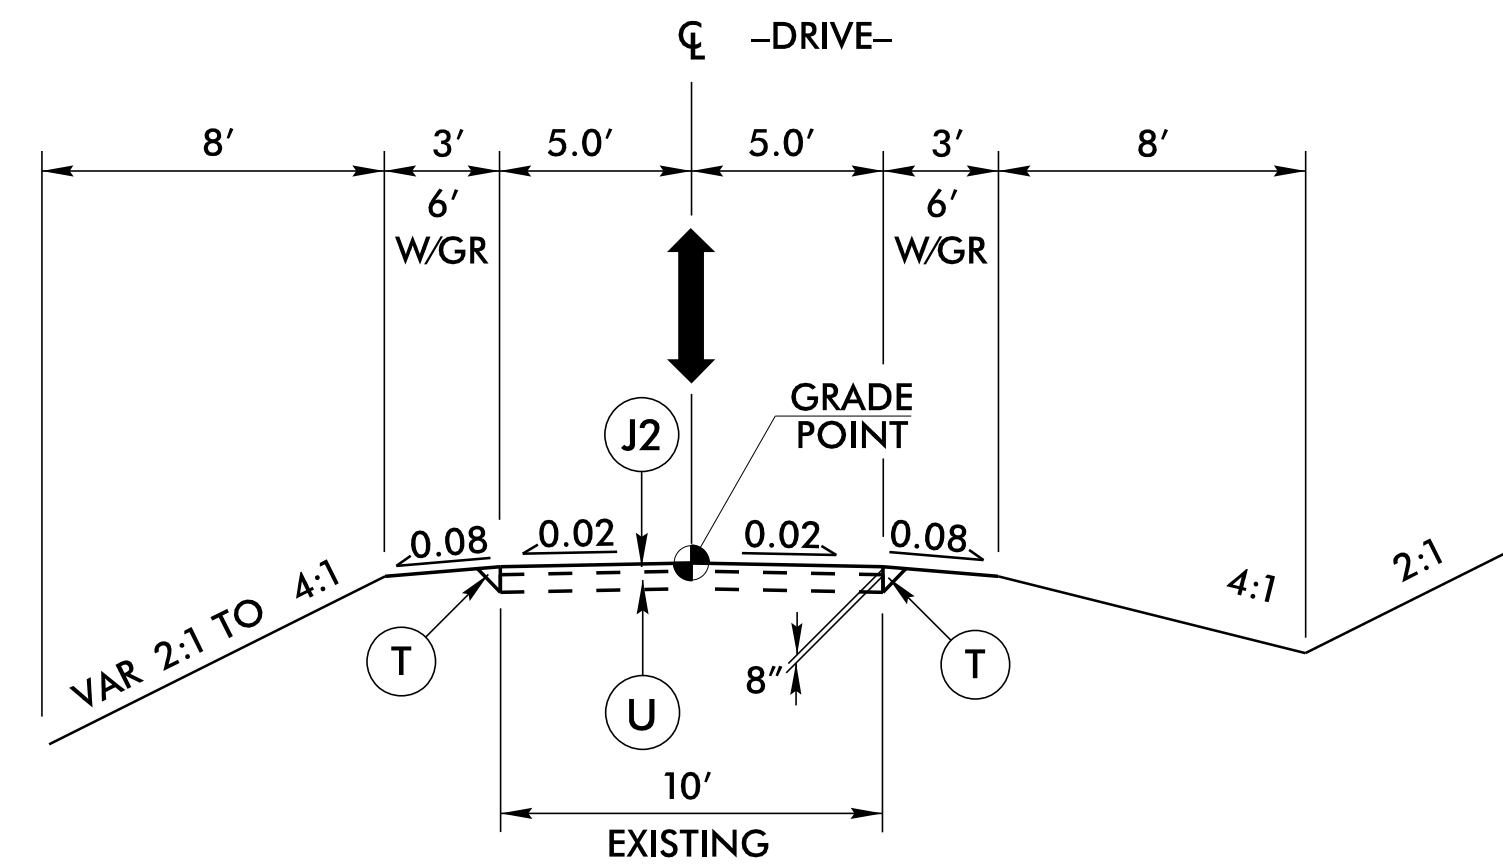

TYPICAL SECTION NO. 4

USE TYPICAL SECTION NO. 4
 -DRIVE- STA. 10+34.73 TO -DRIVE- STA. 11+08.93

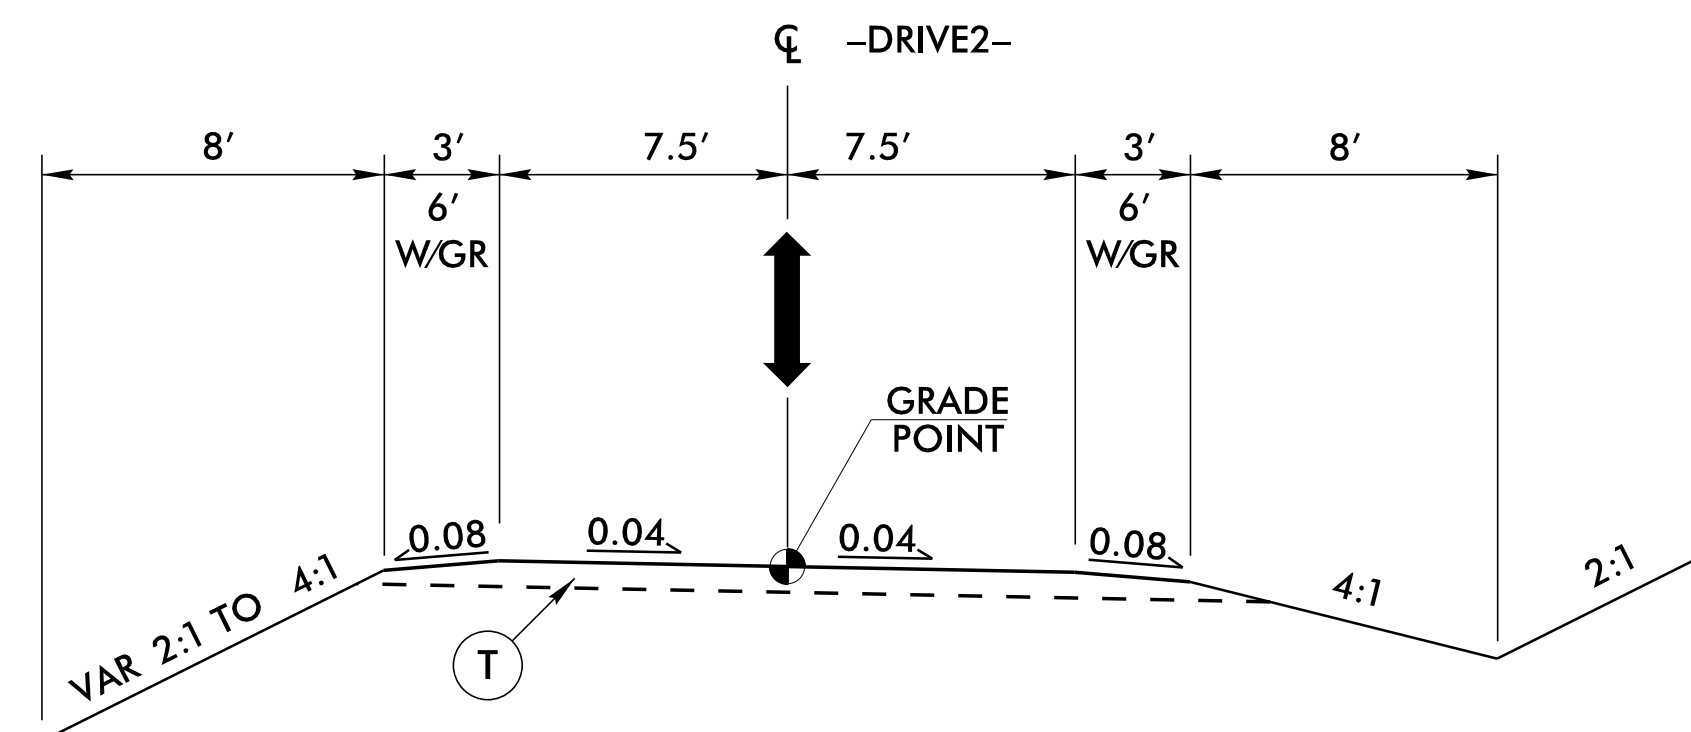

TYPICAL SECTION NO. 5

USE TYPICAL SECTION NO. 5
 -DRIVE2- STA. 10+10.00 TO -DRIVE2- STA. 11+07.97

05-FEB-2018 08:30
 R:\F\06\170137_Rfdj_tjpd.dgn
 \$\$\$\$USERNAME\$\$\$\$

8/17/99

BRIDGE NO. 137

PROJECT REFERENCE NO. 17BP14.R122	SHEET NO. 2B-1
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

NAD 83/NA 2011

-LDET- CURVE DATA



PI Sta 10+81.05 Δ = 48° 13' 57.5" (RT) D = 35' 48" 35.5" L = 134.69' T = 71.63' R = 160.00' V = 25 MPH SE = 02	PI Sta 12+38.61 Δ = 55° 23' 43.0" (LT) D = 31' 49" 51.6" L = 174.03' T = 94.49' R = 180.00' V = 25 MPH SE = 02
---	---

-L- CURVE DATA


PI Sta 11+12.53 Δ = 36° 37' 36.4" (RT) D = 16' 51" 06.1" L = 217.35' T = 112.53' R = 340.00' V = 35 MPH SE = 06	PI Sta 14+50.87 Δ = 27° 59' 36.4" (LT) D = 12' 43" 56.6" L = 219.86' T = 112.17' R = 450.00' V = 35 MPH SE = 06
--	--

NOTE: USE SANDBAG HEADWALLS AT INLET AND OUTLET OF DETOUR TEMPORARY PIPE.

FOR ROADWAY PLAN, SEE SHEET 4

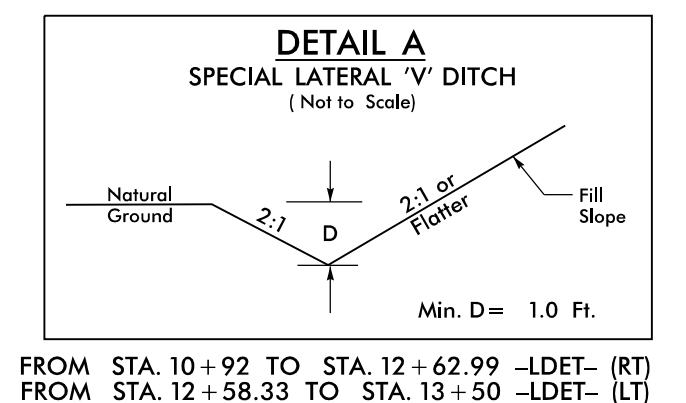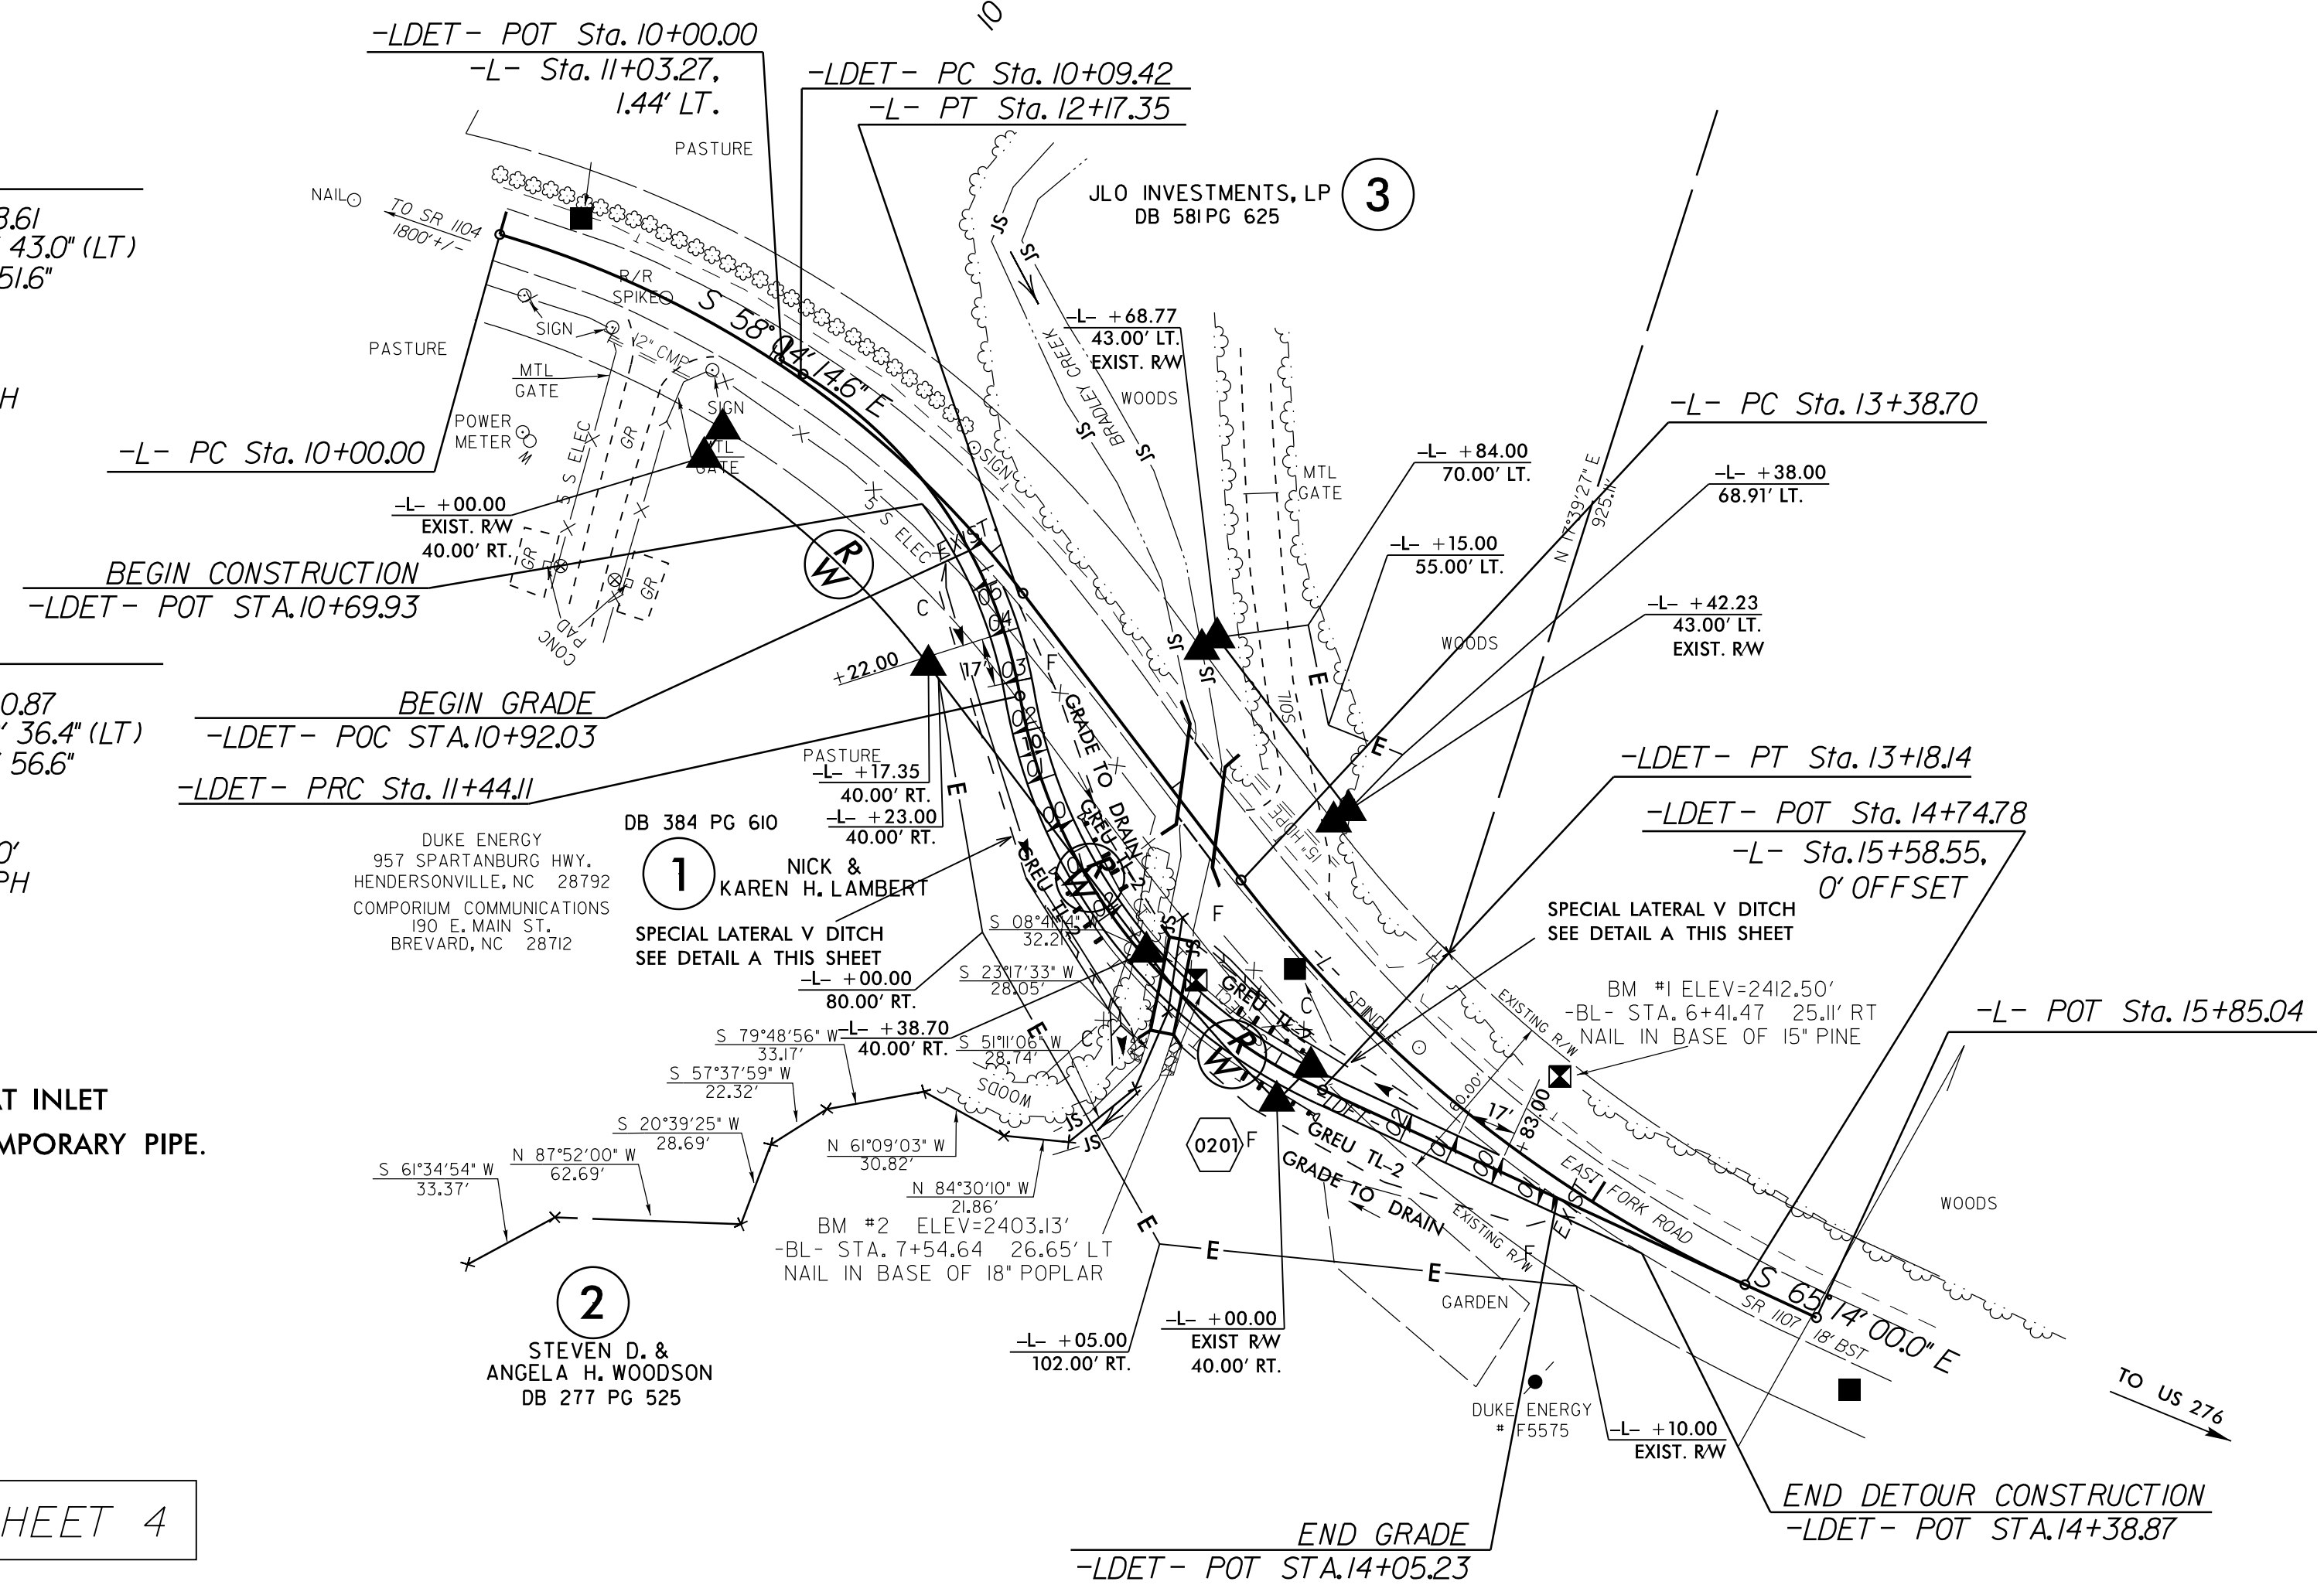

REVISIONS

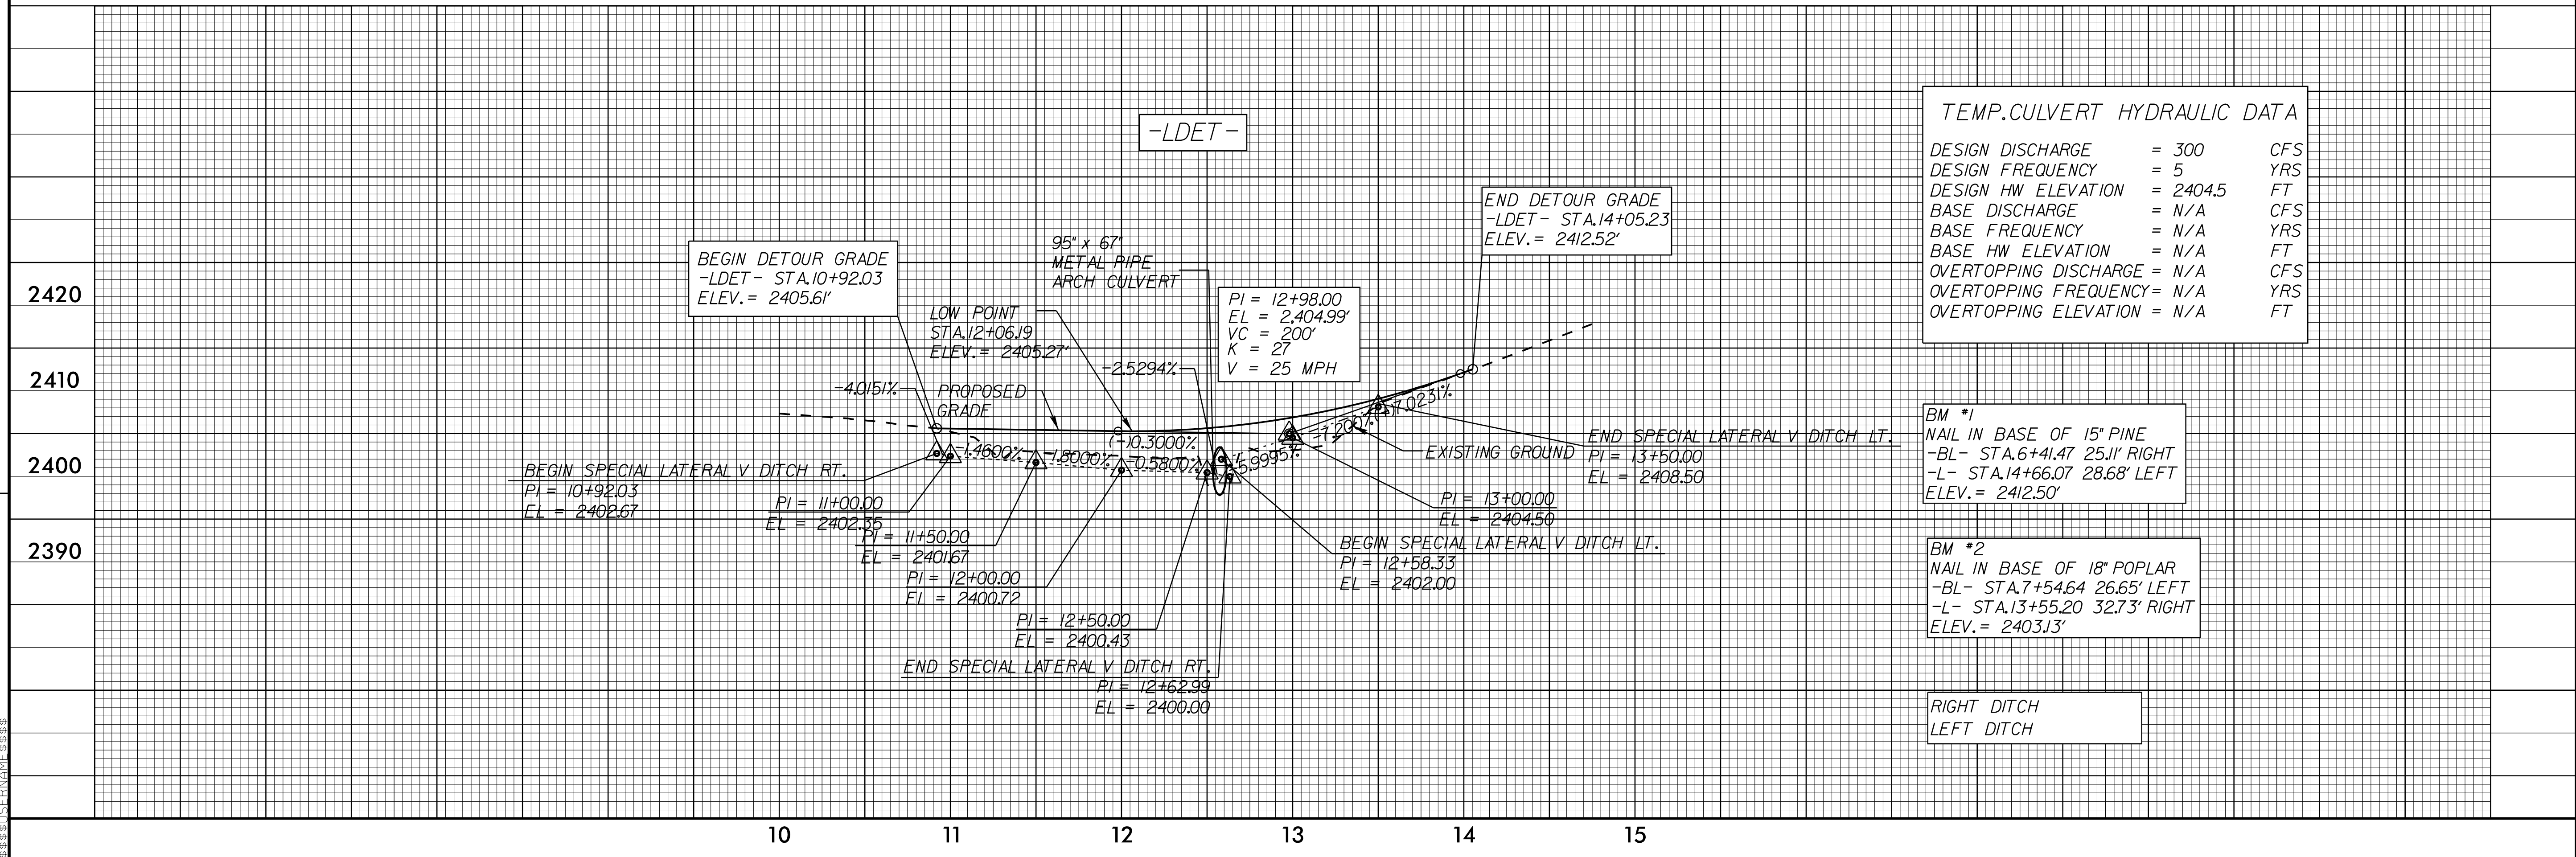

TEMP. CULVERT HYDRAULIC DATA


DESIGN DISCHARGE	= 300	CFS
DESIGN FREQUENCY	= 5	YRS
DESIGN HW ELEVATION	= 2404.5	FT
BASE DISCHARGE	= N/A	CFS
BASE FREQUENCY	= N/A	YRS
BASE HW ELEVATION	= N/A	FT
OVERTOPPING DISCHARGE	= N/A	CFS
OVERTOPPING FREQUENCY	= N/A	YRS
OVERTOPPING ELEVATION	= N/A	FT

BM #1
NAIL IN BASE OF 15' PINE
-BL- STA. 6+41.47 25.11' RIGHT
-L- STA. 14+66.07 28.68' LEFT
ELEV. = 2412.50'


BM #2
NAIL IN BASE OF 18" POPLAR
-BL- STA. 7+54.64 26.65' LEFT
-L- STA. 13+55.20 32.73' RIGHT
ELEV. = 2403.13'

RIGHT DITCH
LEFT DITCH

31-MAR-2018 13:42
R:\Projects\17BP14.R122\870137_Rdly_det_psh.dgn

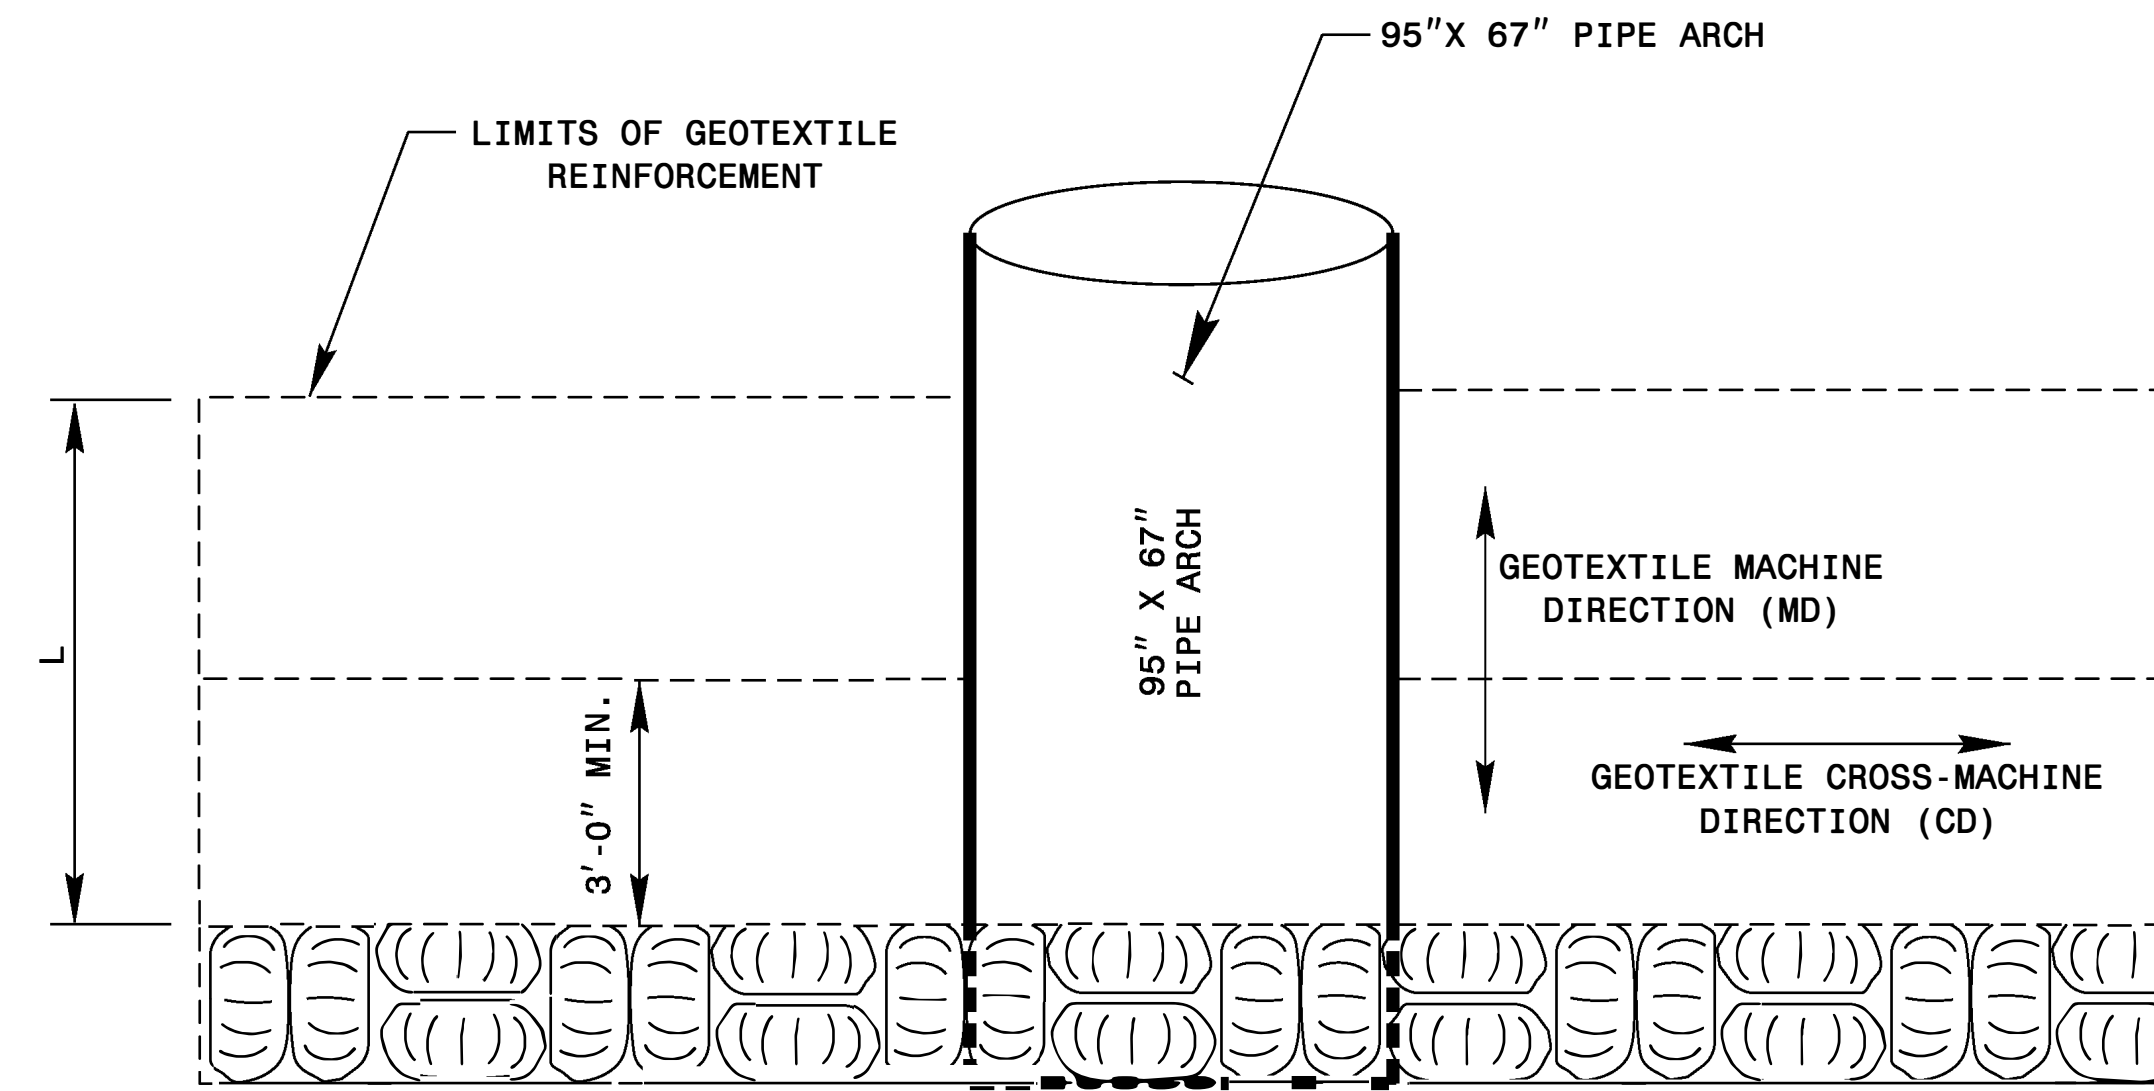

PLAN

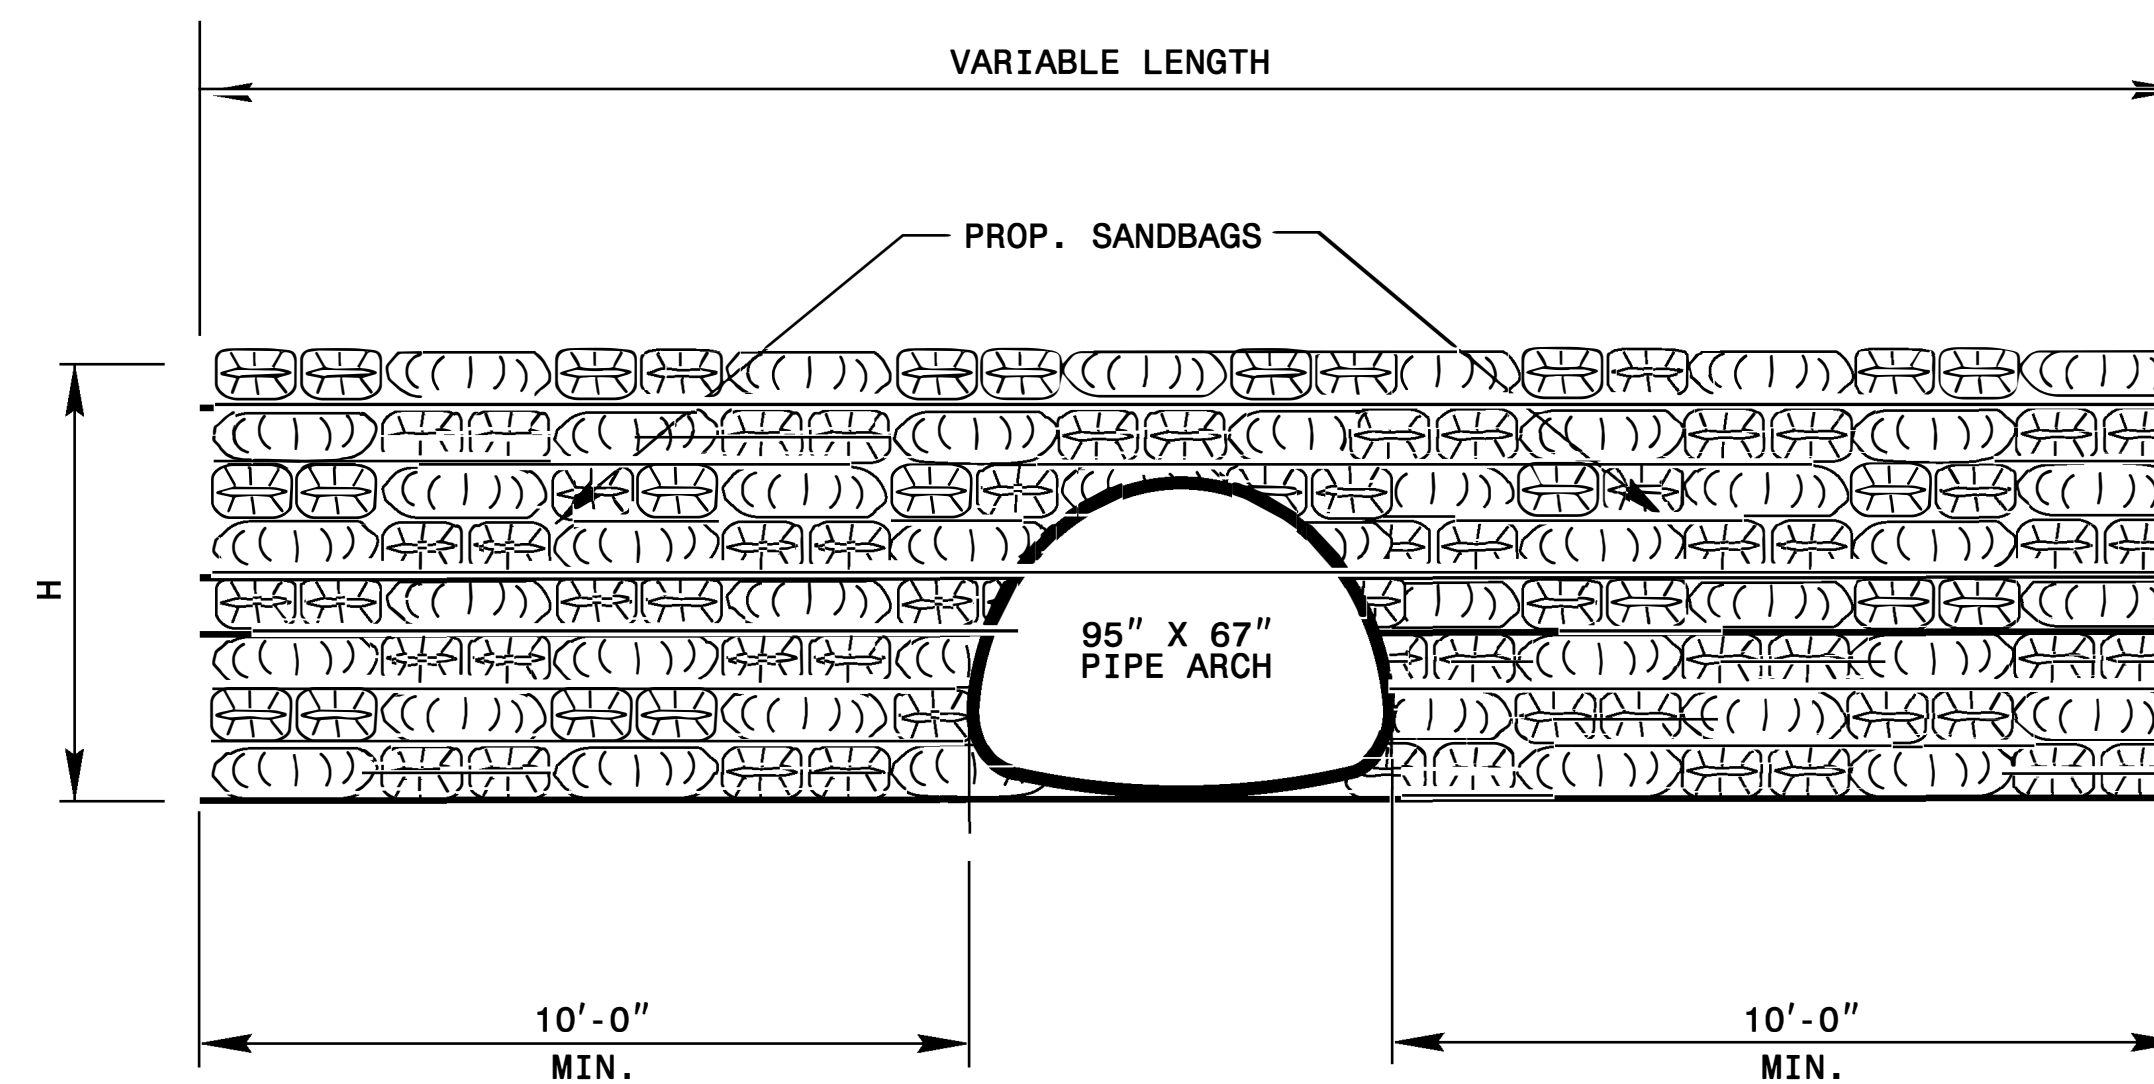

FRONT ELEVATION

**GEOTEXTILE REINFORCEMENT
(TYPE 5 GEOTEXTILE)**

WALL HEIGHT H (ft)	REINF. LENGTH L (ft)	WIDE WIDTH TENSILE STRENGTH @ ULTIMATE (MD) (lb/ft)
< 4	6	2400
4 TO 6	6	3400
6 TO 8	= H	4300
8 TO 10	= H	5200


TOTAL AREA SANDBAG HEADWALL = 185 S.F.

- GENERAL NOTES:**
- FOR REINFORCED SANDBAG HEADWALLS, SEE SANDBAG HEADWALLS PROVISION.
 - REINFORCED SANDBAG HEADWALLS ARE BASED ON A TRAFFIC SURCHARGE OF 250 LB/SF OR LESS AND A BACK SLOPE OF 2:1(H:V) OR FLATTER.
 - REINFORCED SANDBAG HEADWALLS ARE BASED ON THE FOLLOWING IN-SITU ASSUMED SOIL PARAMETERS:
 UNIT WEIGHT, $\gamma = 120$ LB/CF
 FRICTION ANGLE, $\phi = 30$ DEGREES
 COHESION, $c = 0$ LB/SF
 - DO NOT USE REINFORCED SANDBAG HEADWALLS IF ASSUMED SOIL PARAMETERS ARE NOT APPLICABLE.
 - DO NOT USE REINFORCED SANDBAG HEADWALLS WHEN VERY LOOSE OR SOFT SOIL OR MUCK IS BELOW SANDBAGS OR PIPES.
 - DO NOT PLACE GEOTEXTILE REINFORCEMENT OR SANDBAGS UNTIL EXCAVATION DIMENSIONS AND FOUNDATION MATERIAL ARE APPROVED.
 - 24" LONG #4 REINFORCING STEEL BARS MAY BE SUBSTITUTED FOR 8" LONG STEEL SPIKES. DRIVE #4 BAR THROUGH NO MORE THAN 5 SANDBAGS.
 - DO NOT SPLICE OR OVERLAP GEOTEXTILE REINFORCEMENT SO SEAMS ARE PARALLEL TO THE HEADWALL FACE.
 - HEADWALL DIMENSIONS MAY BE ADJUSTED AS DIRECTED BY THE ENGINEER.



EACH BAG CONNECTED WITH 4 - 8" SPIKES

SANDBAG PLAN VIEW

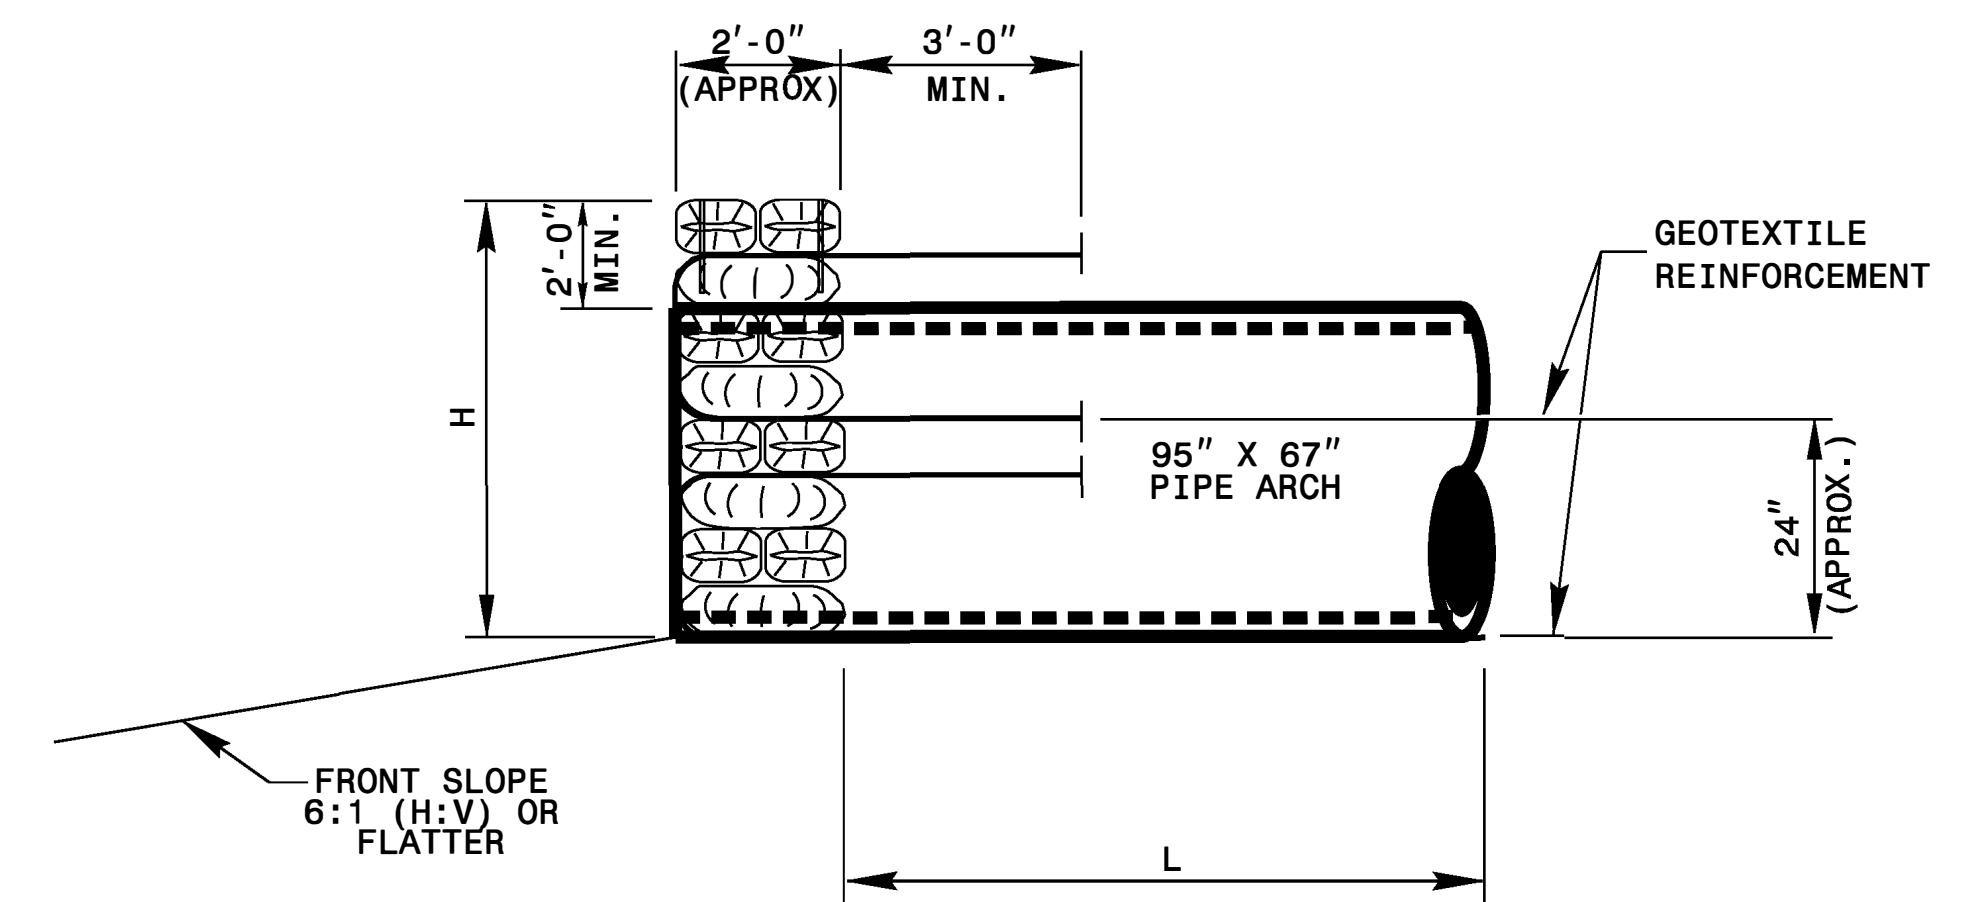

SIDE ELEVATION



3/27/2018

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACT STANDARDS AND DEVELOPMENT UNIT
 PLANS AND STANDARDS SECTION
 Office 919-707-6950 FAX 919-250-4119

**DETAIL OF 95" X 67" ARCH
 REINFORCED SANDBAG HEADWALL**

ORIGINAL BY: _____ DATE: _____
 MODIFIED BY: rnbritt DATE: 08-22-2012
 CHECKED BY: _____ DATE: _____
 FILE SPEC.: details/rnbrit/english/hydro/b4547archsbhw.dgn

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.


ROADWAY DETAIL DRAWING FOR
GUARDRAIL INSTALLATION

SHEET OF


STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR
GUARDRAIL INSTALLATION

SHEET OF

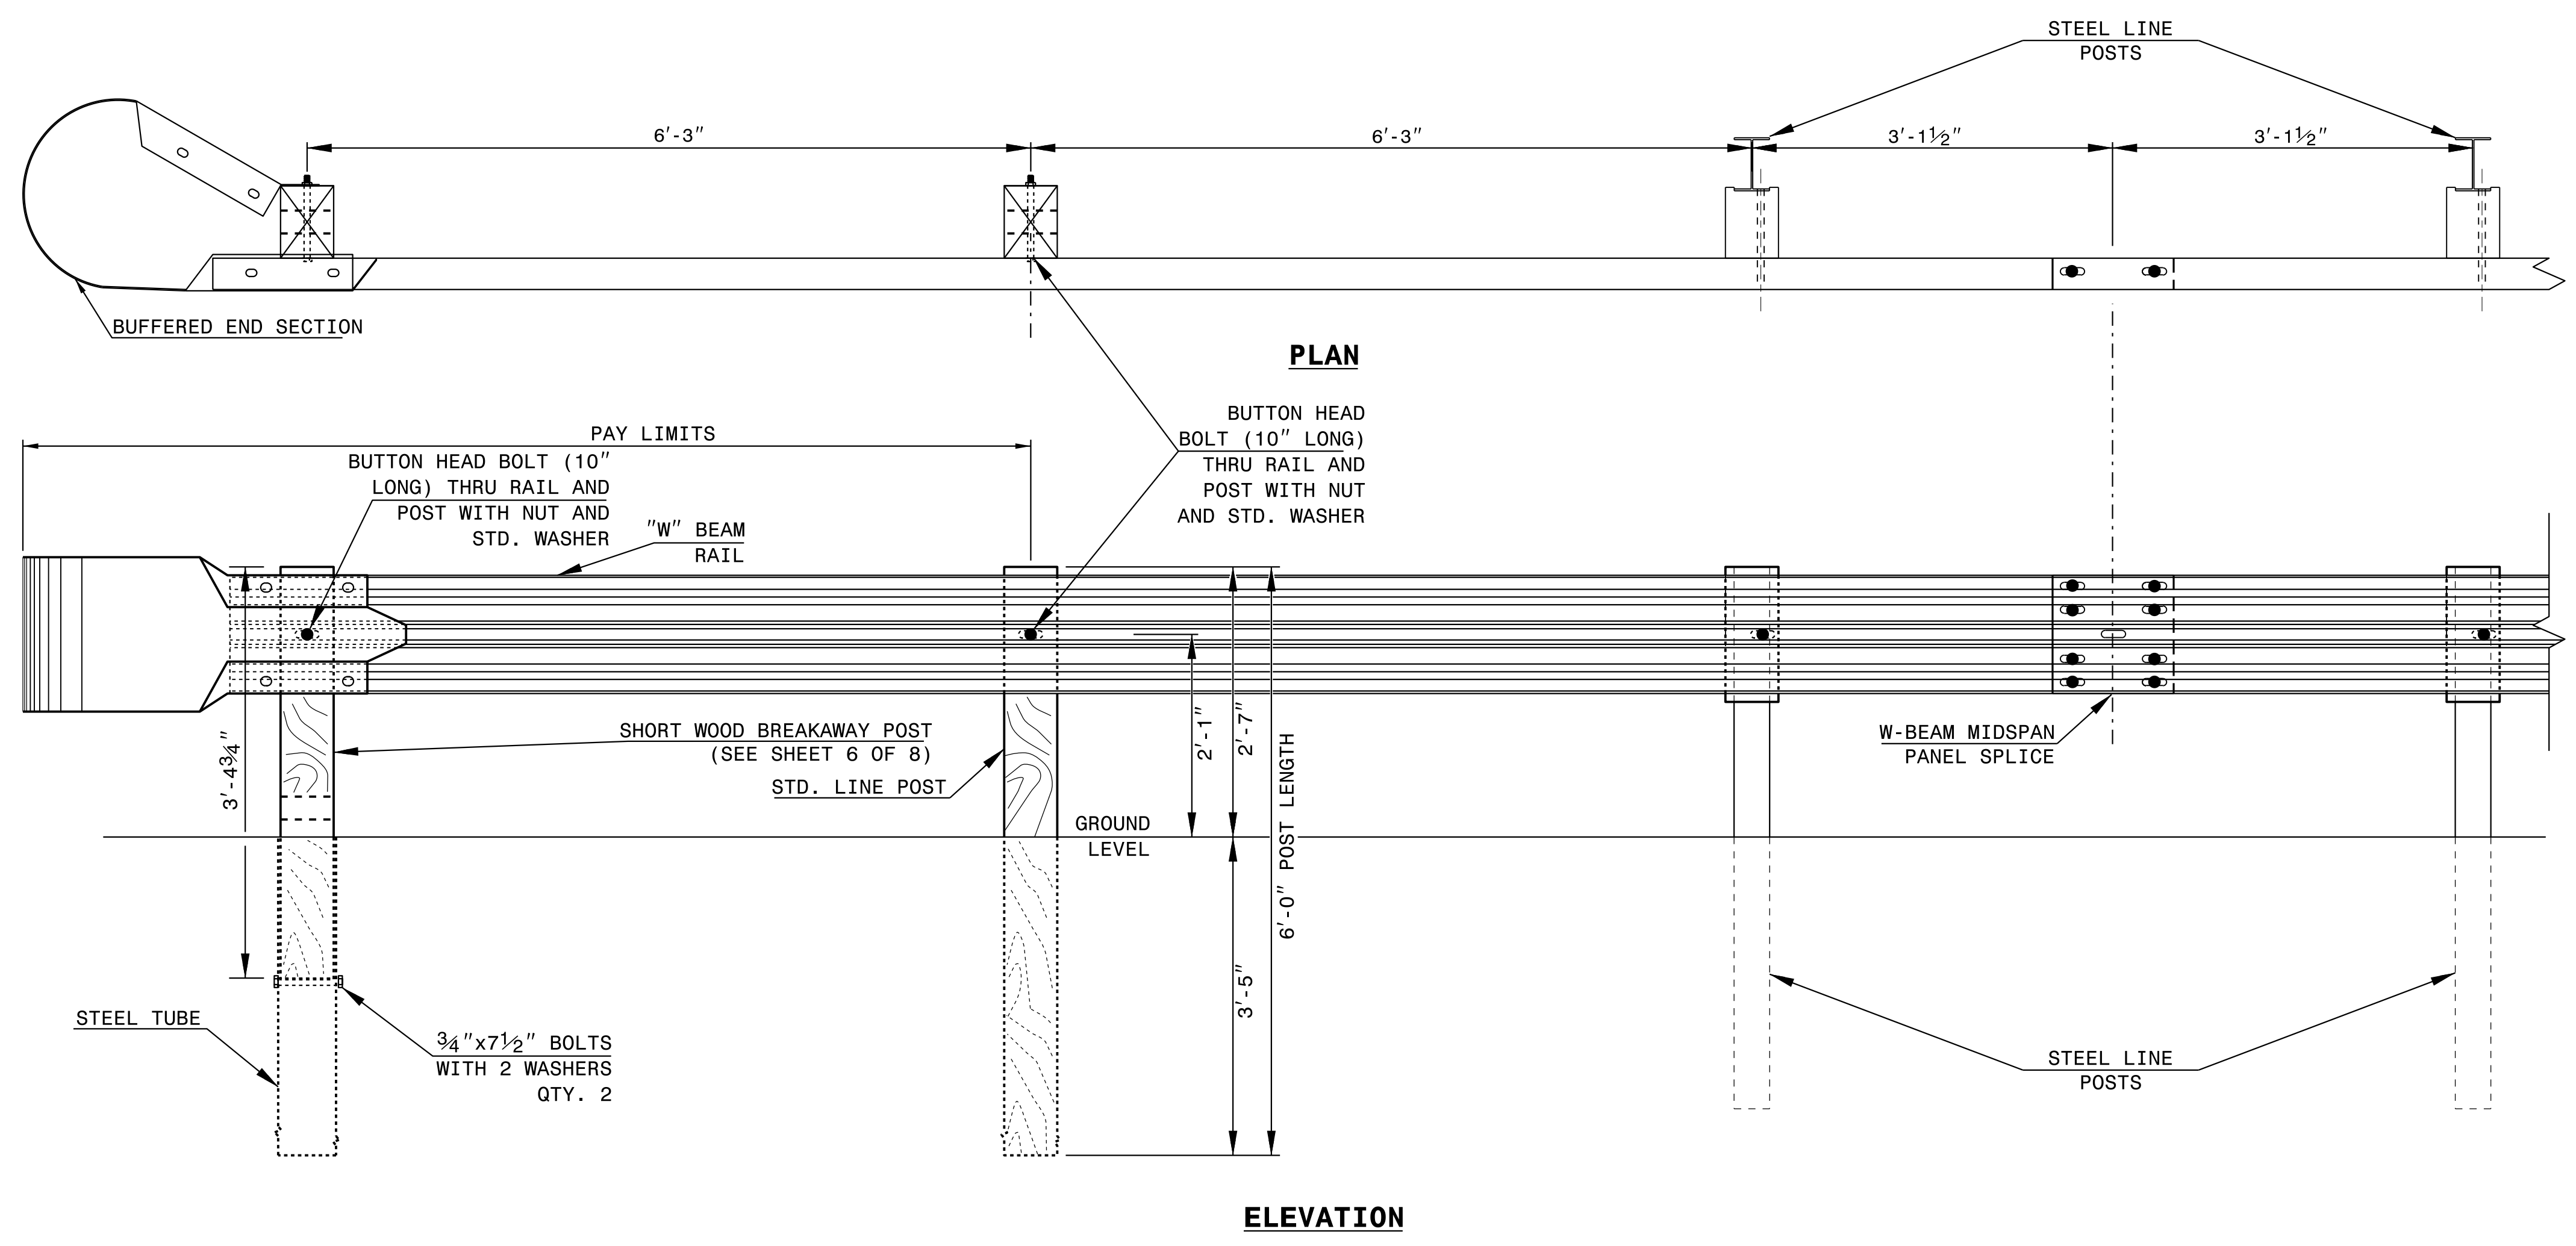

TRAILING END UNIT ASSEMBLY
A.T. - 1 SYSTEM

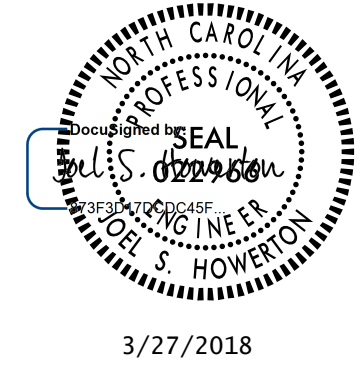

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

**CONTRACTS STANDARDS
AND DEVELOPMENT UNIT**
Office 919-707-6950 FAX 919-250-4119

A.T. - 1 SYSTEM

ORIGINAL BY: _____ DATE: _____
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC.: _____

STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.


STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

SPECIAL DETAIL FOR
GUARDRAIL PLACEMENT
25'-0" CLEAR SPAN


SPECIAL DETAIL FOR
GUARDRAIL PLACEMENT
25'-0" CLEAR SPAN

SHEET - OF -
862D01


SHEET - OF -
862D01

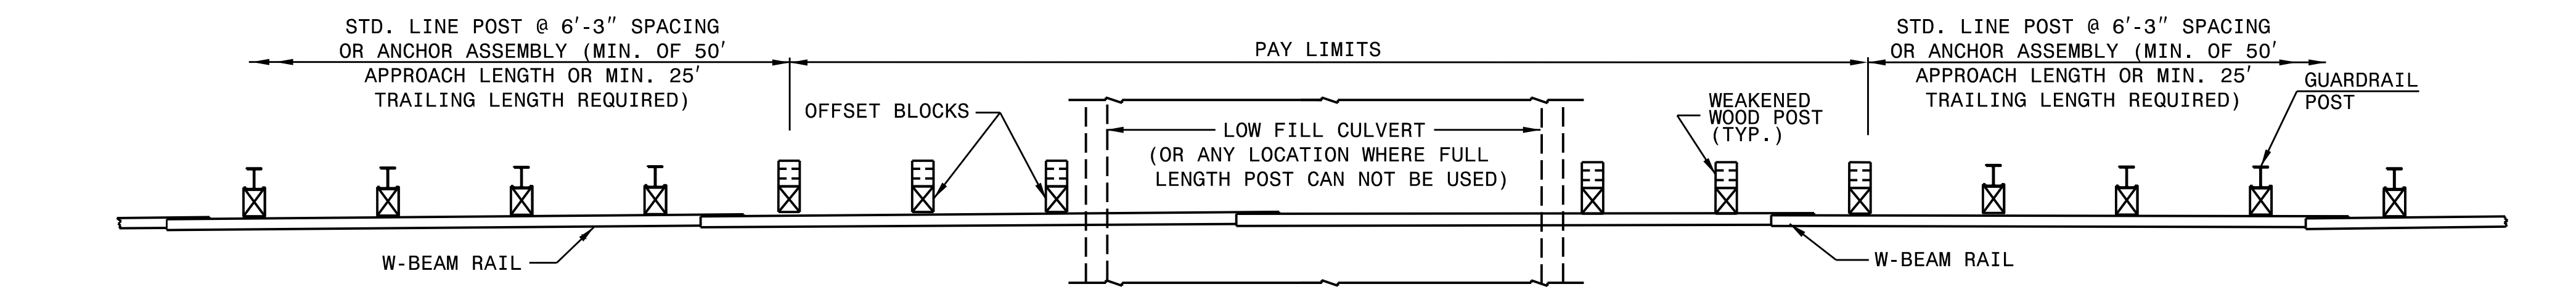


PLAN

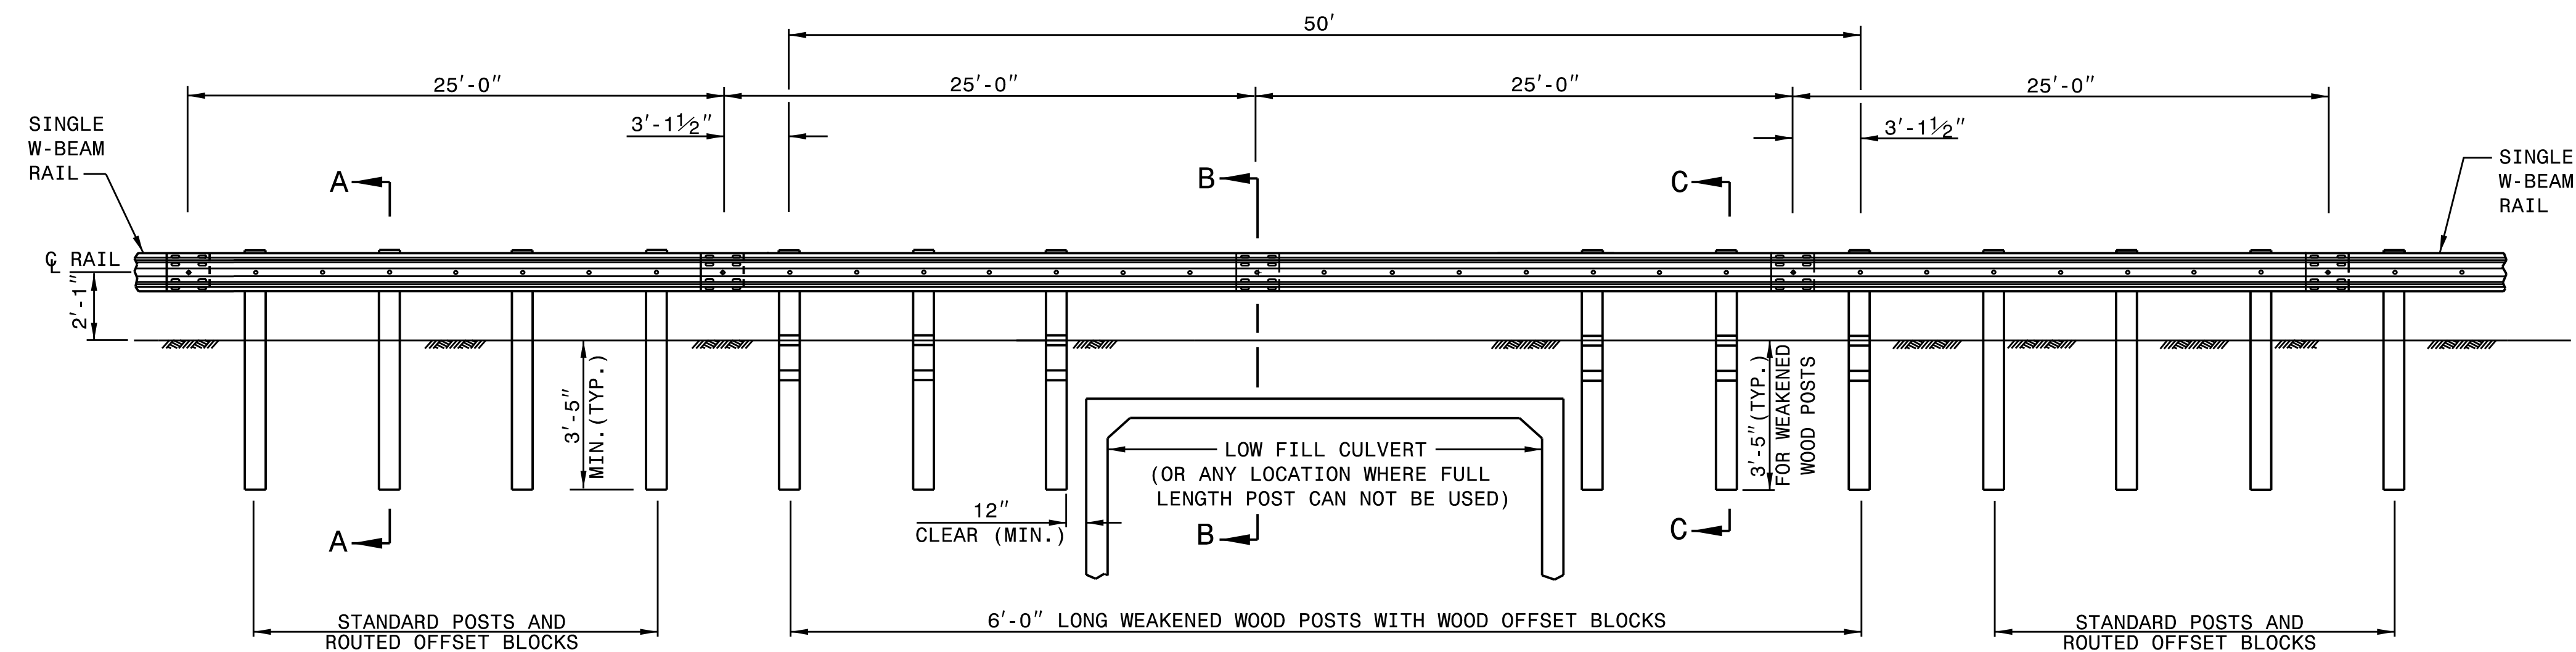


**ELEVATION
25'-0" GUARDRAIL SPAN**

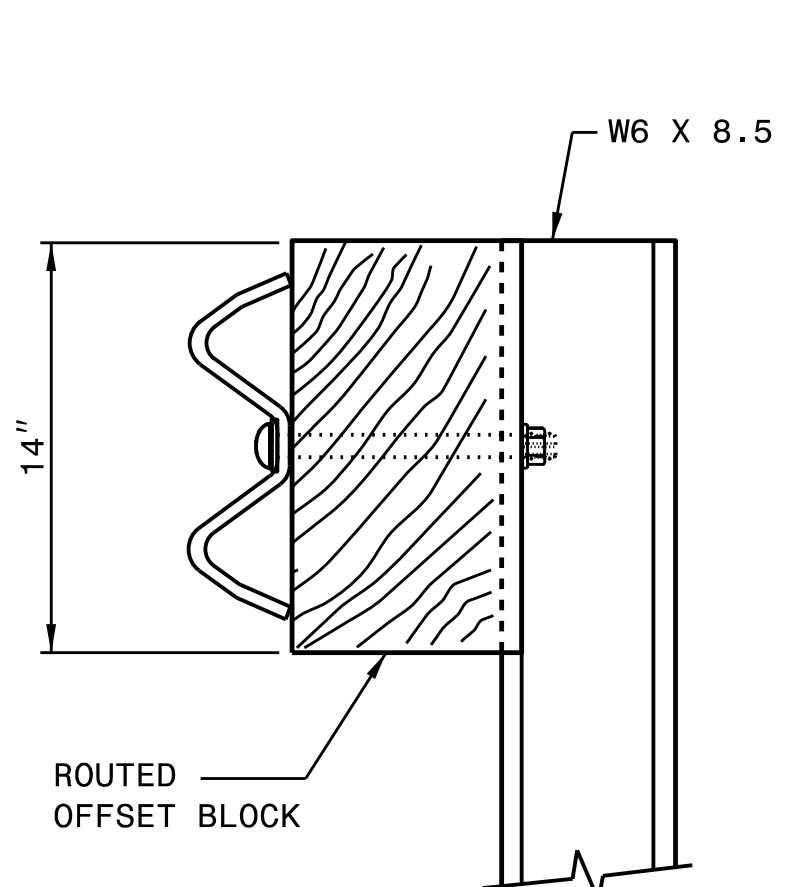

SECTION A-A

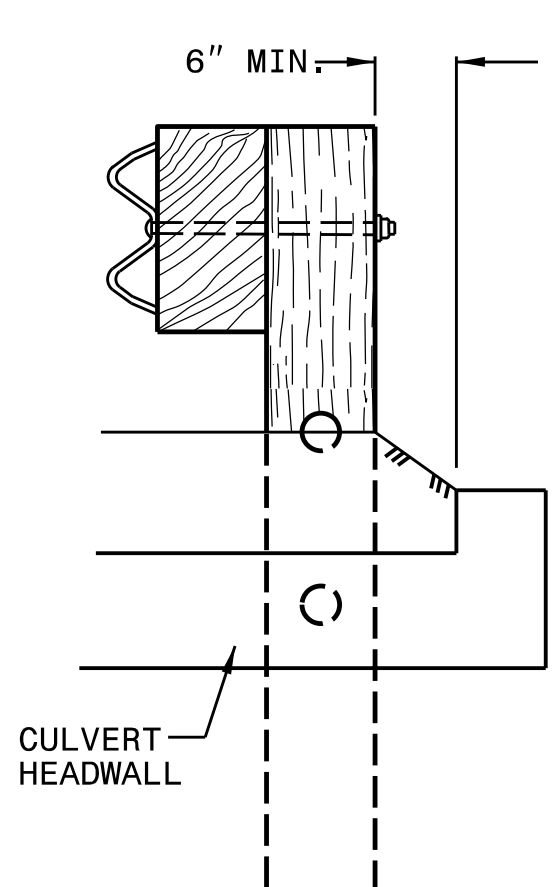


SECTION B-B

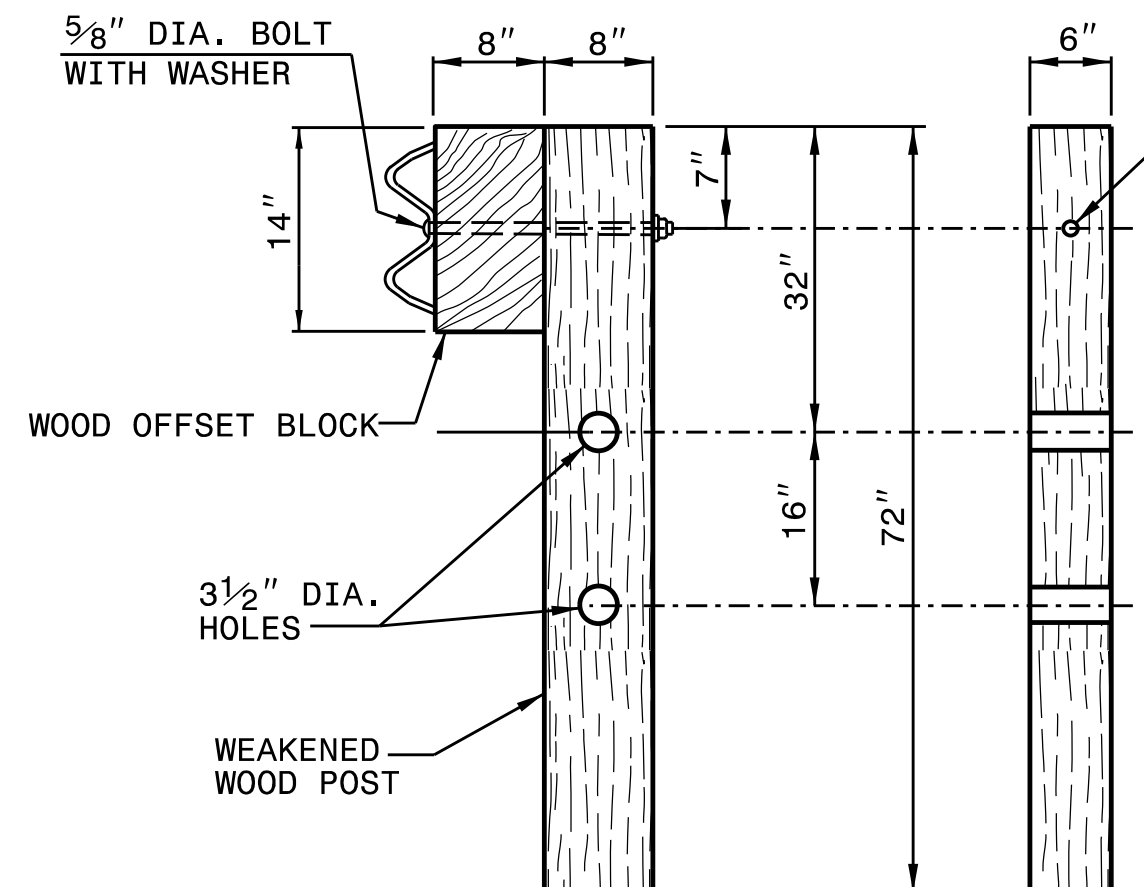

**SECTION C-C FRONT
WEAKENED WOOD POST**

- GENERAL NOTES:
1. LAP RAIL IN THE DIRECTION OF TRAFFIC FLOW.
2. SEE ROADWAY PLANS FOR LOCATIONS AND CONTINUATION OF RAIL OR END SECTIONS.
3. MINIMUM DISTANCE OF 5 FEET BEHIND THE GUARDRAIL SHOULD BE CLEAR OF ANY FIXED-OBJECT HAZARDS THAT COULD SNAG AN IMPACTING VEHICLE.

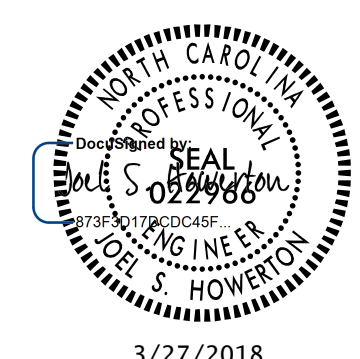

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

CONTRACTS STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

25'-0" CLEAR SPAN GUARDRAIL PLACEMENT

ORIGINAL BY: _____ DATE: _____
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC.: _____

12/06/07

COMPUTED BY: SMK DATE: 6-10-14
 CHECKED BY: JMT DATE: 10-30-14

SUMMARY OF EARTHWORK

STATION	STATION	UNCL. EXCAV.	EMBANK. +15%	BORROW	WASTE
PHASE I: DETOUR & DRIVES CONSTRUCTION					
-L- STA. 12 + 00.00	-L- STA. 14 + 50	39	821	782	
-DRIVE- STA. 10 + 34.73	-DRIVE- STA. 11 + 10	3	36	33	
-DRIVE2- STA. 10 + 10	-DRIVE2- STA. 11 + 07.97		320	320	
PHASE II: L CONSTRUCTION					
-L- STA. 10 + 81	-L- STA. 15 + 51	32	896	864	
PHASE III: DET. REMOVAL & GRADING					
-L- STA. 12 + 00	-L- STA. 14 + 50	595	31		564
SUMMARIES SUBTOTAL:		669	2104	1999	564
5% TO REPLACE TOPSOIL				100	
PROJECT TOTALS:		669	2104	2099	564
GRAND TOTALS:		669	2104	2099	564
SAY:		680		2100	

STATE OF NORTH CAROLINA
 DIVISION OF HIGHWAYS

PAVEMENT REMOVAL SUMMARY

SURVEY LINE	STATION	STATION	LOCATION L/R/CL	YD'
-L-	11 + 31.00	13 + 06.00	CL	343.58
-L-	13 + 10.00	15 + 01.00	CL	356.36
TOTAL:				699.94
SAY:				700.00

EST. UNDERCUT = 50 CY (CONTINGENCY)
 EST. SELECT GRANULAR MATERIAL = 50 CY (CONTINGENCY)
 EST. FABRIC FOR SOIL STABILIZATION = 50 SY (CONTINGENCY)

NOTE: APPROXIMATE QUANTITIES ONLY. UNCLASSIFIED EXCAVATION, FINE GRADING, CLEARING AND GRUBBING, AND REMOVAL OF EXISTING ASPHALT PAVEMENT WILL BE PAID OR AT THE CONTRACT LUMP SUM PRICE FOR "GRADING".

LIST OF TEMPORARY PIPES, ENDWALLS, ETC. (FOR PIPES 54" & OVER)

STATION	SIZE	THICKNESS OR GAUGE	LOCATION (L/RT, OR CL)	STRUCTURE NO.	TOP ELEVATION	INVERT ELEVATION	INVERT ELEVATION	SLOPE CRITICAL	CLASS III R.C. PIPE (UNLESS NOTED OTHERWISE)						BITUMINOUS COATED C.S. PIPE TYPE B				STRUCTURAL PLATE PIPE			REINFORCED ENDWALLS		MASONRY DRAINAGE STRUCTURES CUBIC YARDS	REINF. CONC. FLARED END SECTIONS NO. & SIZE	CORR. STEEL FLARED END SECTIONS NO. & SIZE	REINF. CONC. ELBOWS NO. & SIZE	CORR. STEEL ELBOWS NO. & SIZE	CONC. COLLARS CL "B" C.Y. STD 840.72	PIPE REMOVAL LIN. FT.	ABBREVIATIONS		REMARKS		
									54"	60"	66"	72"	78"	84"	54"	60"	66"	72"	60"	66"	72"	WITH R.C. - C.Y.	WITH C.S. - C.Y.								C.B.	N.D.I.		D.I.	G.D.I.
-LDET- STA. 12 + 56.00	CL					2397.86		0.5%					.109	.138	.168	.138	.168	.138	.168	.138	.168														95"x67" METAL ARCH CULVERT, L = 32'

"N" = DISTANCE FROM EDGE OF LANE TO FACE OF GUARDRAIL.
 TOTAL SHOULDER WIDTH = DISTANCE FROM EDGE OF TRAVEL LANE TO SHOULDER BREAK POINT.
 FLARE LENGTH = DISTANCE FROM LAST SECTION OF PARALLEL GUARDRAIL TO END OF GUARDRAIL.
 W = TOTAL WIDTH OF FLARE FROM BEGINNING OF TAPER TO END OF GUARDRAIL.
 G = GATING IMPACT ATTENUATOR TYPE 350
 NG = NON-GATING IMPACT ATTENUATOR TYPE 350

GUARDRAIL SUMMARY

SURVEY LINE	BEG. STA.	END STA.	LOCATION	LENGTH			WARRANT POINT		"N" DIST. FROM E.O.L.	TOTAL SHOUL. WIDTH	FLARE LENGTH		W		ANCHORS				IMPACT ATTENUATOR TYPE 350			SINGLE FACED GUARDRAIL	REMOVE EXISTING GUARDRAIL	REMOVE AND STOCKPILE EXISTING GUARDRAIL	REMARKS
				STRAIGHT	SHOP CURVED	DOUBLE FACED	APPROACH END	TRAILING END			APPROACH END	TRAILING END	GREU TL-2	AT-1	EA	G	NG								
-L-	11 + 94.37	13 + 19.37	LT.	125.00'	37.50'		13 + 11.23 (HEADWALL)	12 + 80.03 (HEADWALL)	3'	6'															10' RADIUS W-BEAM SHOP CURVED SECTION
-L-	11 + 87.50	14 + 00.00	RT.	212.50'			13 + 18.18 (HEADWALL)	13 + 50.00	3'	6'	25'	25'	0.5'	0.5'											
SUBTOTAL				337.50'	37.50'																				
ANCHOR DEDUCTION				75.00'	6.25'																				
TOTAL				262.50'	31.25'																				
SAY				275.00'	31.25'																				

TEMPORARY GUARDRAIL SUMMARY

SURVEY LINE	BEG. STA.	END STA.	LOCATION	LENGTH			WARRANT POINT		"N" DIST. FROM E.O.L.	TOTAL SHOUL. WIDTH	FLARE LENGTH		W		ANCHORS				IMPACT ATTENUATOR TYPE 350			SINGLE FACED GUARDRAIL	REMOVE EXISTING GUARDRAIL	REMOVE AND STOCKPILE EXISTING GUARDRAIL	REMARKS	
				STRAIGHT	SHOP CURVED	DOUBLE FACED	APPROACH END	TRAILING END			APPROACH END	TRAILING END	GREU TL-2	EA	G	NG										
-LDET-	12 + 04.90	13 + 17.40	RT.	112.50'			12 + 61.06 (HEADWALL)	12 + 67.40 (HEADWALL)	1'	3'	25'	25'	0.5'	0.5'												
-LDET-	11 + 93.26	13 + 05.76	LT.	112.50'			12 + 50.16 (HEADWALL)	12 + 43.26 (HEADWALL)	1'	3'	25'	25'	0.5'	0.5'												
SUBTOTAL				225.00'																						
ANCHOR DEDUCTION				100.00'																						
TOTAL				125.00'																						
SAY				137.50'																						

12 DEC 2017 10:18 AM \\870137_RdL_sam.dgn

8/17/19

BRIDGE NO. 137

PROJECT REFERENCE NO. 17BP14RJ22	SHEET NO. 4
ROADWAY DESIGN ENGINEER SEAL 030952 3/30/2018	HYDRAULICS ENGINEER SEAL 030952 3/27/2018

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

-L- CURVE DATA

PI Sta 11+12.53 Δ = 36° 37' 36.4" (RT) D = 16' 5' 06.1" L = 217.35' T = 112.53' R = 340.00' V = 35 MPH SE = 06	PI Sta 14+50.87 Δ = 27° 59' 36.4" (LT) D = 12' 43' 56.6" L = 219.86' T = 112.17' R = 450.00' V = 35 MPH SE = 06
---	--

-DRIVE- CURVE DATA

PI Sta 10+34.07 Δ = 9° 28' 44.1" (LT) D = 39' 34' 57.3" L = 23.95' T = 12.00' R = 144.75'	PI Sta 10+88.96 Δ = 69° 29' 51.4" (RT) D = 226' 54' 50.3" L = 306.3' T = 17.52' R = 25.25'
--	---



-DRIVE2- CURVE DATA

PI Sta 10+32.25 Δ = 44° 31' 54.5" (RT) D = 190' 59' 09.4" L = 23.32' T = 12.28' R = 30.00'


-LDET- CURVE DATA

PI Sta 10+81.05 Δ = 48° 13' 57.5" (RT) D = 35' 48' 35.5" L = 134.69' T = 71.63' R = 160.00' V = 25 MPH SE = 02	PI Sta 12+38.61 Δ = 55° 23' 43.0" (LT) D = 31' 49' 51.6" L = 174.03' T = 94.49' R = 180.00' V = 25 MPH SE = 02
---	---

FOR DETOUR PLANS, SEE SHEET 2B-2
FOR CULVERT PLANS, SEE SHEET C-1 THRU C-3

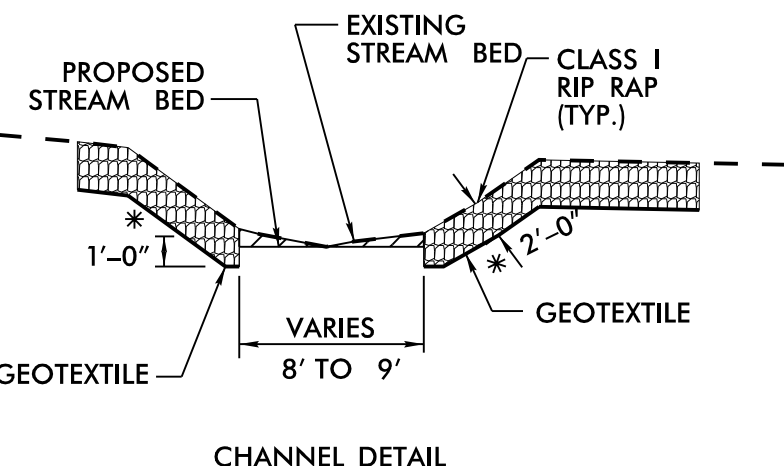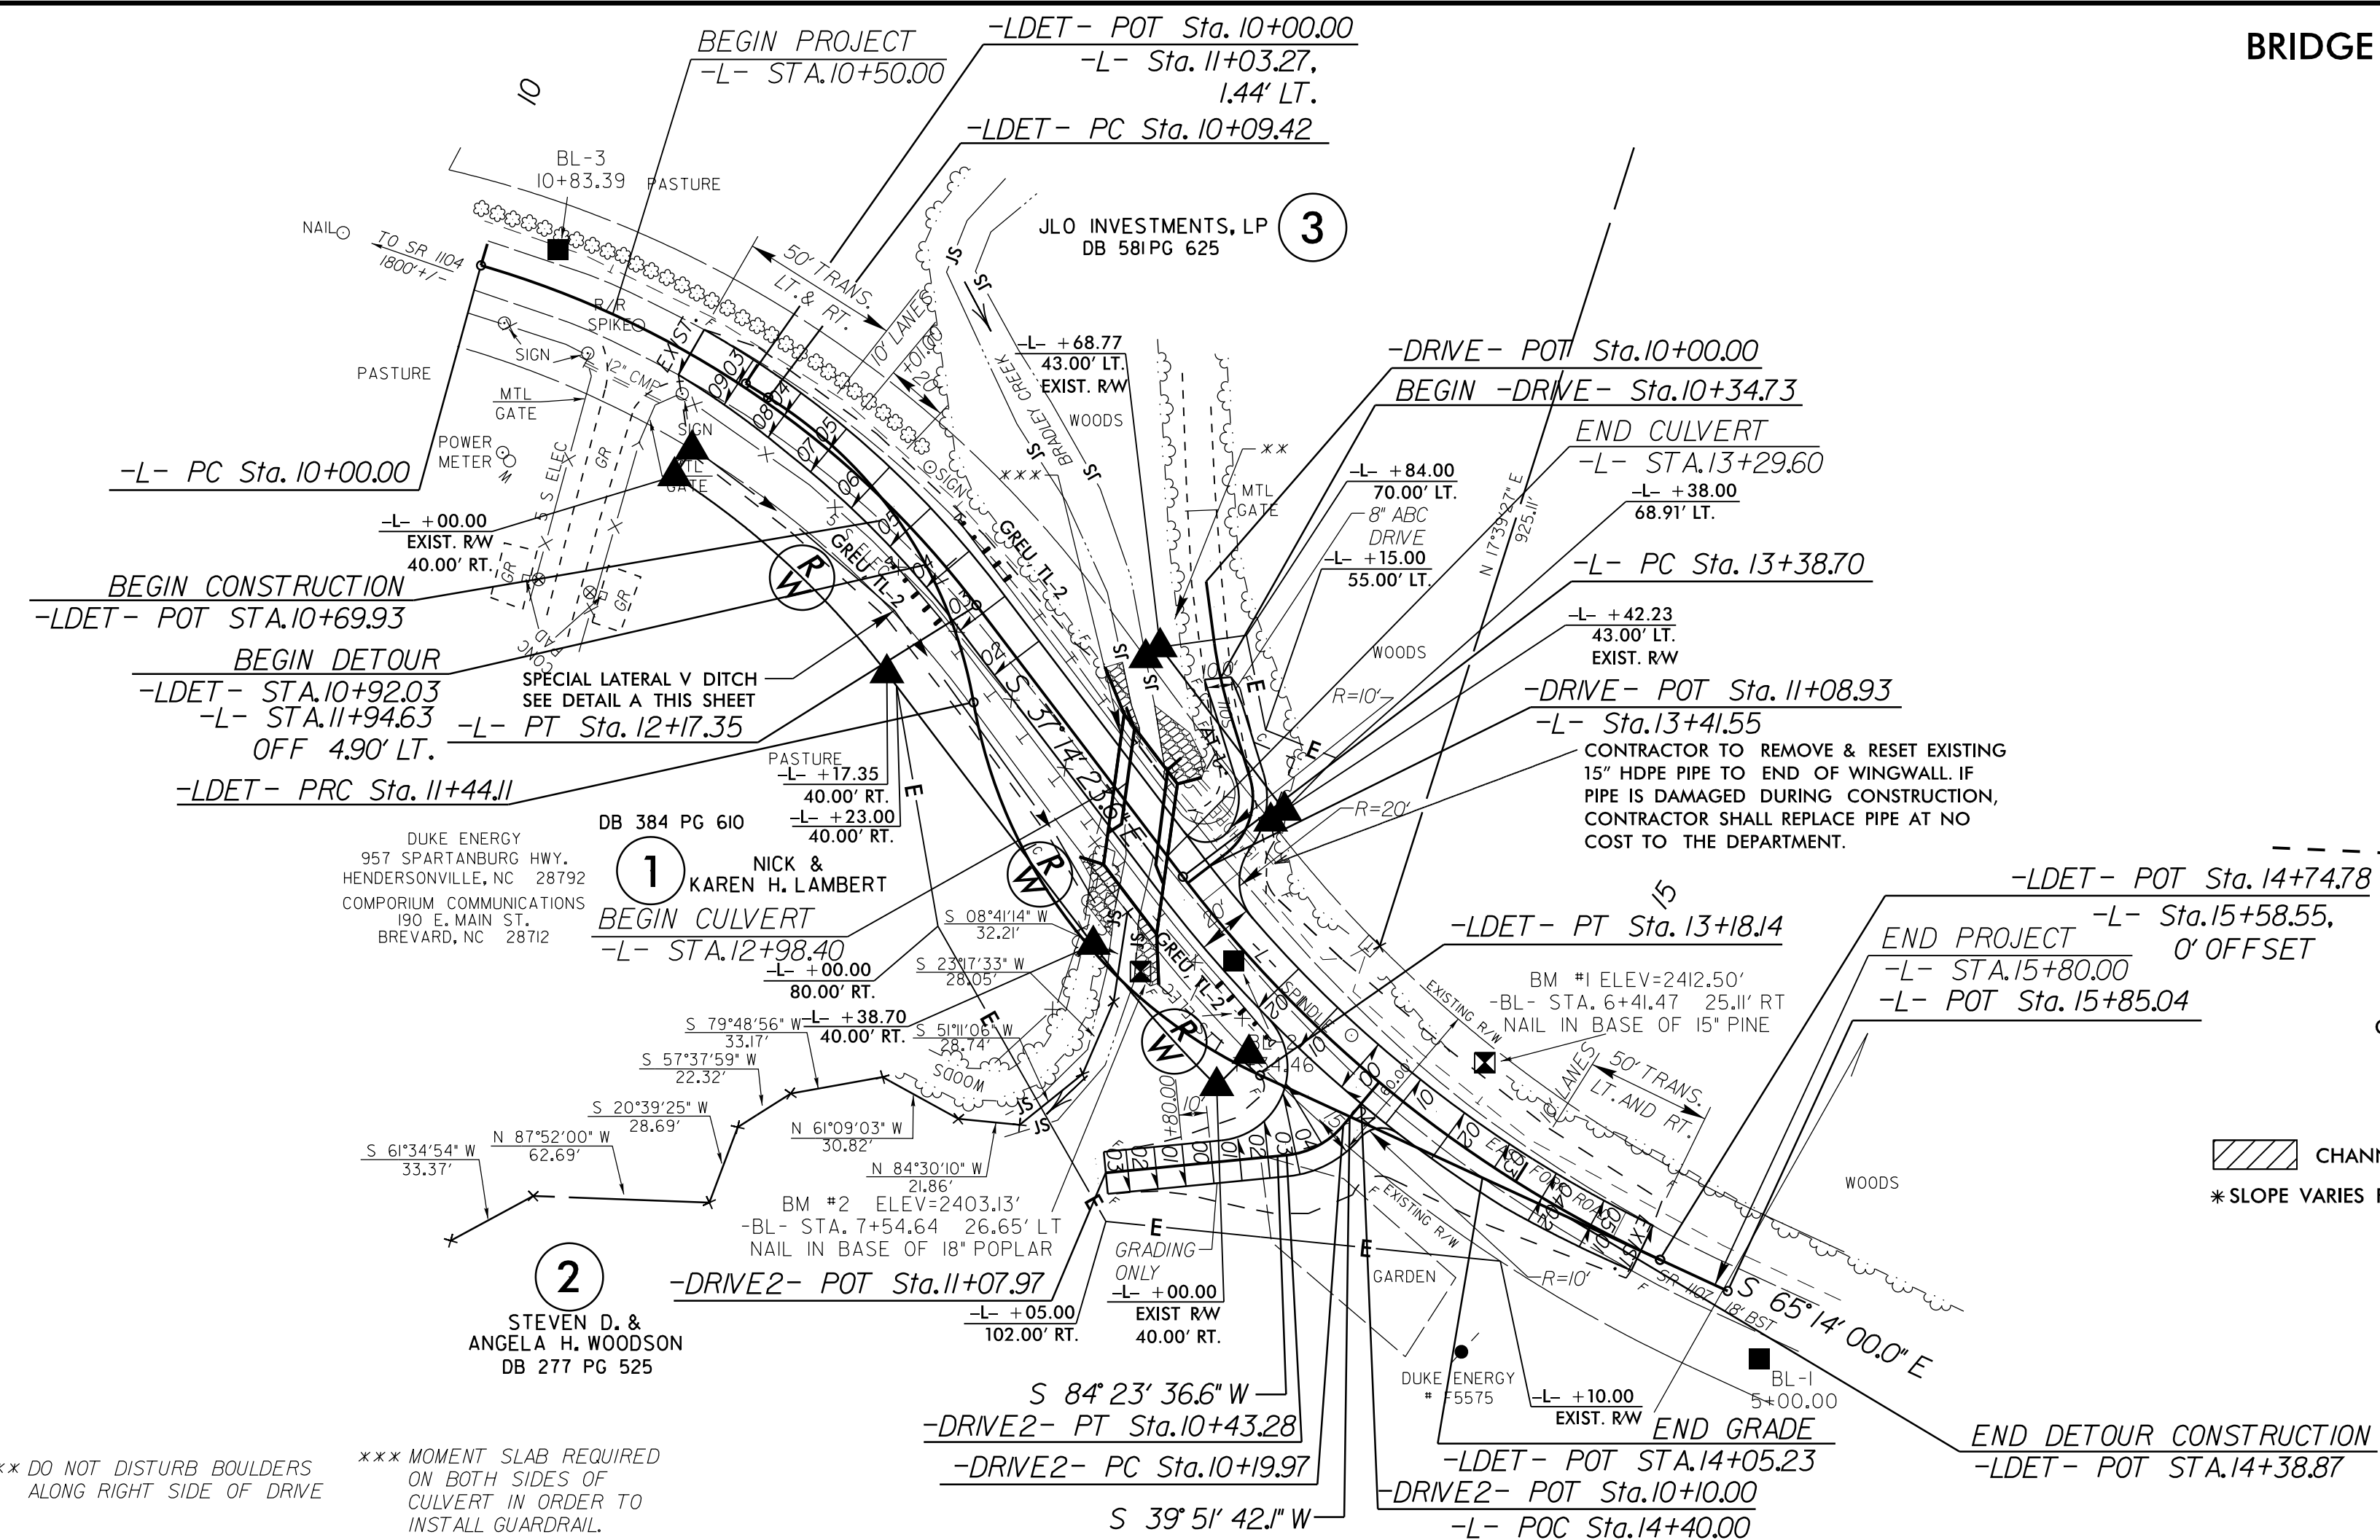


CHANNEL EXCAVATION
*SLOPE VARIES FROM 2:1 TO EXISTING
EST. CLASS I RIP RAP = 86 TONS (STR. PAY ITEM)
EST. GEOTEXTILE = 77 SY (STR. PAY ITEM)

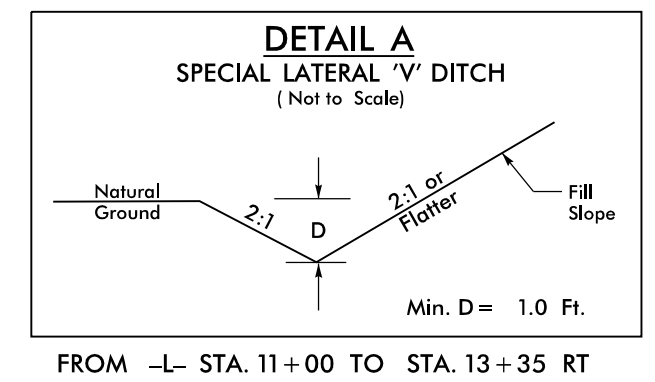

REVISIONS

01-MAR-2018 14:20
 X:\10333185\000 Division 14 YR4 17BP Bridges Group 4\10333185\137 Bridge 870137\Project Production\Design\Roadway\Proj\870137_Rdy_psh.dgn
 8/17/19

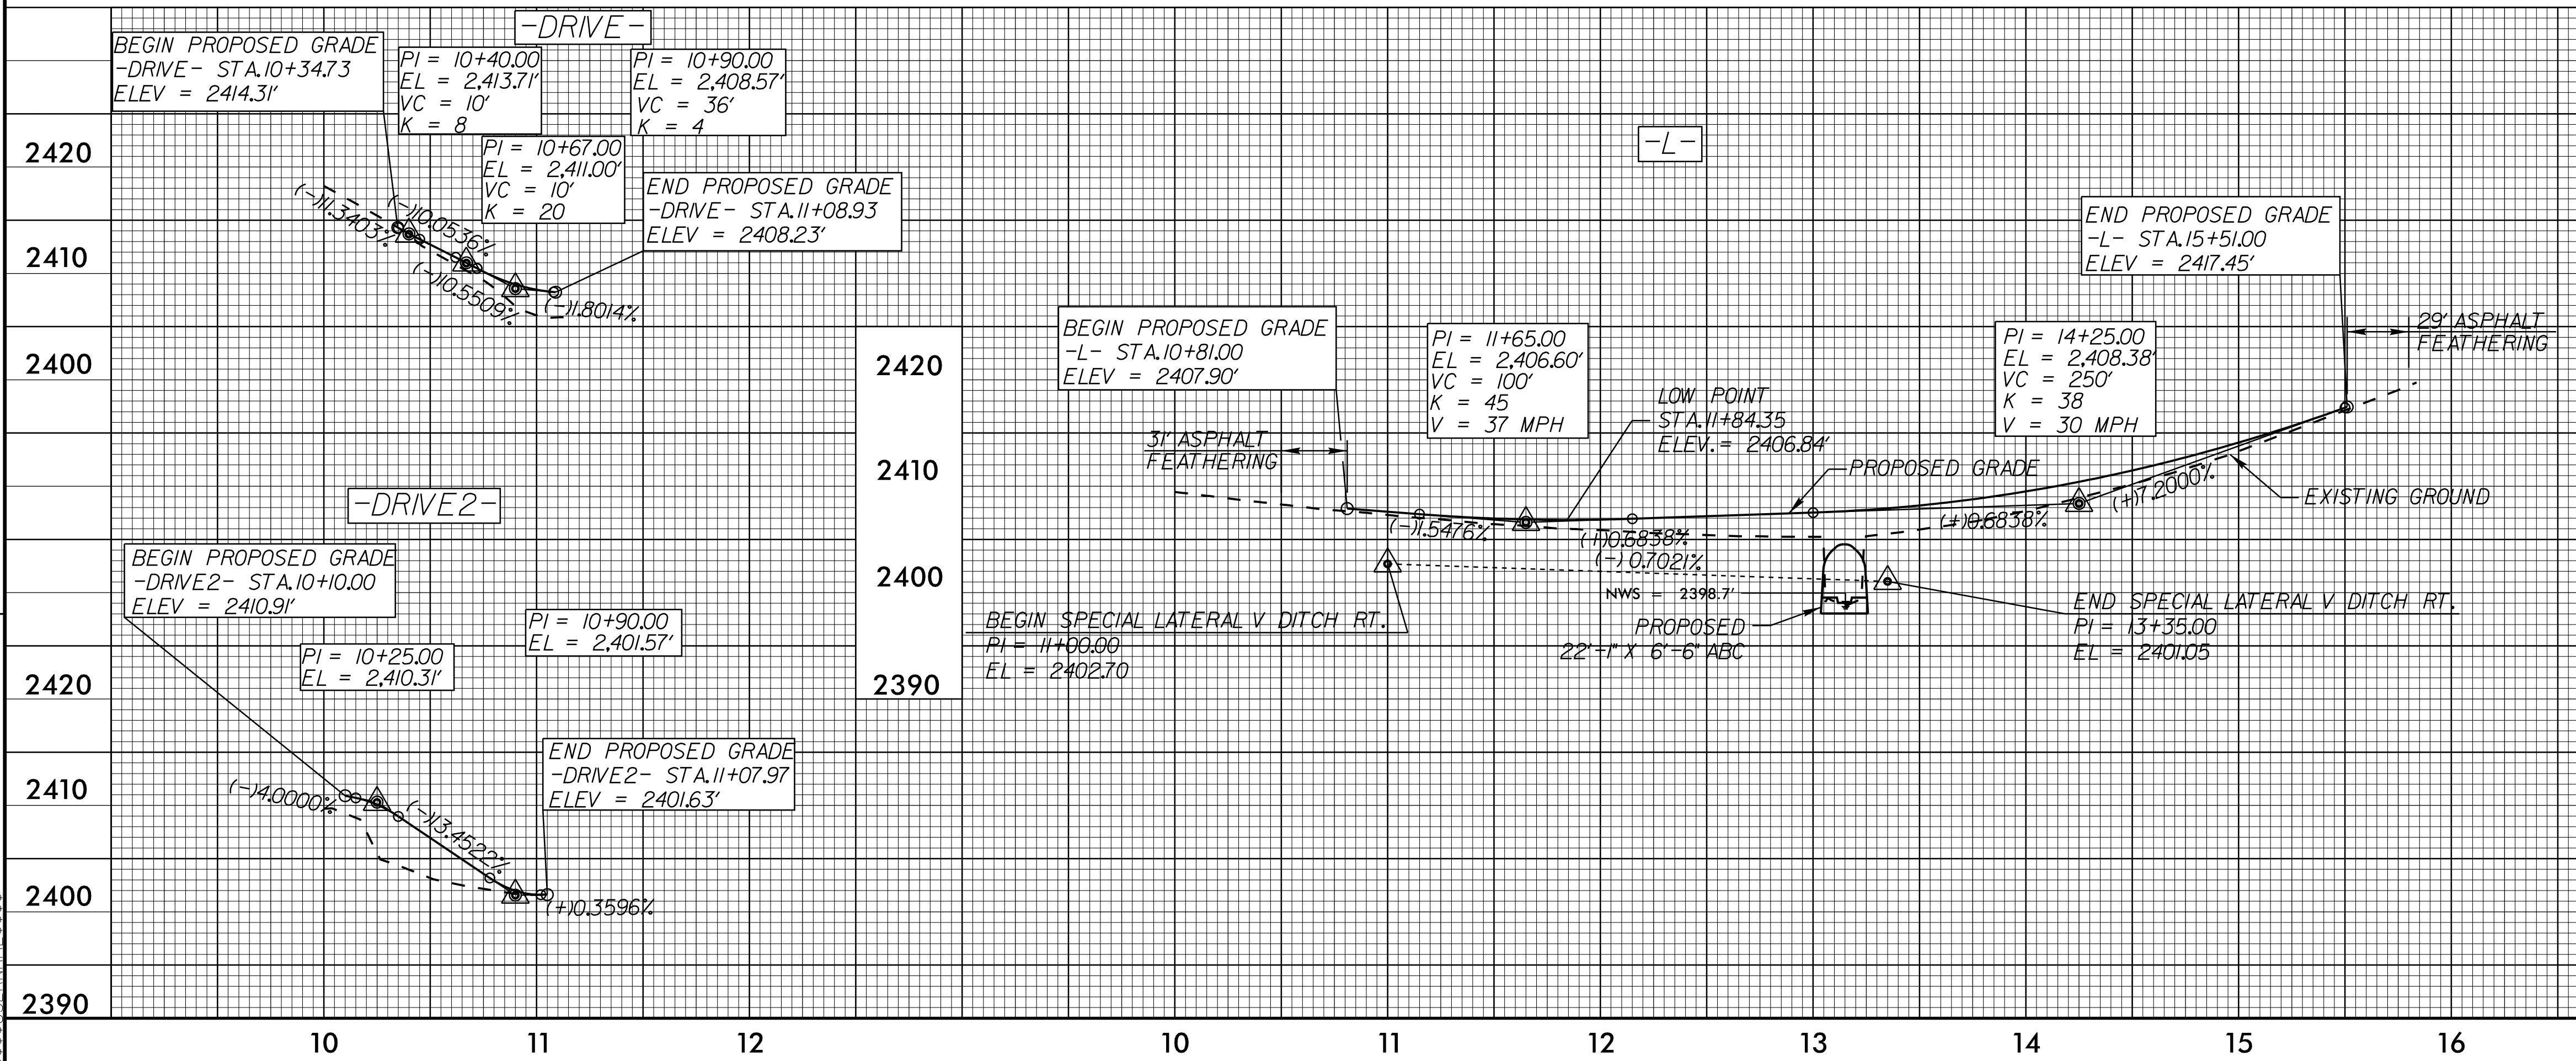

CULVERT HYDRAULIC DATA

DESIGN DISCHARGE	= 550	CFS
DESIGN FREQUENCY	= 25	YRS
DESIGN HW ELEVATION	= 2403.4	FT
BASE DISCHARGE	= 800	CFS
BASE FREQUENCY	= 100	YRS
BASE HW ELEVATION	= 2405.29	FT
OVERTOPPING DISCHARGE	= 930	CFS
OVERTOPPING FREQUENCY	= 100+	YRS
OVERTOPPING ELEVATION	= 2406.8	FT

BM #1
NAIL IN BASE OF 15" PINE
-BL- STA.6+41.47 25.11' RIGHT
-L- STA.14+66.07 28.68' LEFT
ELEV. = 2412.50'




BM #2
R/R NAIL IN BASE OF 18" POPLAR
-BL- STA.7+54.64 26.65' LEFT
-L- STA.13+55.20 32.73' RIGHT
ELEV. = 2403.13'

RIGHT DITCH -----

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

TRANSPORTATION MANAGEMENT PLAN

TRANSYLVANIA COUNTY

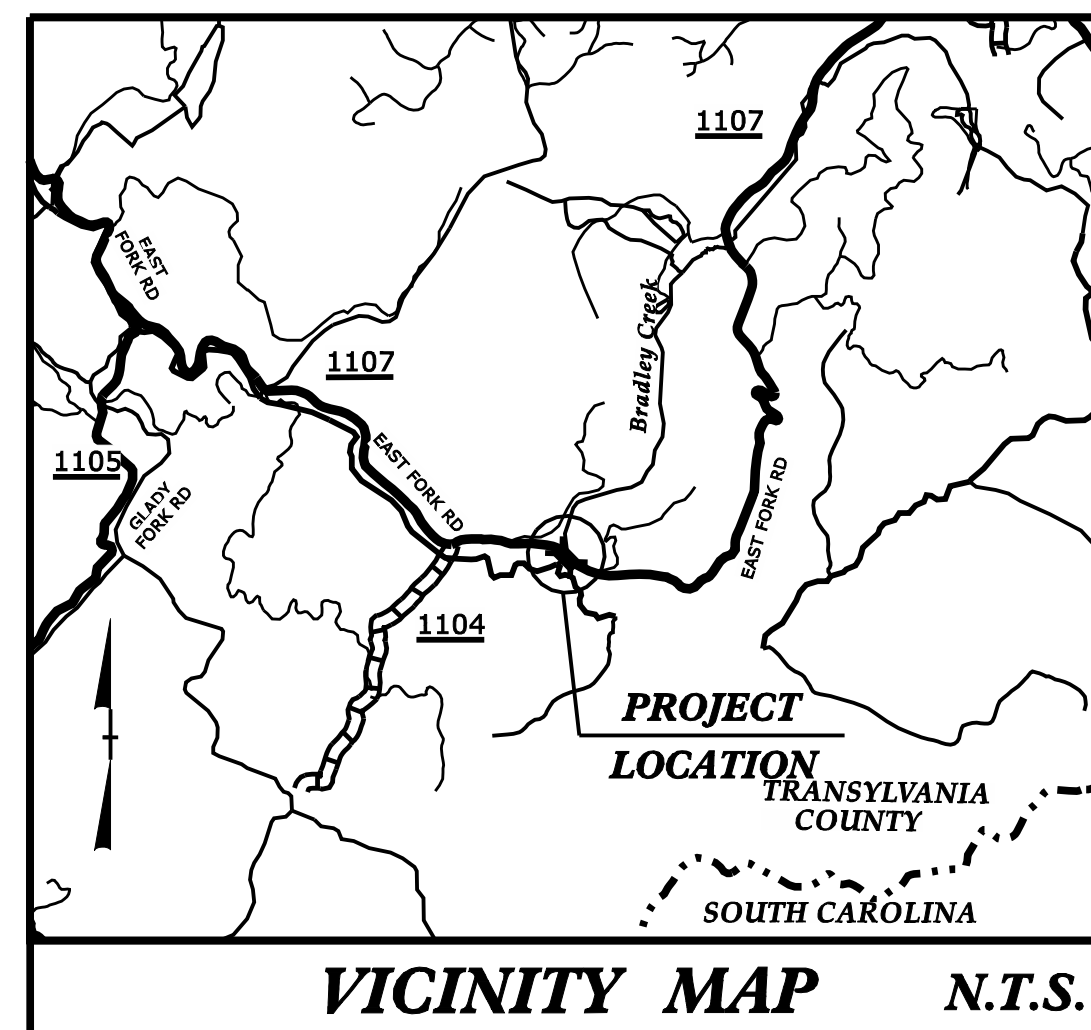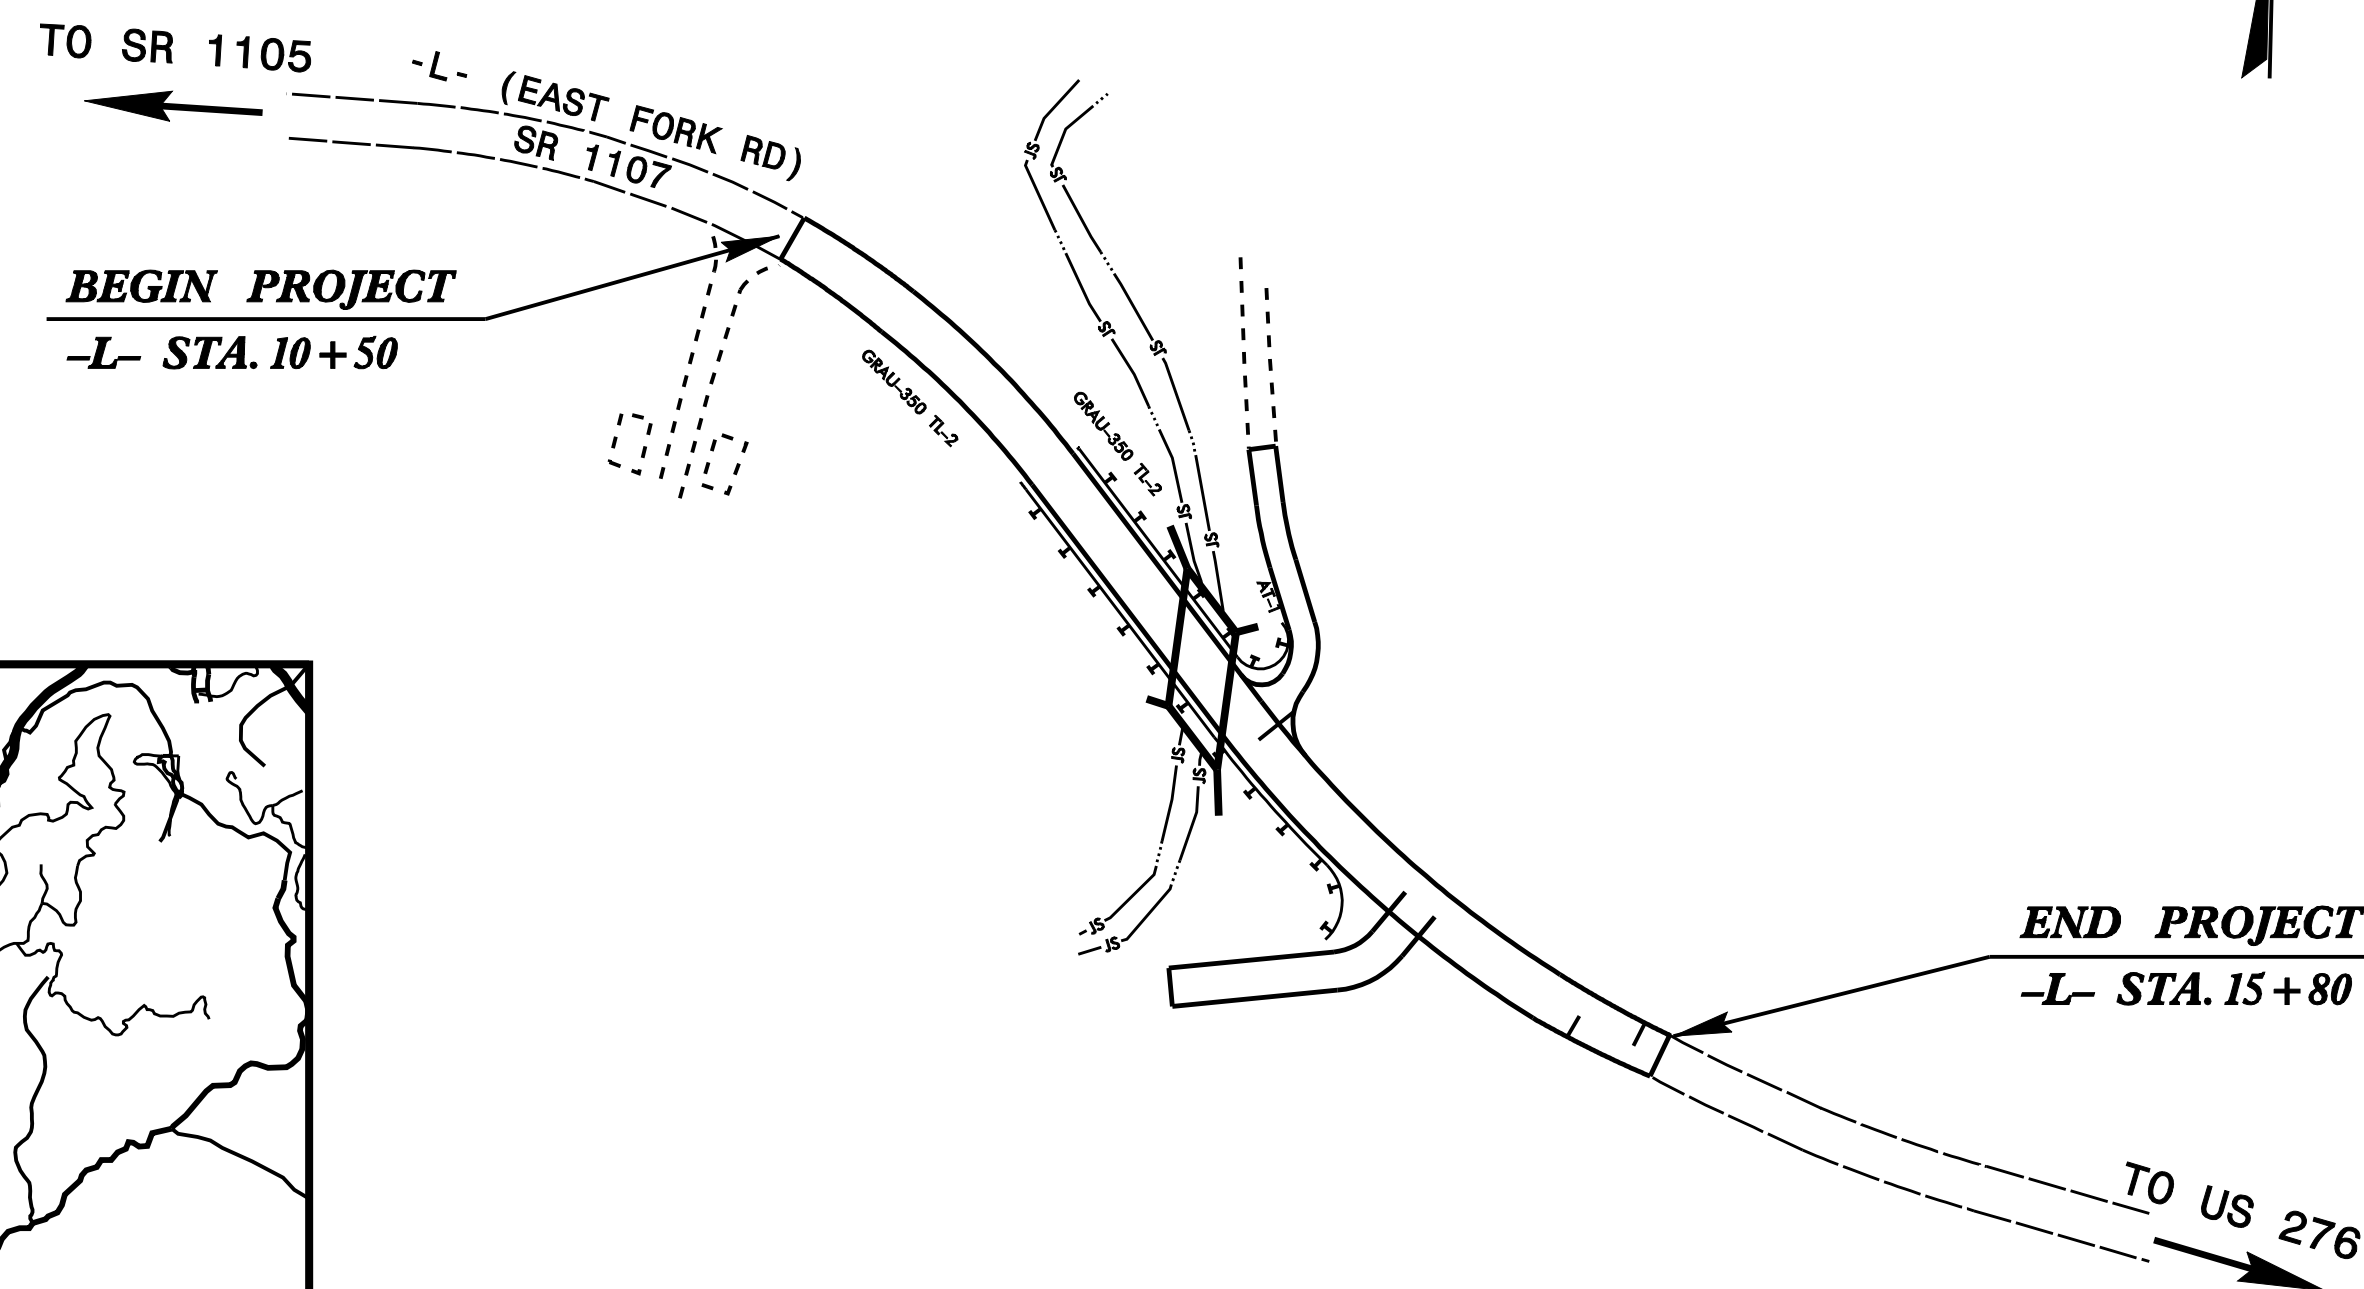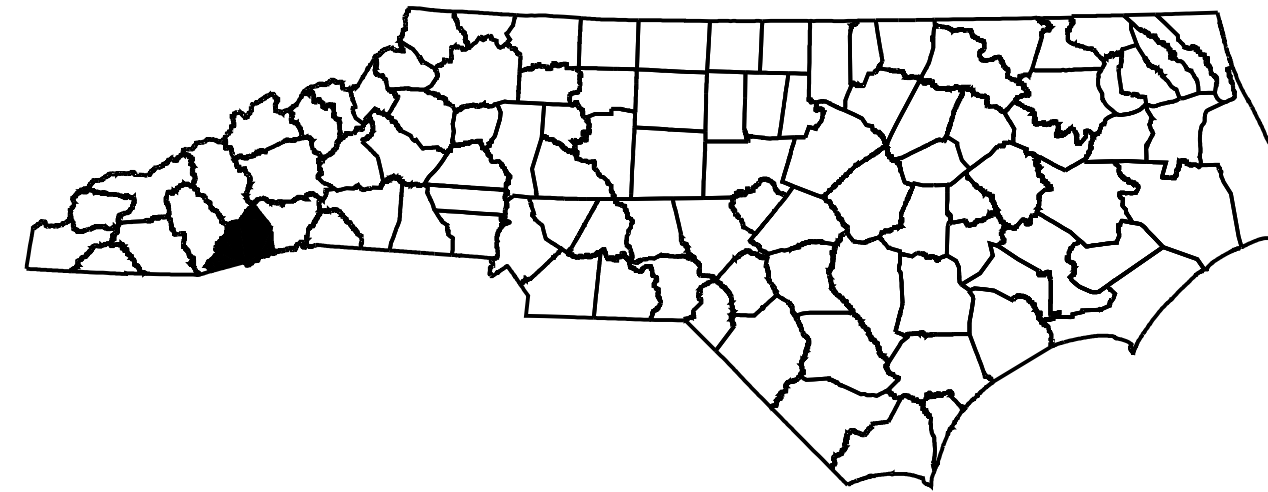

INDEX OF SHEETS


SHEET NO.	TITLE
TMP-1	TITLE SHEET, VICINITY MAP AND INDEX OF SHEETS
TMP-1A	LIST OF APPLICABLE ROADWAY STANDARD DRAWINGS AND LEGEND
TMP-1B	TRANSPORTATION OPERATIONS PLAN: (PROJECT NOTES AND PHASING)
TMP-2	TEMPORARY TRAFFIC CONTROL PHASE DETAILS

SHEET NO.
TMP-1

17BP.14.R.122


WBS ELEMENT:

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

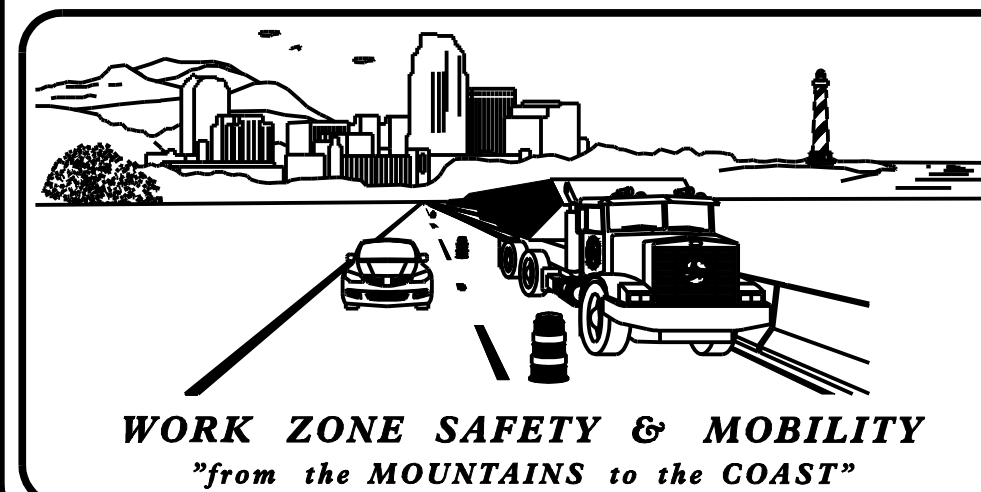

N.C.D.O.T. WORK ZONE TRAFFIC CONTROL
1561 MAIL SERVICE CENTER (MSC) RALEIGH, NC 27699-1561
750 N. GREENFIELD PARKWAY, GARNER, NC 27529 (DELIVERY)
PHONE: (919) 773-2800 FAX: (919) 771-2745

- _____ STATE TRAFFIC MANAGEMENT ENGINEER
- _____ TRAFFIC CONTROL PROJECT ENGINEER
- _____ TRAFFIC CONTROL PROJECT DESIGN ENGINEER
- _____ TRAFFIC CONTROL DESIGN ENGINEER

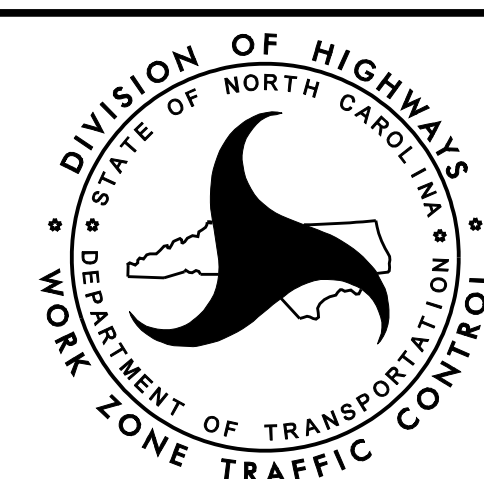

Prepared In the Office of:

PROGRESSIVE
DESIGN GROUP, INC.

ENGINEERS • CONSULTANTS

APPROVED: Tim Arrey
DATE: 11/20/2018

SEAL

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS SHOWN IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1101.01	WORK ZONE ADVANCE WARNING SIGNS FOR TWO-WAY UNDIVIDED FACILITIES
1101.02	TEMPORARY LANE CLOSURES
1101.04	TEMPORARY SHOULDER CLOSURES
1101.05	WORK ZONE VEHICLE ACCESSES
1101.11	TRAFFIC CONTROL DESIGN TABLES
1110.01	STATIONARY WORK ZONE SIGNS
1110.02	PORTABLE WORK ZONE SIGNS
1115.01	FLASHING ARROW BOARDS
1130.01	DRUMS
1135.01	CONES
1145.01	BARRICADES
1150.01	FLAGGERS
1160.01	TEMPORARY CRASH CUSHION
1165.01	TRUCK MOUNTED ATTENUATOR
1170.01	PORTABLE CONCRETE BARRIER
1180.01	SKINNY DRUMS
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTI-LANE ROADWAYS
1250.01	RAISED PAVEMENT MARKERS - INSTALLATION SPACING
1251.01	RAISED PAVEMENT MARKERS - PERMANENT AND TEMPORARY
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES AND MOUNTING
1262.01	GUARDRAIL END DELINEATION

LEGEND

GENERAL

- DIRECTION OF TRAFFIC FLOW
- DIRECTION OF PEDESTRIAN TRAFFIC FLOW
- EXIST. PVMT.
- NORTH ARROW
- PROPOSED PVMT.
- TEMP. SHORING (LOCATION PURPOSES ONLY)

- WORK AREA
- REMOVAL
- TEMPORARY PAVEMENT WEDGING

PAVEMENT MARKINGS

- EXISTING LINES
- TEMPORARY LINES

TRAFFIC CONTROL DEVICES

- BARRICADE (TYPE III)
- CONE
- DRUM SKINNY DRUM TUBULAR MARKER
- TEMPORARY CRASH CUSHION
- FLASHING ARROW BOARD
- FLAGGER
- LAW ENFORCEMENT
- TRUCK MOUNTED ATTENUATOR (TMA)
- CHANGEABLE MESSAGE SIGN
- TRAFFIC SIGNAL

TEMPORARY SIGNING

- PORTABLE SIGN
- STATIONARY SIGN
- STATIONARY OR PORTABLE SIGN

PAVEMENT MARKERS

- CRYSTAL/CRYSTAL
- CRYSTAL/RED
- YELLOW/YELLOW

PAVEMENT MARKING SYMBOLS

- PAVEMENT MARKING SYMBOLS

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

PLAN PREPARED IN THE OFFICE OF:

PROGRESSIVE
DESIGN GROUP, INC.

ENGINEERS • CONSULTANTS

APPROVED: Tim Arvey DATE: 1/20/2018

SEAL

ROADWAY STANDARD
DRAWINGS & LEGEND

GENERAL NOTES

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS, AND ROADWAY DETAILS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS OR RESULT IN DUPLICATE OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING, OR REMOVAL OF DEVICES AS DIRECTED BY THE ENGINEER.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT EXCEPT WHEN OTHERWISE NOTED IN THE PLAN OR DIRECTED BY THE ENGINEER.

LANE AND SHOULDER CLOSURE REQUIREMENTS

- A) REMOVE LANE CLOSURE DEVICES FROM THE LANE WHEN WORK IS NOT BEING PERFORMED BEHIND THE LANE CLOSURE OR WHEN A LANE CLOSURE IS NO LONGER NEEDED OR AS DIRECTED BY THE ENGINEER.
- B) WHEN PERSONNEL AND/OR EQUIPMENT ARE WORKING WITHIN 15 FT OF AN OPEN TRAVEL LANE, CLOSE THE NEAREST OPEN SHOULDER USING ROADWAY STANDARD DRAWING NO. 1101.04 UNLESS THE WORK AREA IS PROTECTED BY BARRIER OR GUARDRAIL OR A LANE CLOSURE IS INSTALLED.
- C) WHEN PERSONNEL AND/OR EQUIPMENT ARE WORKING ON THE SHOULDER ADJACENT TO AN UNDIVIDED FACILITY AND WITHIN 5 FT OF AN OPEN TRAVEL LANE, CLOSE THE NEAREST OPEN TRAVEL LANE USING ROADWAY STANDARD DRAWING NO. 1101.02 UNLESS THE WORK AREA IS PROTECTED BY BARRIER OR GUARDRAIL.
- D) WHEN PERSONNEL AND/OR EQUIPMENT ARE WORKING WITHIN A LANE OF TRAVEL OF AN UNDIVIDED OR DIVIDED FACILITY, CLOSE THE LANE ACCORDING TO THE TRAFFIC CONTROL PLANS, ROADWAY STANDARD DRAWINGS, OR AS DIRECTED BY THE ENGINEER. CONDUCT THE WORK SO THAT ALL PERSONNEL AND/OR EQUIPMENT REMAIN WITHIN THE CLOSED TRAVEL LANE.
- E) DO NOT WORK SIMULTANEOUSLY WITHIN 15 FT ON BOTH SIDES OF AN OPEN TRAVELWAY, RAMP, OR LOOP WITHIN THE SAME LOCATION UNLESS PROTECTED WITH GUARDRAIL OR BARRIER.

PAVEMENT EDGE DROP OFF REQUIREMENTS

- F) BACKFILL AT A 6:1 SLOPE UP TO THE EDGE AND ELEVATION OF EXISTING PAVEMENT IN AREAS ADJACENT TO AN OPENED TRAVEL LANE THAT HAS AN EDGE OF PAVEMENT DROP-OFF AS FOLLOWS:

BACKFILL DROP-OFFS THAT EXCEED 3 INCHES ON ROADWAYS WITH POSTED SPEED LIMITS LESS THAN 45 MPH.

BACKFILL WITH SUITABLE COMPACTED MATERIAL, AS APPROVED BY THE ENGINEER, AT NO EXPENSE TO THE DEPARTMENT.
- G) DO NOT EXCEED A DIFFERENCE OF 2 INCHES IN ELEVATION BETWEEN OPEN LANES OF TRAFFIC FOR NOMINAL LIFTS OF 1.5 INCHES. INSTALL ADVANCE WARNING "UNEVEN LANES" SIGNS (W8-11) 100 ft IN ADVANCE AND A MINIMUM OF EVERY HALF MILE THROUGHOUT THE UNEVEN AREA.

TRAFFIC PATTERN ALTERATIONS

- H) NOTIFY THE ENGINEER TWENTY ONE (21) CALENDAR DAYS PRIOR TO ANY TRAFFIC PATTERN ALTERATION.

SIGNING

- I) INSTALL ADVANCE WORK ZONE WARNING SIGNS WHEN WORK IS WITHIN 40 FT FROM THE EDGE OF TRAVEL LANE AND NO MORE THAN THREE (3) DAYS PRIOR TO THE BEGINNING OF CONSTRUCTION.
- J) ENSURE ALL NECESSARY SIGNING IS IN PLACE PRIOR TO ALTERING ANY TRAFFIC PATTERN.
- K) INSTALL BLACK ON ORANGE "DIP" SIGNS (W8-2) AND/OR "BUMP" SIGNS (W8-1) 100 ft IN ADVANCE OF THE UNEVEN AREA, OR AS DIRECTED BY THE ENGINEER.

PROJECT NOTES & PHASING

TRAFFIC BARRIER

- L) INSTALL TEMPORARY BARRIER ACCORDING TO THE TRANSPORTATION MANAGEMENT PLANS A MAXIMUM OF TWO (2) WEEKS PRIOR TO BEGINNING WORK IN ANY LOCATION. ONCE TEMPORARY BARRIER IS INSTALLED AT ANY LOCATION PROCEED IN A CONTINUOUS MANNER TO COMPLETE THE PROPOSED WORK IN THAT LOCATION UNLESS OTHERWISE STATED IN THE TRANSPORTATION MANAGEMENT PLANS OR AS DIRECTED BY THE ENGINEER.

DO NOT PLACE BARRIER DIRECTLY ON ANY SURFACE OTHER THAN ASPHALT OR CONCRETE.

ONCE TEMPORARY BARRIER IS INSTALLED AT ANY LOCATION AND NO WORK IS PERFORMED BEHIND THE TEMPORARY BARRIER FOR A PERIOD LONGER THAN TWO (2) MONTHS, REMOVE / RESET TEMPORARY BARRIER AT NO COST TO THE DEPARTMENT UNLESS OTHERWISE STATED IN THE TRANSPORTATION MANAGEMENT PLANS, TEMPORARY BARRIER IS PROTECTING A HAZARD, OR AS DIRECTED BY THE ENGINEER.

INSTALL TEMPORARY BARRIER WITH THE TRAFFIC FLOW BEGINNING WITH THE UPSTREAM SIDE OF TRAFFIC. REMOVE TEMPORARY BARRIER AGAINST THE TRAFFIC FLOW BEGINNING WITH THE DOWNSTREAM SIDE OF TRAFFIC.

INSTALL AND SPACE DRUMS NO GREATER THAN TWICE THE POSTED SPEED LIMIT (MPH) TO CLOSE OR KEEP THE SECTION OF THE ROADWAY CLOSED UNTIL THE TEMPORARY BARRIER CAN BE PLACED OR AFTER THE TEMPORARY BARRIER IS REMOVED.

- M) PROTECT THE APPROACH END OF MOVABLE/PORTABLE CONCRETE BARRIER AT ALL TIMES DURING THE INSTALLATION AND REMOVAL OF THE BARRIER BY EITHER A TRUCK MOUNTED ATTENUATOR (MAXIMUM 72 HOURS) OR A TEMPORARY CRASH CUSHION.

PROTECT THE APPROACH END OF MOVABLE/PORTABLE CONCRETE BARRIER FROM ONCOMING TRAFFIC AT ALL TIMES BY A TEMPORARY CRASH CUSHION UNLESS THE APPROACH END OF MOVABLE/PORTABLE CONCRETE BARRIER IS OFFSET FROM ONCOMING TRAFFIC AS FOLLOWS OR AS SHOWN IN THE PLANS: (SEE ALSO 1101.05)

POSTED SPEED LIMIT	MINIMUM OFFSET
40 OR LESS	15 FT
45 - 50	20 FT
55	25 FT
60 MPH or HIGHER	30 FT

TRAFFIC CONTROL DEVICES

- N) WHEN LANE CLOSURES ARE NOT IN EFFECT SPACE CHANNELIZING DEVICES IN WORK AREAS NO GREATER IN FEET THAN TWICE THE POSTED SPEED LIMIT (MPH) EXCEPT, 10 FT ON-CENTER IN RADII, AND 3 FT OFF THE EDGE OF AN OPEN TRAVELWAY. REFER TO STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES SECTIONS 1130 (DRUMS), 1135 (CONES) AND 1180 (SKINNY DRUMS) FOR ADDITIONAL REQUIREMENTS.
- O) PLACE TYPE III BARRICADES, WITH "ROAD CLOSED" SIGN R11-2 ATTACHED, OF SUFFICIENT LENGTH TO CLOSE ENTIRE ROADWAY.

LOCAL NOTES

- 1) CONTACT TRANSYLVANIA COUNTY EMERGENCY SERVICES AND SCHOOLS AT LEAST ONE MONTH PRIOR TO CONSTRUCTION.

PHASING


PHASE I

- STEP 1: INSTALL WORK ZONE ADVANCE WARNING SIGNS AS SHOWN ON ROADWAY STANDARD DRAWING NO. 1101.01. (SEE LOCAL NOTE #1)
- STEP 2: CONSTRUCT -LDET-, DRIVE 2 AND TEMPORARY DRAINAGE AS SHOWN ON SHEET TMP-2 (PHASE I DETAIL) AND INSTALL A PORTABLE TRAFFIC SIGNAL SYSTEM TO OPERATE THE ONE-LANE, TWO-WAY TEMPORARY PATTERN SHOWN ON SHEET TMP-2 (PHASE II DETAIL).



PHASE II

- STEP 1: ACTIVATE THE PORTABLE TRAFFIC SIGNAL SYSTEM AND SHIFT TRAFFIC ONTO -LDET- IN A ONE-LANE, TWO-WAY PATTERN AS SHOWN ON SHEET TMP-2 (PHASE II DETAIL). MAINTAIN ACCESS TO DRIVEWAY LEFT OF STA. 12+50+/- -L- AS SHOWN ON SHEET TMP-2 (PHASE II DETAIL).
- STEP 2: CONSTRUCT PROPOSED -L-, DRIVE 1 AND CULVERT AS SHOWN ON SHEET TMP-2 (PHASE II DETAIL) AND THE ROADWAY DESIGN PLANS. CONSTRUCT REMAINING SECTIONS OF -L- ROADWAY USING ROADWAY STANDARD DRAWING NO. 1101.02, SHEET 1 OF 15.
- STEP 3: USING THE PORTABLE TRAFFIC SIGNAL SYSTEM, SHIFT TRAFFIC INTO A ONE-LANE, TWO-WAY PATTERN ON THE FAR LEFT SIDE OF PROPOSED -L- AND CONSTRUCT THE REMAINING SECTIONS OF THE PROPOSED CULVERT WING WALLS ON THE DOWN STREAM SIDE OF BRADLEY CREEK AND REMOVE -LDET-.
- STEP 4: SHIFT TRAFFIC TO THE FINAL PATTERN AND REMOVE ALL TEMPORARY TRAFFIC CONTROL DEVICES.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

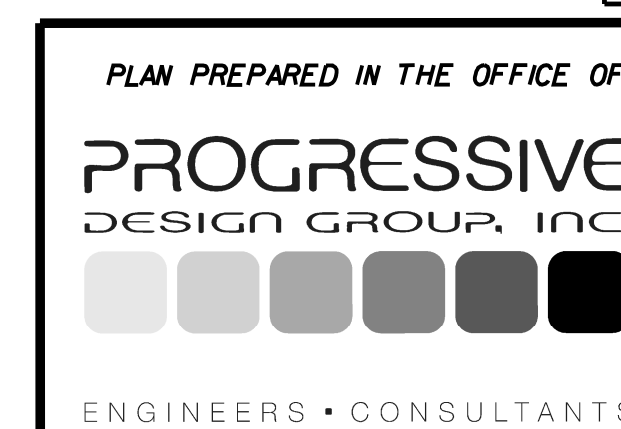








APPROVED: Tim Arley DATE: 1/20/2018

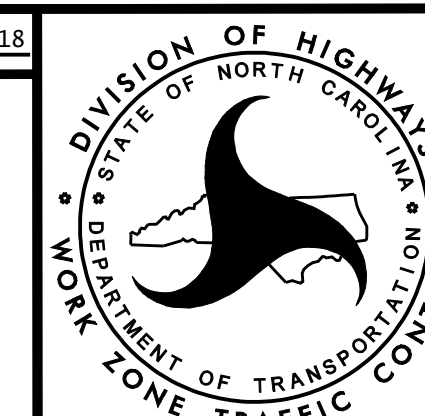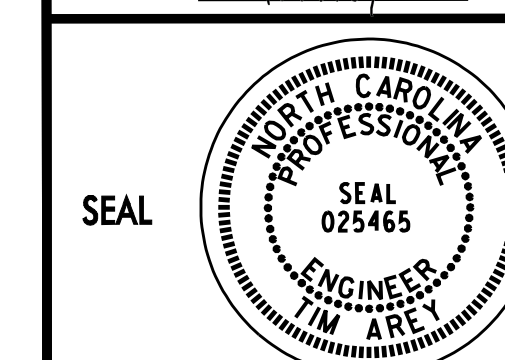

TRANSPORTATION
OPERATIONS PLAN

PHASE I DETAIL

PHASE II DETAIL

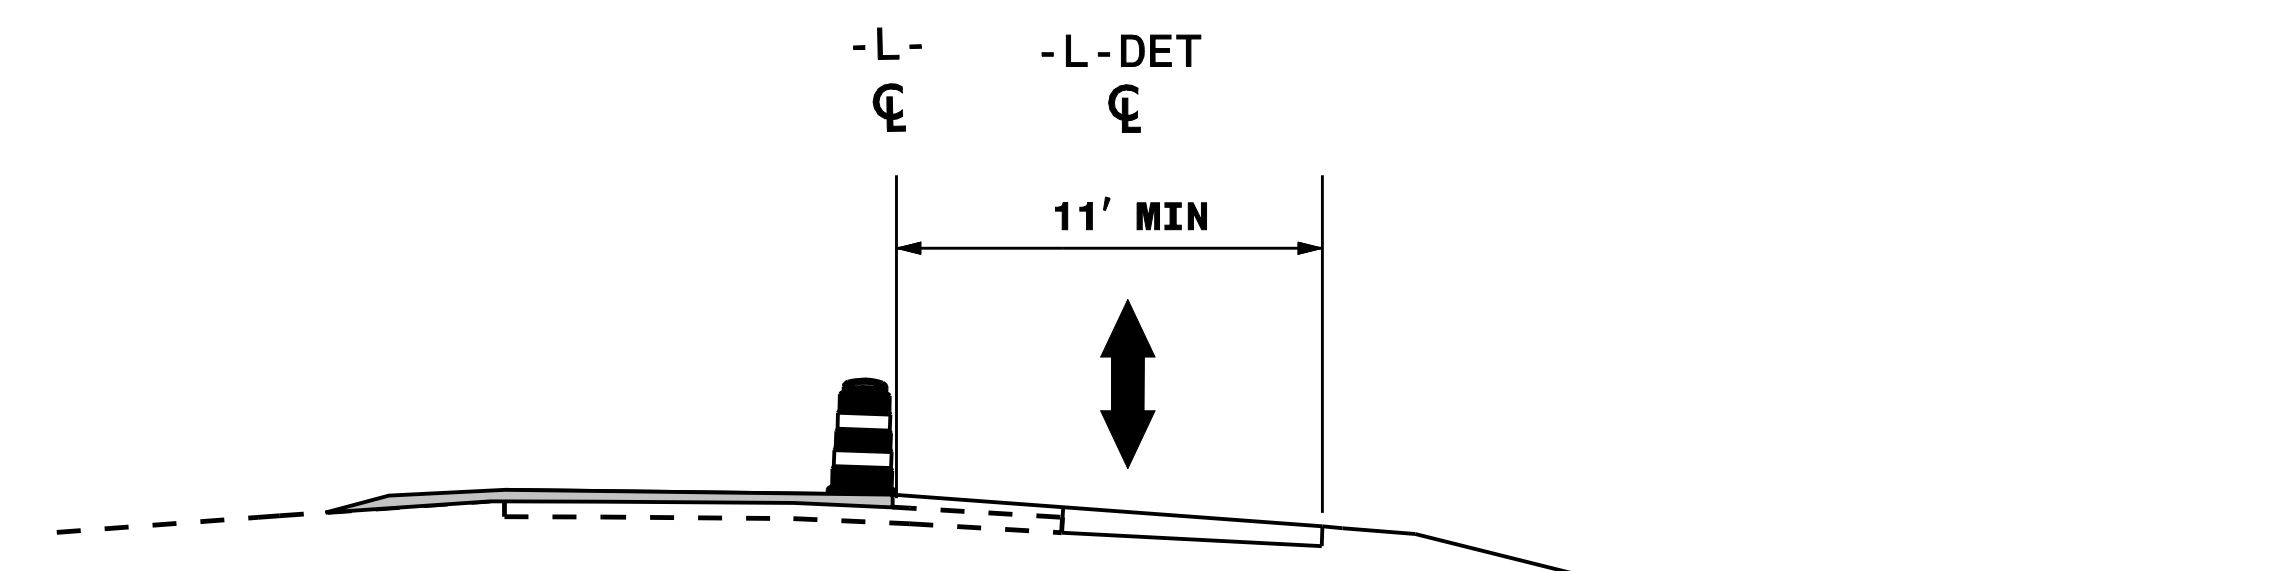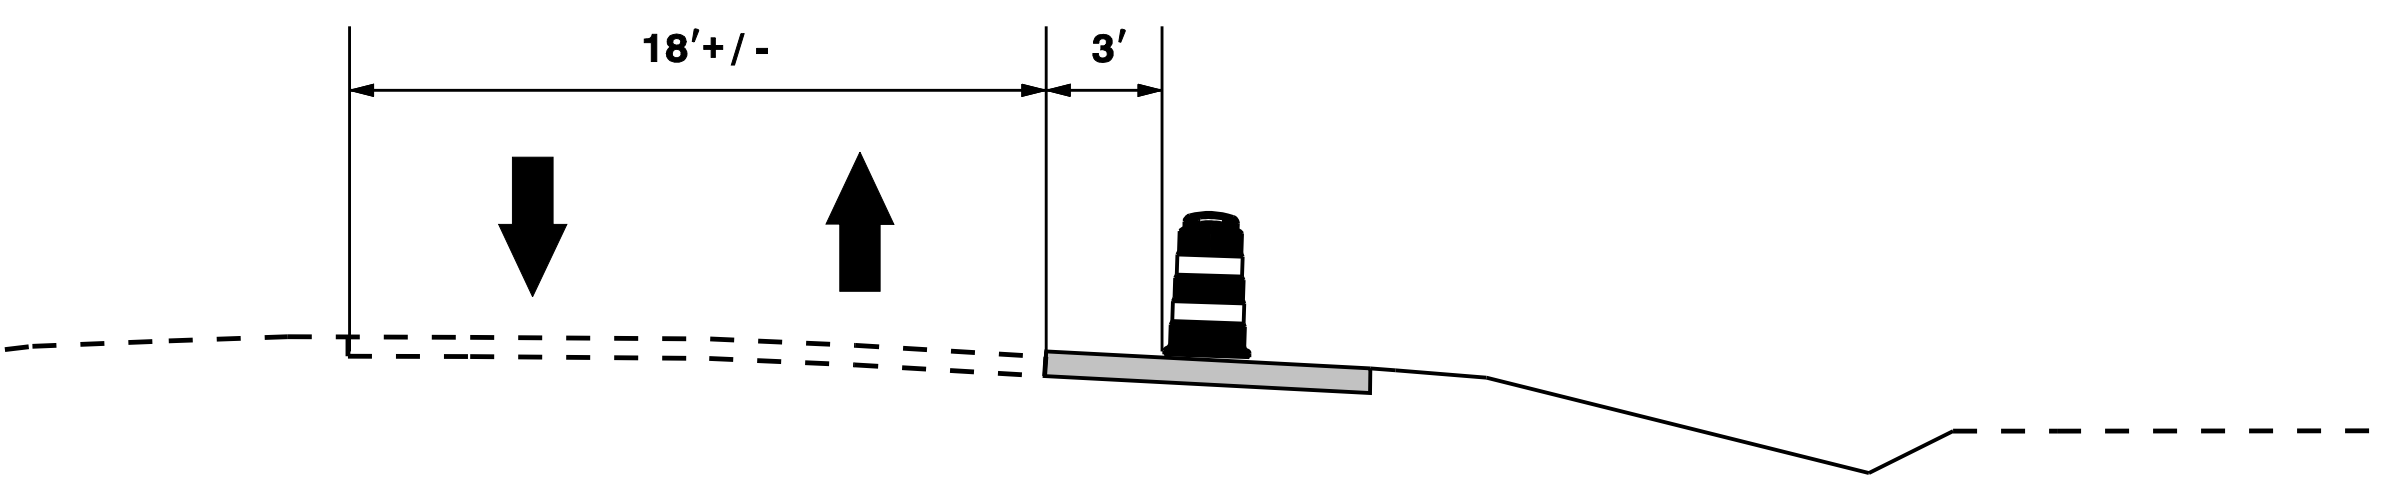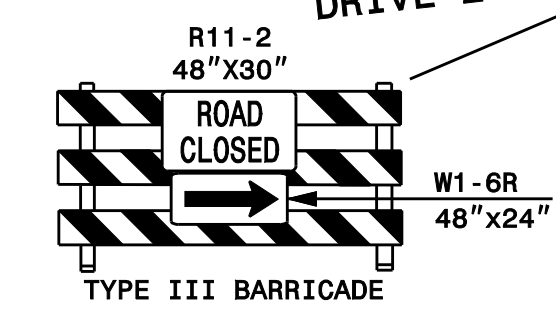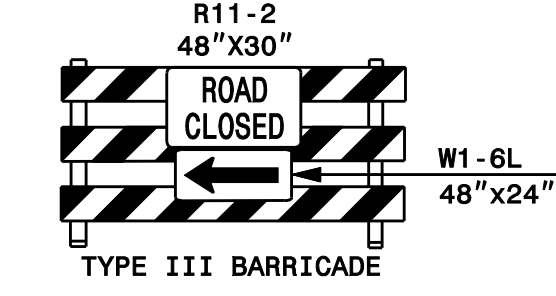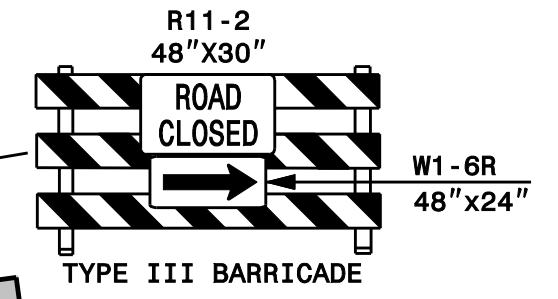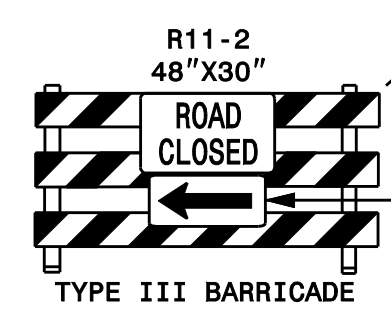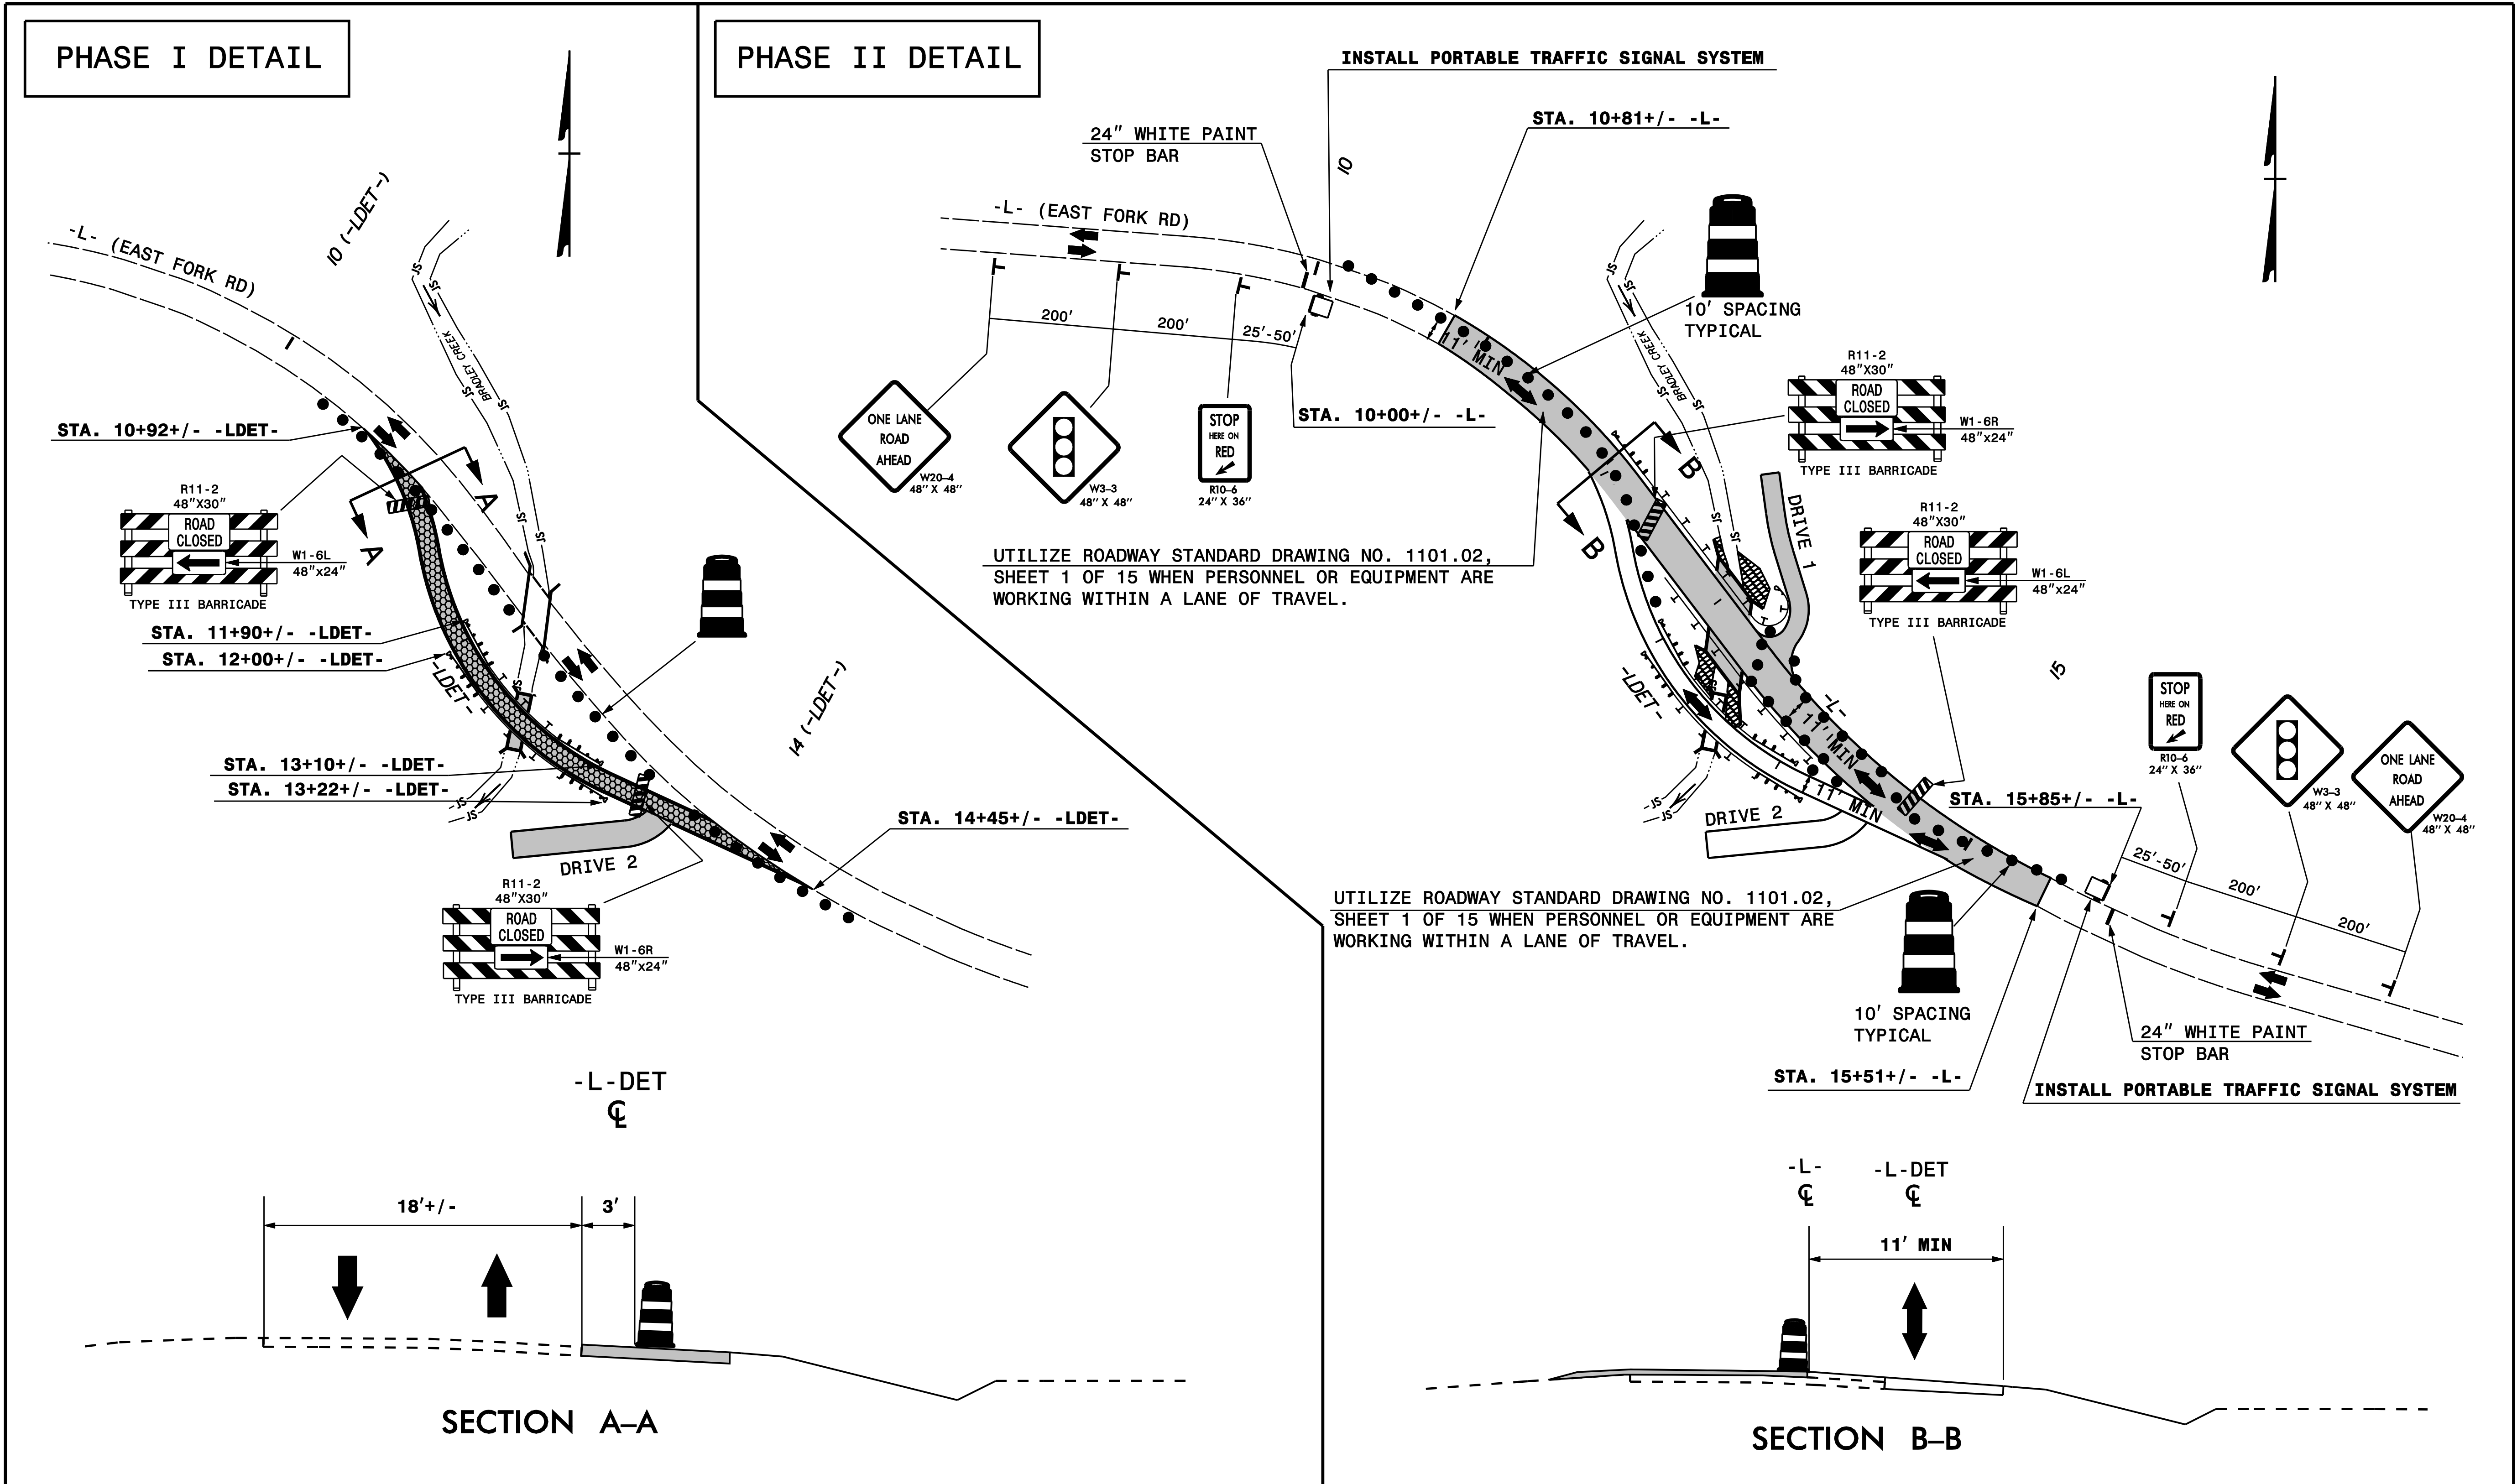

UTILIZE ROADWAY STANDARD DRAWING NO. 1101.02, SHEET 1 OF 15 WHEN PERSONNEL OR EQUIPMENT ARE WORKING WITHIN A LANE OF TRAVEL.

UTILIZE ROADWAY STANDARD DRAWING NO. 1101.02, SHEET 1 OF 15 WHEN PERSONNEL OR EQUIPMENT ARE WORKING WITHIN A LANE OF TRAVEL.

INSTALL WORK ZONE ADVANCE WARNING SIGNS ACCORDING TO ROADWAY STANDARD DRAWING NO. 1101.01 AND GENERAL NOTE 'I'. UTILIZE ROADWAY STANDARD DRAWING NO. 1101.02, SHEET 1 OF 15 FOR OPERATIONS REQUIRING A TEMPORARY LANE CLOSURE AS IDENTIFIED IN GENERAL NOTES 'C' AND 'D'.

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

PLAN PREPARED IN THE OFFICE OF:
PROGRESSIVE DESIGN GROUP, INC.
 ENGINEERS • CONSULTANTS

APPROVED: *Tim Arvey* DATE: 1/20/2018
 SEAL
 NORTH CAROLINA PROFESSIONAL ENGINEER
 SEAL 025465
 TIM ARVEY

DIVISION OF HIGHWAYS
 STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 WORK ZONE TRAFFIC CONTROL

TRANSPORTATION MANAGEMENT PLAN



WBS: 17BP.14.R.122

CONTRACT: DN00290

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**PAVEMENT MARKING PLAN
TRANSYLVANIA COUNTY**

**LOCATION: BRIDGE NO.137 ON SR 1107 (EAST FORK ROAD)
OVER BRADLEY CREEK**

PROJECT REFERENCE NO. 17BP.14.R.122	SHEET NO. PMP-1
APPROVED:  DATE: 11/16/2018 2:24:50 PM EST	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS SHOWN IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1250.01	PAVEMENT MARKER SPACING
1251.01	RAISED PAVEMENT MARKERS
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION

PAVEMENT MARKING SCHEDULE
BRIDGE NO. 870137

FINAL
PAVEMENT MARKINGS

PA	WHITE EDGELINE	PAINT (4")
PI	YELLOW DOUBLE CENTER	PAINT (4")

PLAN PREPARED BY: RS&H ARCHITECT-ENGINEERS-PLANNERS, INC.

JENNIFER FARINO, PE	PROJECT ENGINEER
SEAN KORTOVICH, EI	PROJECT DESIGNER

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR AS DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
SR 1107	PAINT	N/A

PLACE TWO APPLICATIONS OF PAINT PAVEMENT MARKINGS ON THE FINAL WEARING SURFACE. PLACE THE SECOND APPLICATION OF PAINT UPON SUFFICIENT DRYING TIME OF THE FIRST.

- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
 C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS.
 D) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.
 E) ALL EXISTING SIGNS ON WOOD & U POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.

INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING TITLE SHEET & PAVEMENT MARKING SCHEDULE
PMP-2	PAVEMENT MARKING DETAIL

09/05/19

17BP.14.R.122


CONTRACT: DN00290

16-NOV-2018 13:21
R:\Tc\FFIC\B870137-Sgn-PMP.dgn
\$\$\$\$\$SERNAME\$\$\$\$\$

SYMBOL AND PAVEMENT MARKING LEGEND	
(PA)	WHITE EDGE LINE (4")
(PI)	YELLOW DOUBLE CENTER (4")

BEGIN (PA) & (PI) MARKINGS
TIE TO EXISTING
-L- STA.10+50.00



TO SR 1105

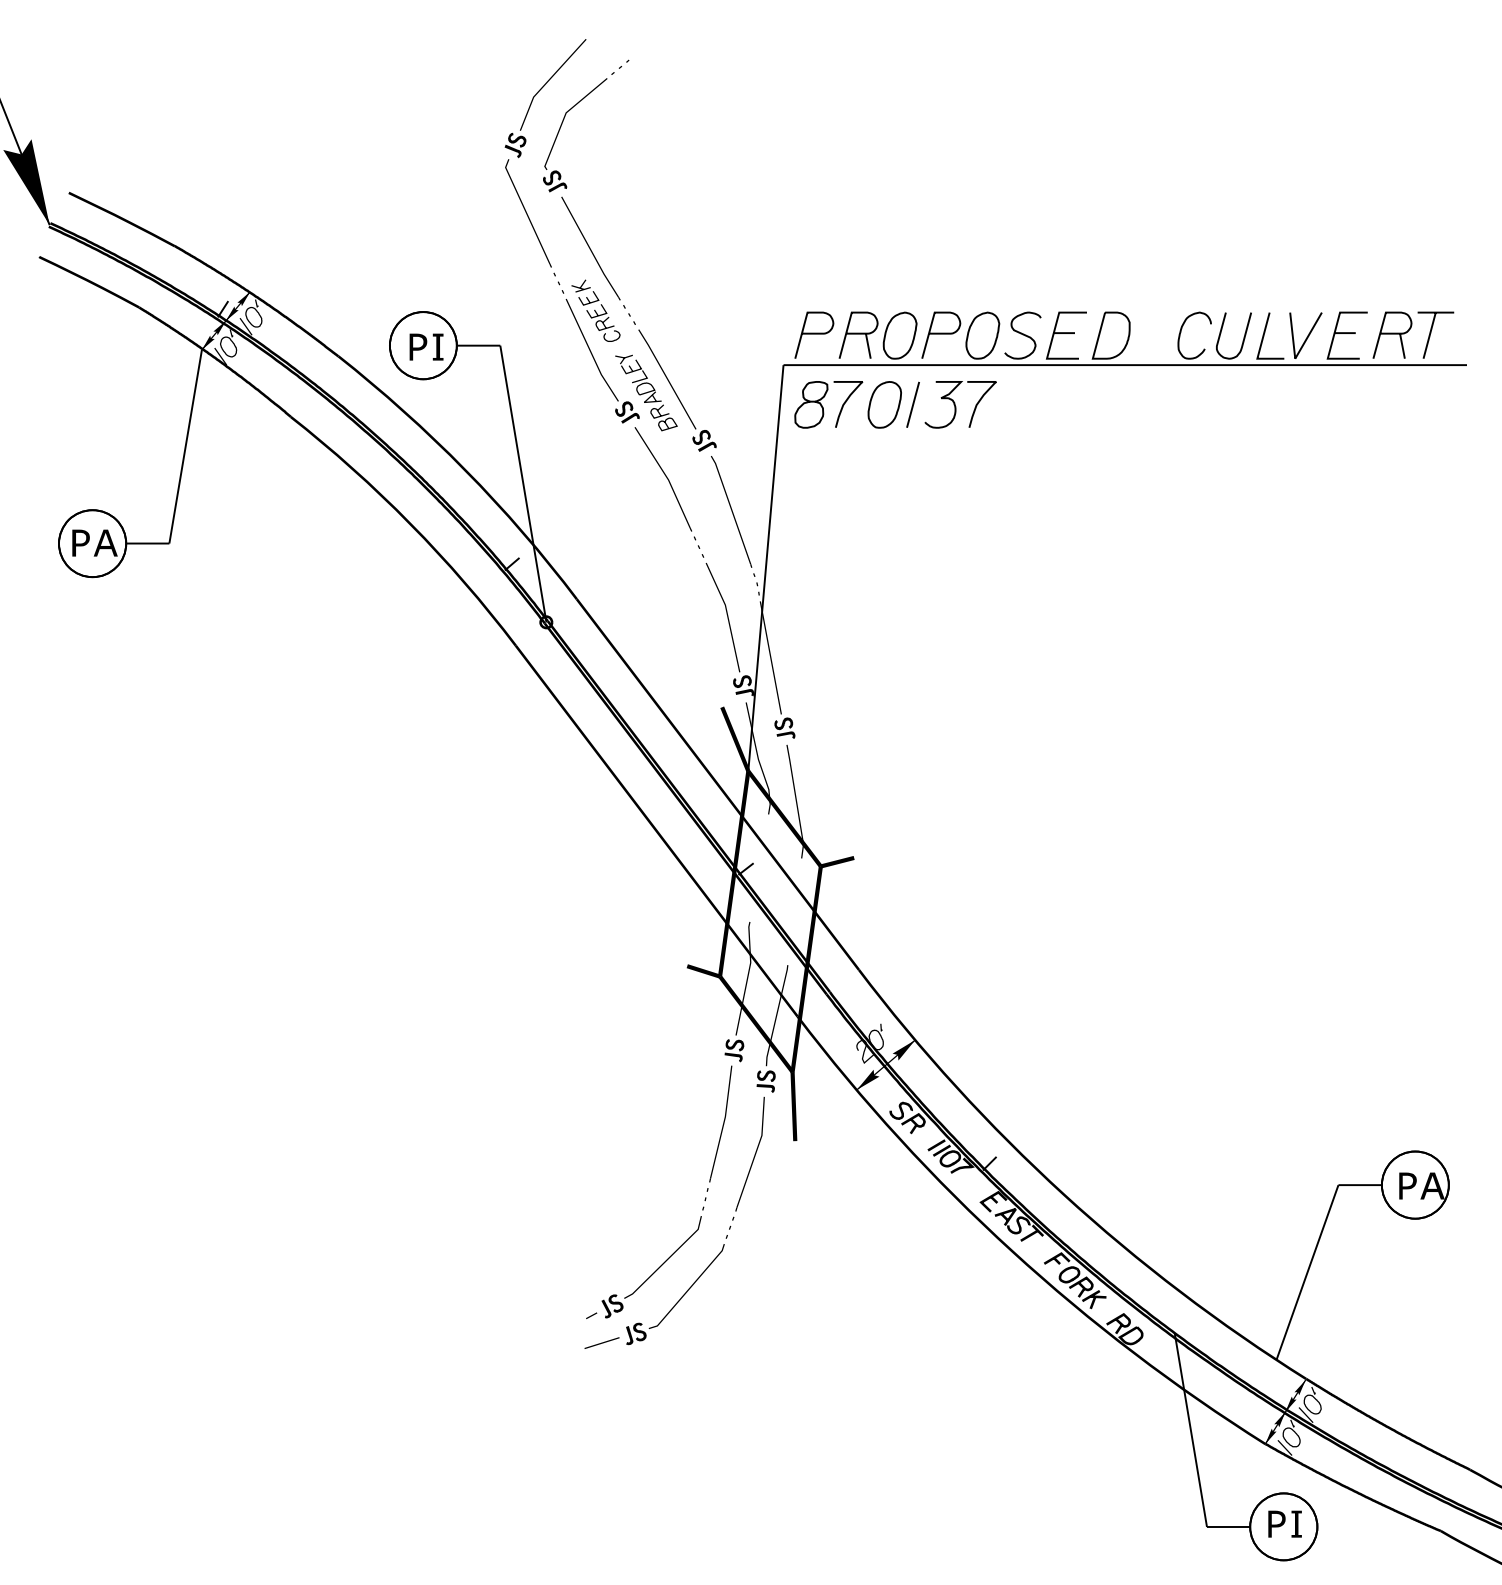

NAD 83/NA 2011


END (PA) & (PI) MARKINGS
TIE TO EXISTING
-L- STA.15+80.00

TO US 276

PROJECT REFERENCE NO. 17BP.14.R.122	SHEET NO. PMP-2
APPROVED:  DocuSigned by: 8701E85708415.	
DATE: 11/16/2018 2:24:50 PM EST	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

PAVEMENT MARKING DETAIL

WBS: 17BP.14.R.122

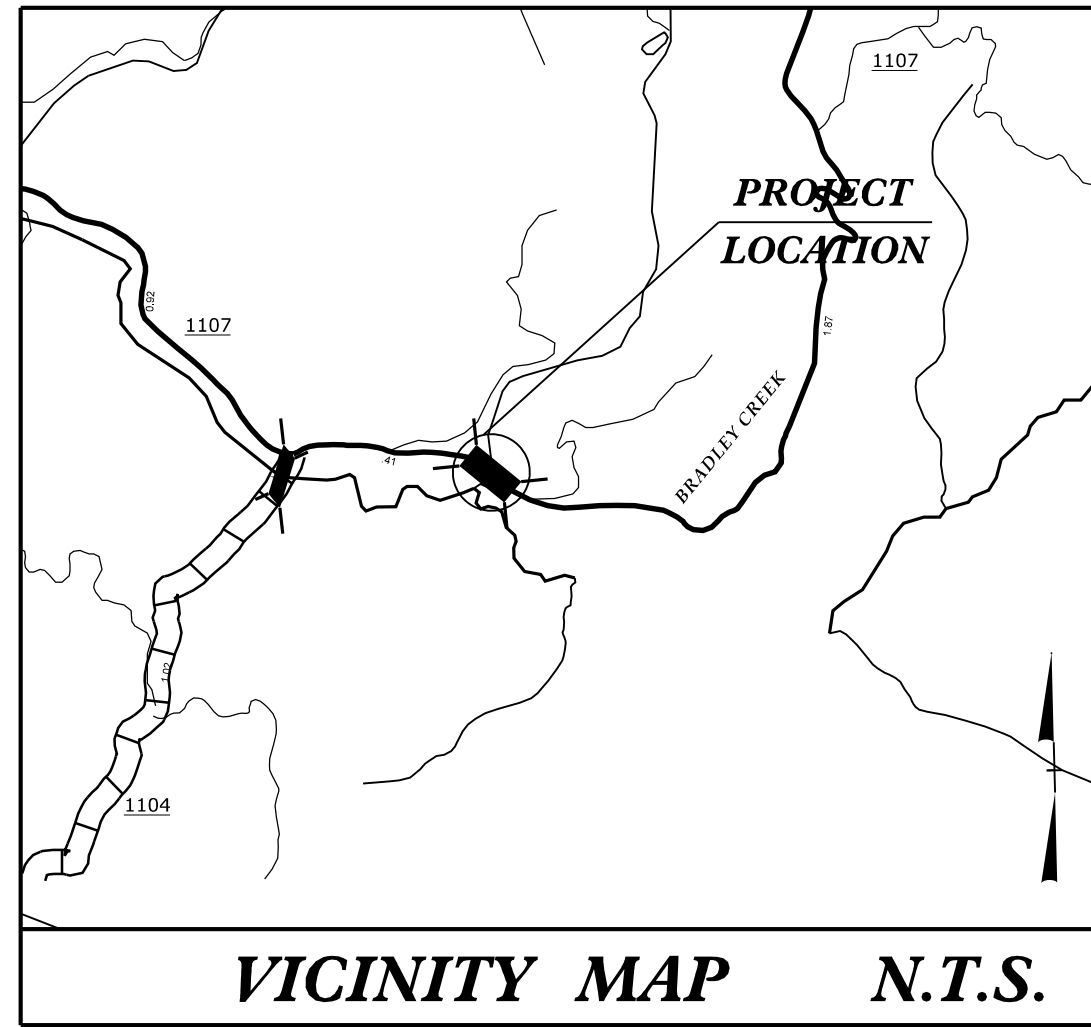



STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

PLAN FOR PROPOSED
HIGHWAY EROSION CONTROL

TRANSYLVANIA COUNTY

**LOCATION: BRIDGE NO. 137 OVER BRADLEY CREEK ON
SR 1107 (EAST FORK ROAD)**

TYPE OF WORK: GRADING, DRAINAGE, PAVING AND STRUCTURE

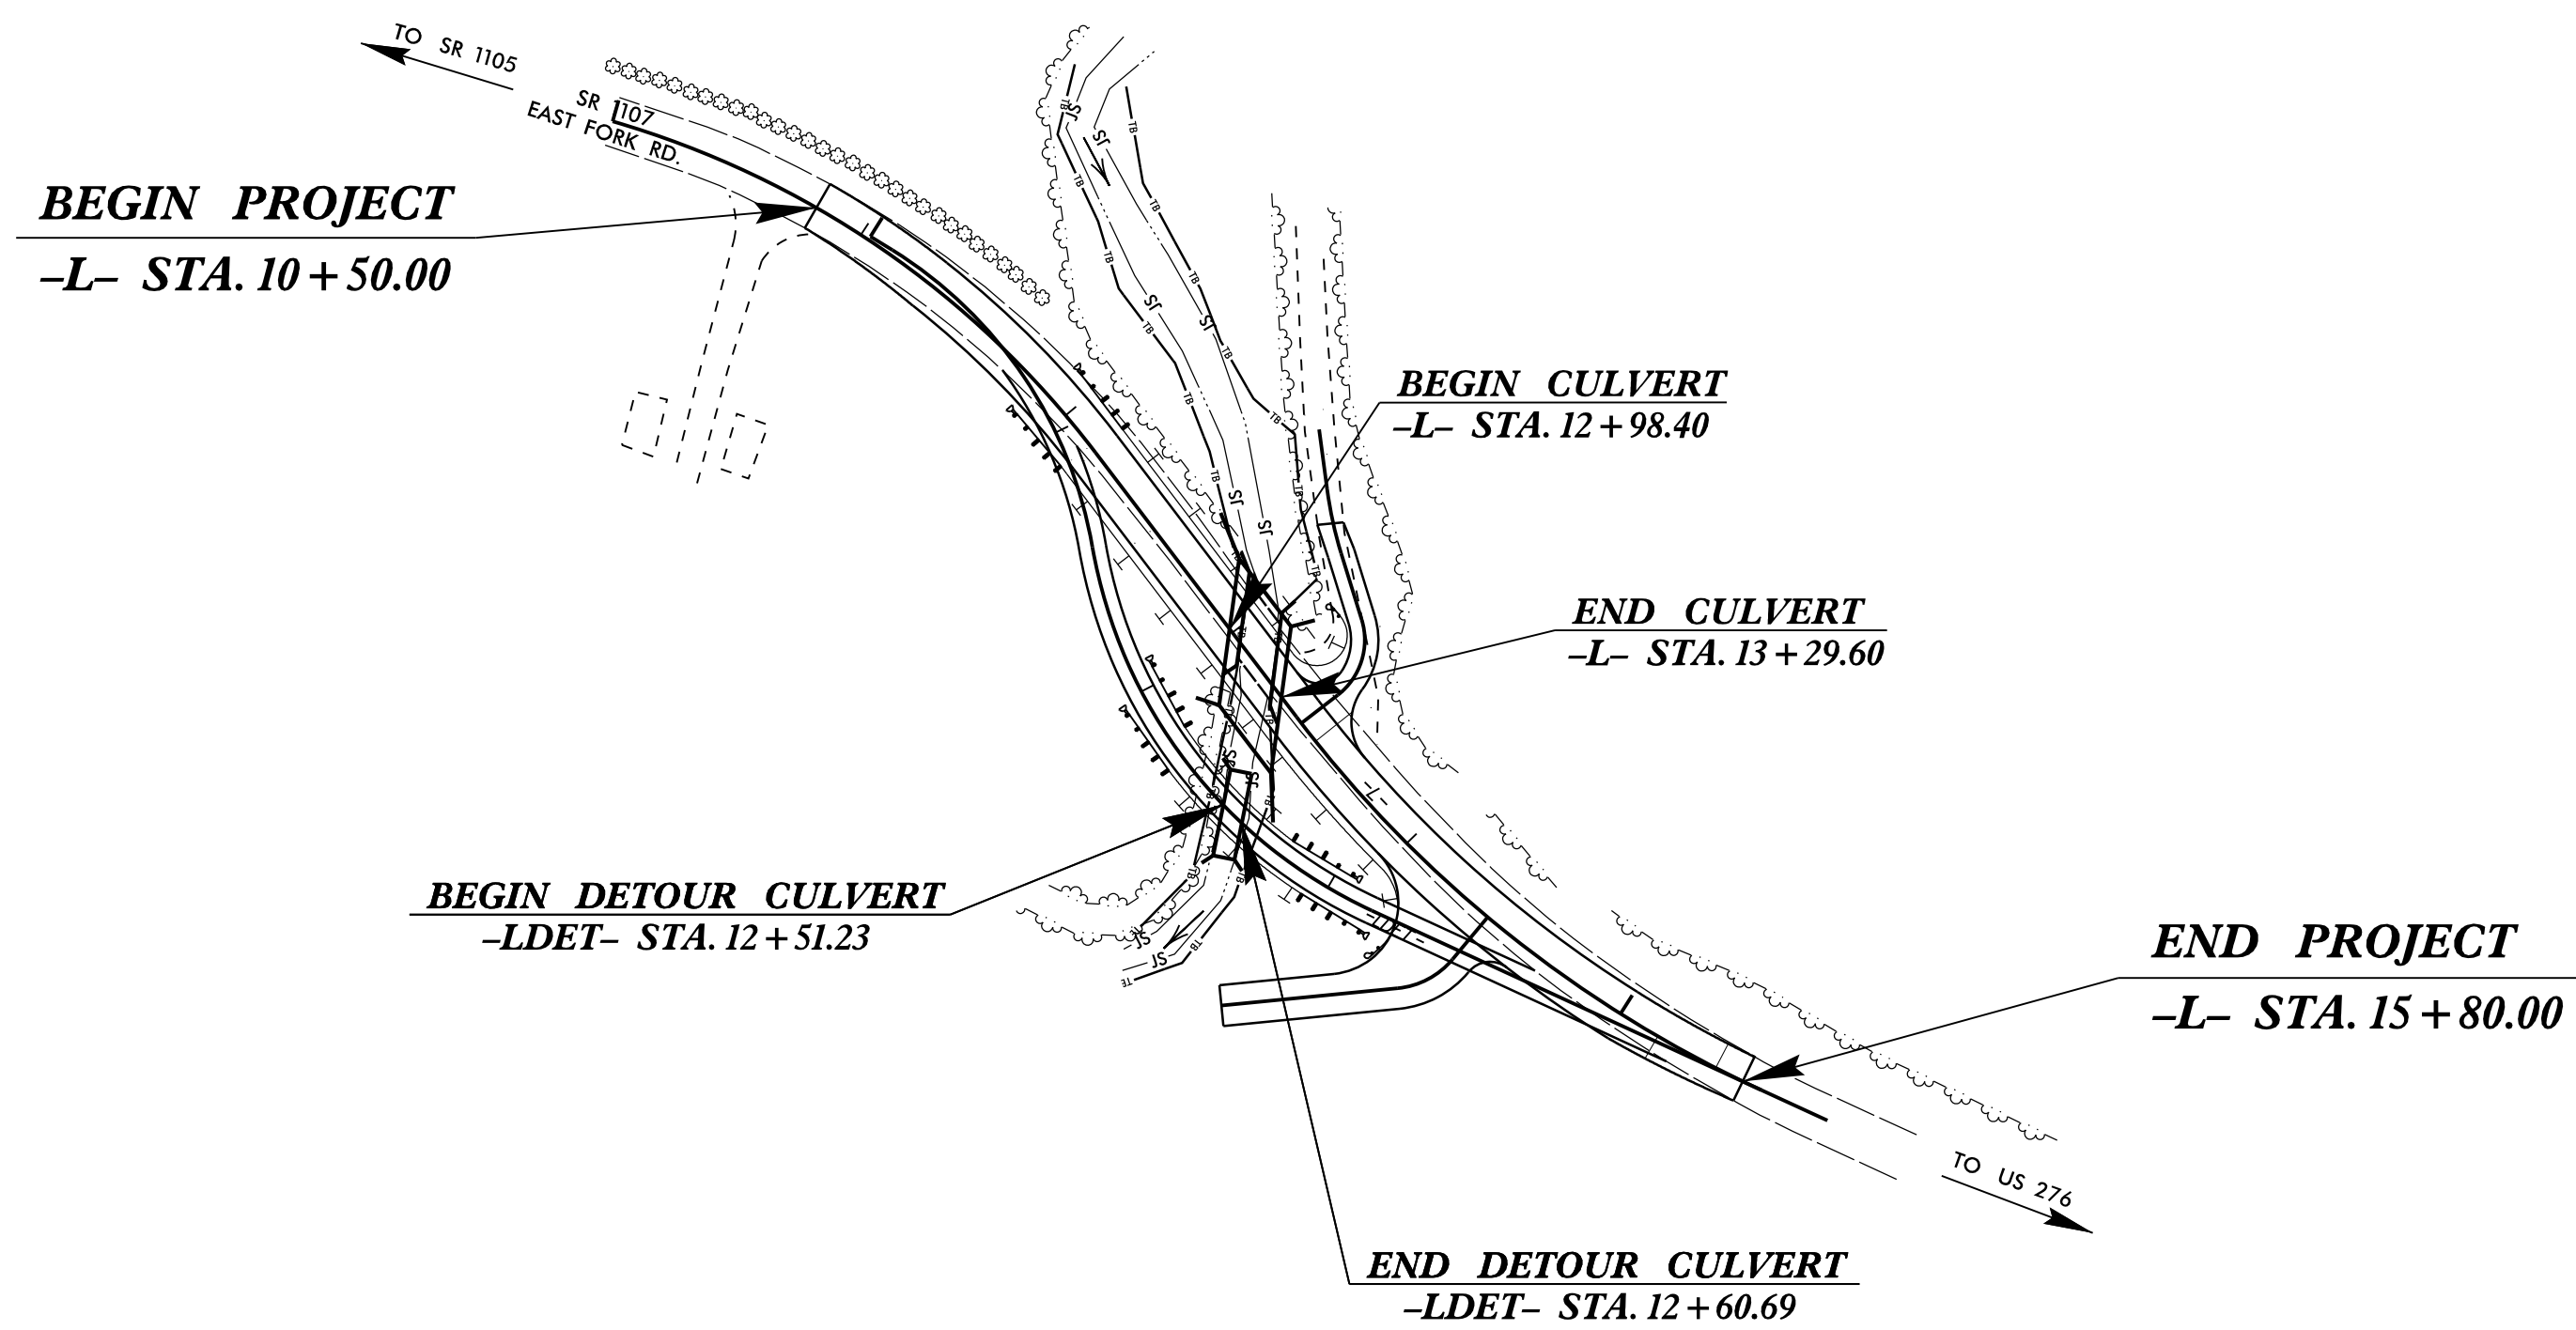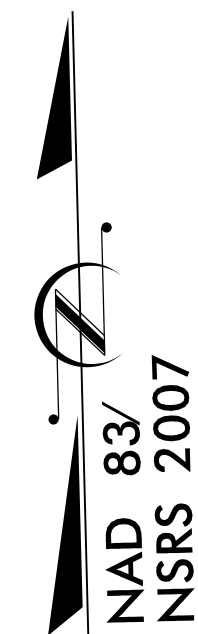

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	17BP.14.R.122	EC-1	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	
17BP.14.R.122	N/A	PE	
17BP.14.R.122	N/A	ROW, UTL	
17BP.14.R.122	N/A	CONST	

EROSION AND SEDIMENT CONTROL MEASURES

Std. #	Description	Symbol
1630.03	Temporary Silt Ditch	TD
1630.05	Temporary Diversion	TD
1605.01	Temporary Silt Fence	TSF
1606.01	Special Sediment Control Fence	SSCF
1622.01	Temporary Berms and Slope Drains	TBSD
1630.02	Silt Basin Type B	SB
1633.01	Temporary Rock Silt Check Type-A	TRSCA
	Temporary Rock Silt Check Type-A with Matting and Polyacrylamide (PAM)	TRSCA-PAM
1633.02	Temporary Rock Silt Check Type-B	TRSCB
	Wattle/Coir Fiber Wattle	WF
	Wattle/Coir Fiber Wattle with Polyacrylamide (PAM)	WF-PAM
1634.01	Temporary Rock Sediment Dam Type-A	TRSDA
1634.02	Temporary Rock Sediment Dam Type-B	TRSDB
1635.01	Rock Pipe Inlet Sediment Trap Type-A	RPISTRA
1635.02	Rock Pipe Inlet Sediment Trap Type-B	RPISTRB
1630.04	Stilling Basin	SB
1630.06	Special Stilling Basin	SSB
	Rock Inlet Sediment Trap:	
1632.01	Type A	A
1632.02	Type B	B
1632.03	Type C	C
	Skimmer Basin	SKB
	Tiered Skimmer Basin	TSKB
	Infiltration Basin	IB

HIGH QUALITY WATER(S) EXIST ON THIS PROJECT

High Quality Water Zone Exist
From Sta. 10+51
to Sta. 15+51
Refer To E. C. Special Provisions for Special Considerations.


THIS PROJECT CONTAINS EROSION CONTROL PLANS FOR CLEARING AND GRUBBING PHASE OF CONSTRUCTION.

THIS PROJECT HAS BEEN DESIGNED TO SENSITIVE WATERSHED STANDARDS.

ENVIRONMENTALLY SENSITIVE AREA(S) EXIST ON THIS PROJECT

Refer To E. C. Special Provisions for Special Considerations.

GRAPHIC SCALE

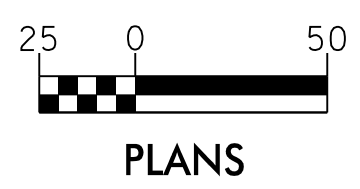

THESE EROSION AND SEDIMENT CONTROL PLANS COMPLY WITH THE REGULATIONS SET FORTH BY THE NCG-010000 GENERAL CONSTRUCTION PERMIT EFFECTIVE AUGUST 1, 2016 AND ISSUED BY THE NORTH CAROLINA DEPARTMENT OF ENVIRONMENT AND NATURAL RESOURCES DIVISION OF WATER RESOURCES.

Prepared in the Office of:

1520 SOUTH BOULEVARD, SUITE 200
CHARLOTTE, NC 28203
704-752-0610

2018 STANDARD SPECIFICATIONS

Designed by:

Will Weathersbee, P.E. **3161**

NAME LEVEL III CERTIFICATION NO.

Reviewed in the Office of:

ROADSIDE ENVIRONMENTAL UNIT

1 South Wilmington St.
Raleigh, NC 27611

2018 STANDARD SPECIFICATIONS

Reviewed by:


Roadway Standard Drawings

The following roadway english standards as appear in "Roadway Standard Drawings"- Roadway Design Unit - N. C. Department of Transportation - Raleigh, N. C., dated January 2018 and the latest revision thereto are applicable to this project and by reference hereby are considered a part of these plans.

1604.01 Railroad Erosion Control Detail	1632.01 Rock Inlet Sediment Trap Type A
1605.01 Temporary Silt Fence	1632.02 Rock Inlet Sediment Trap Type B
1606.01 Special Sediment Control Fence	1632.03 Rock Inlet Sediment Trap Type C
1607.01 Gravel Construction Entrance	1633.01 Temporary Rock Silt Check Type A
1622.01 Temporary Berms and Slope Drains	1633.02 Temporary Rock Silt Check Type B
1630.01 Riser Basin	1634.01 Temporary Rock Sediment Dam Type A
1630.02 Silt Basin Type B	1634.02 Temporary Rock Sediment Dam Type B
1630.03 Temporary Silt Ditch	1635.01 Rock Pipe Inlet Sediment Trap Type A
1630.04 Stilling Basin	1635.02 Rock Pipe Inlet Sediment Trap Type B
1630.05 Temporary Diversion	1640.01 Coir Fiber Baffle
1630.06 Special Stilling Basin	1645.01 Temporary Stream Crossing
1631.01 Matting Installation	

PROJECT REFERENCE NO. 17BPJ4RJ22	SHEET NO. EC-2
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

TEMPORARY ROCK SILT CHECK TYPE 'A' WITH EXCELSIOR MATTING AND POLYACRYLAMIDE (PAM)

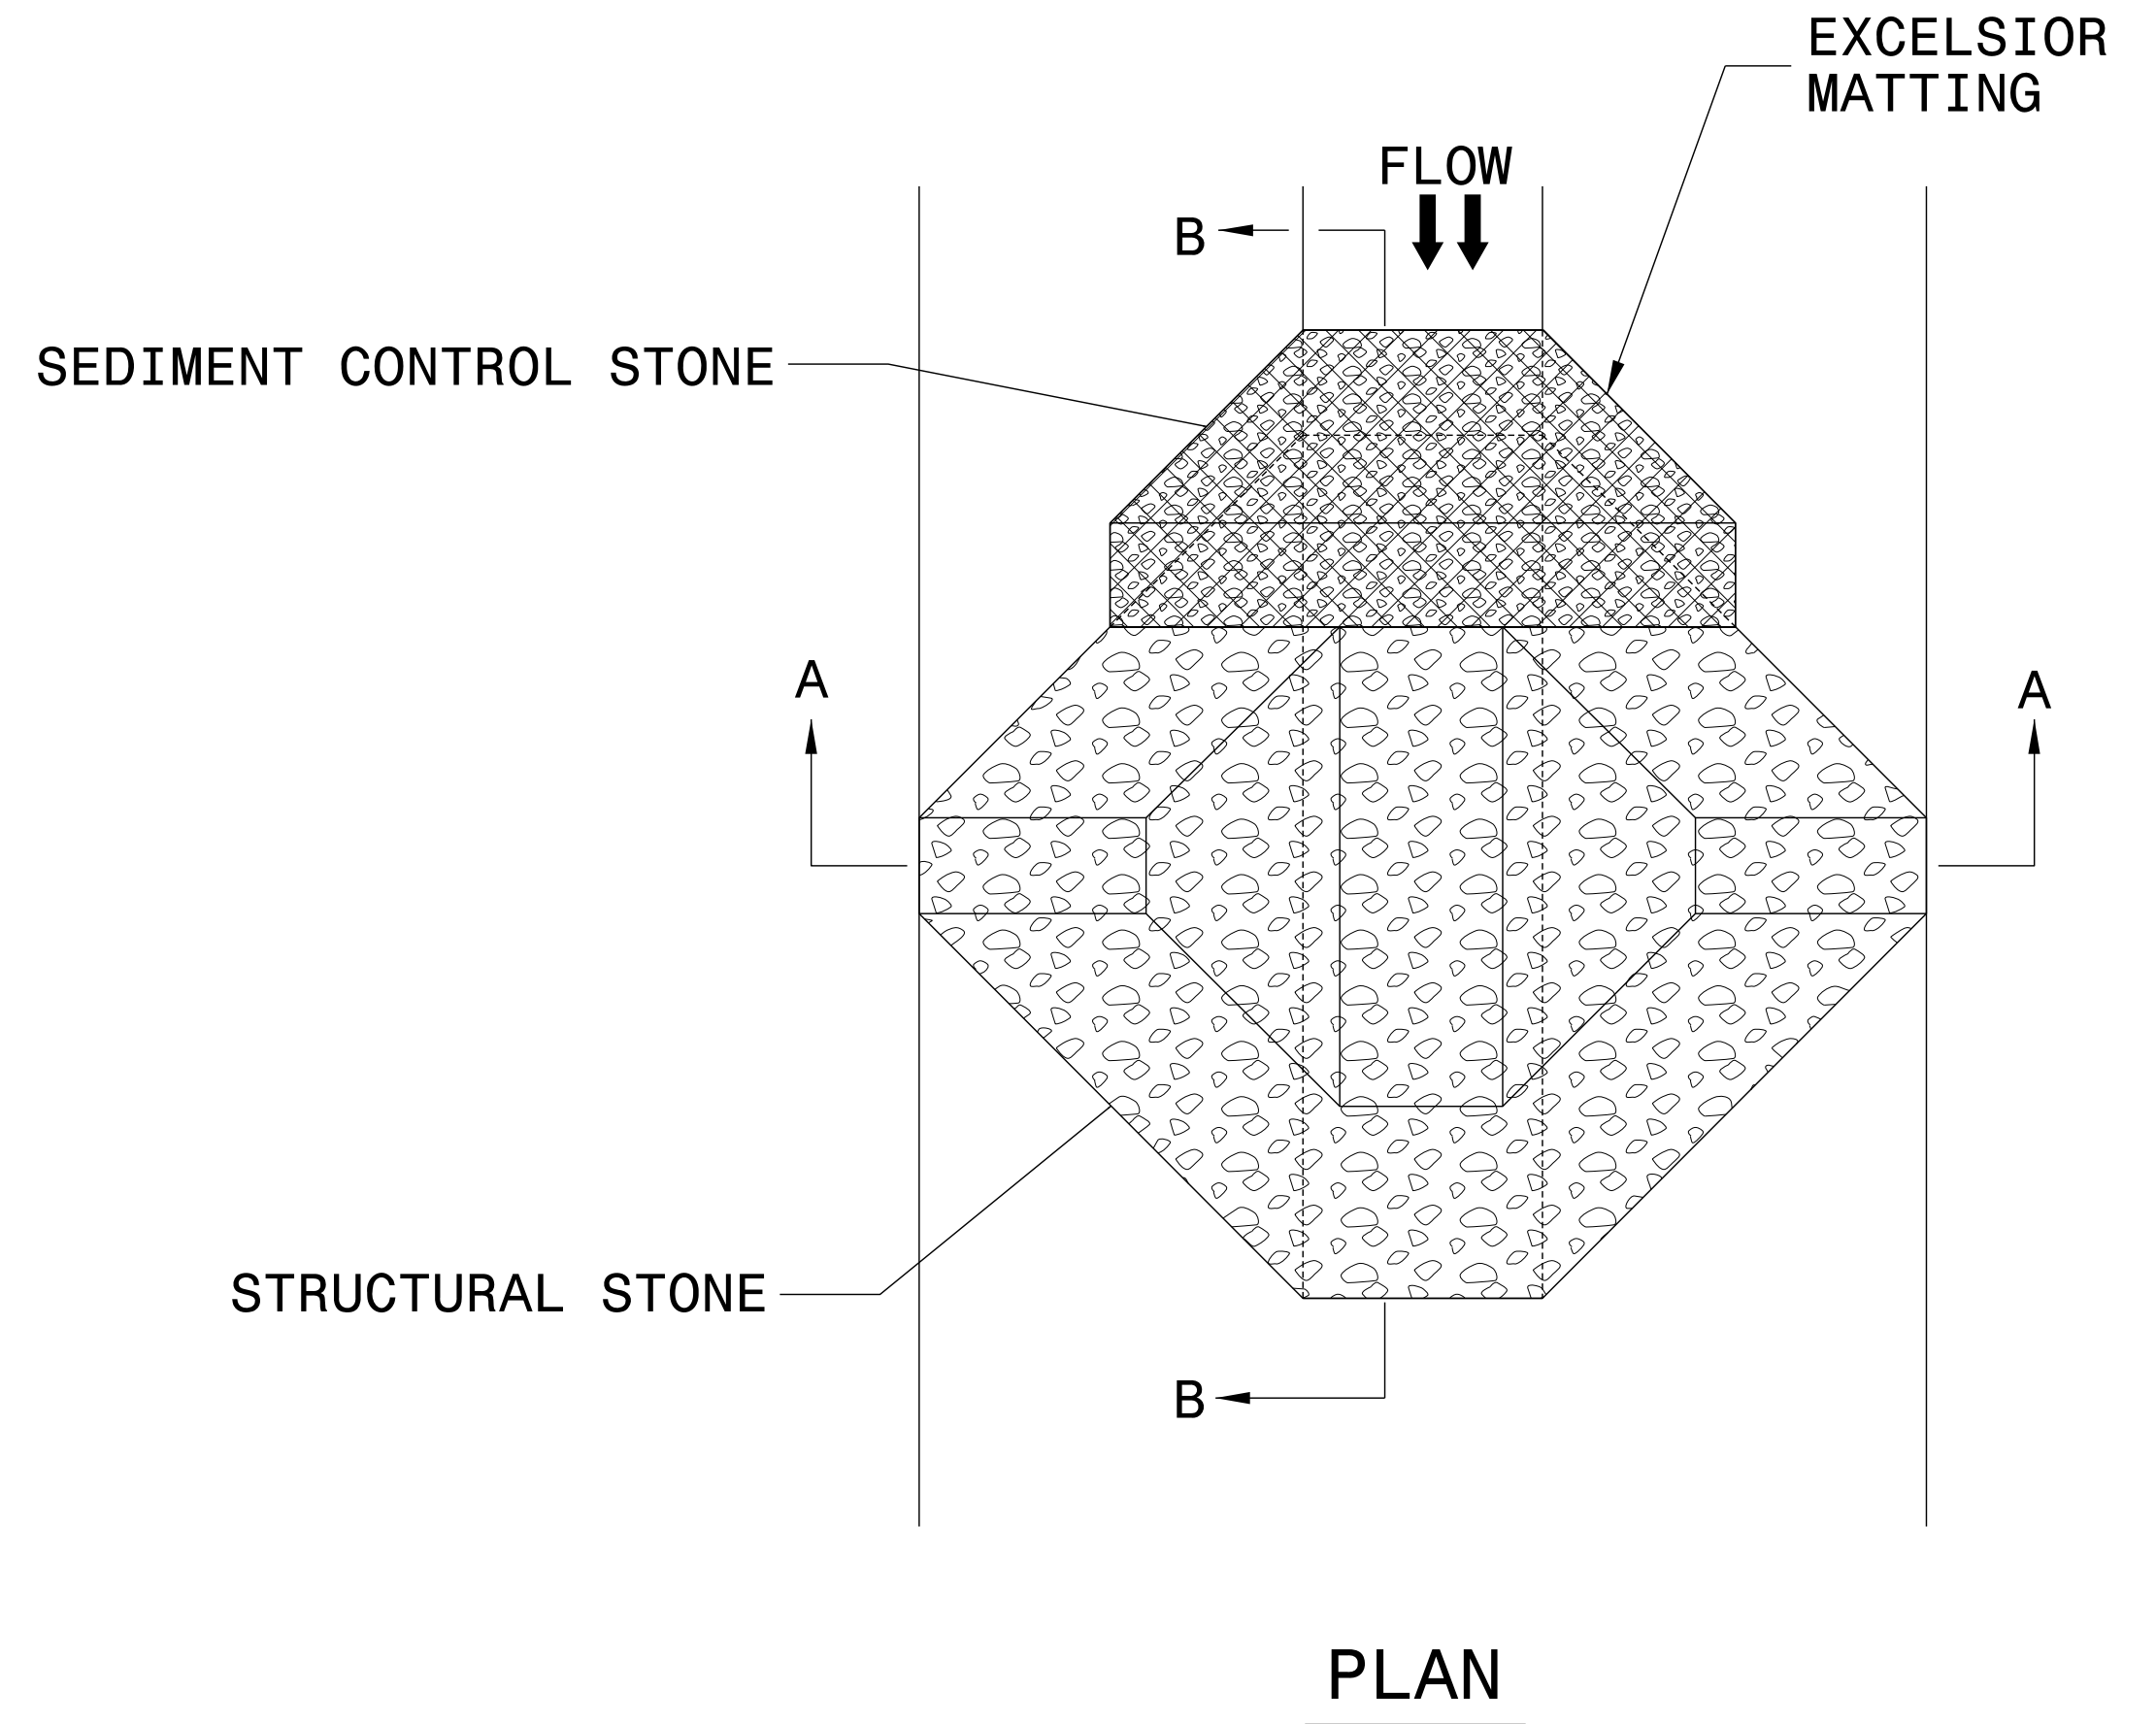




NOTES:

INSTALL TEMPORARY ROCK SILT CHECK TYPE A IN ACCORDANCE WITH ROADWAY STANDARD DRAWING NO. 1633.01.

USE EXCELSIOR FOR MATTING MATERIAL AND ANCHOR MATTING SECTION AT TOP AND BOTTOM WITH CLASS B STONE.

PRIOR TO POLYACRYLAMIDE (PAM) APPLICATION, OBTAIN A SOIL SAMPLE FROM PROJECT LOCATION, AND FROM OFFSITE MATERIAL, AND ANALYZE FOR APPROPRIATE PAM FLOCCULANT TO BE APPLIED TO EACH ROCK SILT CHECK.

INITIALLY APPLY 4 OUNCES OF POLYACRYLAMIDE (PAM) TO TOP OF MATTING SECTION AND AFTER EVERY RAINFALL EVENT THAT EQUALS OR EXCEEDS 0.50 INCHES.

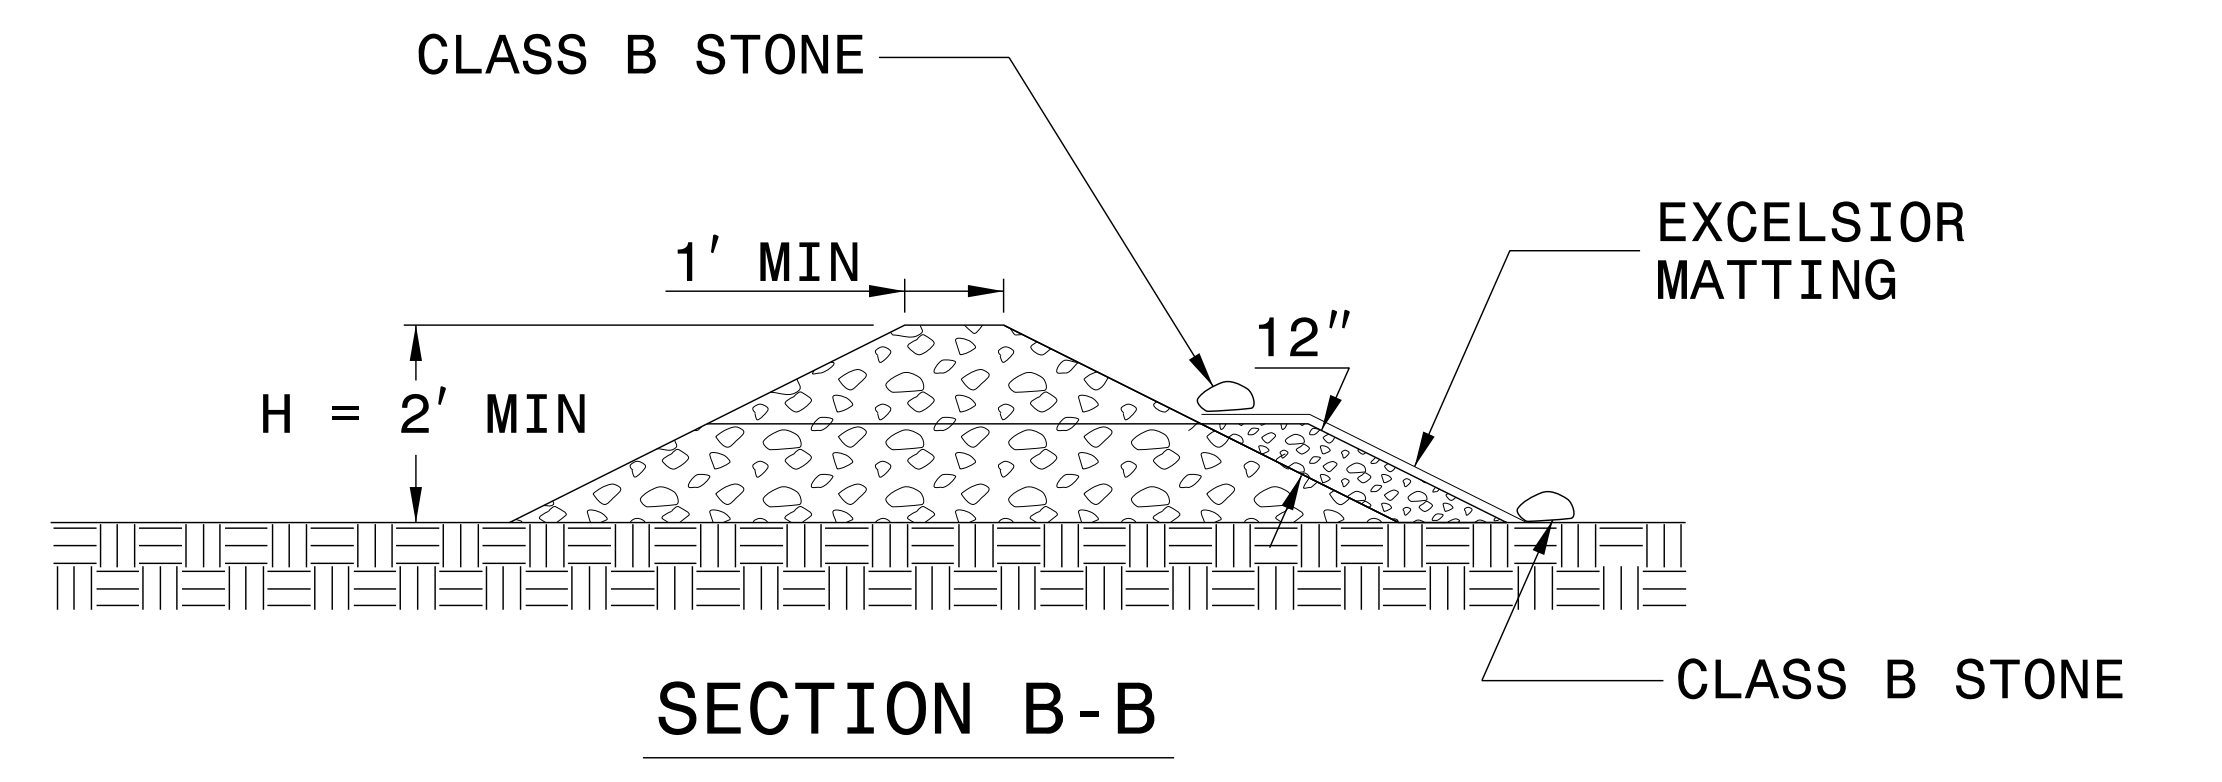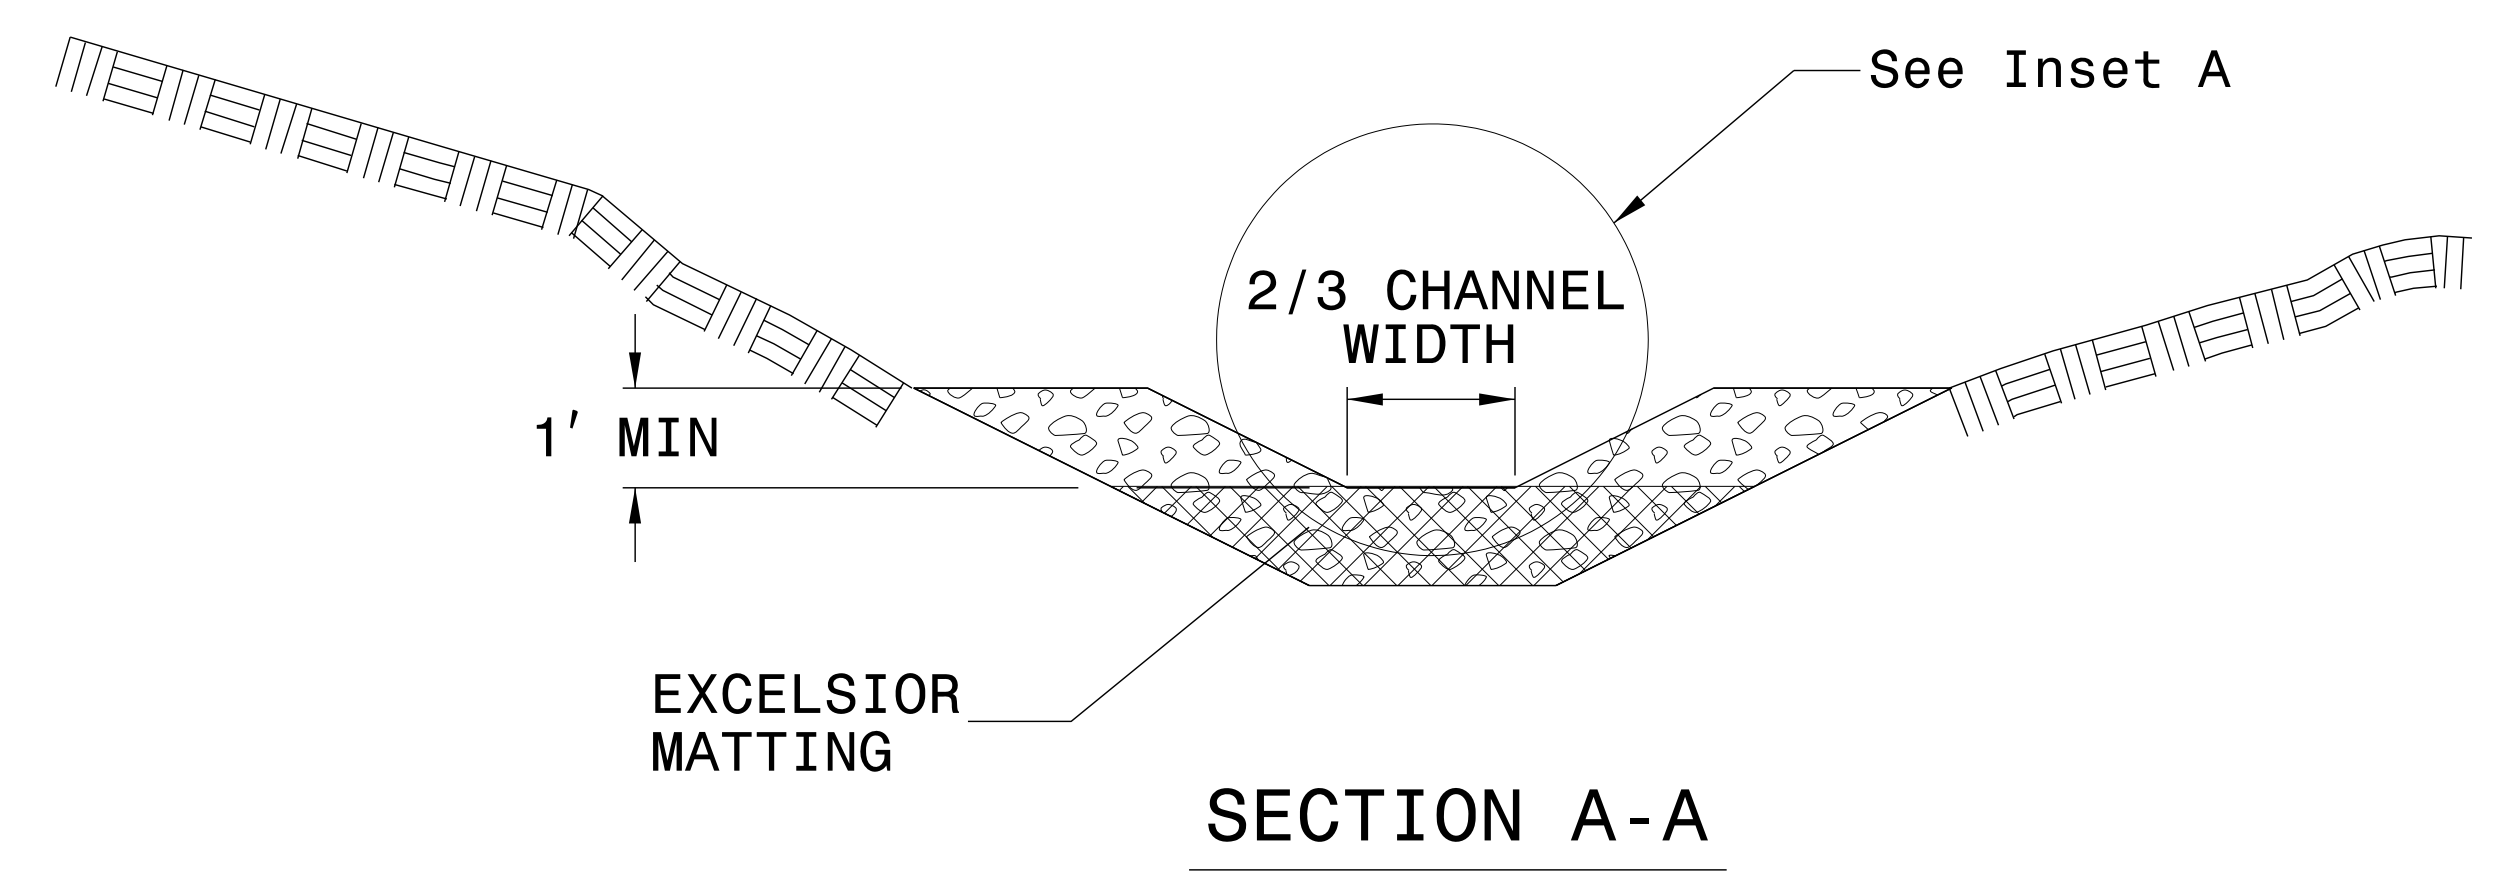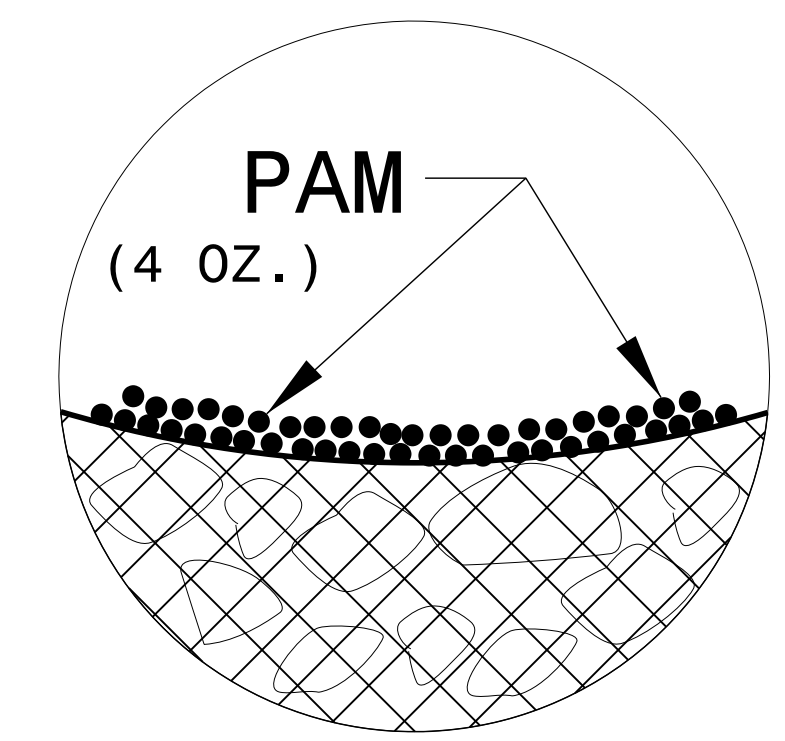

NOT TO SCALE

DIVISION OF HIGHWAYS
STATE OF NORTH CAROLINA



SOIL STABILIZATION TIMEFRAMES



<i>SITE DESCRIPTION</i>	<i>STABILIZATION TIME</i>	<i>TIMEFRAME EXCEPTIONS</i>
PERIMETER DIKES, SWALES, DITCHES AND SLOPES	7 DAYS	NONE
HIGH QUALITY WATER (HQW) ZONES	7 DAYS	NONE
SLOPES STEEPER THAN 3:1	7 DAYS	IF SLOPES ARE 10' OR LESS IN LENGTH AND ARE NOT STEEPER THAN 2:1, 14 DAYS ARE ALLOWED.
SLOPES 3:1 OR FLATTER	14 DAYS	7 DAYS FOR SLOPES GREATER THAN 50' IN LENGTH.
ALL OTHER AREAS WITH SLOPES FLATTER THAN 4:1	14 DAYS	NONE, EXCEPT FOR PERIMETERS AND HQW ZONES.

NAD 83/NA 2011

 ENVIRONMENTALLY SENSITIVE AREA
SEE PROJECT SPECIAL PROVISIONS

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

NOTE:
UTILIZE SPECIAL STILLING BASIN AS
STILLING BASIN WHERE APPLICABLE.

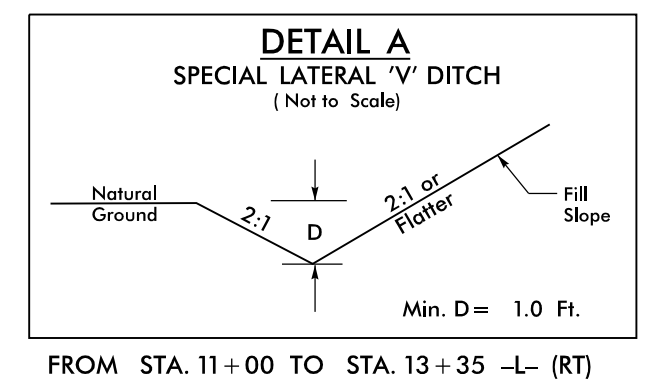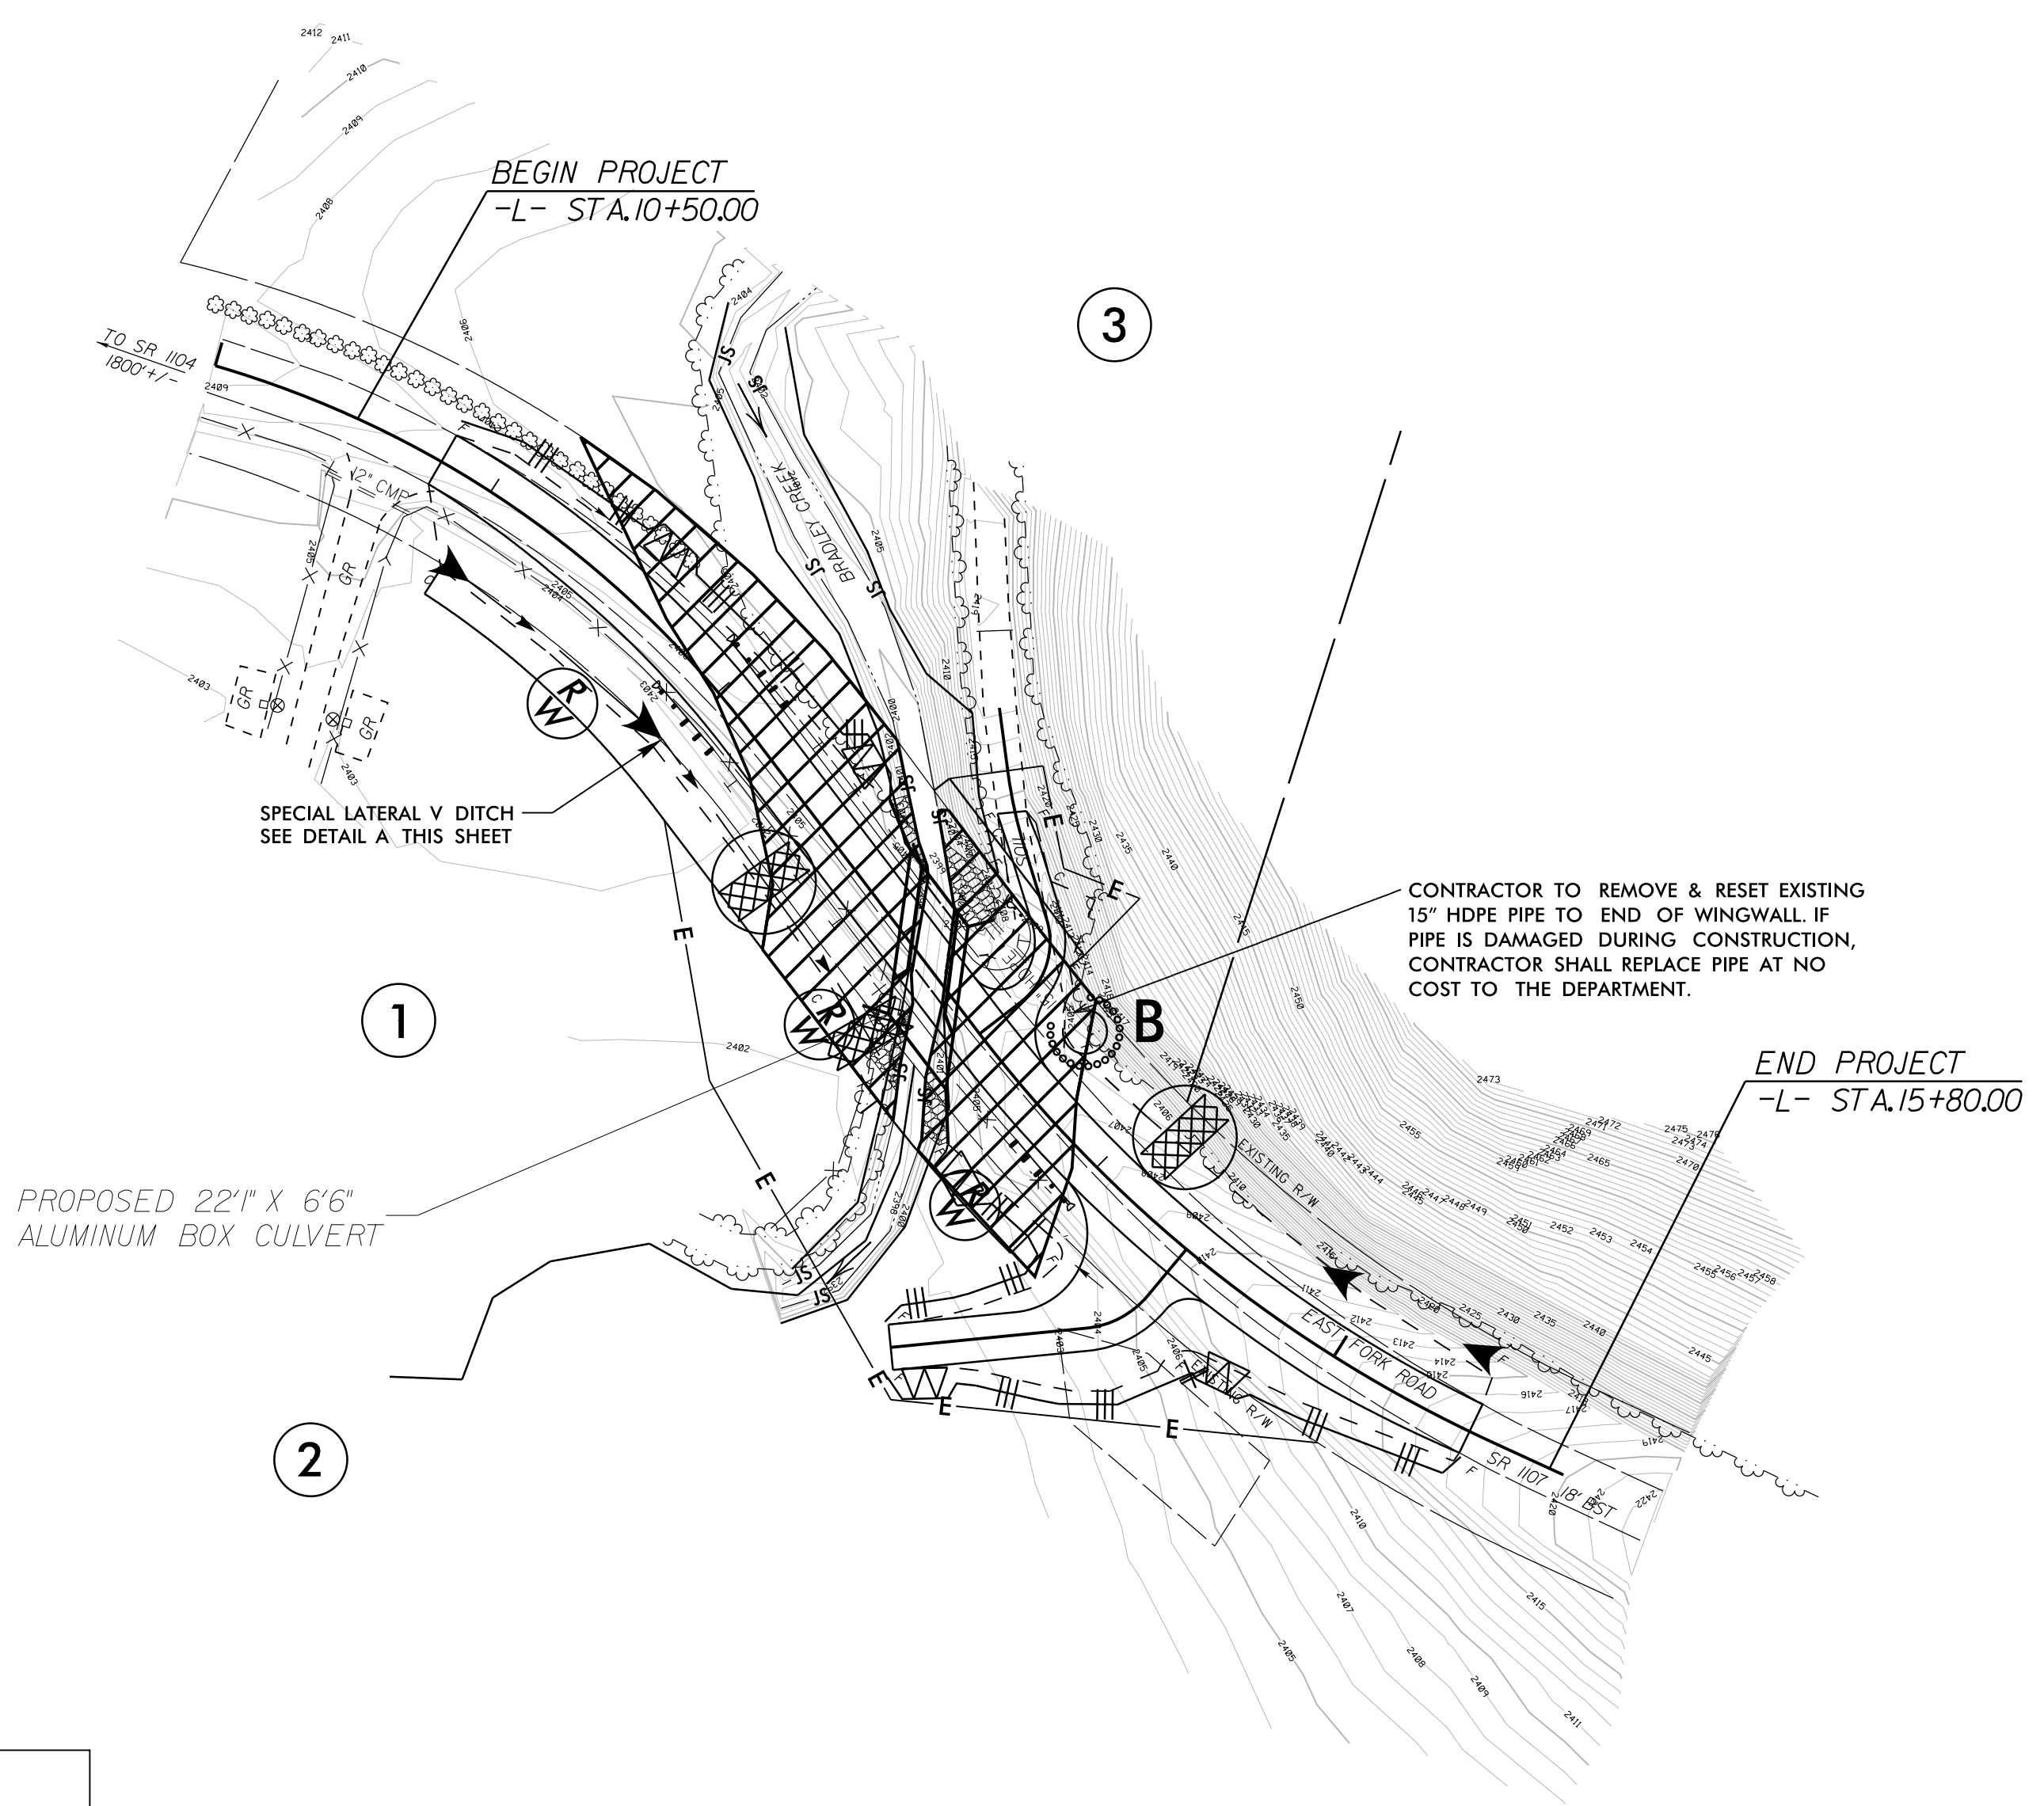



INSTALL DRIVEWAY PIPE DURING
CLEARING & GRUBBING PHASE

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 4

19_DEC_2017_07:43
 R:\Projects\17BPJ4RJ22\Design\870137_EC_dsn_4.dgn
 \$\$\$\$USERNAME\$\$\$\$

CULVERT CONSTRUCTION SEQUENCE -L- STA. 13 + 14



1. UTILIZE SPECIAL STILLING BASIN(S) AS NEEDED THROUGHOUT CULVERT CONSTRUCTION.
2. STAGE 1 - CONSTRUCT IMPERVIOUS DIKES FOR THE DETOUR AND INSTALL 24 INCH TEMPORARY PIPE, DIVERTING FLOW THROUGH THE TEMPORARY PIPE.
3. CONSTRUCT PROPOSED DETOUR CULVERT AND INLET/OUTLET CHANNEL IMPROVEMENTS.
4. REMOVE IMPERVIOUS DIKES AND TEMPORARY PIPE FOR THE DETOUR. DIVERT FLOW THROUGH THE DETOUR CULVERT.
5. STAGE 2 - CONSTRUCT IMPERVIOUS DIKES FOR THE PROPOSED CULVERT AND INSTALL 24 INCH TEMPORARY PIPE, DIVERTING FLOW THROUGH THE TEMPORARY PIPE.
6. CONSTRUCT PROPOSED CULVERT AND INLET/OUTLET CHANNEL IMPROVEMENTS.
7. REMOVE IMPERVIOUS DIKES AND TEMPORARY PIPE. DIVERT FLOW THROUGH THE PROPOSED CULVERT.
8. COMPLETE ROADWAY.

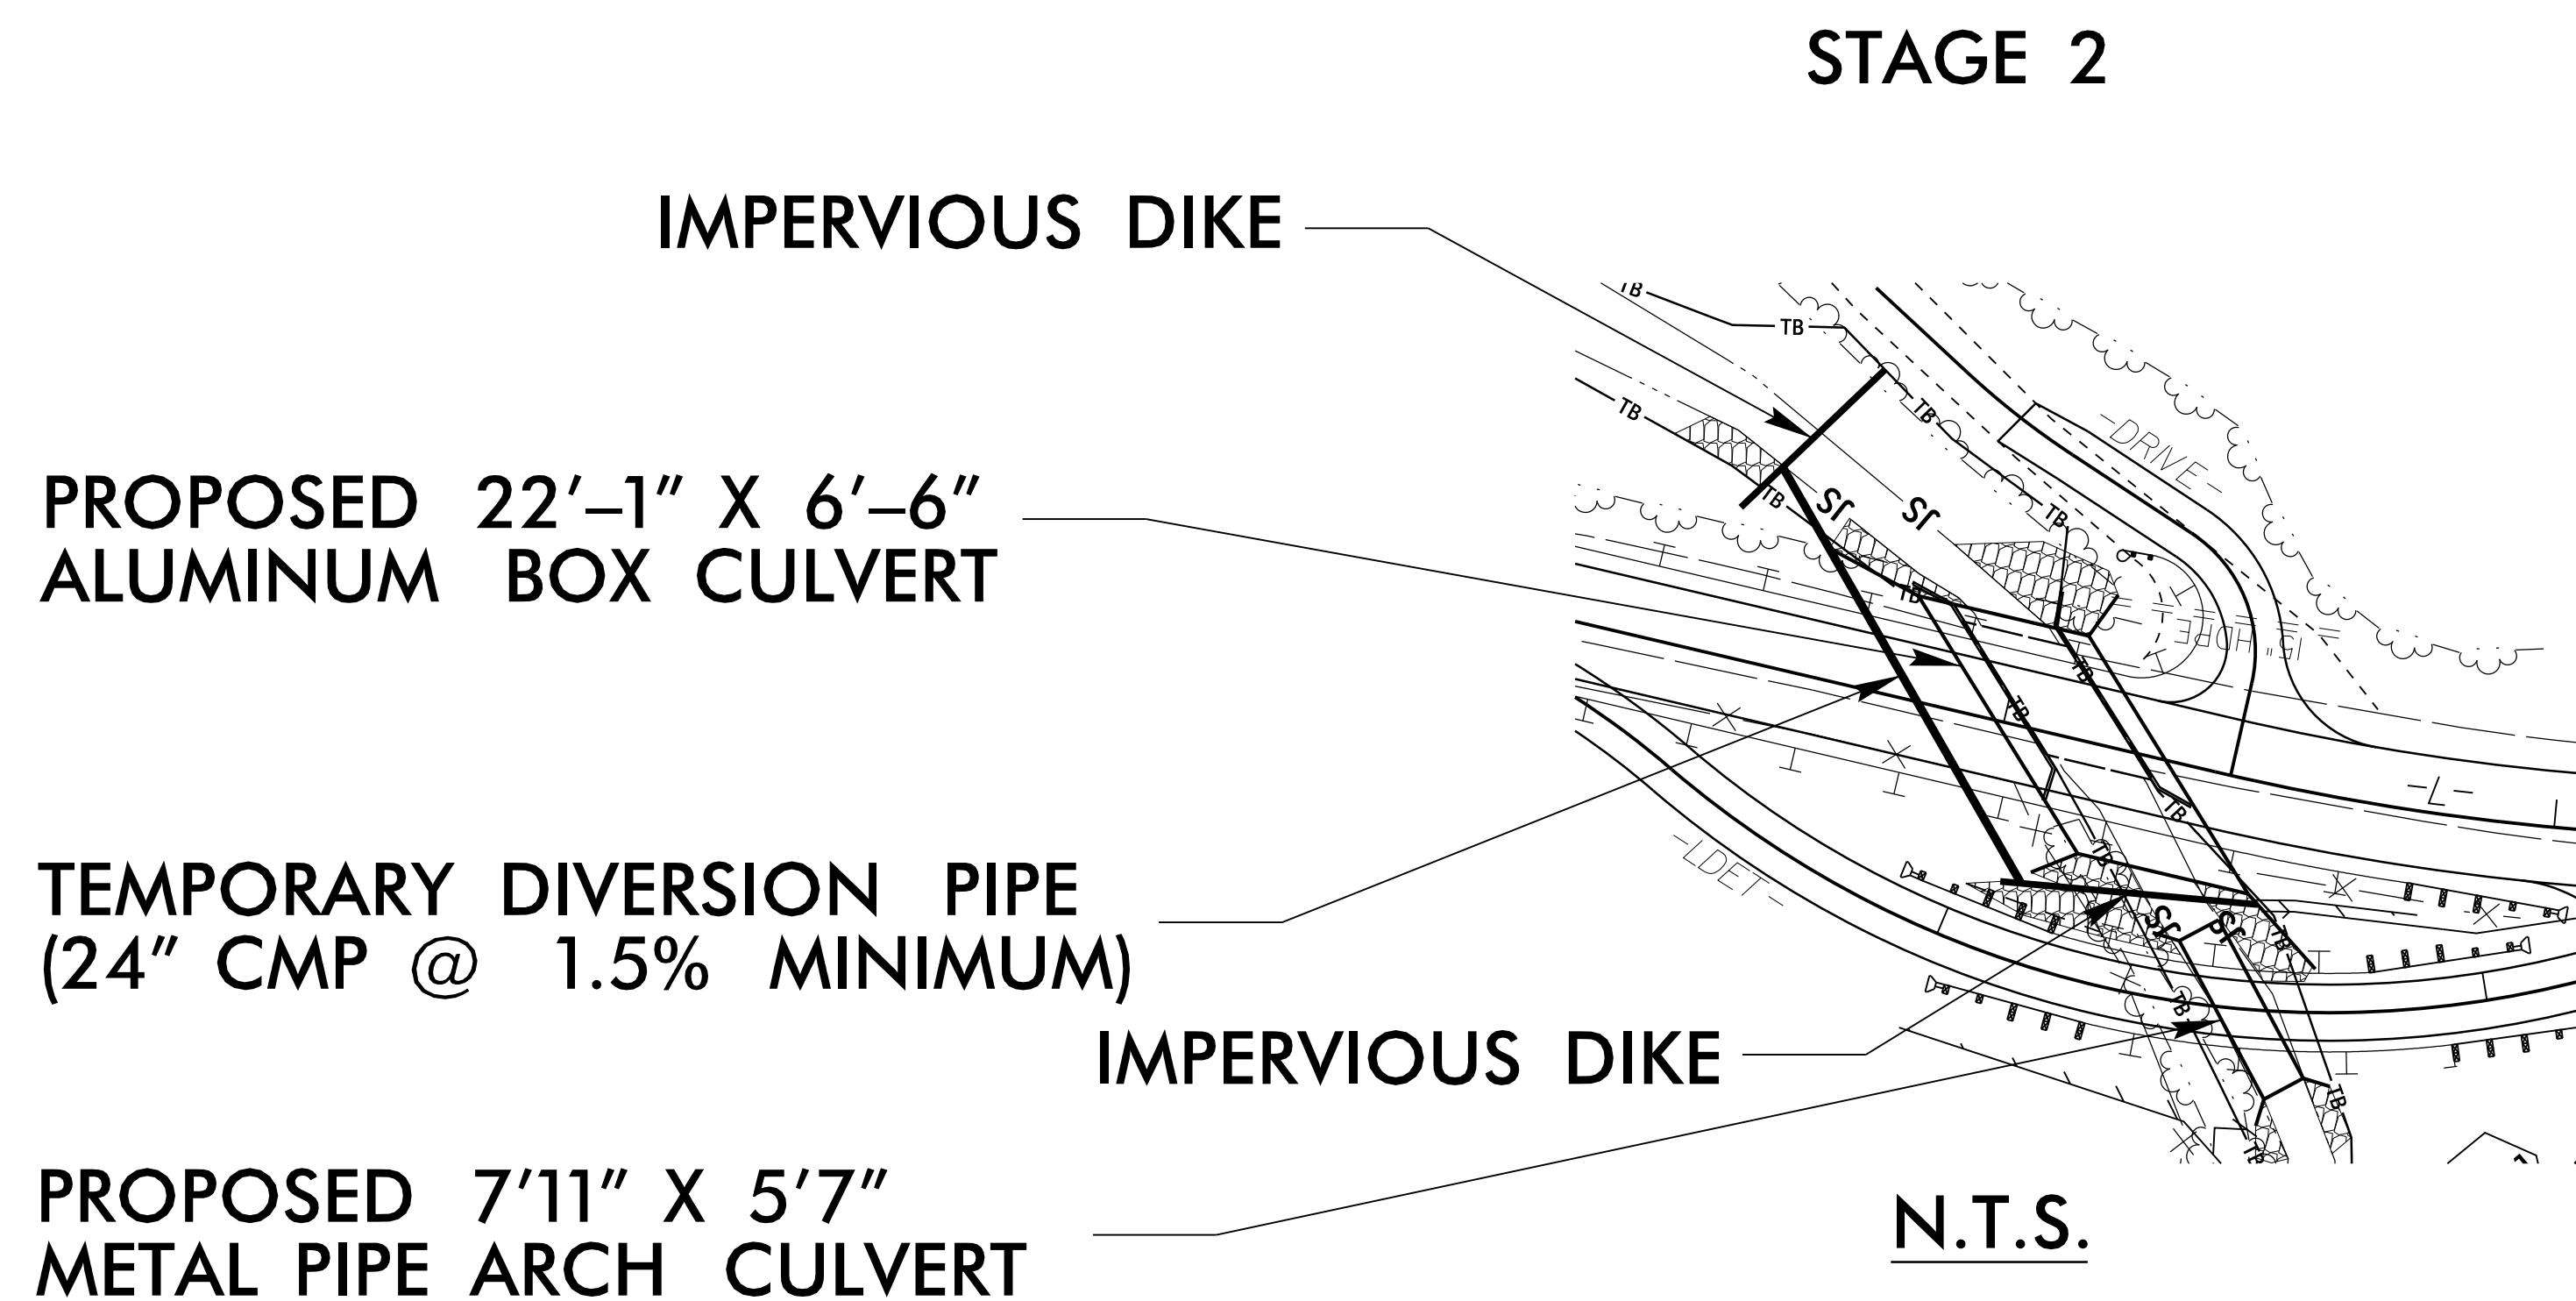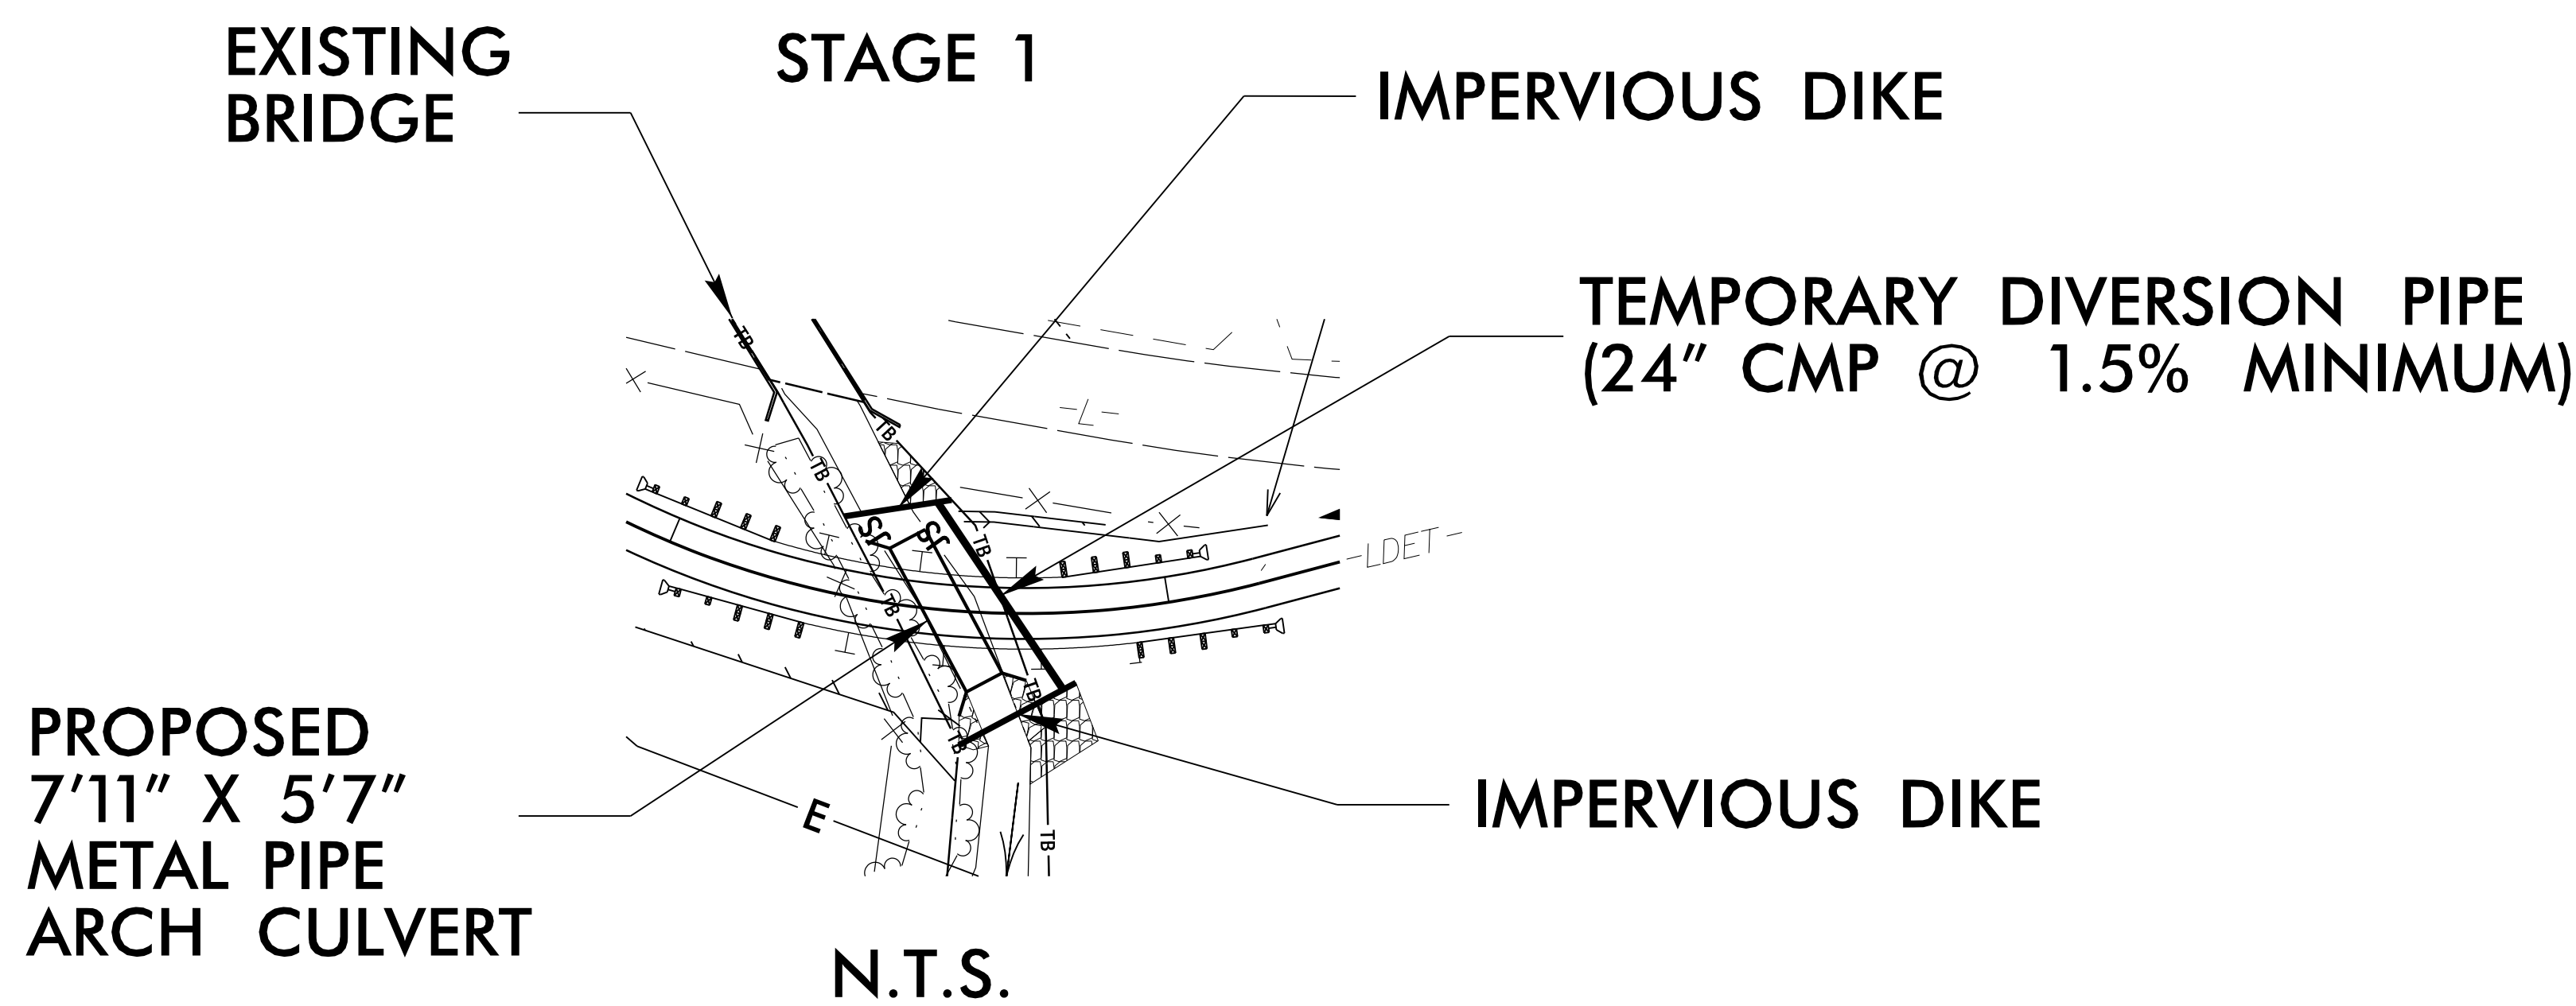


B/17/99
 19-QEC-2017_07:54_Design\870137_EC_dsm_5.dgn
 19-07-2017 07:54
 19-07-2017 07:54

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

NOTE:
UTILIZE SPECIAL STILLING BASIN AS
STILLING BASIN WHERE APPLICABLE.

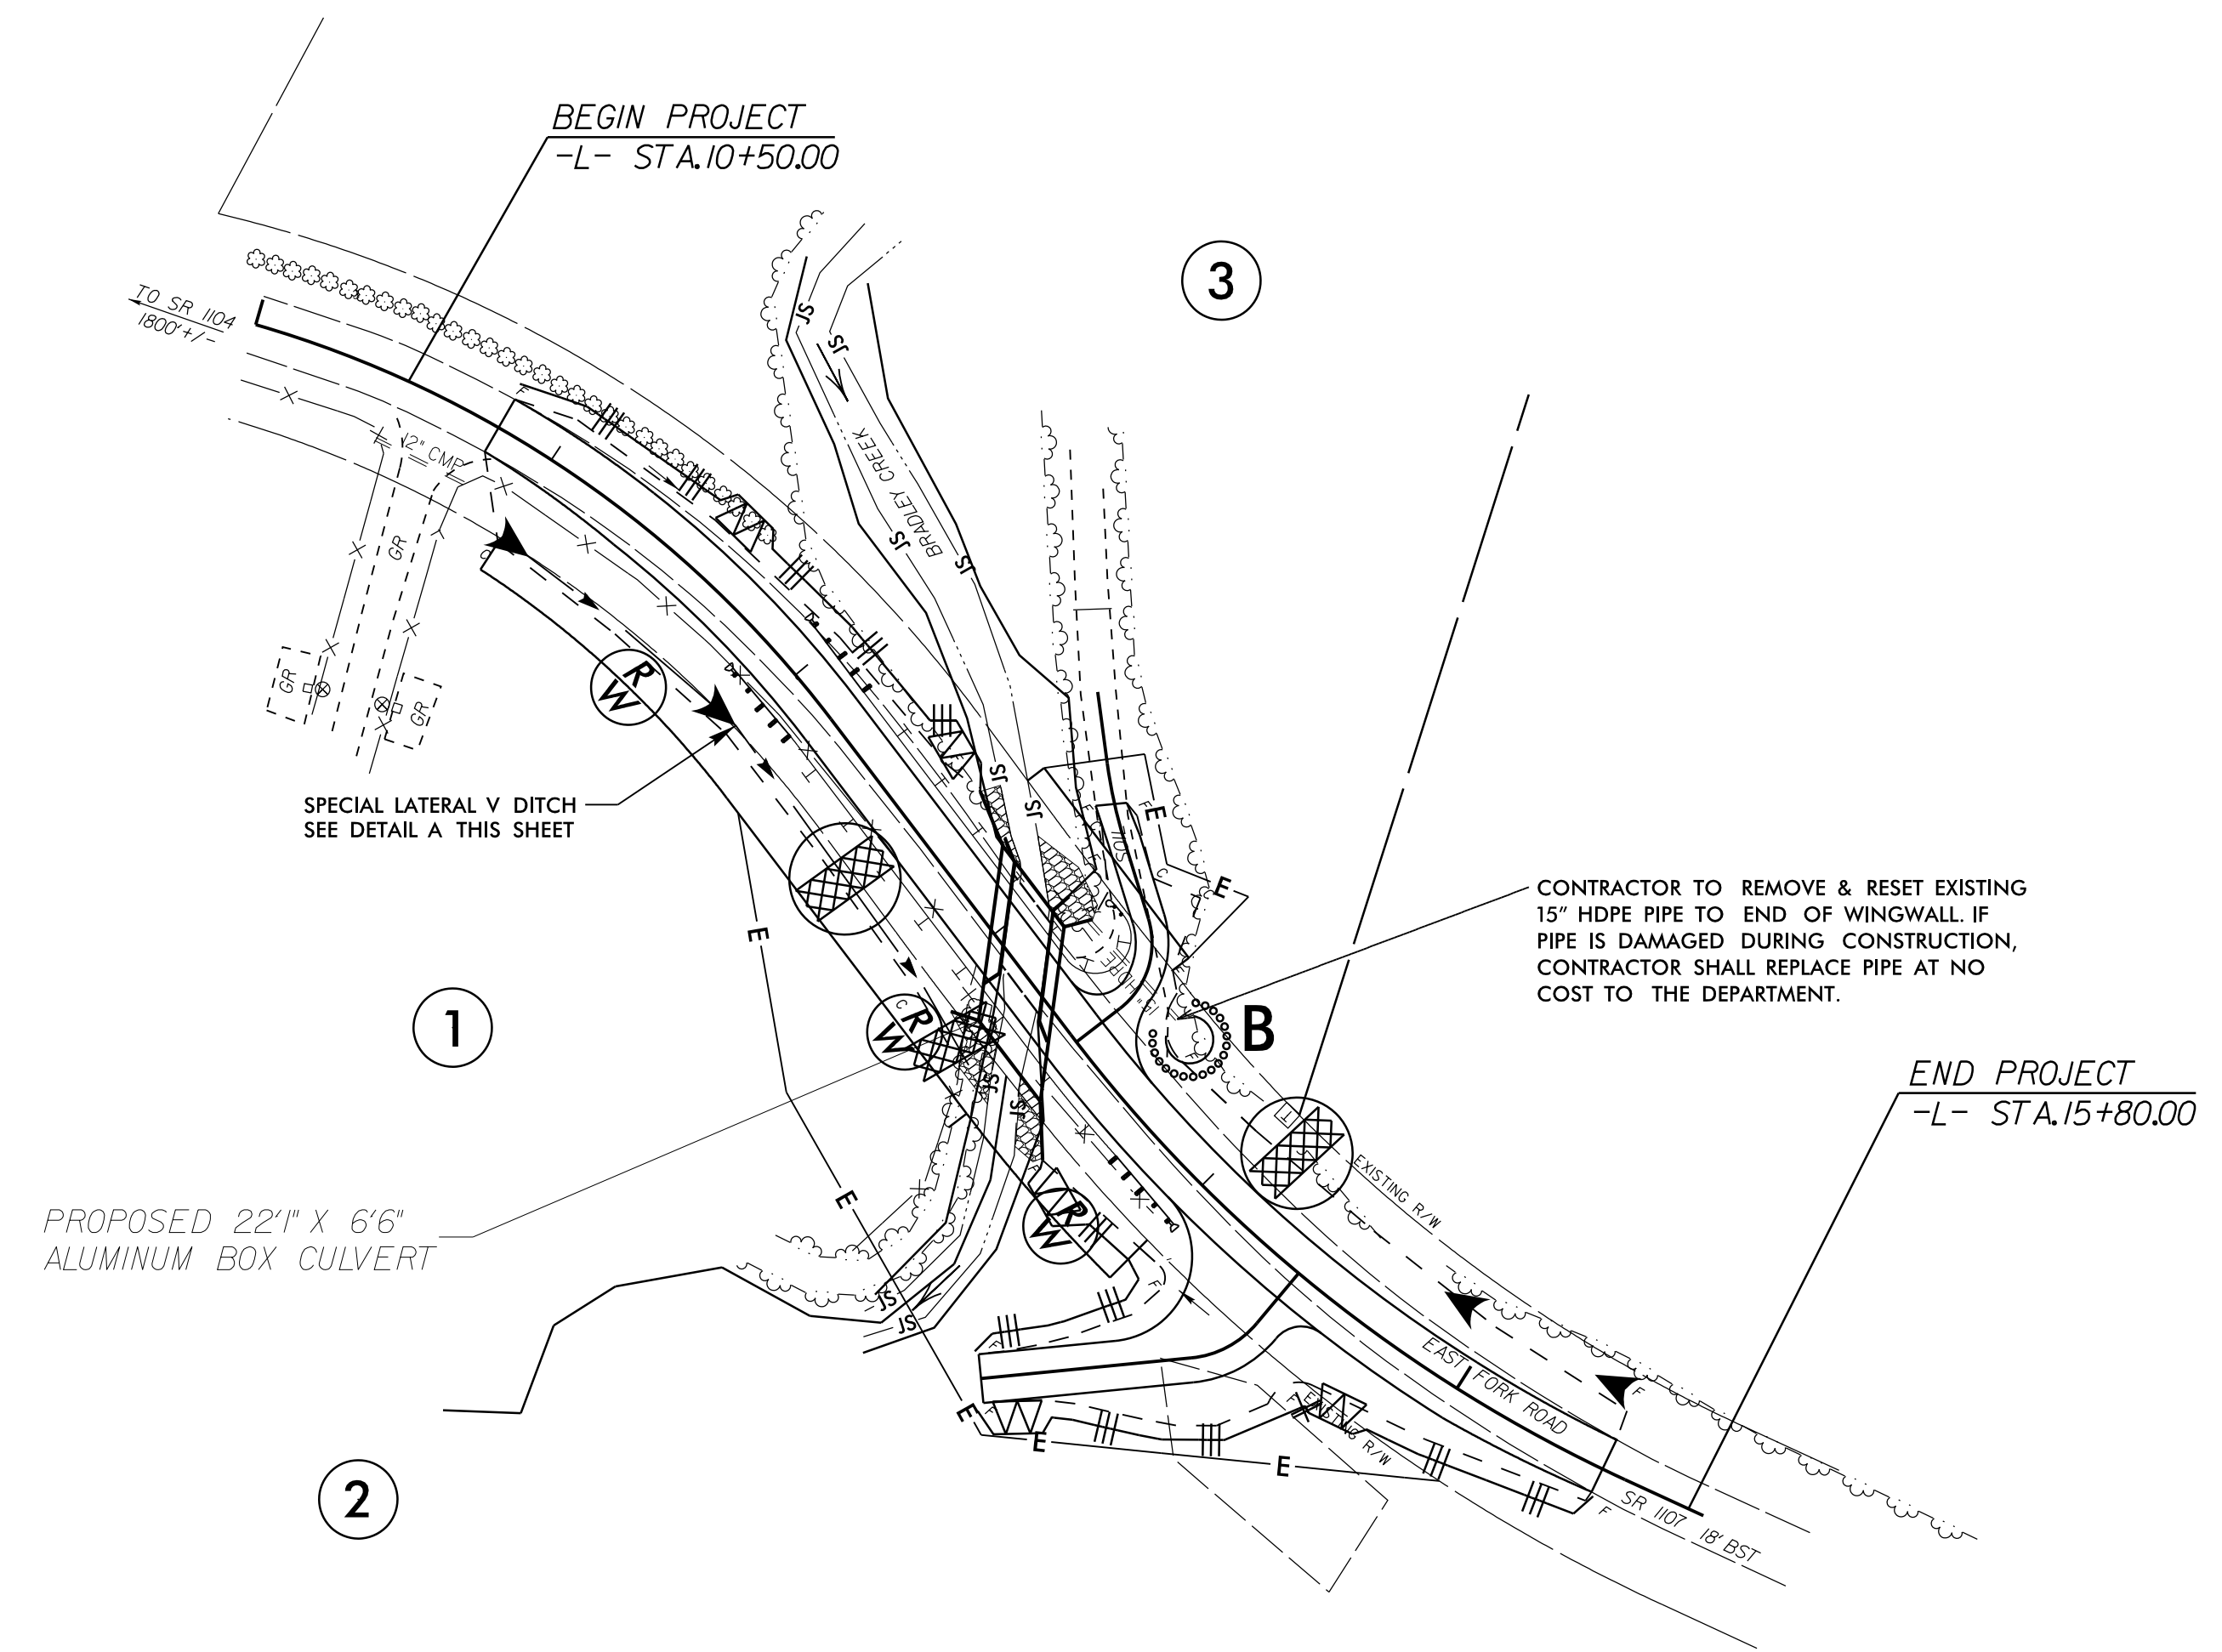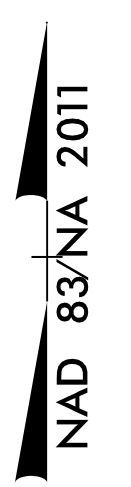

CONTRACTOR TO REMOVE & RESET EXISTING
15" HDPE PIPE TO END OF WINGWALL. IF
PIPE IS DAMAGED DURING CONSTRUCTION,
CONTRACTOR SHALL REPLACE PIPE AT NO
COST TO THE DEPARTMENT.

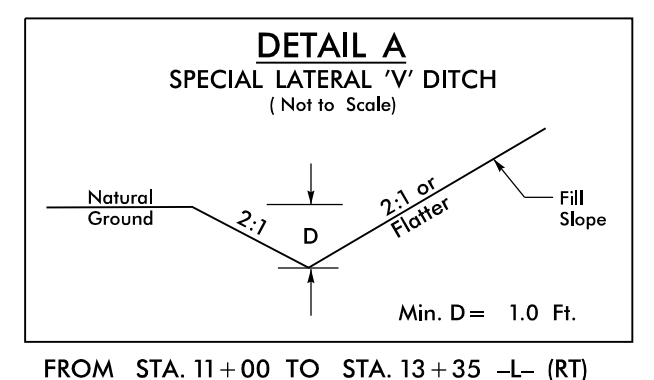

FROM STA. 11+00 TO STA. 13+35 -L- (RT)

**HIGH QUALITY WATER(S) EXIST
ON THIS PROJECT**

High Quality Water Zone Exist
From Sta. 10+81
to Sta. 15+51
Refer To E. C. Special Provisions
for Special Considerations.

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL
REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY
NEED TO BE INSTALLED AS DIRECTED BY THE
ENGINEER.

19_DEC_2017_07:57
R:\Projects\17BPJ4RJ22\Design\870137_EC_dsm_6.dgn
\$\$\$\$\$UNOFFICIAL\$\$\$\$\$



DETOUR

 ENVIRONMENTALLY SENSITIVE AREA
SEE PROJECT SPECIAL PROVISIONS

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

NOTE:
UTILIZE SPECIAL STILLING BASIN AS
STILLING BASIN WHERE APPLICABLE.

NAD 83/NA 2011

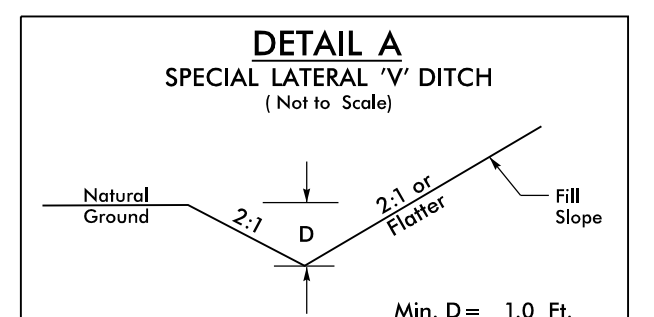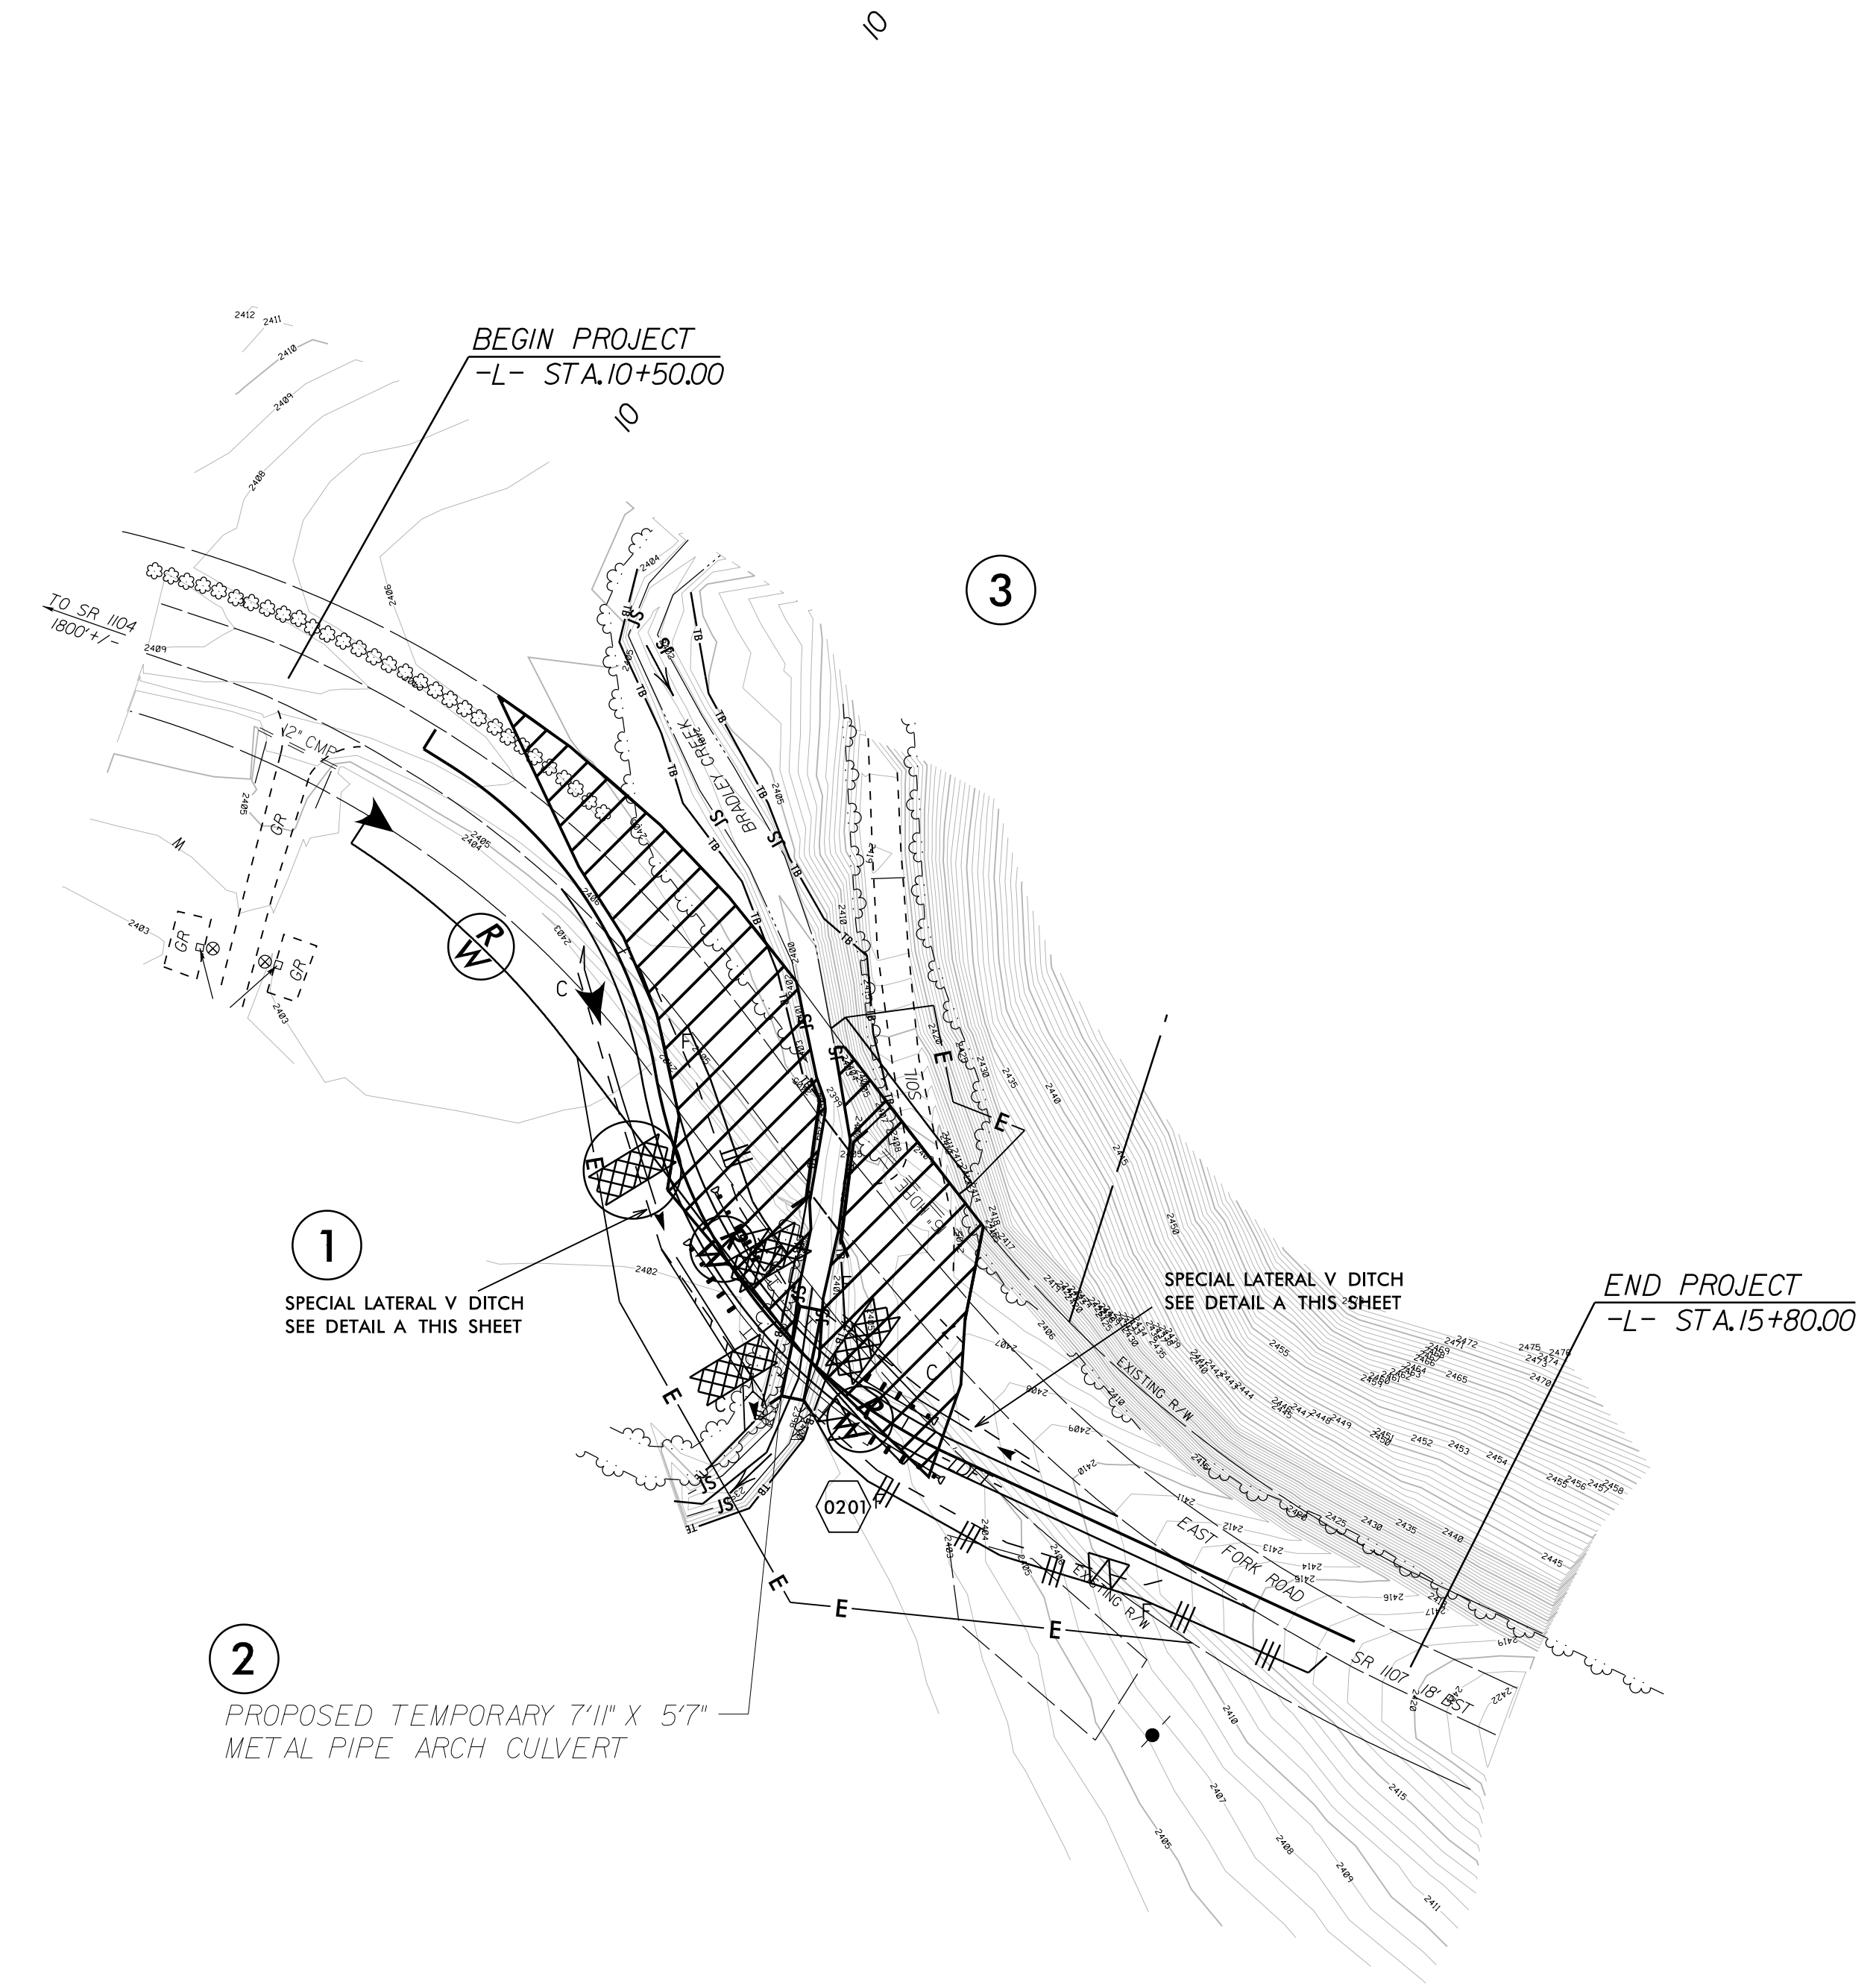

FROM STA. 10+92 TO STA. 12+62.99 -LDET- (RT)
FROM STA. 12+58.33 TO STA. 13+50 -LDET- (LT)

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 4



8/17/99
19 DEC 2017 08:00
R:\PROJECTS\17BPJ4RJ22\Design\870137_EC_dsm_7.dgn
\$\$\$\$\$UNSERVED\$\$\$\$\$

DETOUR

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE:
UTILIZE SPECIAL STILLING BASIN AS STILLING BASIN WHERE APPLICABLE.

NAD 83/NA 2011

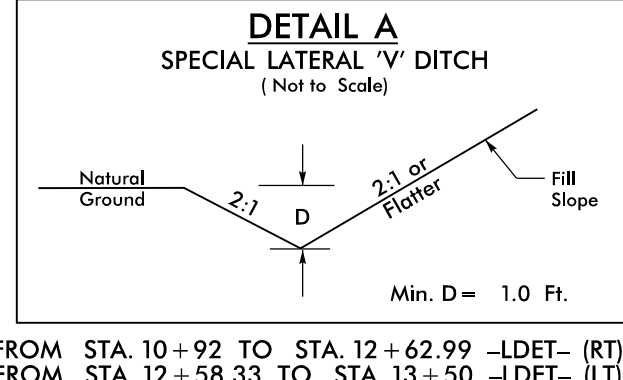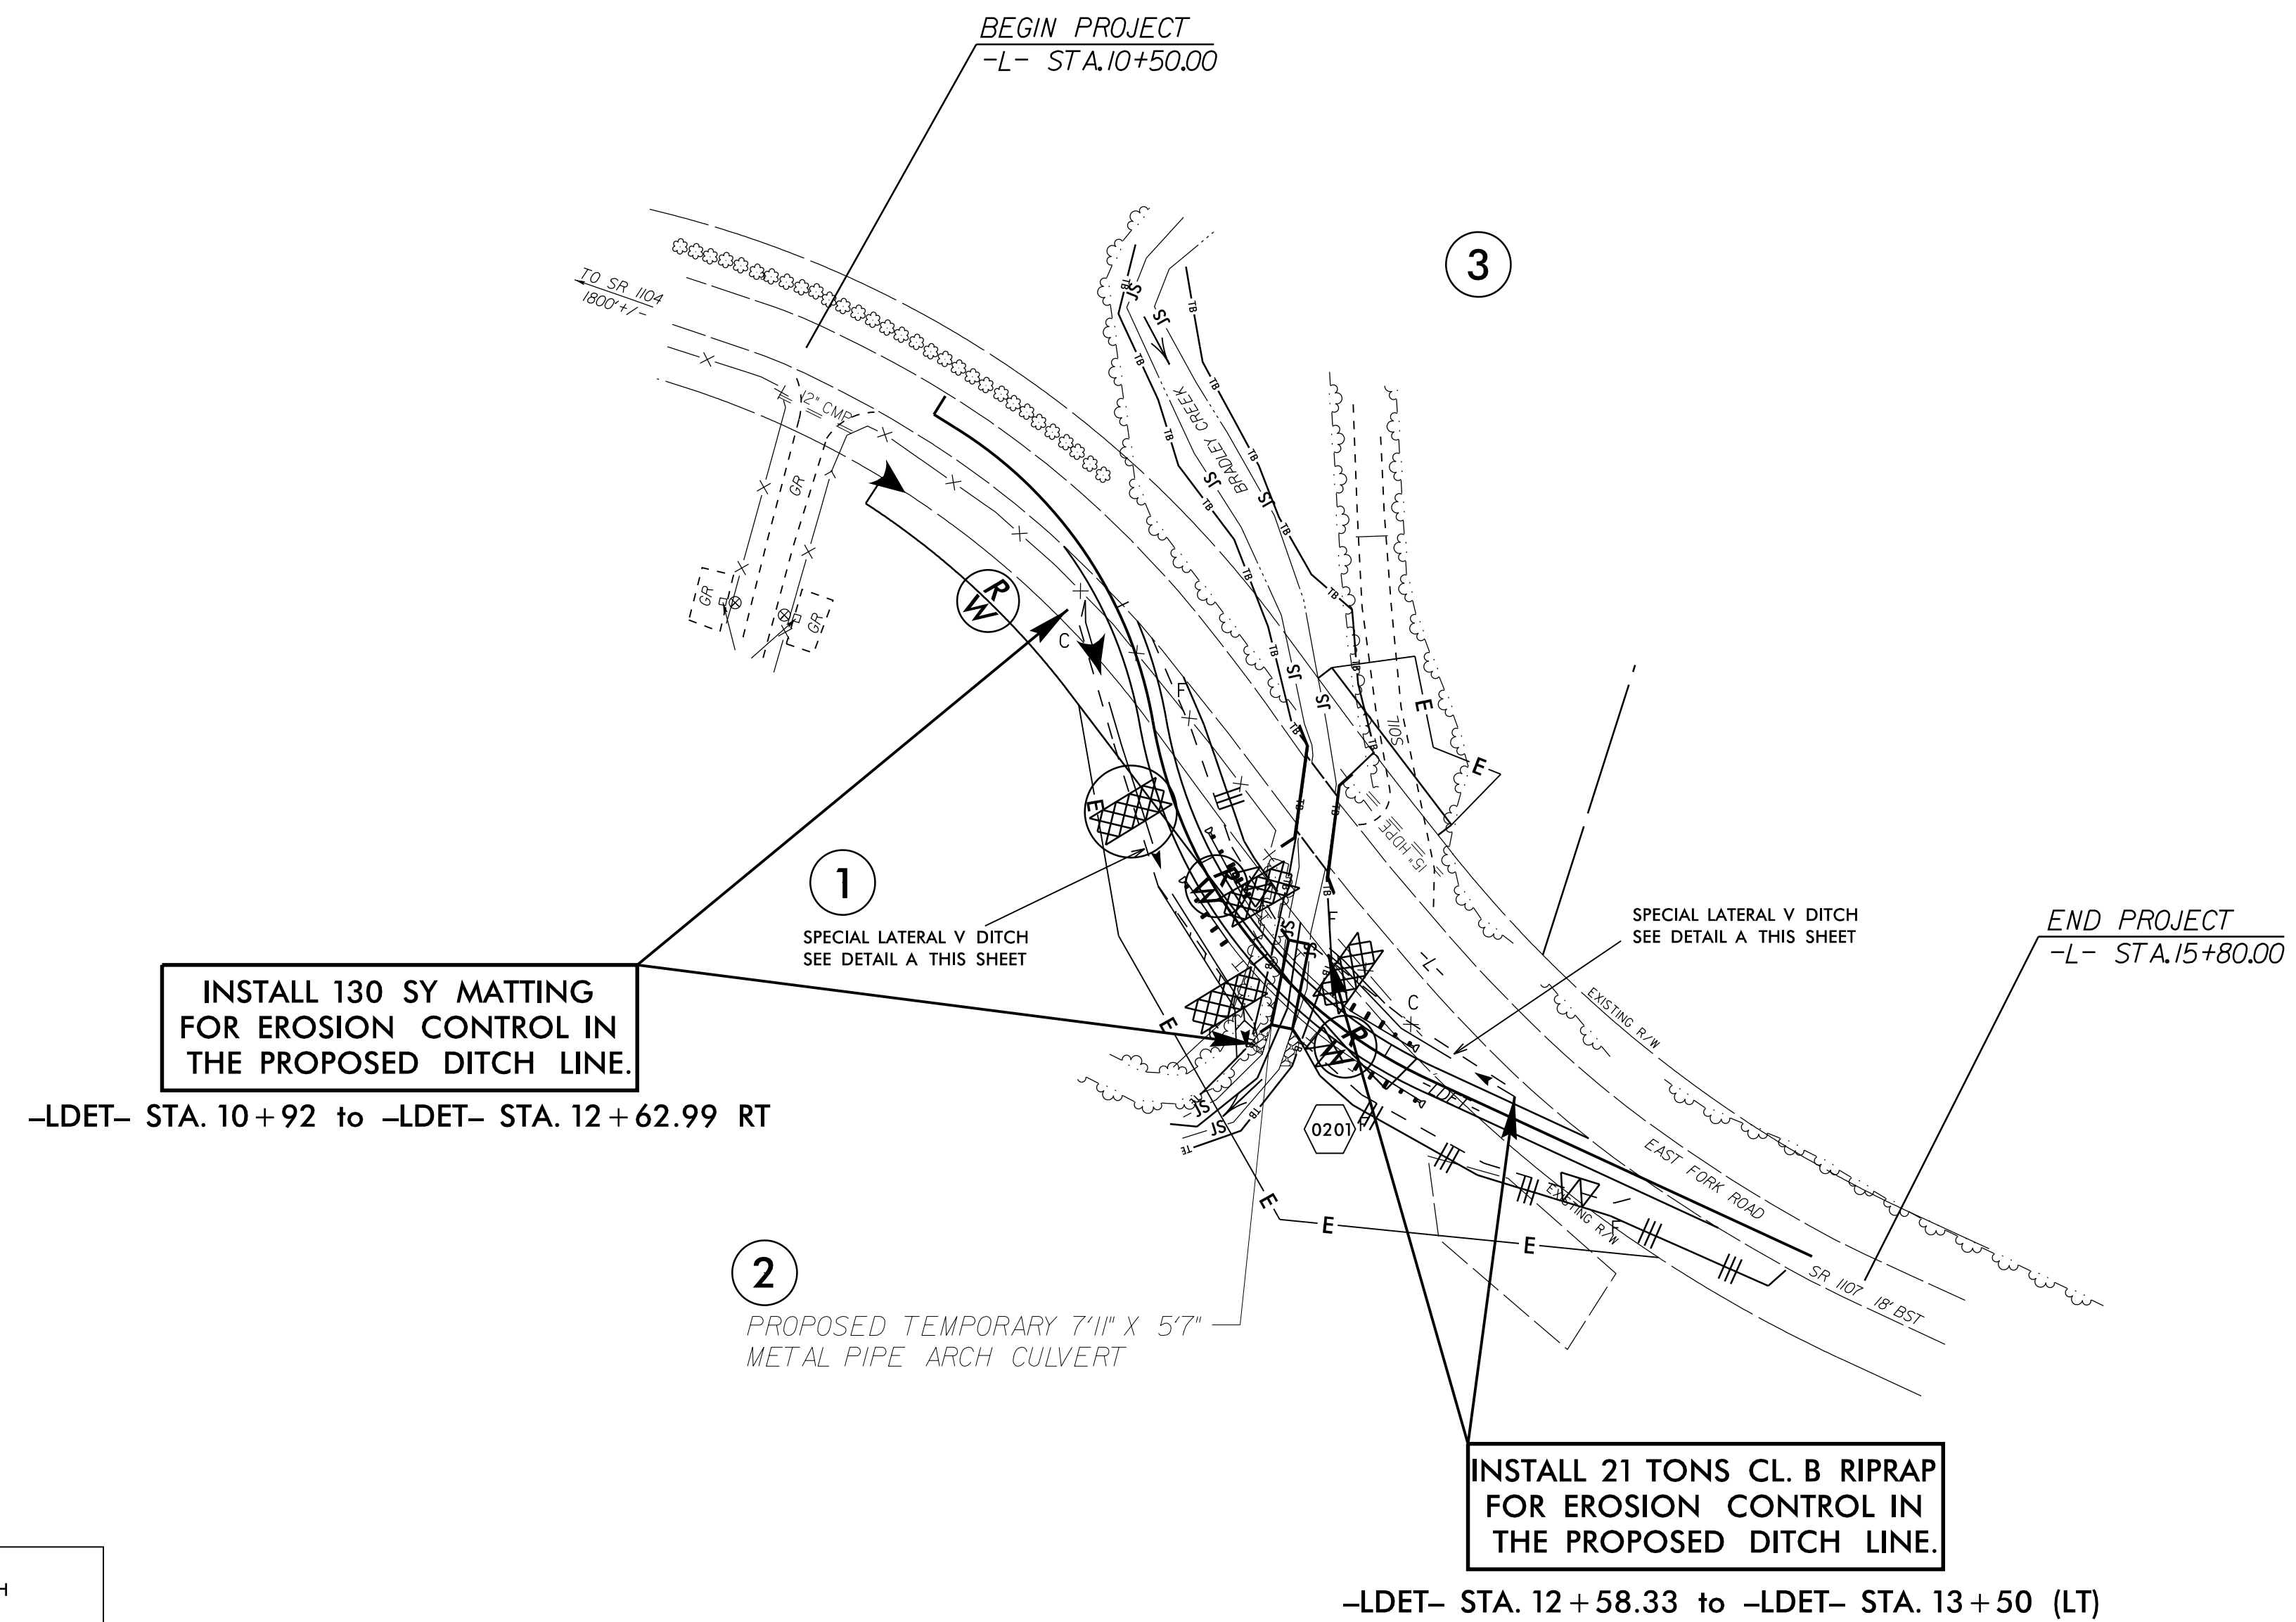

FROM STA. 10+92 TO STA. 12+62.99 -LDET- (RT)
FROM STA. 12+58.33 TO STA. 13+50 -LDET- (LT)

HIGH QUALITY WATER(S) EXIST ON THIS PROJECT

High Quality Water Zone Exist
From Sta. 10+81
to Sta. 15+51
Refer To E. C. Special Provisions for Special Considerations.


NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

19_DEC_2017_08:02
R:\N\Projects\17BPJ4RJ22\17BPJ4RJ22_EC.dgn
USER:RMM

WBS ELEMENT: 17BP.14.R.122

CONTRACT: DN00290

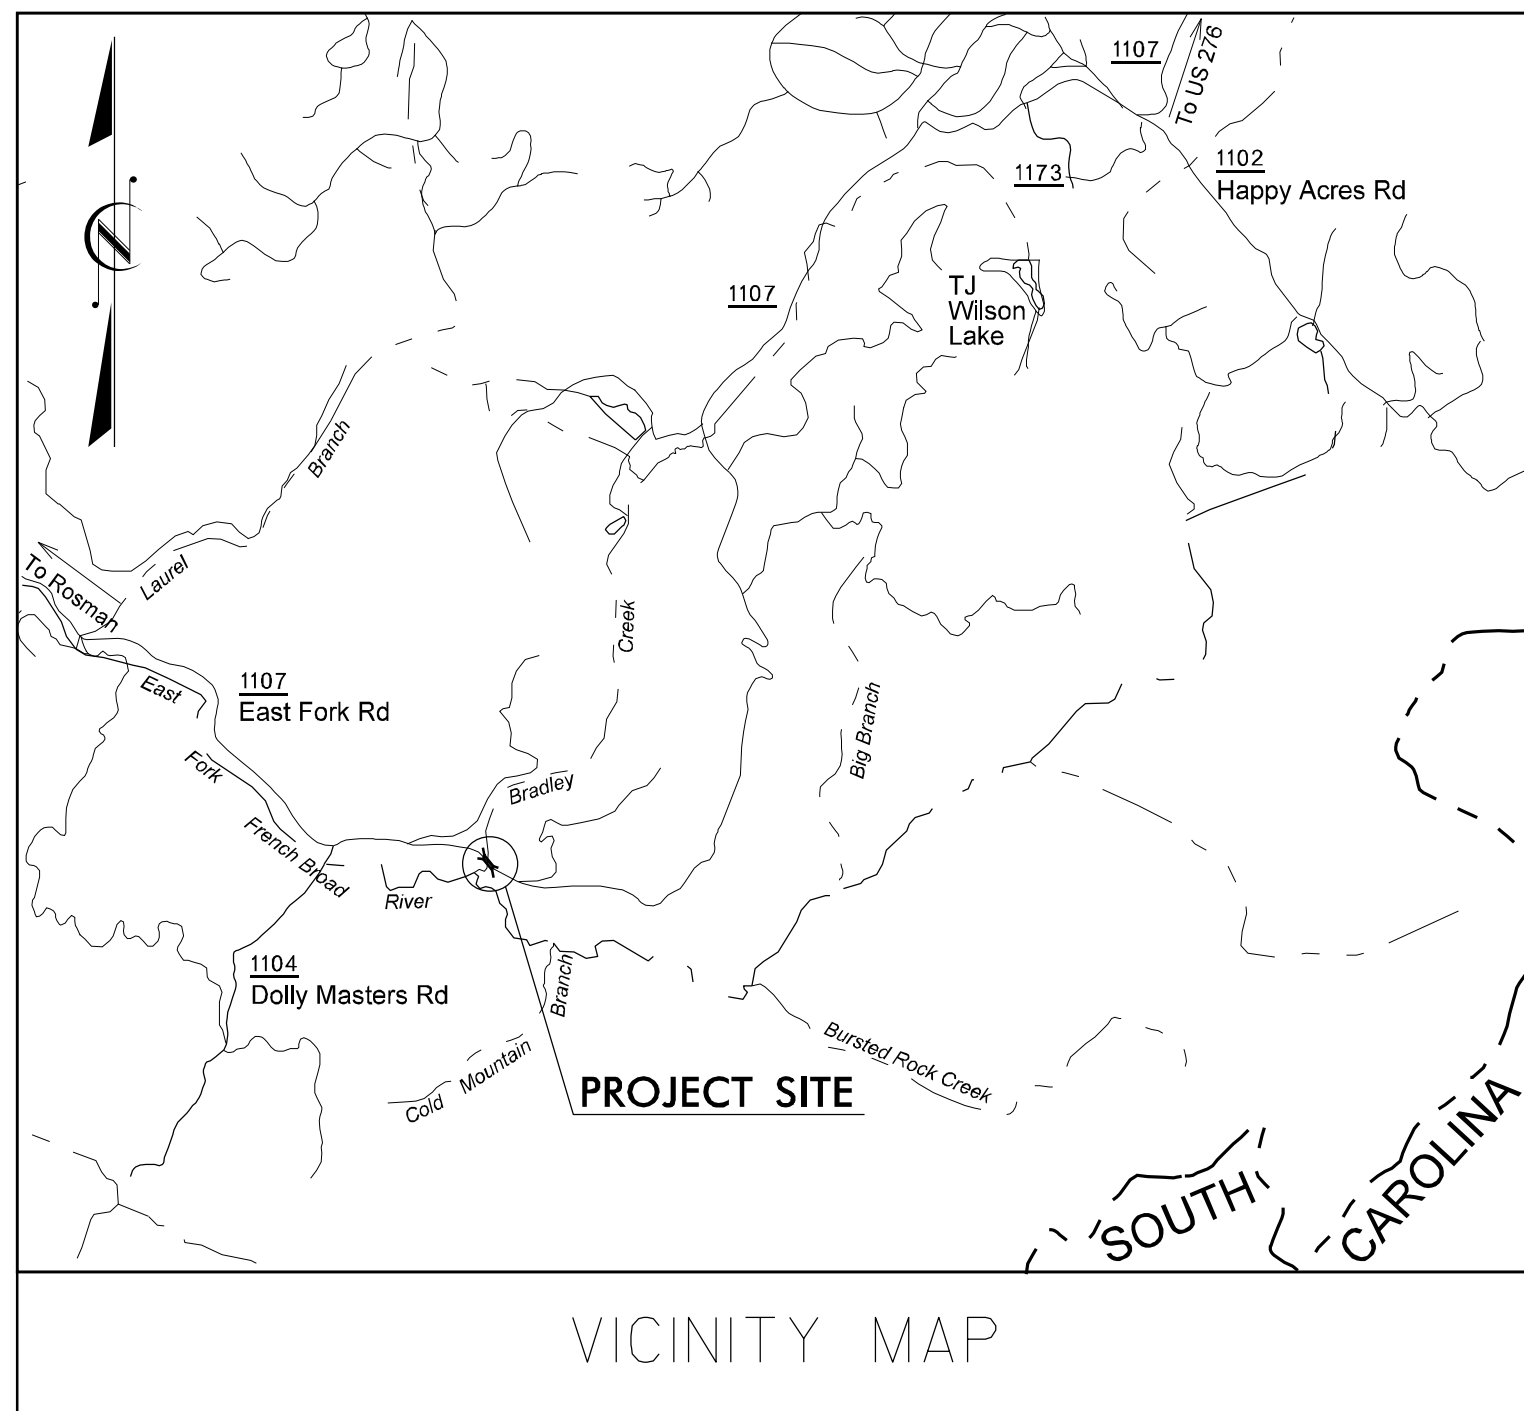

VICINITY MAP

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

**UTILITIES BY OTHERS PLANS
TRANSYLVANIA COUNTY**

**LOCATION: BRIDGE NO. 137 OVER BRADLEY CREEK
ON SR 1107 (EAST FORK ROAD)**



TYPE OF WORK: AERIAL & BURIED TELEPHONE

PROJECT REFERENCE NO.

SHEET NO.

17BP.14.R.122

UO-1

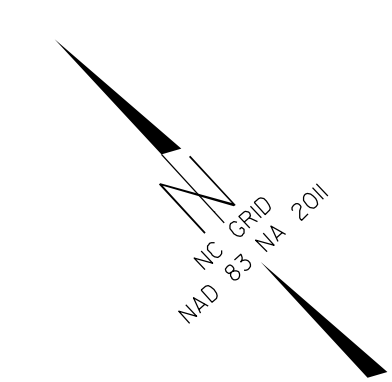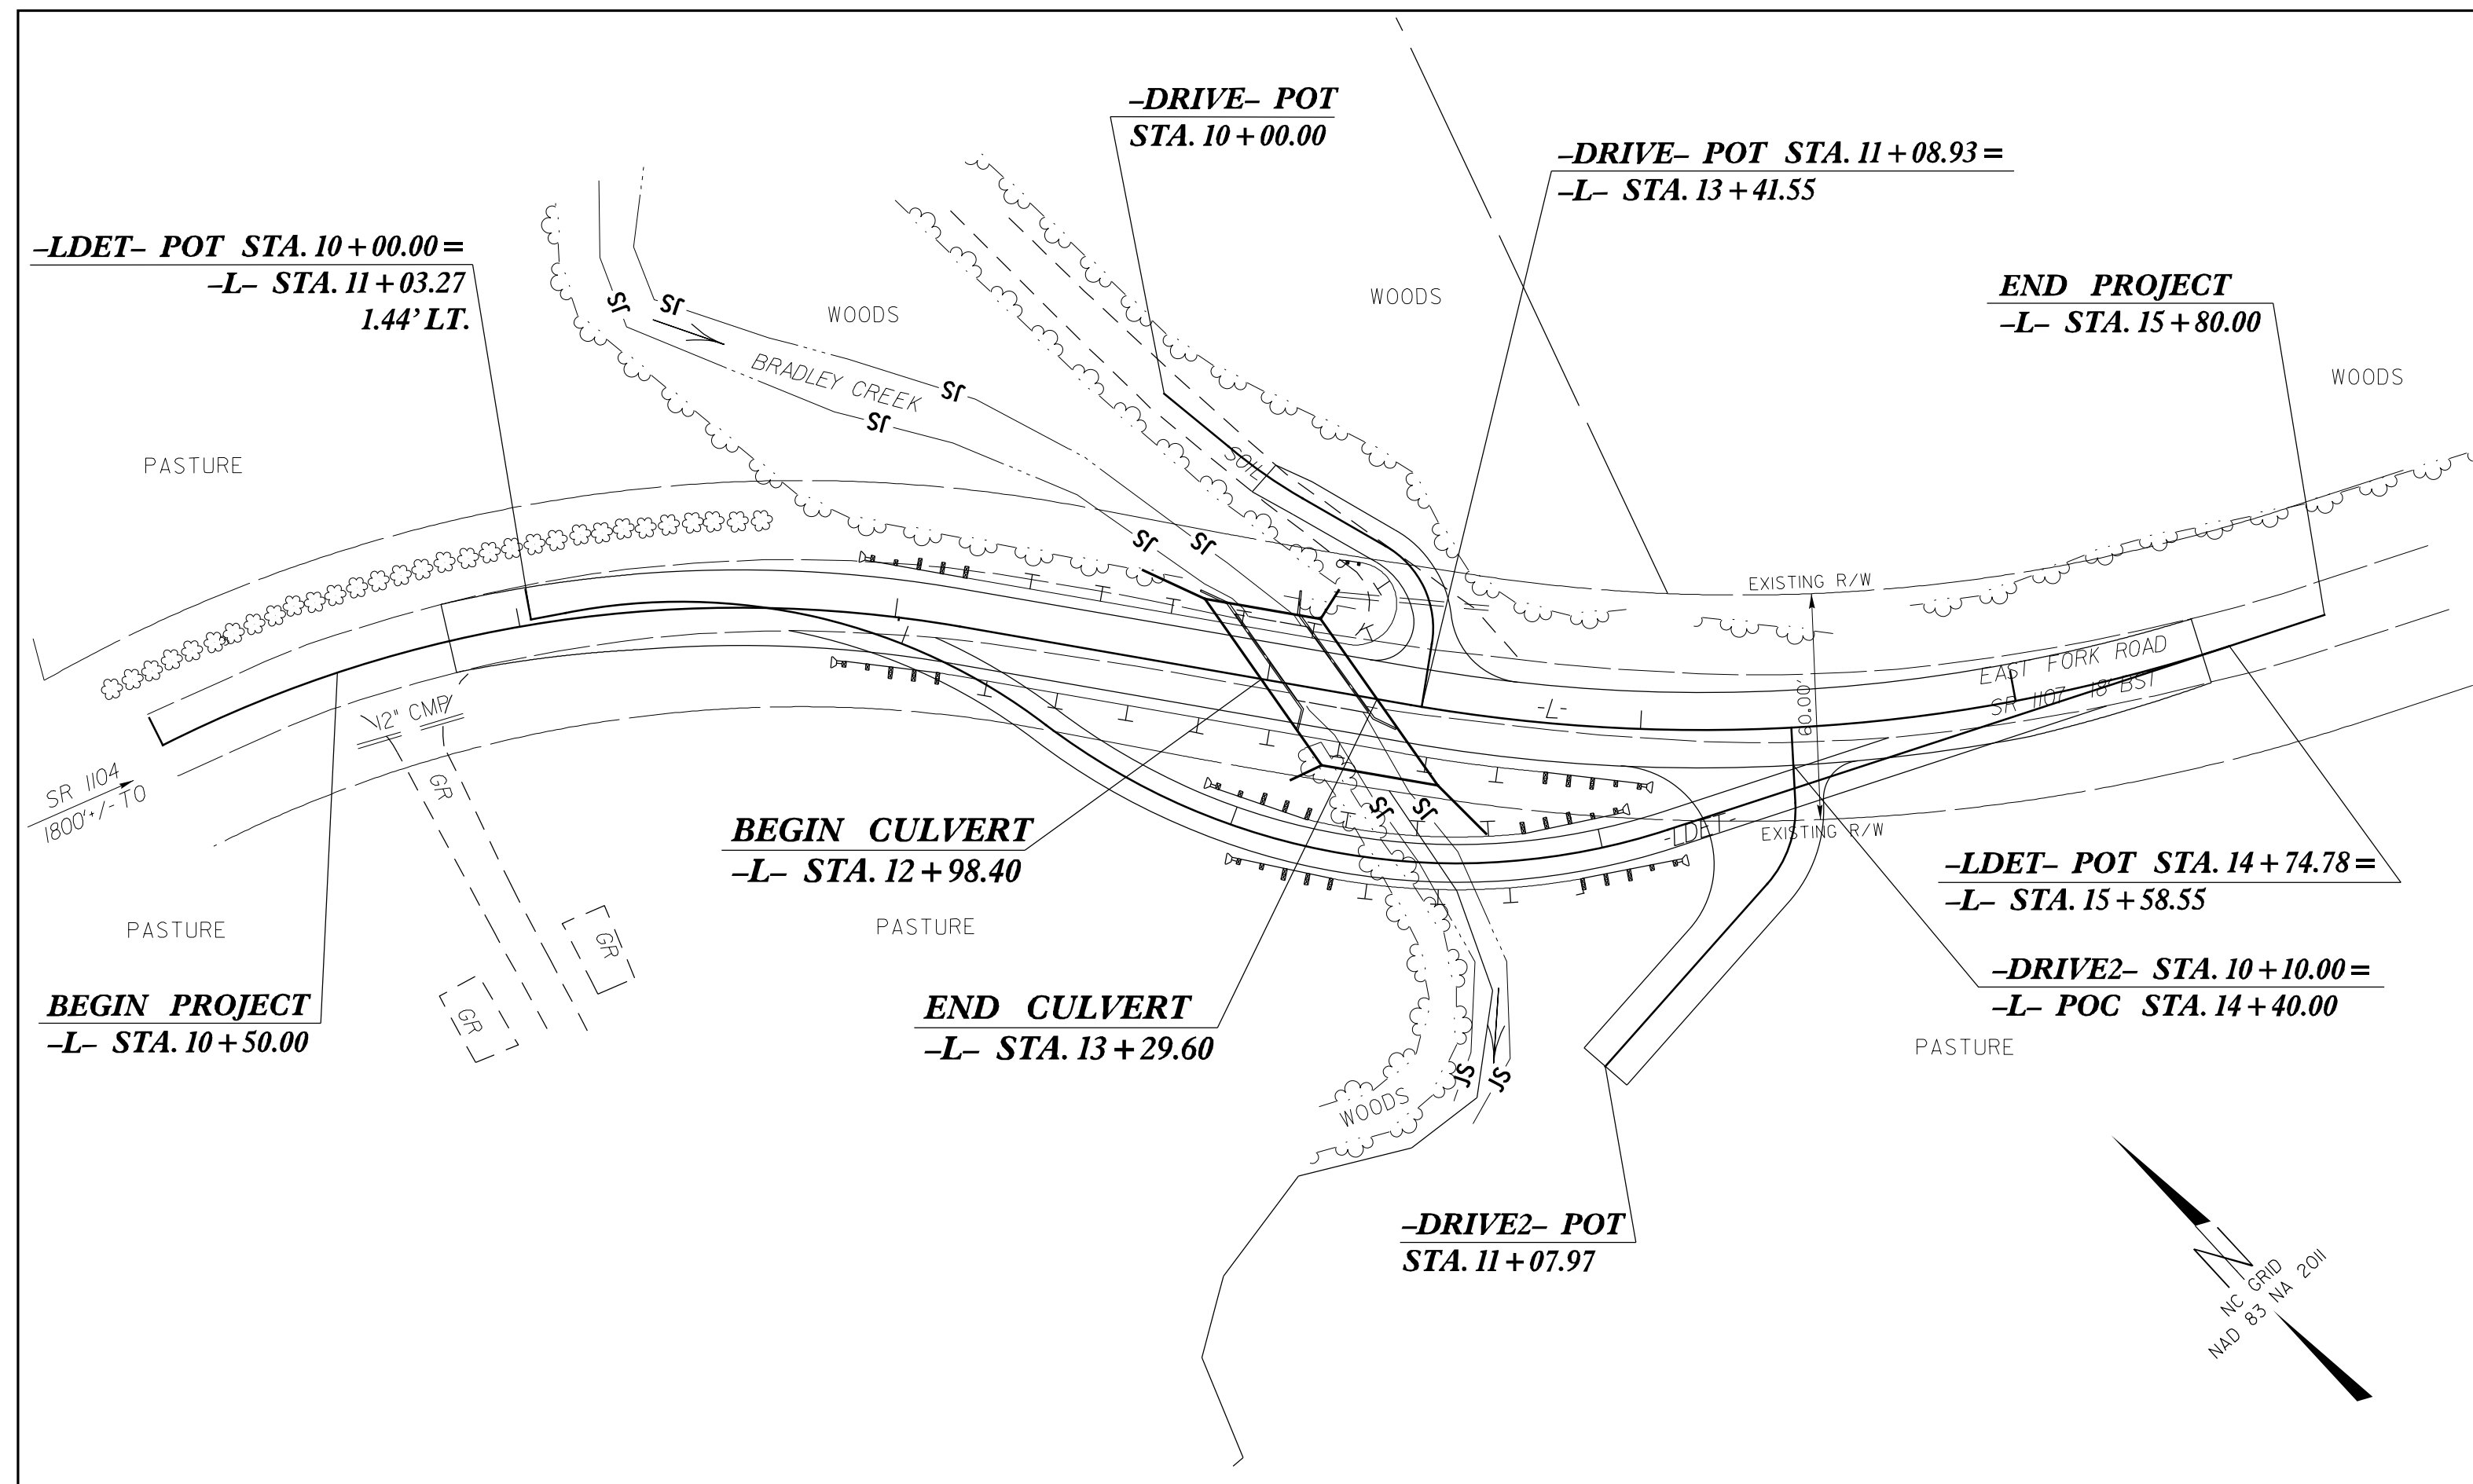


V&M
Vaughn & Melton
Consulting Engineers

Asheville, North Carolina
828-253-2796

- ☐ Tri-Cities, TN 423-467-8401
- ☐ Knoxville, TN 865-546-5800
- ☐ Spartanburg, SC 864-574-4775
- ☐ Charleston, SC 843-974-5650
- ☐ Middlesboro, KY 606-248-6600
- ☐ Charlotte, NC 704-357-0488
- ☐ Boone, NC 828-355-9933
- ☐ Atlanta, GA 770-627-3509

Copyright © 2006 Vaughn & Melton, Inc. All Rights Reserved

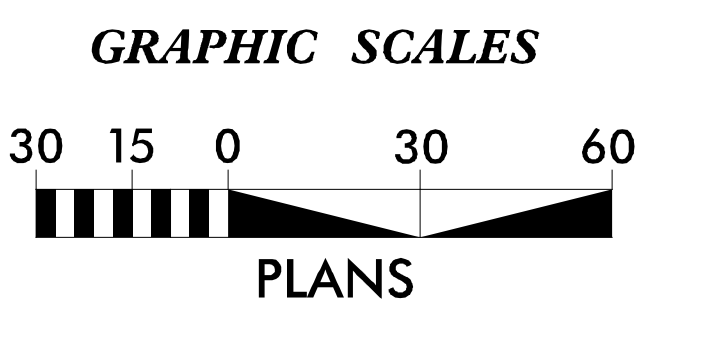

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
UO-1	TITLE SHEET
UO-2	UTILITIES BY OTHERS PLAN SHEET

- UTILITY OWNERS ON PROJECT**
- POWER - DUKE ENERGY
 - TELEPHONE - COMPORIUM (CITIZENS TELEPHONE COMPANY)

PLANS PREPARED BY:

V&M
Vaughn & Melton
Consulting Engineers
1318-F PATTON AVE.
Asheville, NC 28806
828-253-2796

PREPARED FOR THE OFFICE OF:
**DIVISION OF HIGHWAYS
UTILITIES ENGINEERING SECTION**

1591 MAIL SERVICES CENTER
RALEIGH NC 27699-1591
PHONE (919) 250-4128
FAX (919) 250-4119

Roger Worthington, P.E. UTILITIES SECTION ENGINEER

Lynn A. Mann, P.G. UTILITIES PROJECT DESIGNER

WBS ELEMENT: 17BP.14.R.122



CONTRACT: DN00290

PROPOSED 19"x6'-1"
ALUMINUM BOX CULVERT

PROJECT REFERENCE NO. 17BP.14.R.122	SHEET NO. U0-2
--	-------------------

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK
SHOWN ON THIS SHEET WILL
BE DONE BY OTHERS

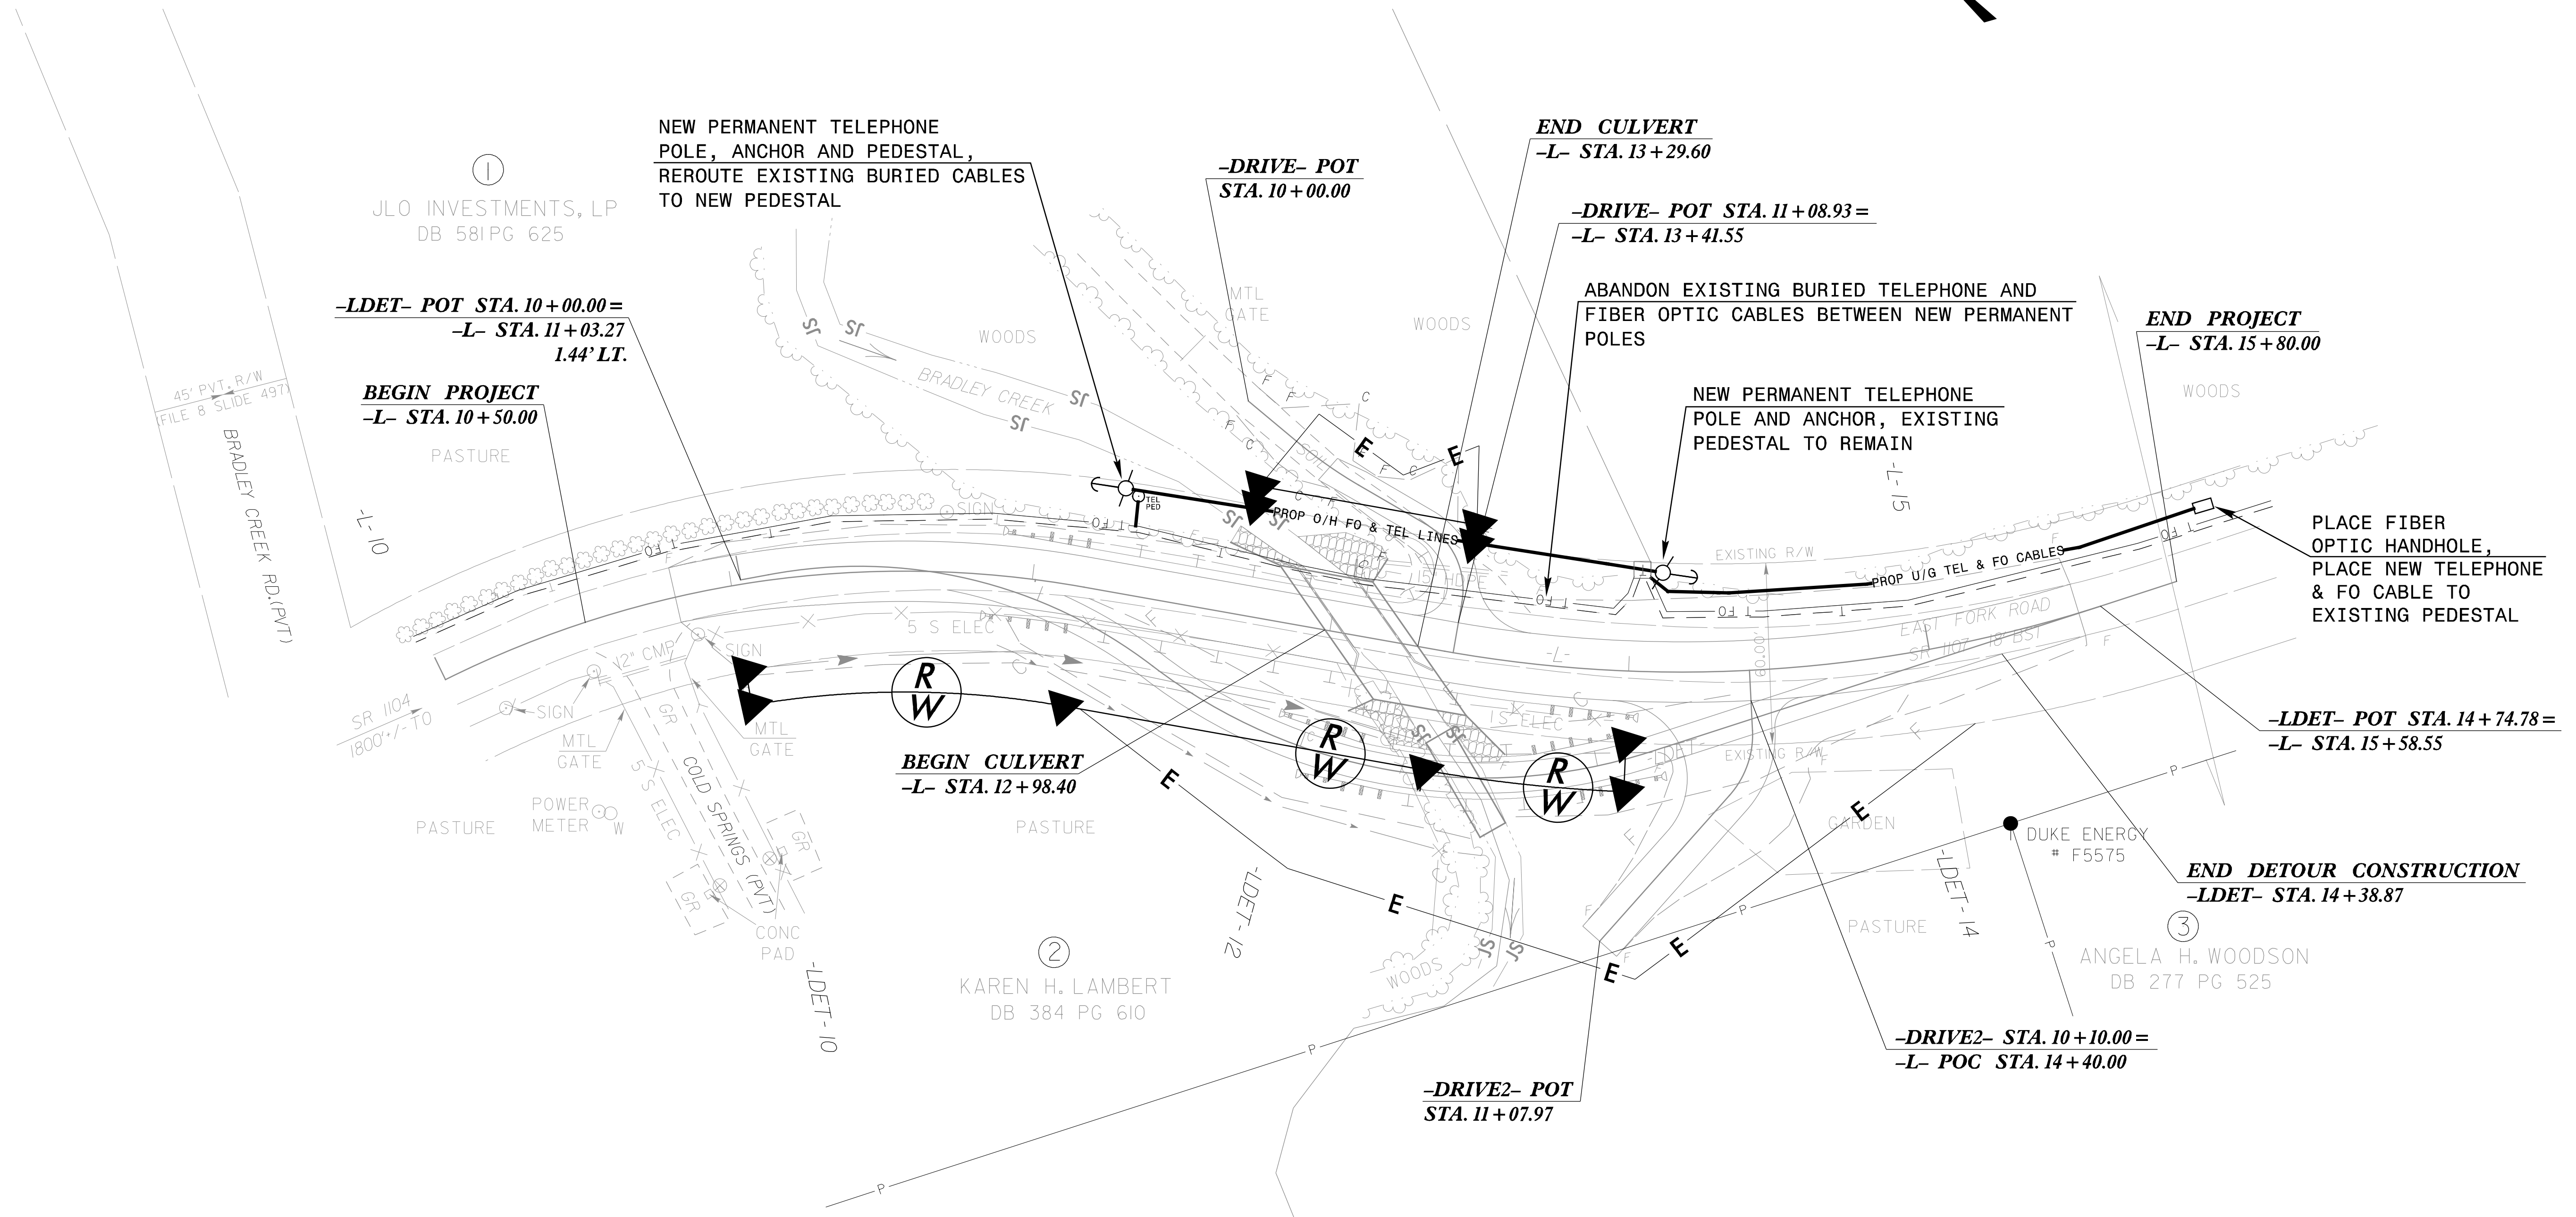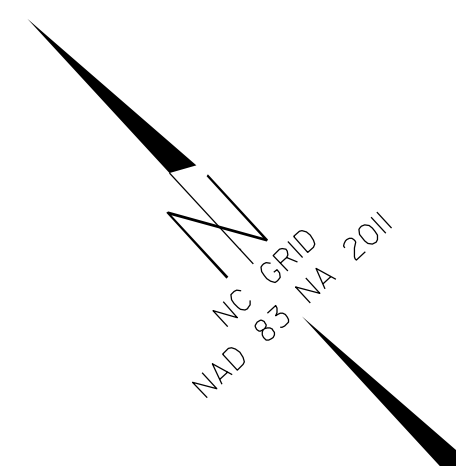

V&M
Vaughn & Melton
Consulting Engineers

Asheville, North Carolina
828-253-2796

- Tri-Cities, TN 423-467-8401
- Knoxville, TN 865-546-5800
- Spartanburg, SC 864-514-4775
- Charleston, SC 843-974-5650
- Middlesboro, KY 606-248-6600
- Atlanta, GA 770-627-3509
- Charlotte, NC 704-357-0488
- Boone, NC 828-355-9933

Copyright © 2006 Vaughn & Melton, Inc. All Rights Reserved