



PAVEMENT SCHEDULE (FINAL PAVEMENT SCHEDULE)	
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 1.5" IN DEPTH OR GREATER THAN 2" IN DEPTH.
E1	PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
J1	8" ABC
T	EARTH MATERIAL
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAIL.)
U	EXISTING PAVEMENT.


NOTE: ALL PAVEMENT SLOPES ARE 1:1 UNLESS LABELED OTHERWISE.

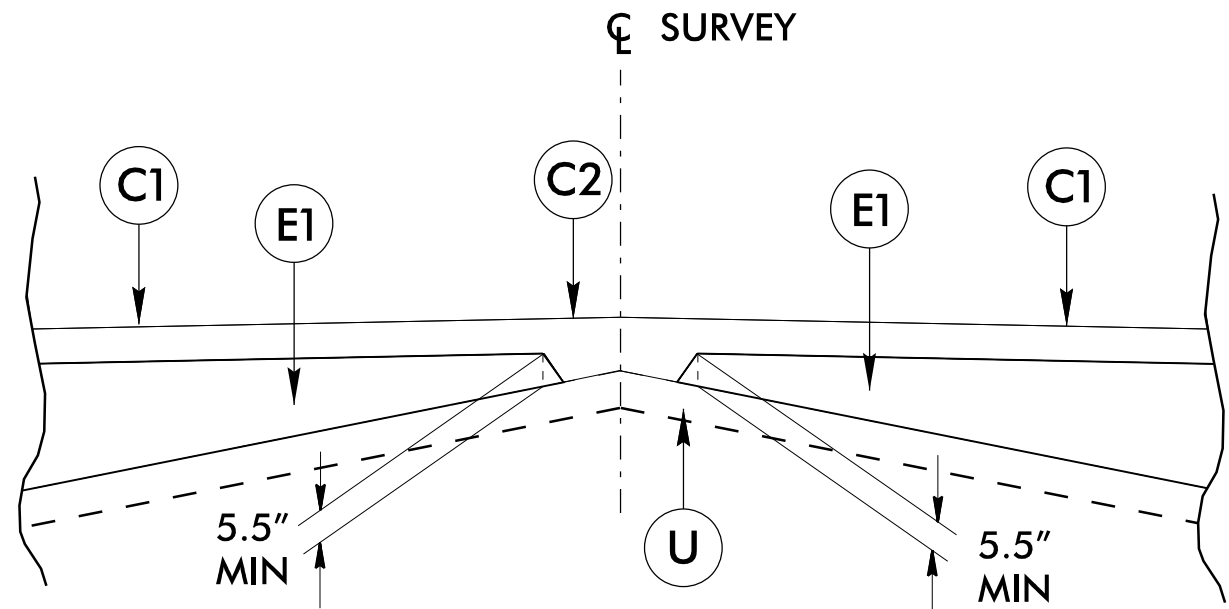

Detail Showing Method of Wedging (W)

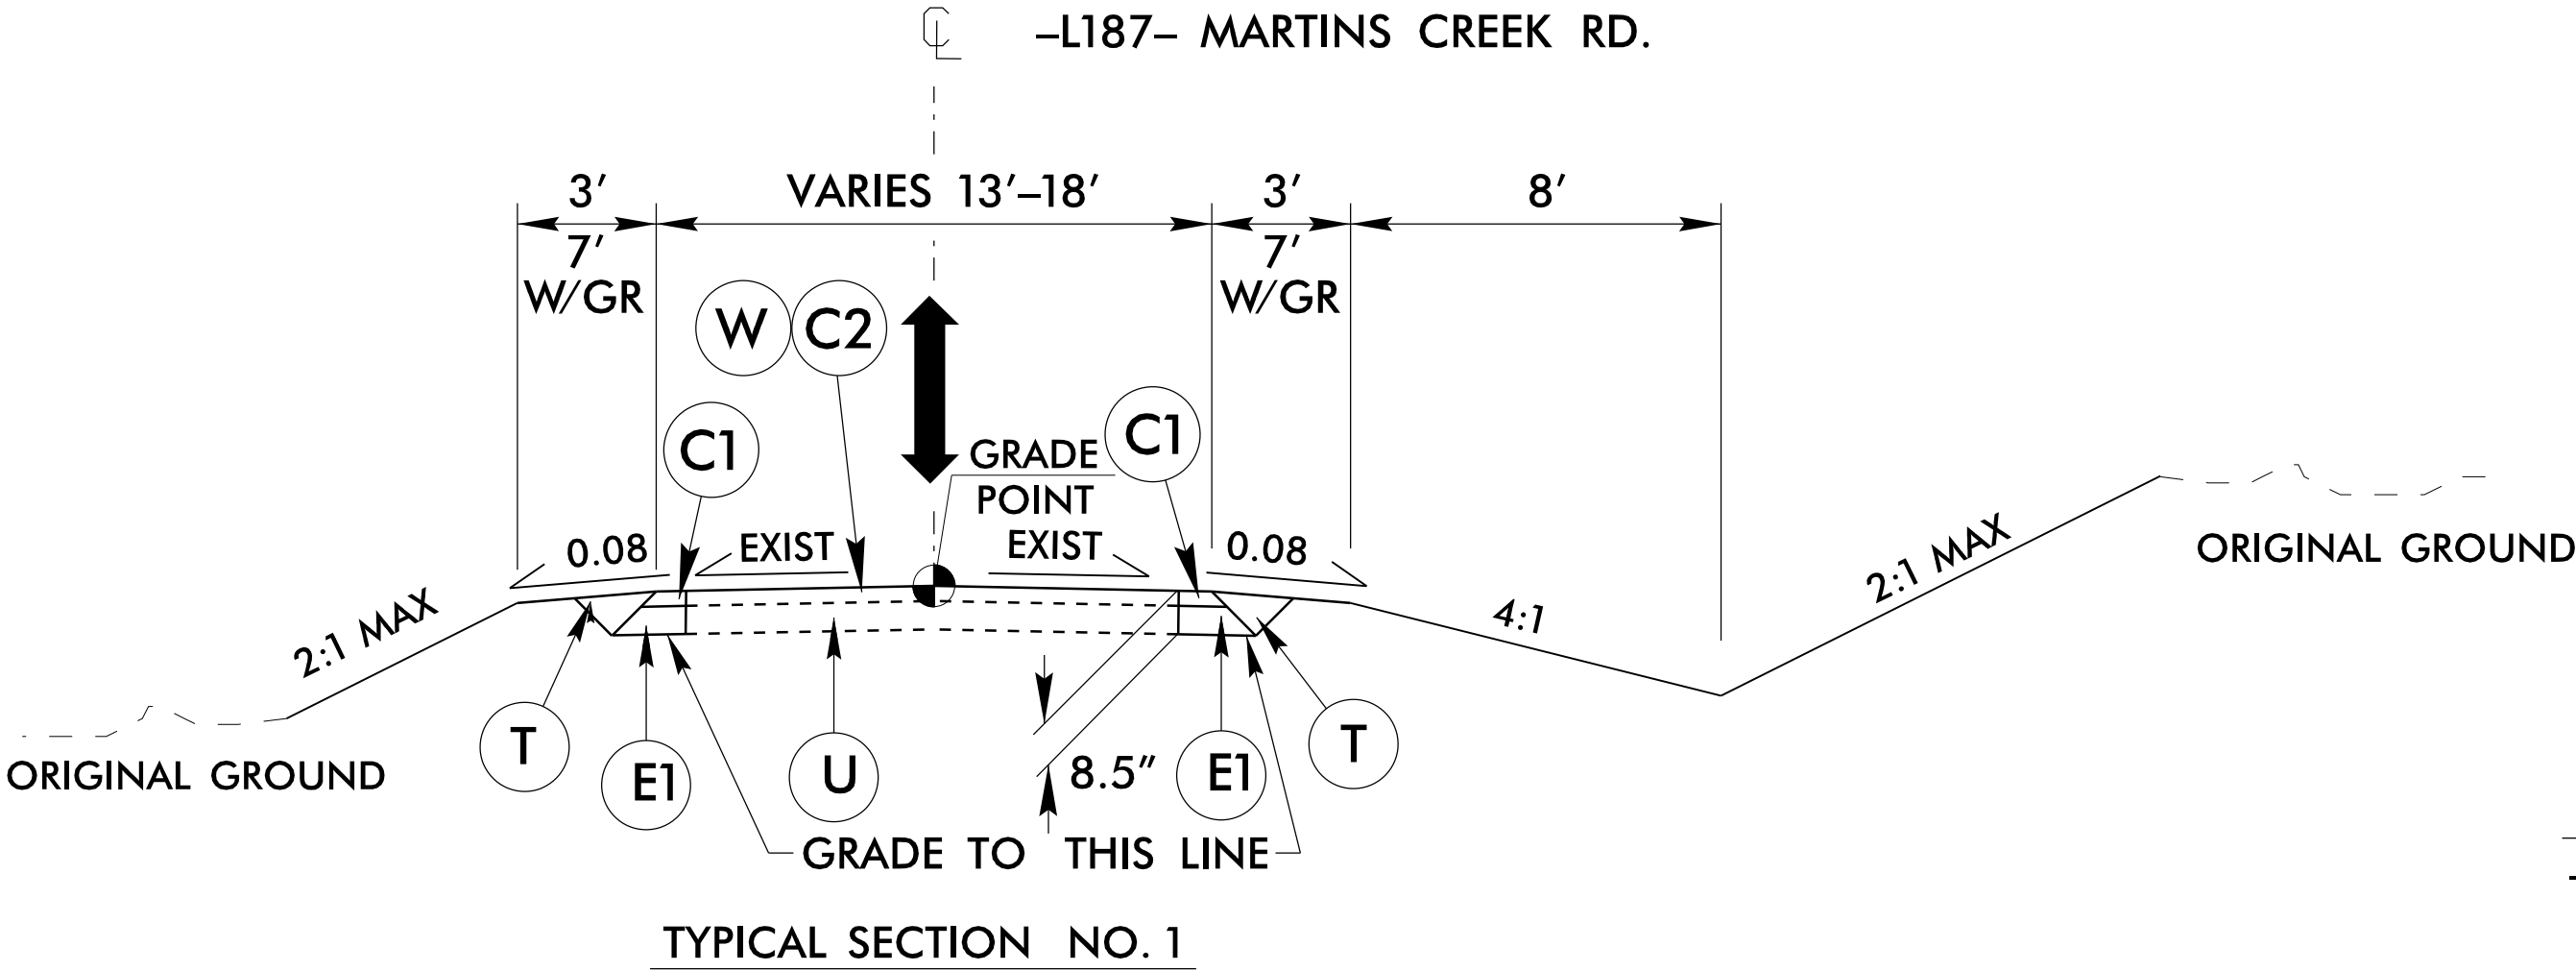


USE TYPICAL SECTION NO. 1
-L187- STA. 11+45.00 TO -L187- STA. 12+62.00

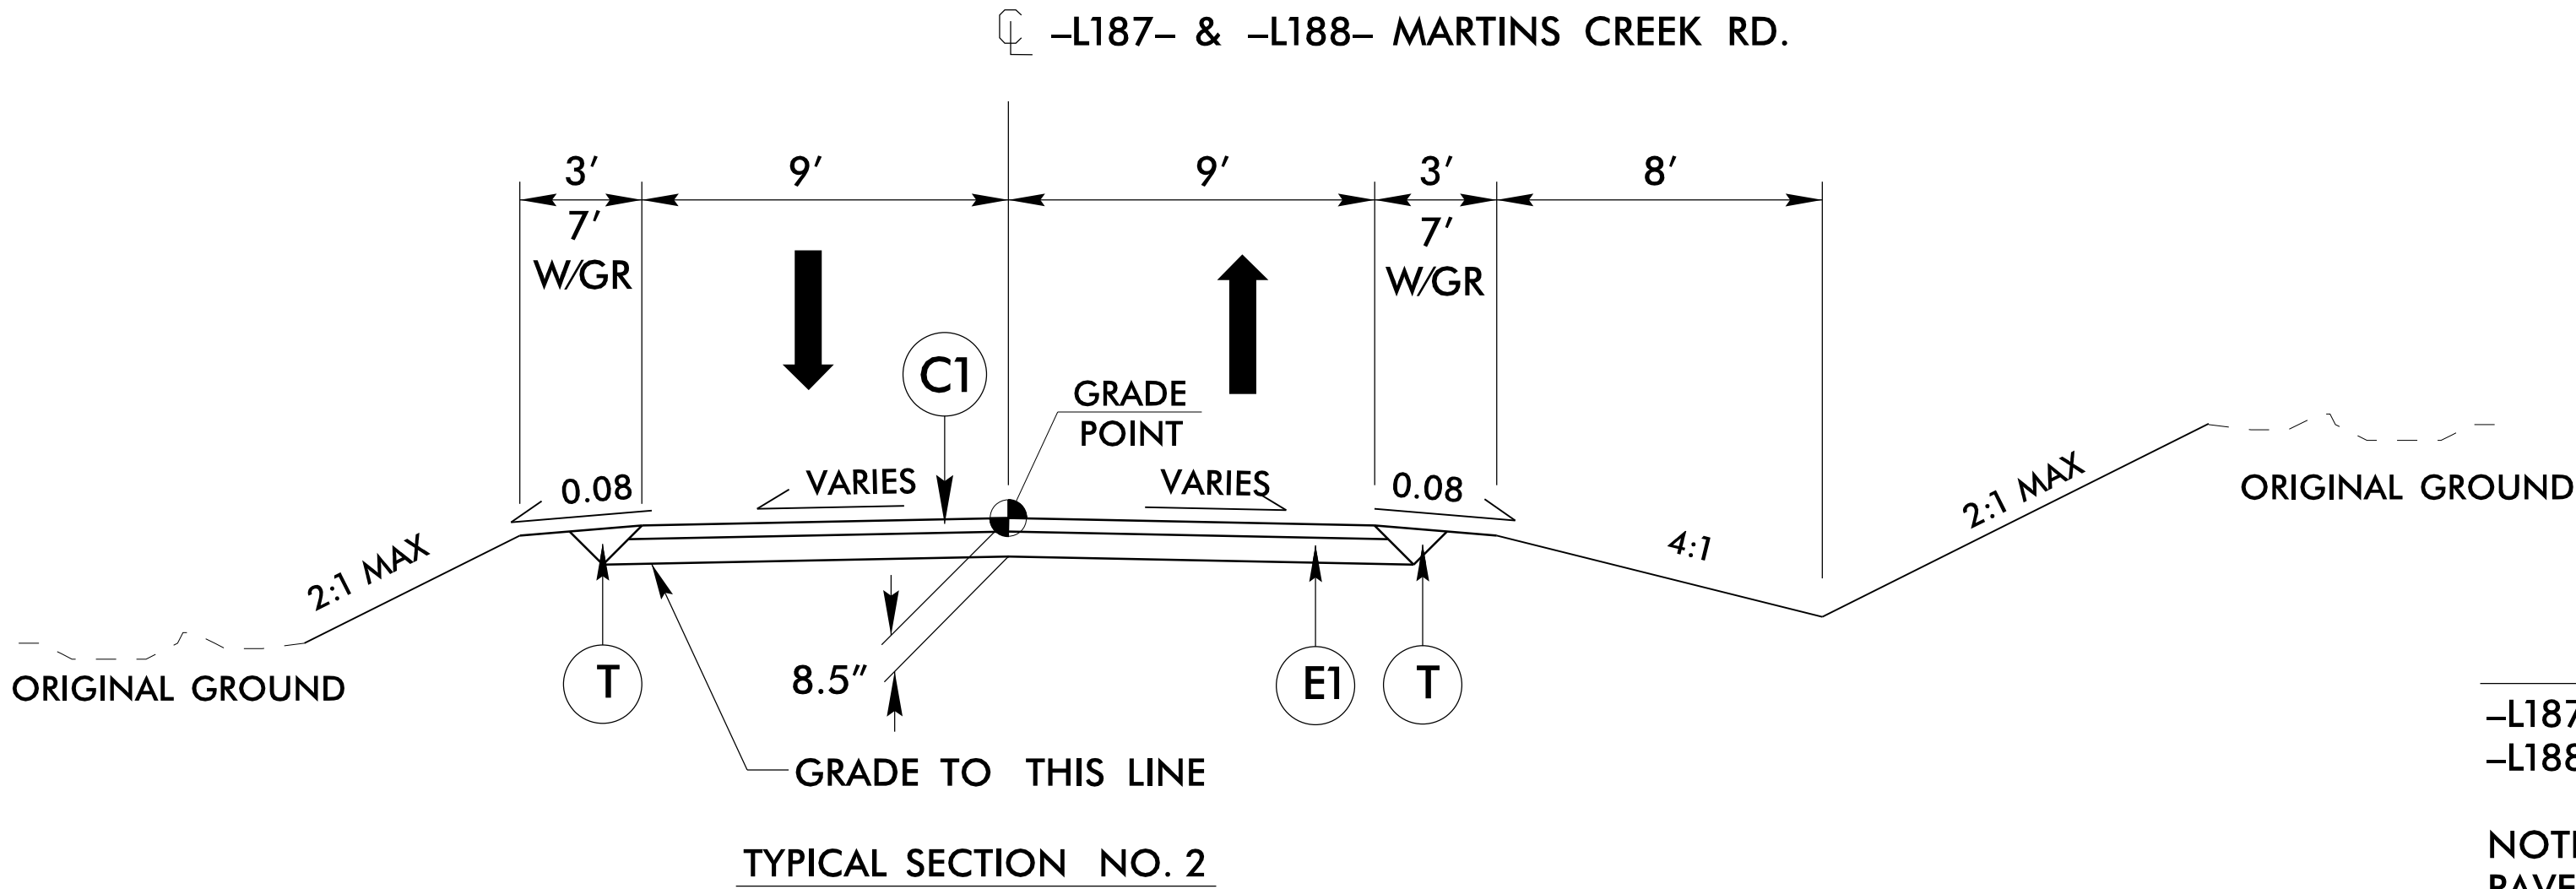

USE TYPICAL SECTION NO. 2
-L187- STA. 12+62.00 TO -L187- STA. 13+80.00
-L188- STA. 11+34.00 TO -L188- STA. 13+78.25

NOTE:
PAVE EXISTING ROAD FROM -L187- STA. 13+80.00
TO -L188- STA. 11+34.00. MATCH EXISTING WIDTH.

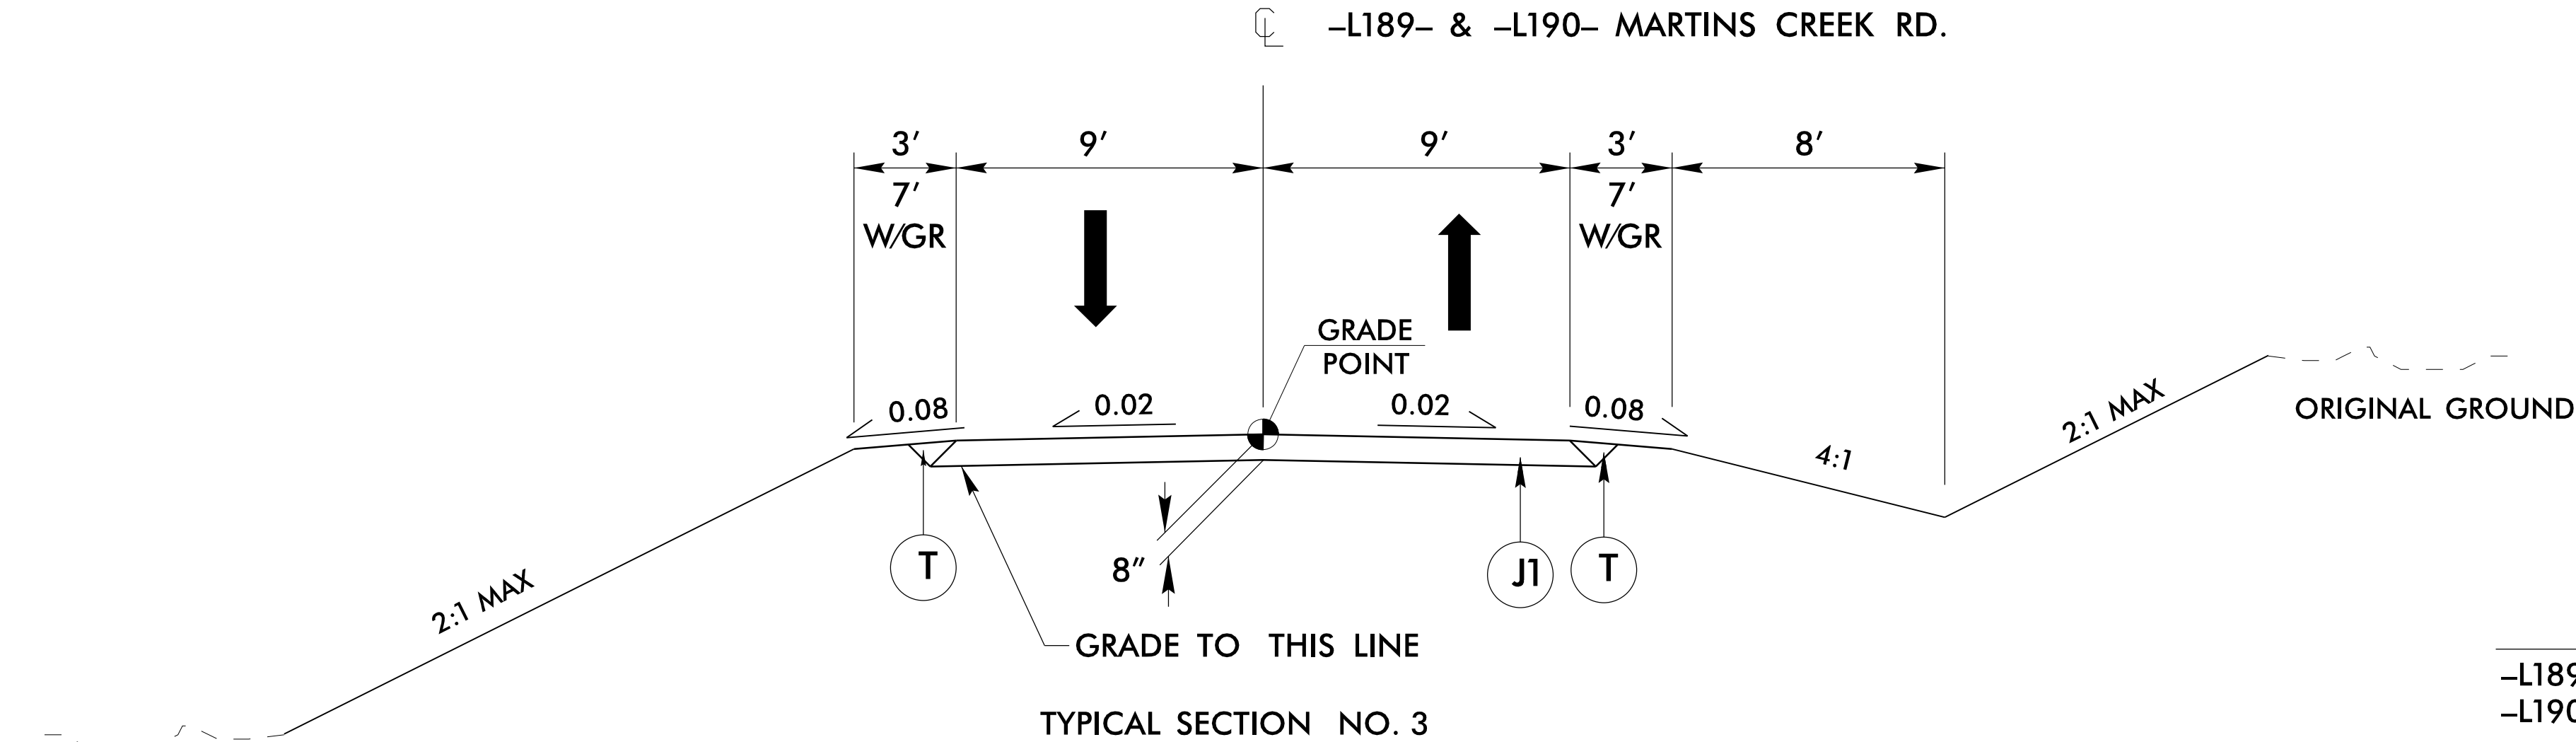

USE TYPICAL SECTION NO. 3
-L189- STA. 10+00.00 TO -L189- STA. 13+73.50
-L190- STA. 11+07.00 TO -L190- STA. 16+20.00

PROJECT REFERENCE NO.
BPI4.R002

SHEET NO.
2A-1

R/W SHEET NO.

ROADWAY DESIGN ENGINEER

PAVEMENT DESIGN ENGINEER

SEAL
044511
12/1/2025

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

RS&H

8521 SIX FORKS ROAD, SUITE 400
RALEIGH, NC 27615
NC FIRM LICENSE No: F-0493