
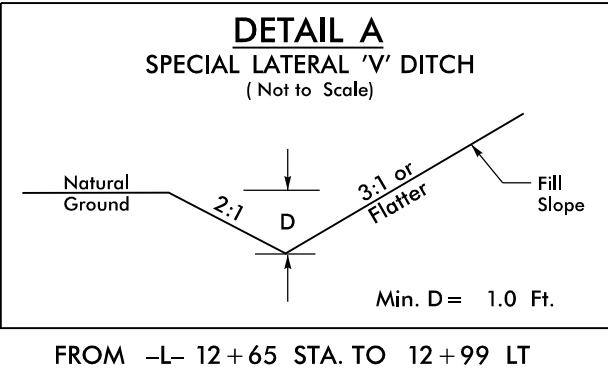
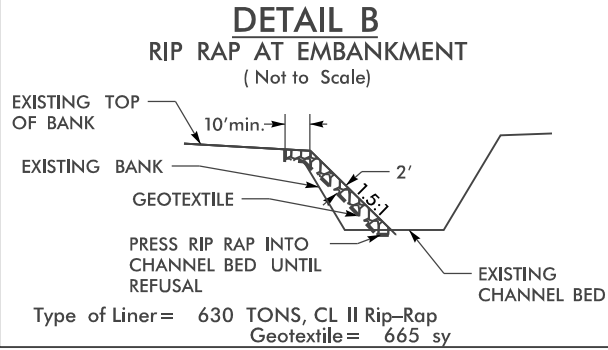


-L- CURVE DATA

PI Sta 10+31.23 Δ = 45°12'33.5" (LT) D = 76'23'39.7" L = 59.18' T = 31.23' R = 75.00' SE = NC	PI Sta 11+00.45 Δ = 30°45'51.4" (LT) D = 38'11'49.9" L = 80.54' T = 41.27' R = 150.00' SE = NC	PI Sta 13+67.36 Δ = 3°59'15.2" (RT) D = 2°23'14.4" L = 167.03' T = 83.55' R = 2,400.00' SE = NC
---	--	---

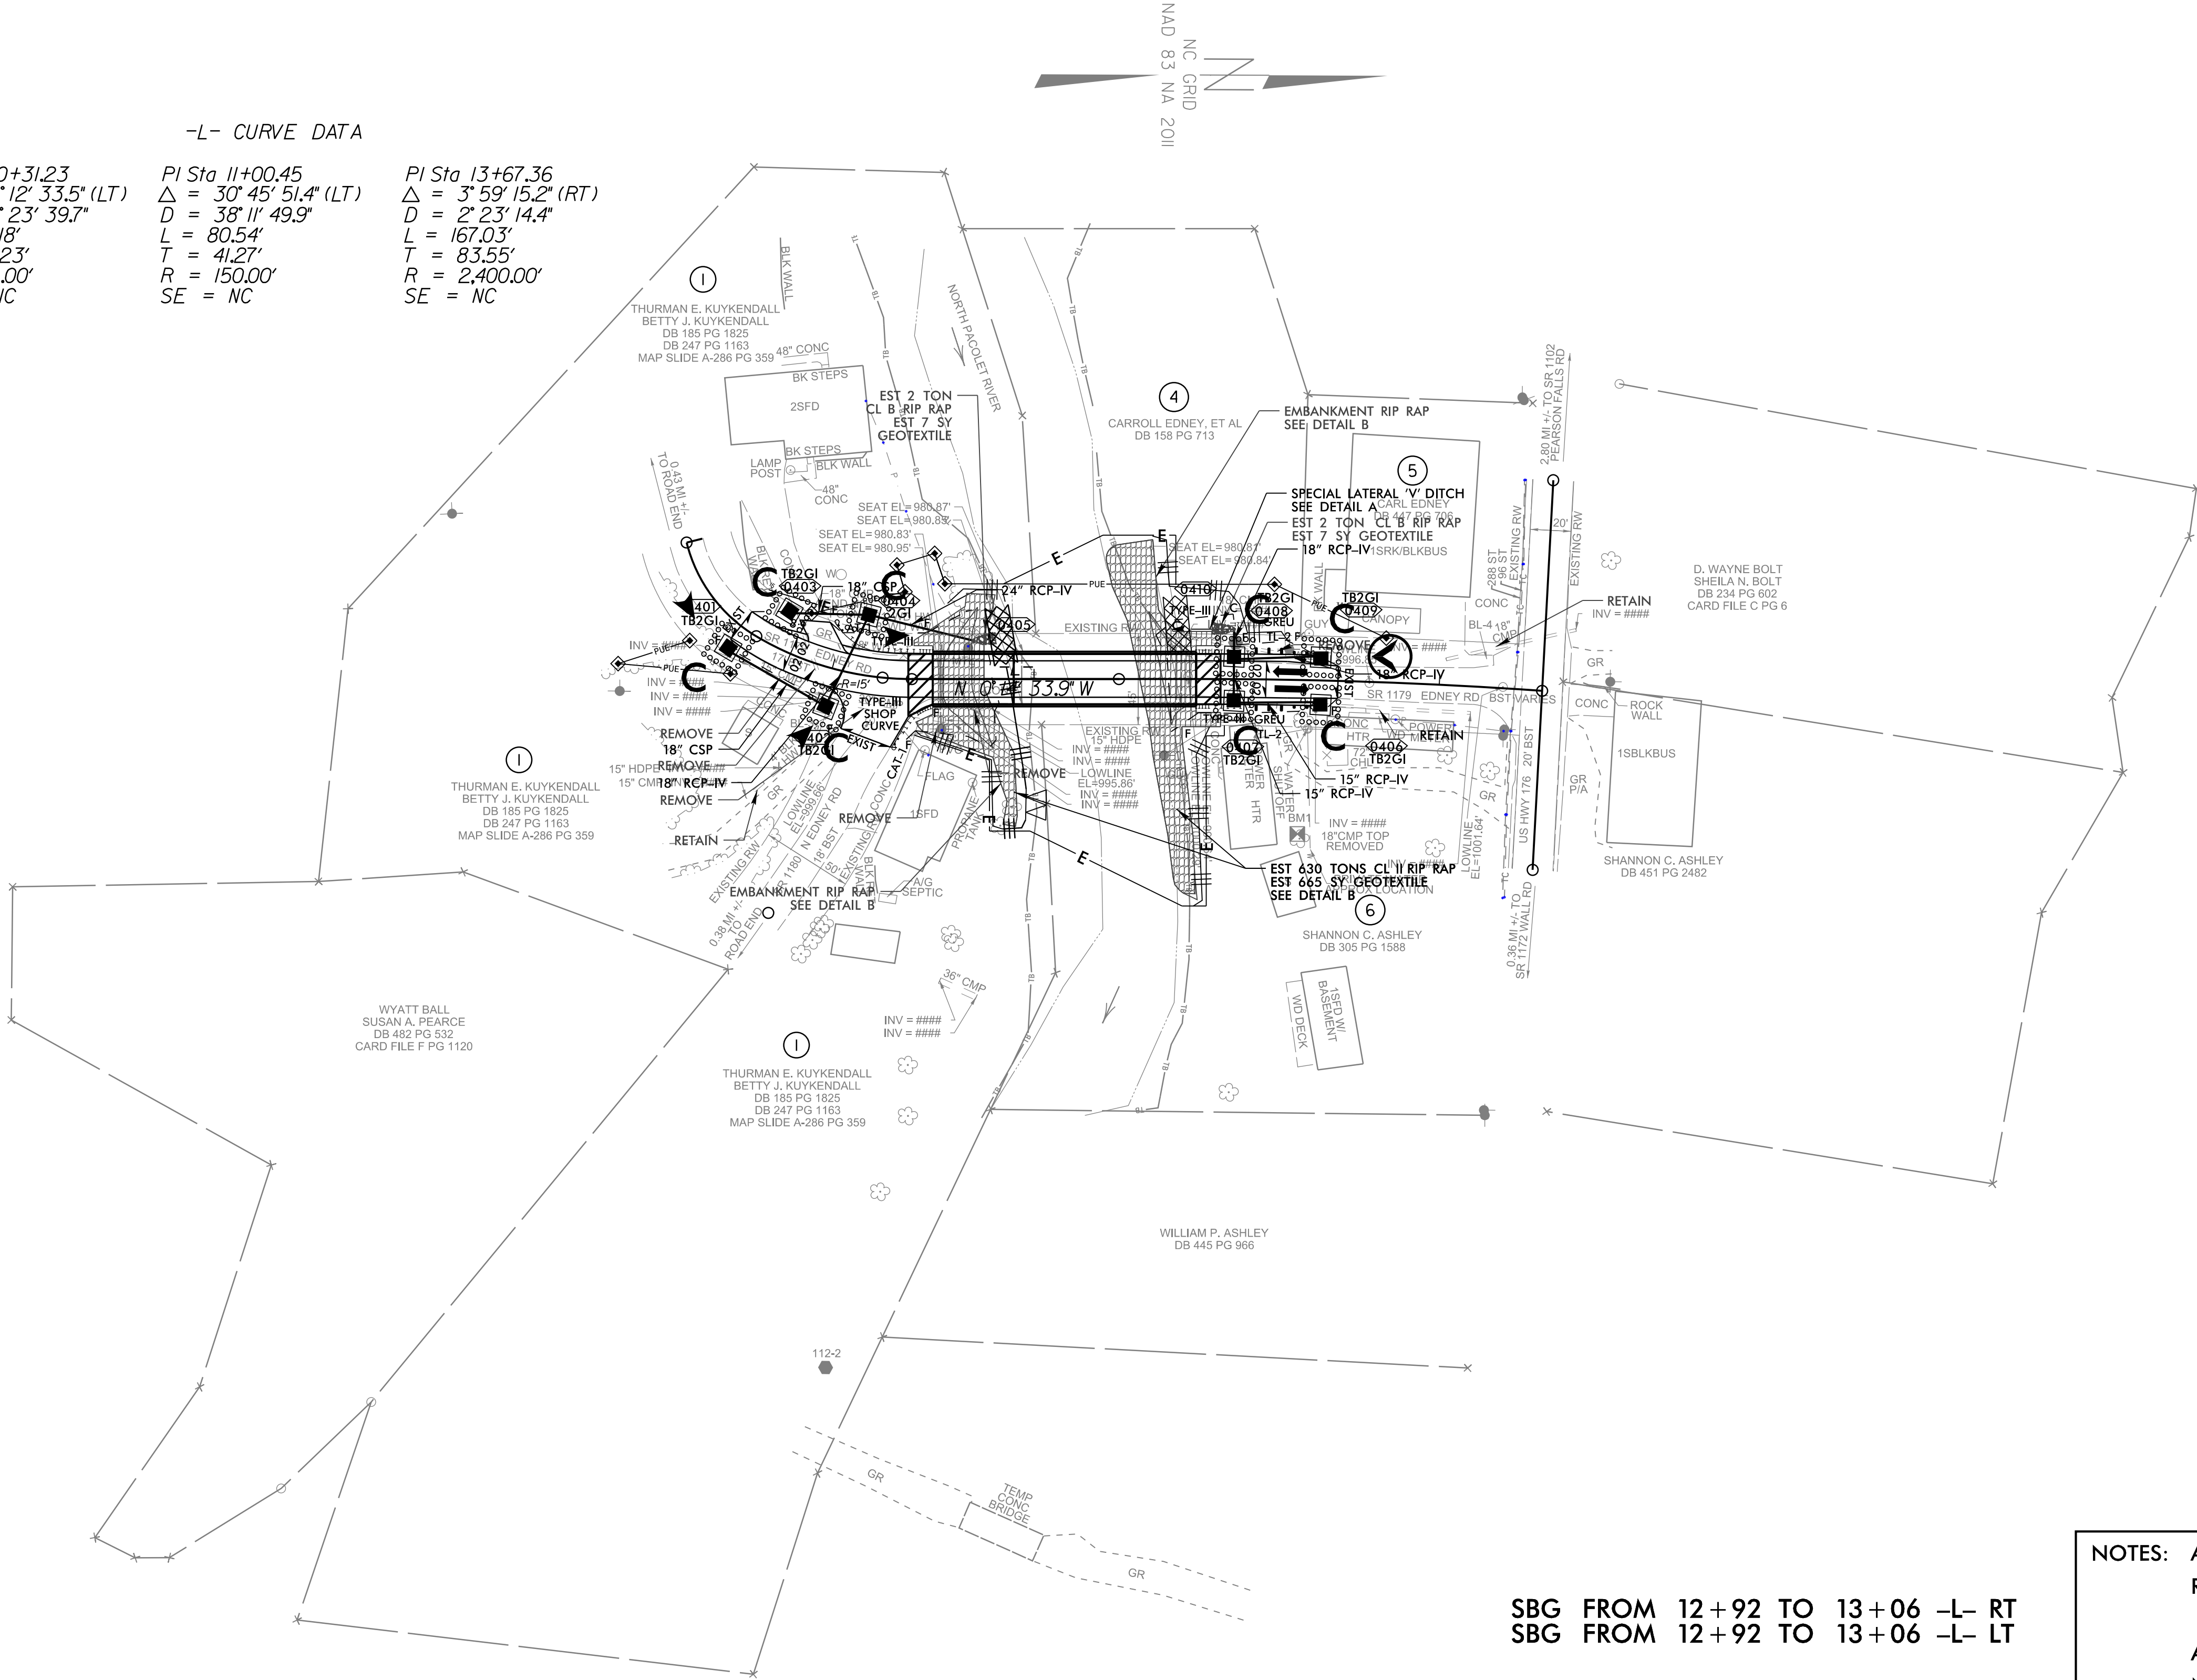

SBG FROM 12+92 TO 13+06 -L- RT  
SBG FROM 12+92 TO 13+06 -L- LT

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

BRIDGE APPROACH SLAB