
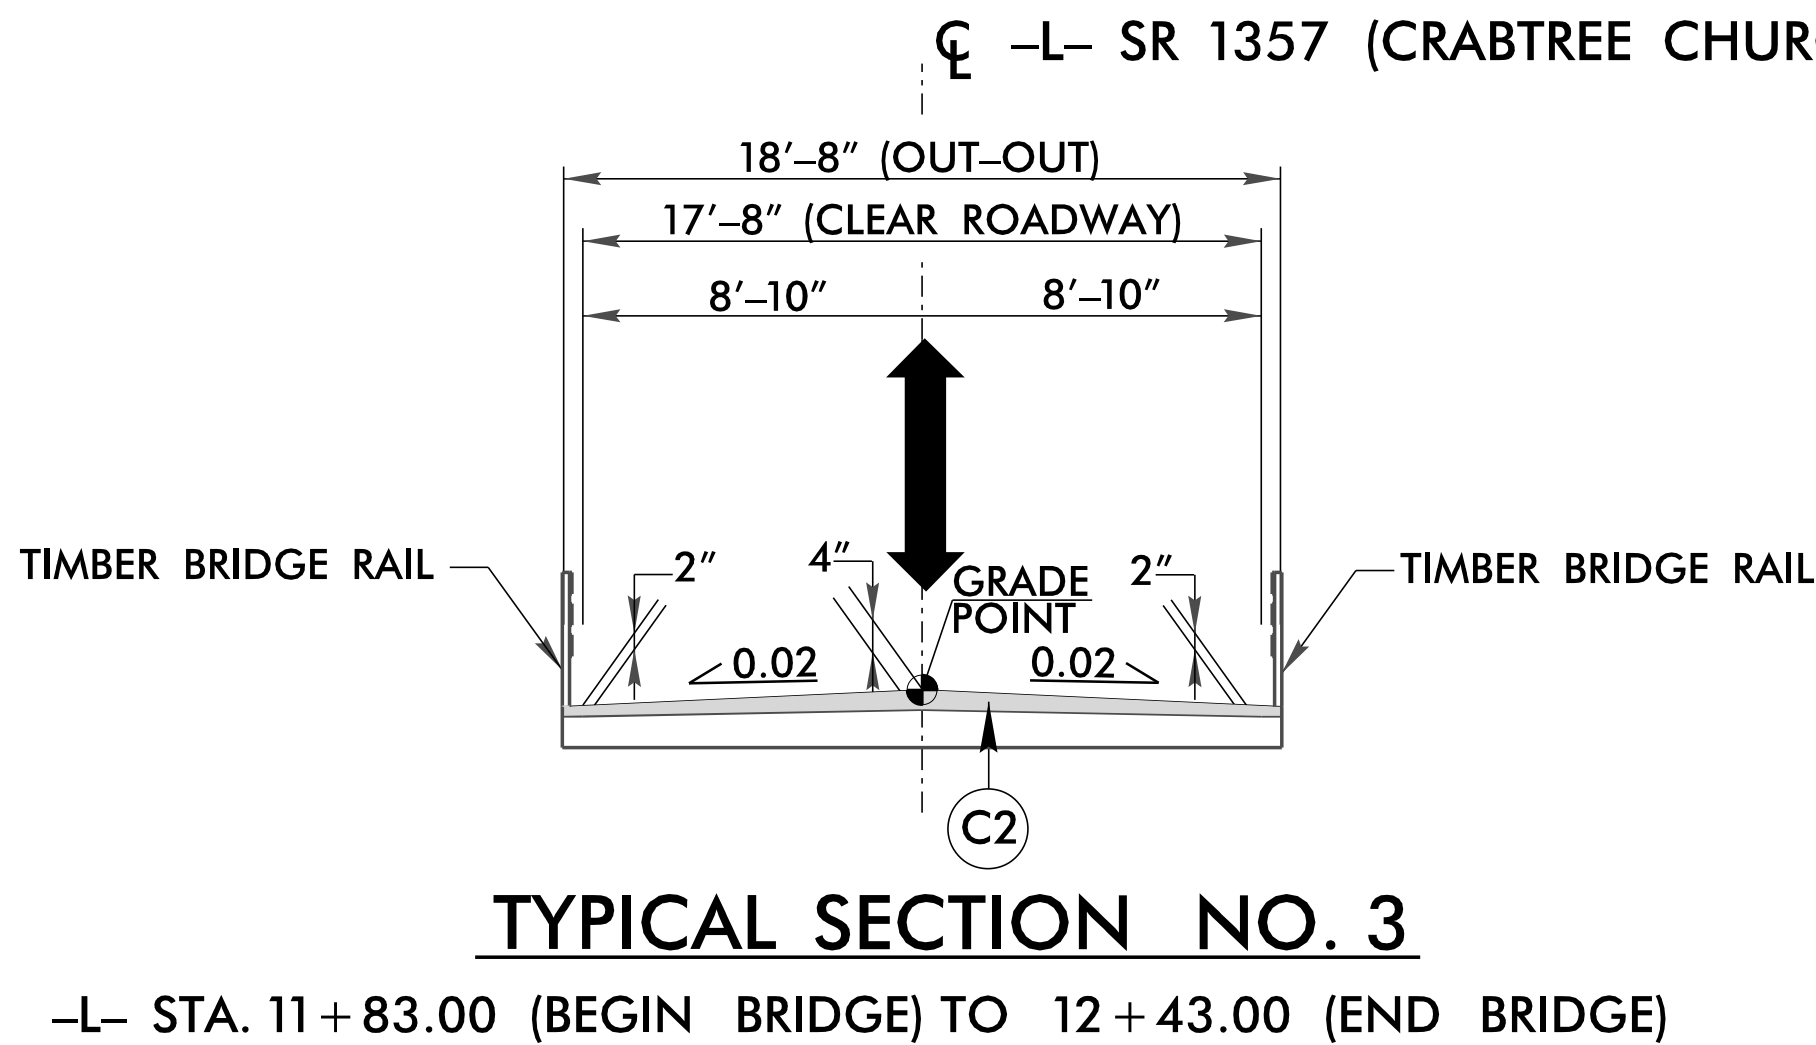
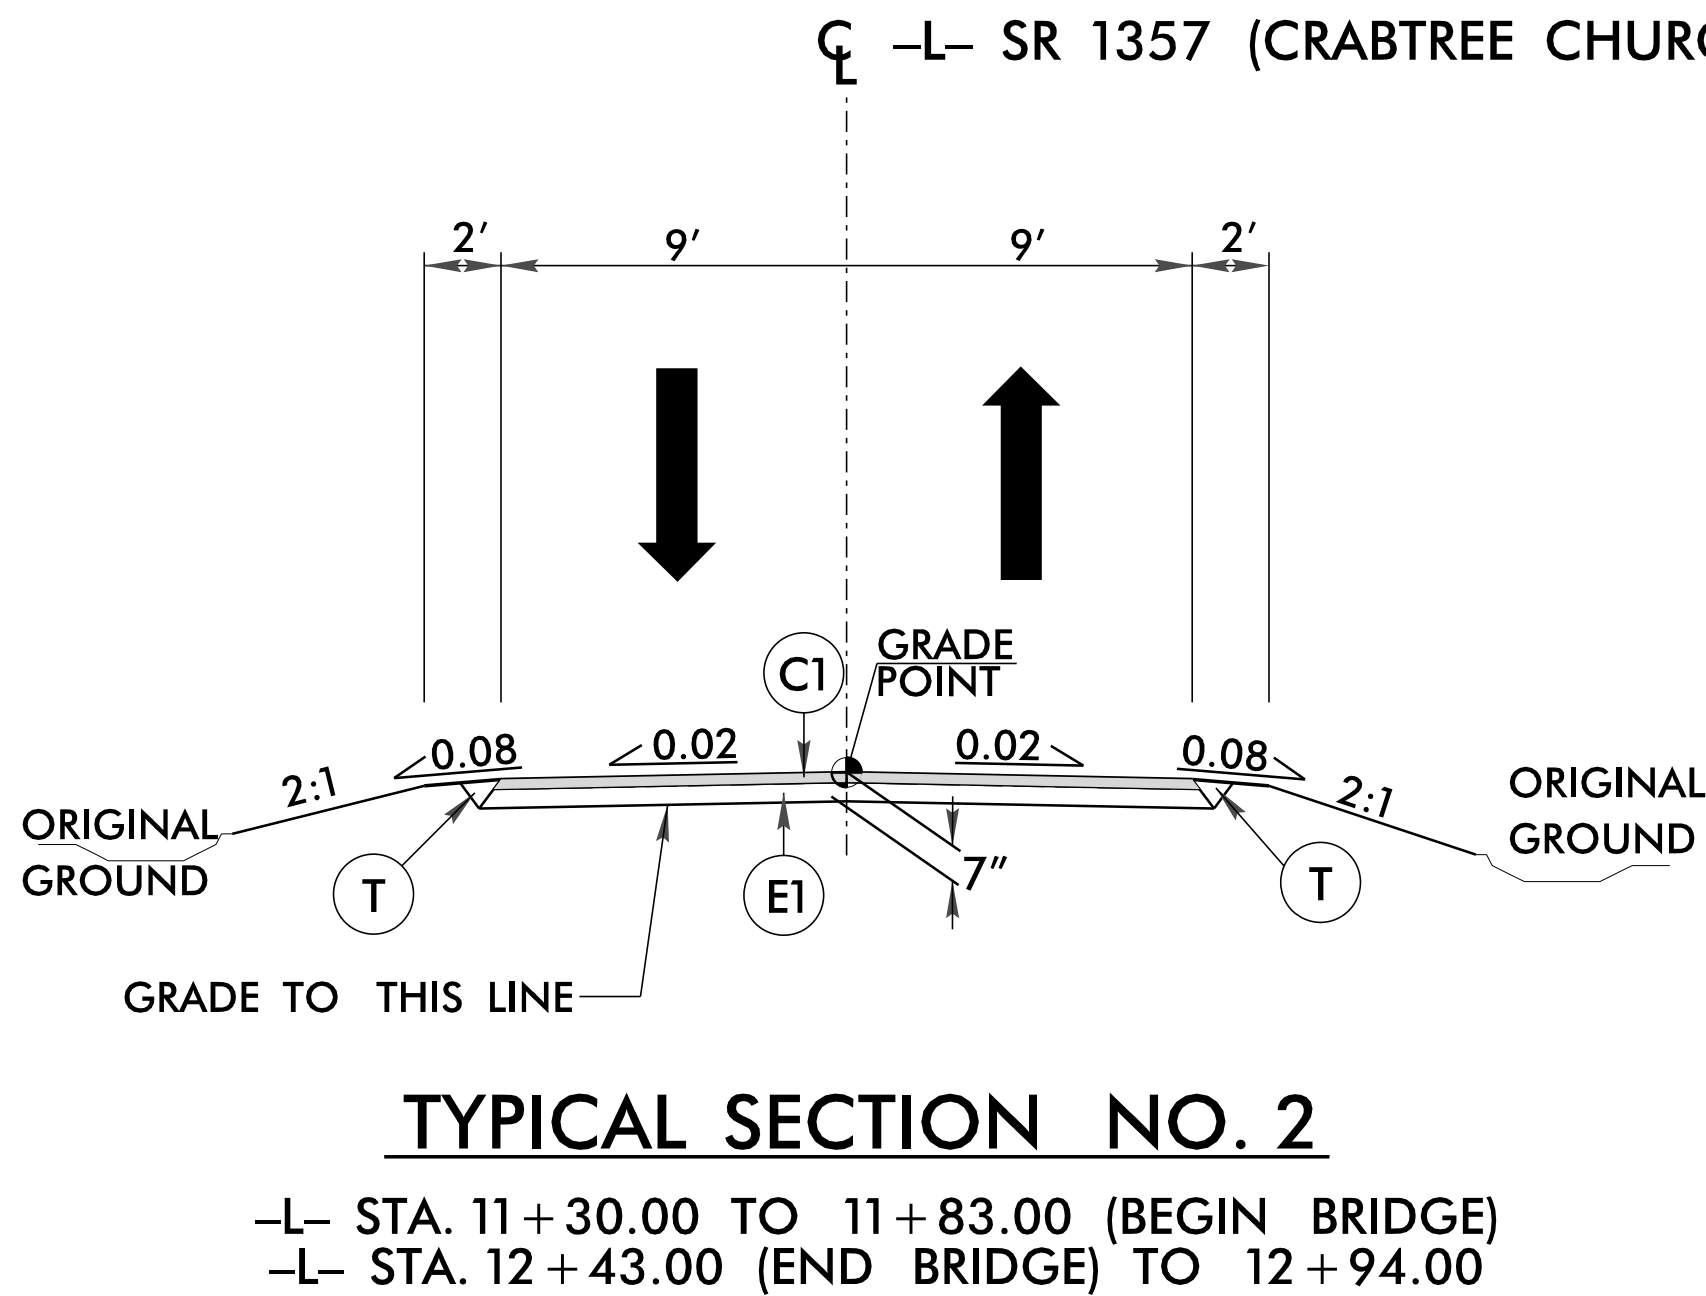
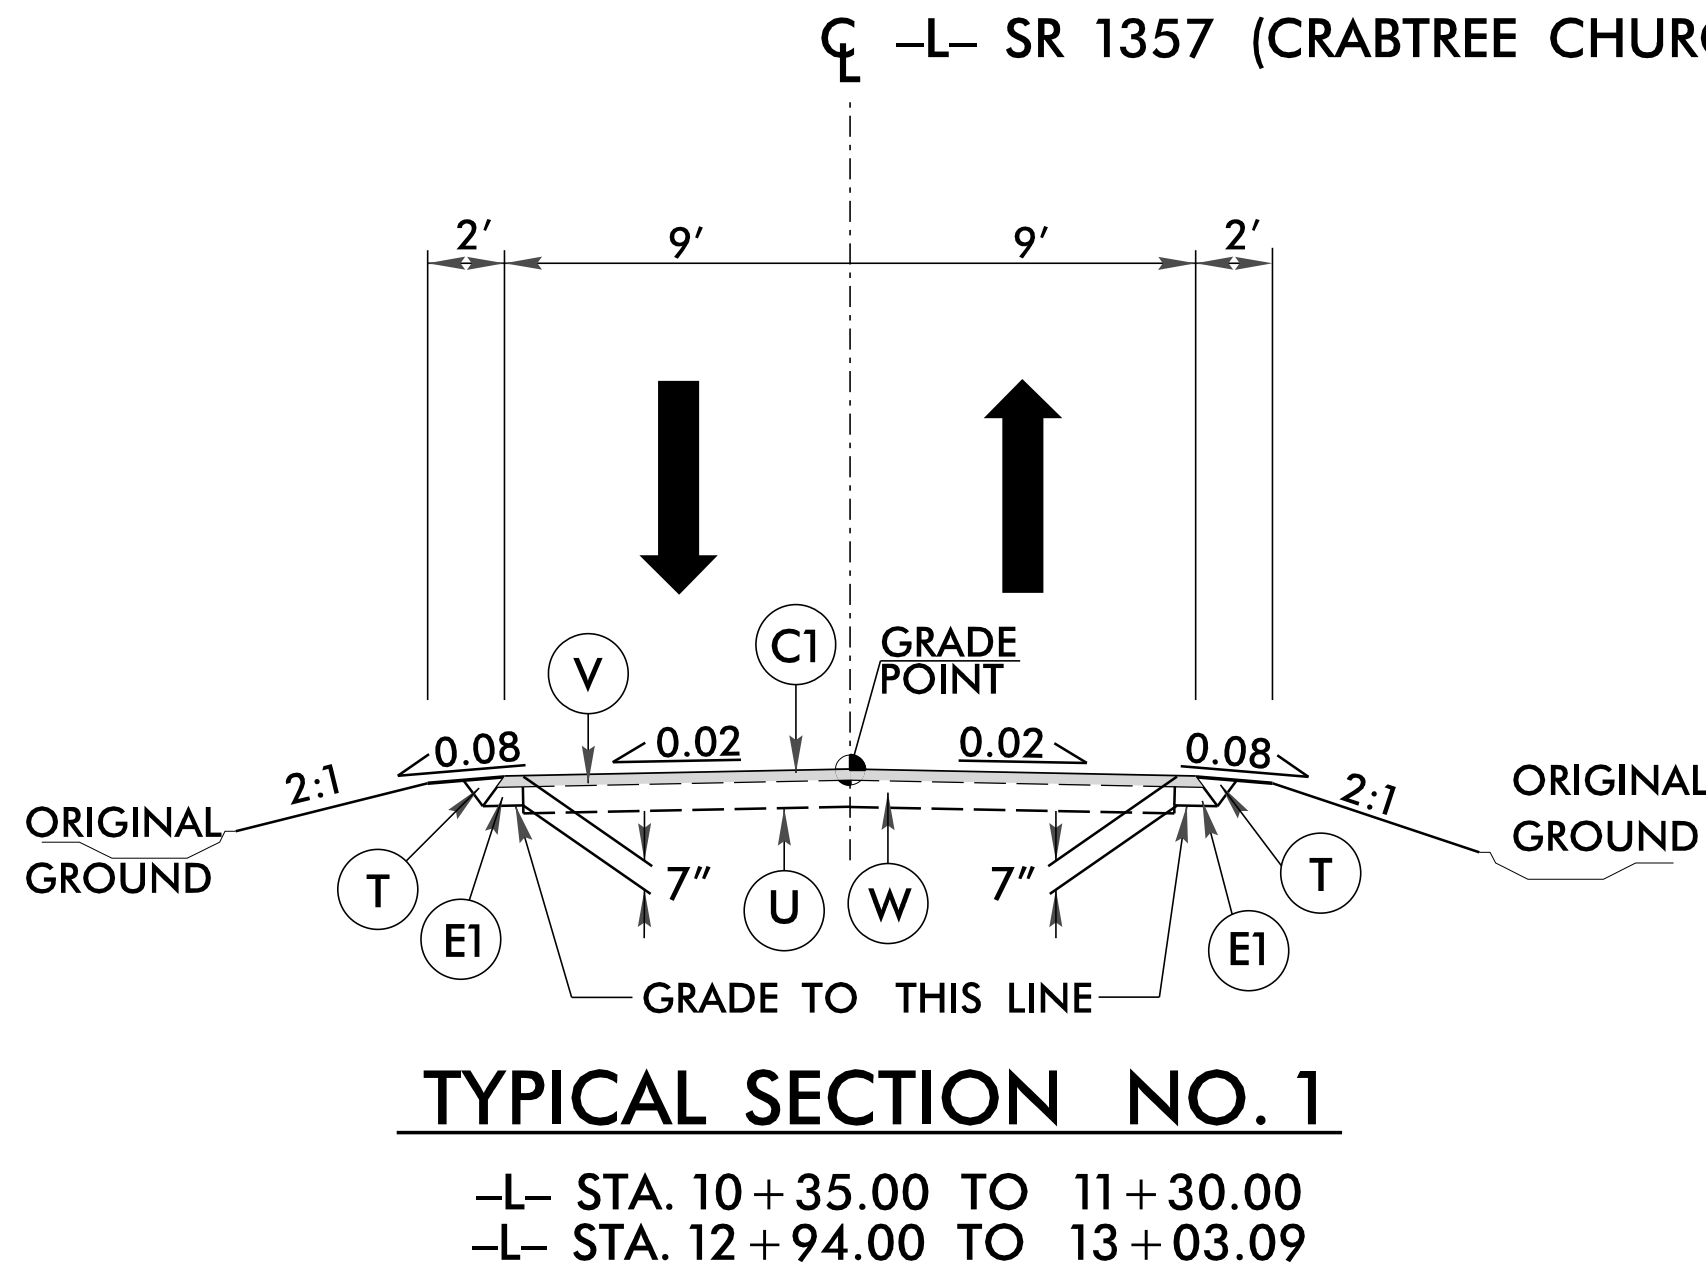
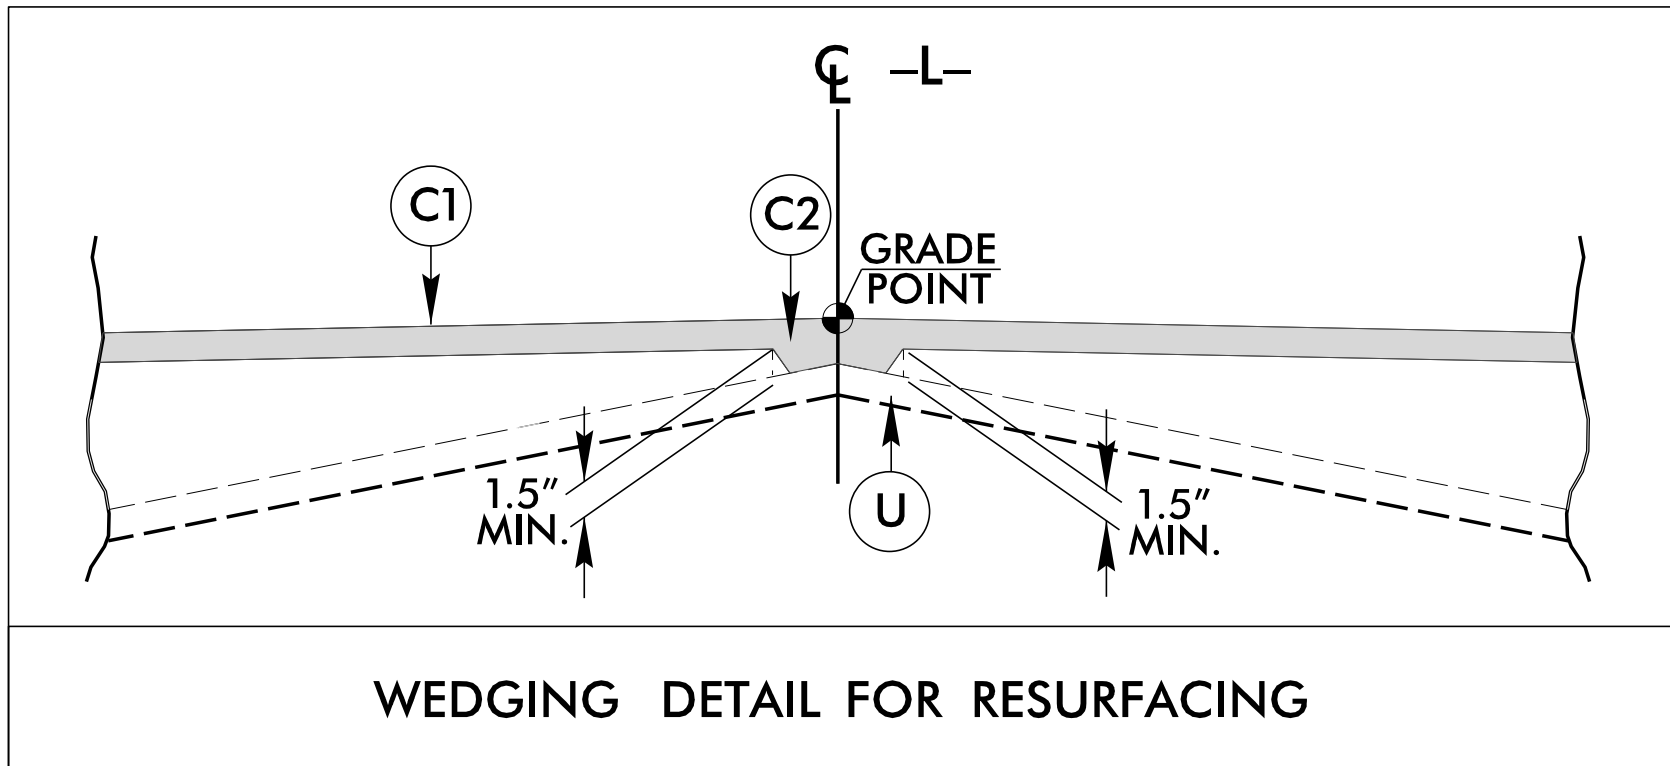


FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1.5" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
T	EARTH MATERIAL
U	EXISTING PAVEMENT
V	INCIDENTAL MILLING OR AS NEEDED
W	WEDGING

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS OTHERWISE SHOWN.

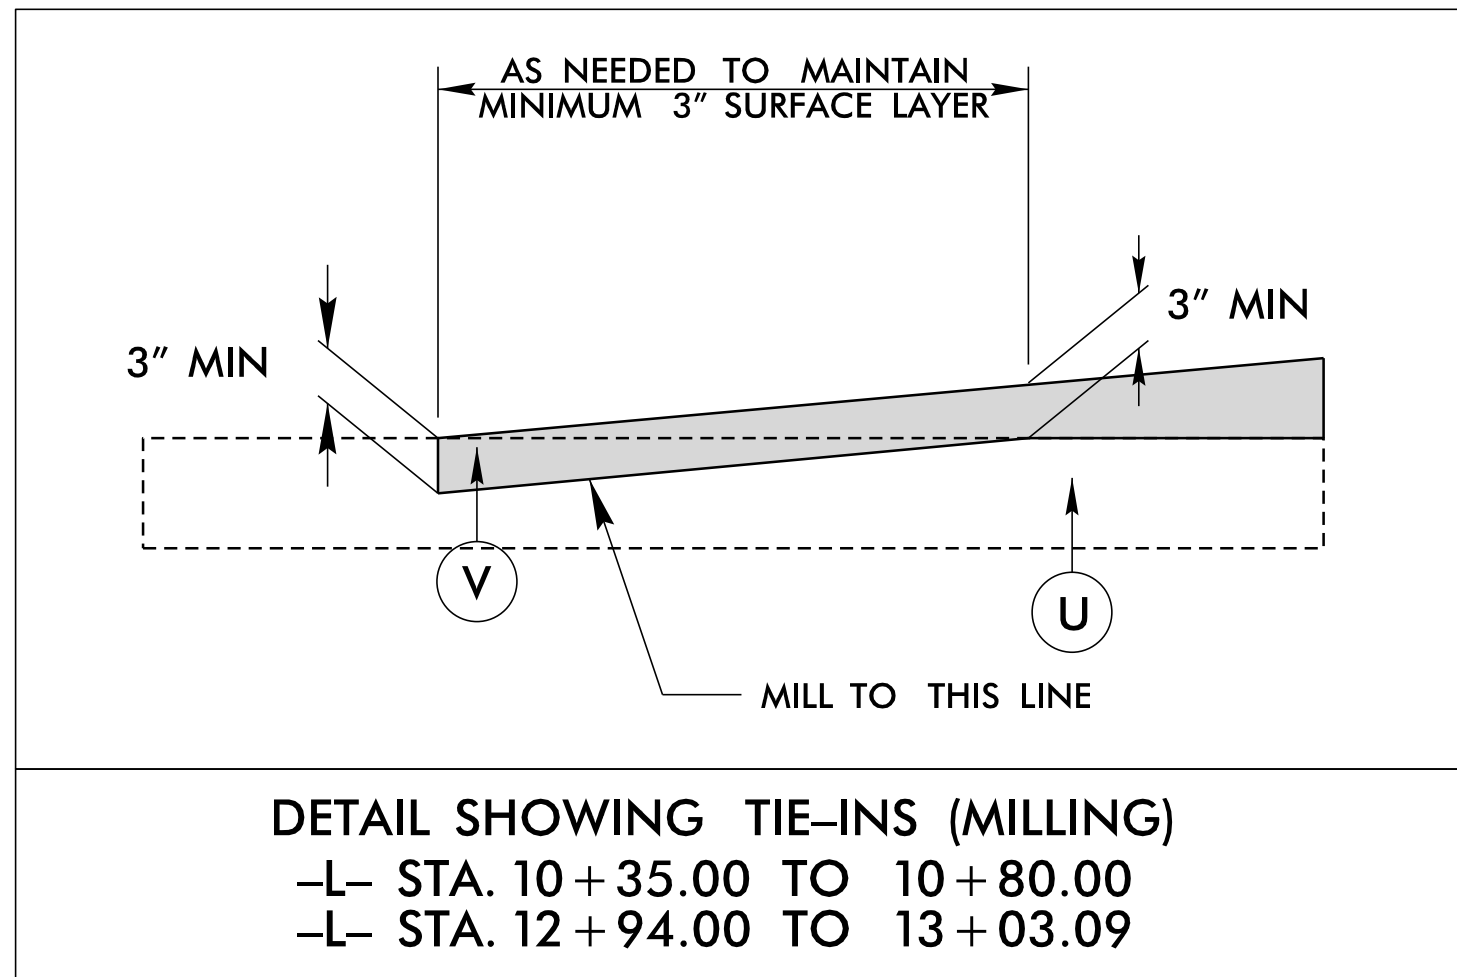

18314.1044073

2A-1

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
HAYWOOD COUNTY

NC DOT DIVISION 14

ROADWAY DESIGN
ENGINEER

4/15/2025

Signed by:
Scott D. Blevins

4762304056 SEAL
PAVEMENT DESIGN
ENGINEER

4/16/2025

Signed by:
Joseph T. Holland

7196538 PREPARED BY

P: 919.878.9560
8601 Six Forks Road, Forum 1, Suite 700
Raleigh, North Carolina 27615-3960
NC License No. F-0112
www.rkandk.com
Engineers | Construction Managers | Planners | Scientists
Responsive People | Creative Solutions

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

REVISIONS