

ADDENDUM NO. 4

TO: Prospective Bidders
FROM: Brenda Faison, Procurement Agent, Senior
DATE: October 22, 2024
PROJECT: Beatties Ford Road Sunset Pedestrian Improvements Phase 1
 Project No.: 512-16-049

The following items are being issued herein for modification and clarification to the Bid Requirements for the project referenced above.

The following sections have been clarified by this addendum:

CLARIFICATIONS TO PROJECT DRAWINGS

- 1) Regarding the DRAWINGS, See screenshot(s) of Plan Sheet 25 where the pole will be located.

| SHEET NO | DRAWING TITLE |
|----------|----------------------------|
| 25 | SIGNAL PLANS – SIG1 – SIG6 |
| | |
| | |

QUESTIONS AND ANSWERS

1. Line items 135 and 136 are for a 15 ft pole and base but not on the plans(see attached). Please advise.

Answer: *The information is not included on the plans but in the manual. Article 3: CDOT Implementation Special Provisions See SP-21 Pedestrian Poles and Bases.*

Those line items pertain to the Pedestrian Signals the Contractor will have to install at Peach Tree and Sunset Road. They are outlined in the project manual and there should be a plan incorporated in the plans from CDOT Implementation. They will be titled SIG1-SIG5 following the erosions control plan sheets.


2. These items are not on the signal plans. The pedestrian signals will be mounted on the 10 ft poles according to the plans. Usually the 15 ft poles are used for cameras. Please revise plans or remove the 15th ft pole line item.

Answer: *There will be two different sizes of pedestrian pedestals installed with this project. There will be one 15 ft tall pole and two 10 ft tall poles. Please see attached screenshots to include a google map of the area as well as the Plan sheet 25 indicating where the pole will be located.*

ACKNOWLEDGEMENT BY BIDDER:

Please recognize receipt of this addendum in the acknowledgment addenda section on the **Execution of BID** page.

END OF ADDENDUM NO. 4

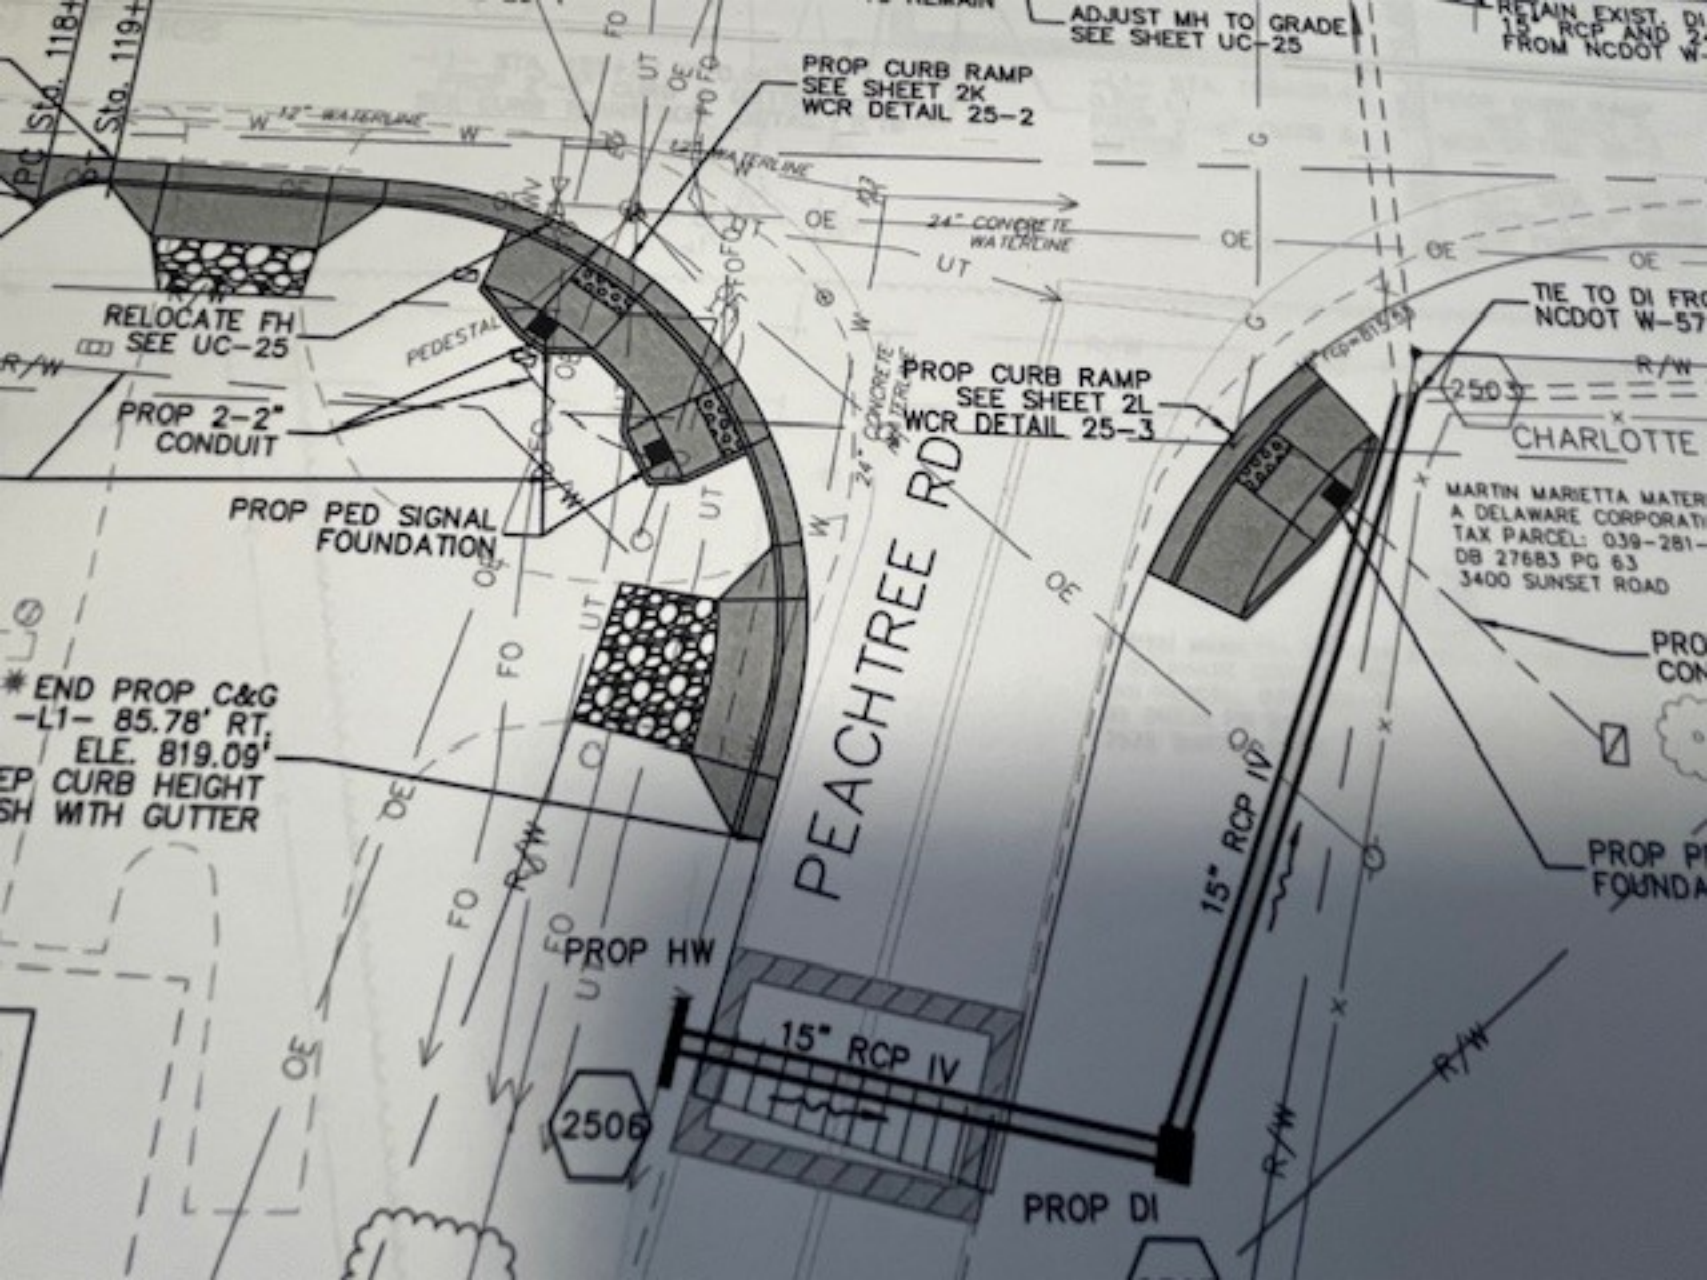

ADJUST MH TO GRADE
SEE SHEET UC-25

RETAIN EXIST DI
15" RCP AND 2"
FROM NCDOT W-

PROP CURB RAMP
SEE SHEET 2K
WCR DETAIL 25-2

PROP CURB RAMP
SEE SHEET 2L
WCR DETAIL 25-3

TIE TO DI FROM
NCDOT W-57

CHARLOTTE

MARTIN MARIETTA WATER
A DELAWARE CORPORATION
TAX PARCEL: 039-281-
DB 27683 PG 63
3400 SUNSET ROAD

PEACHTREE RD

15" RCP IV

15" RCP IV

PROP DI

2506

RELOCATE FH
SEE UC-25

PROP 2-2"
CONDUIT

PROP PED SIGNAL
FOUNDATION

* END PROP C&G
-L1- 85.78' RT,
ELE. 819.09'
EP CURB HEIGHT
SH WITH GUTTER

PROP HW

PROP PI
FOUNDA

PRO
CON

3419



et Rd

Sunset Rd



3336

3400

Peachtree Rd

Google

