
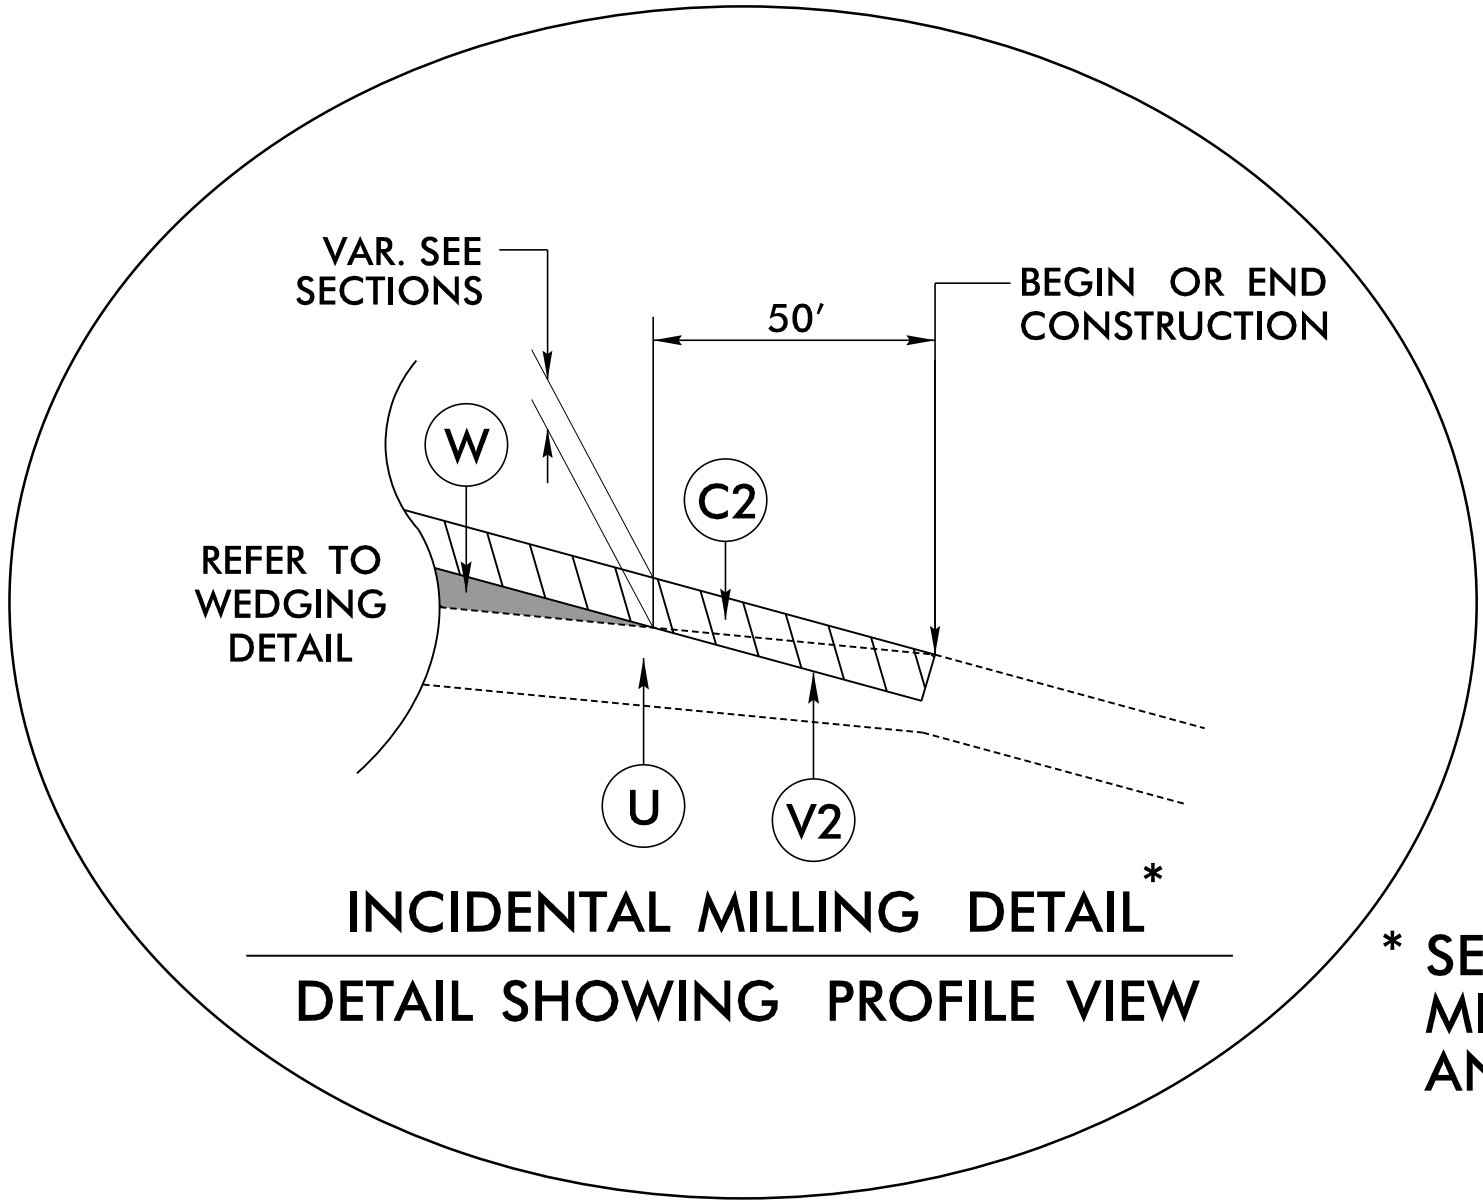


5/14/99


FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1.5" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 4" IN DEPTH.
J1	PROP. 8" AGGEGRATE BASE COURSE
R1	SHOULDER BERM GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAIL 1)
V1	1.5" MILLING
V2	INCIDENTAL MILLING

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

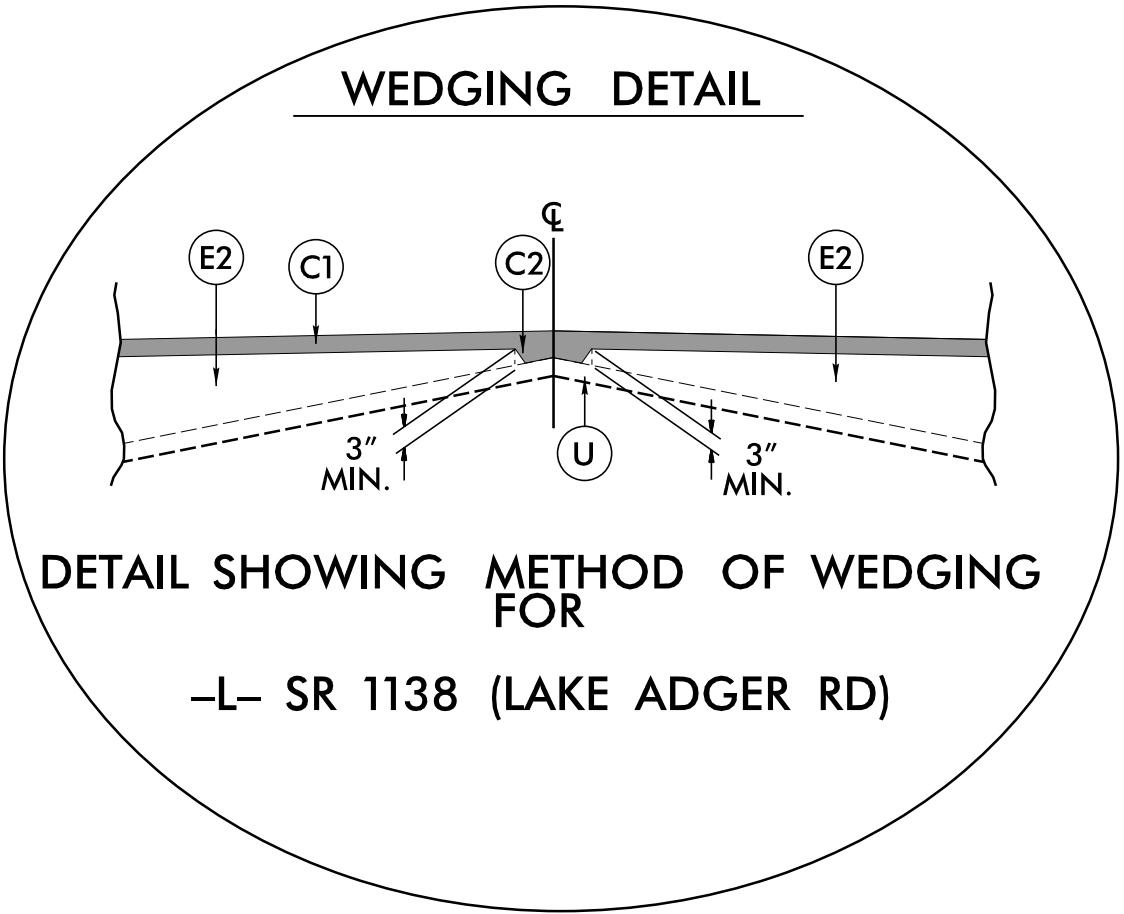


\* SEE TYPICAL SECTIONS FOR DEPTHS OF MILLING, SURFACE COURSE THICKNESS AND WEDGING METHOD.



PROJECT REFERENCE NO.		SHEET NO.
BP14.R006		2A-1
RW SHEET NO.		
ROADWAY DESIGN ENGINEER 10/9/2025	PAVEMENT ENGINEER 10/9/2025	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED		

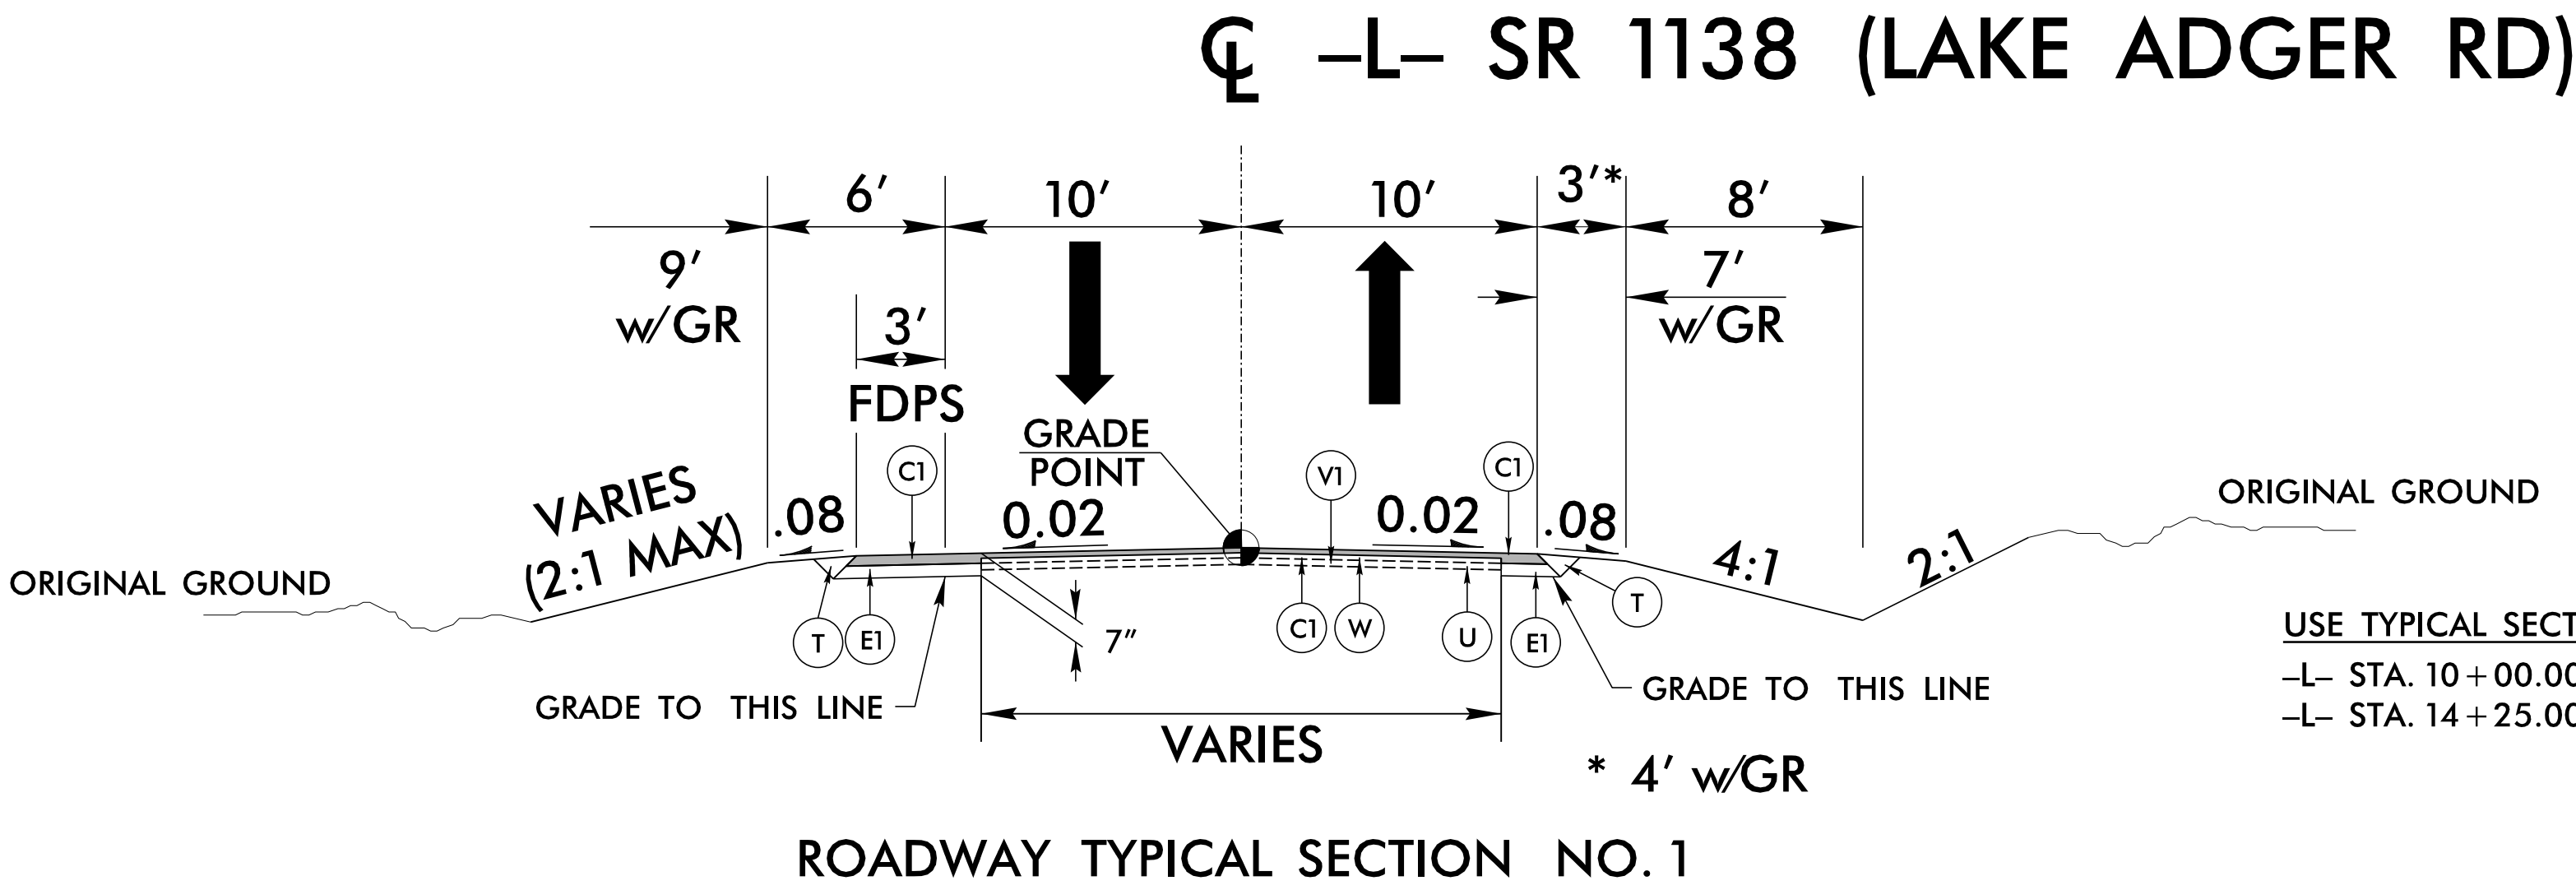

USE TYPICAL SECTION NO. 1  
-L- STA. 10+00.00 TO STA. 11+00.00  
-L- STA. 14+25.00 TO STA. 15+38.00

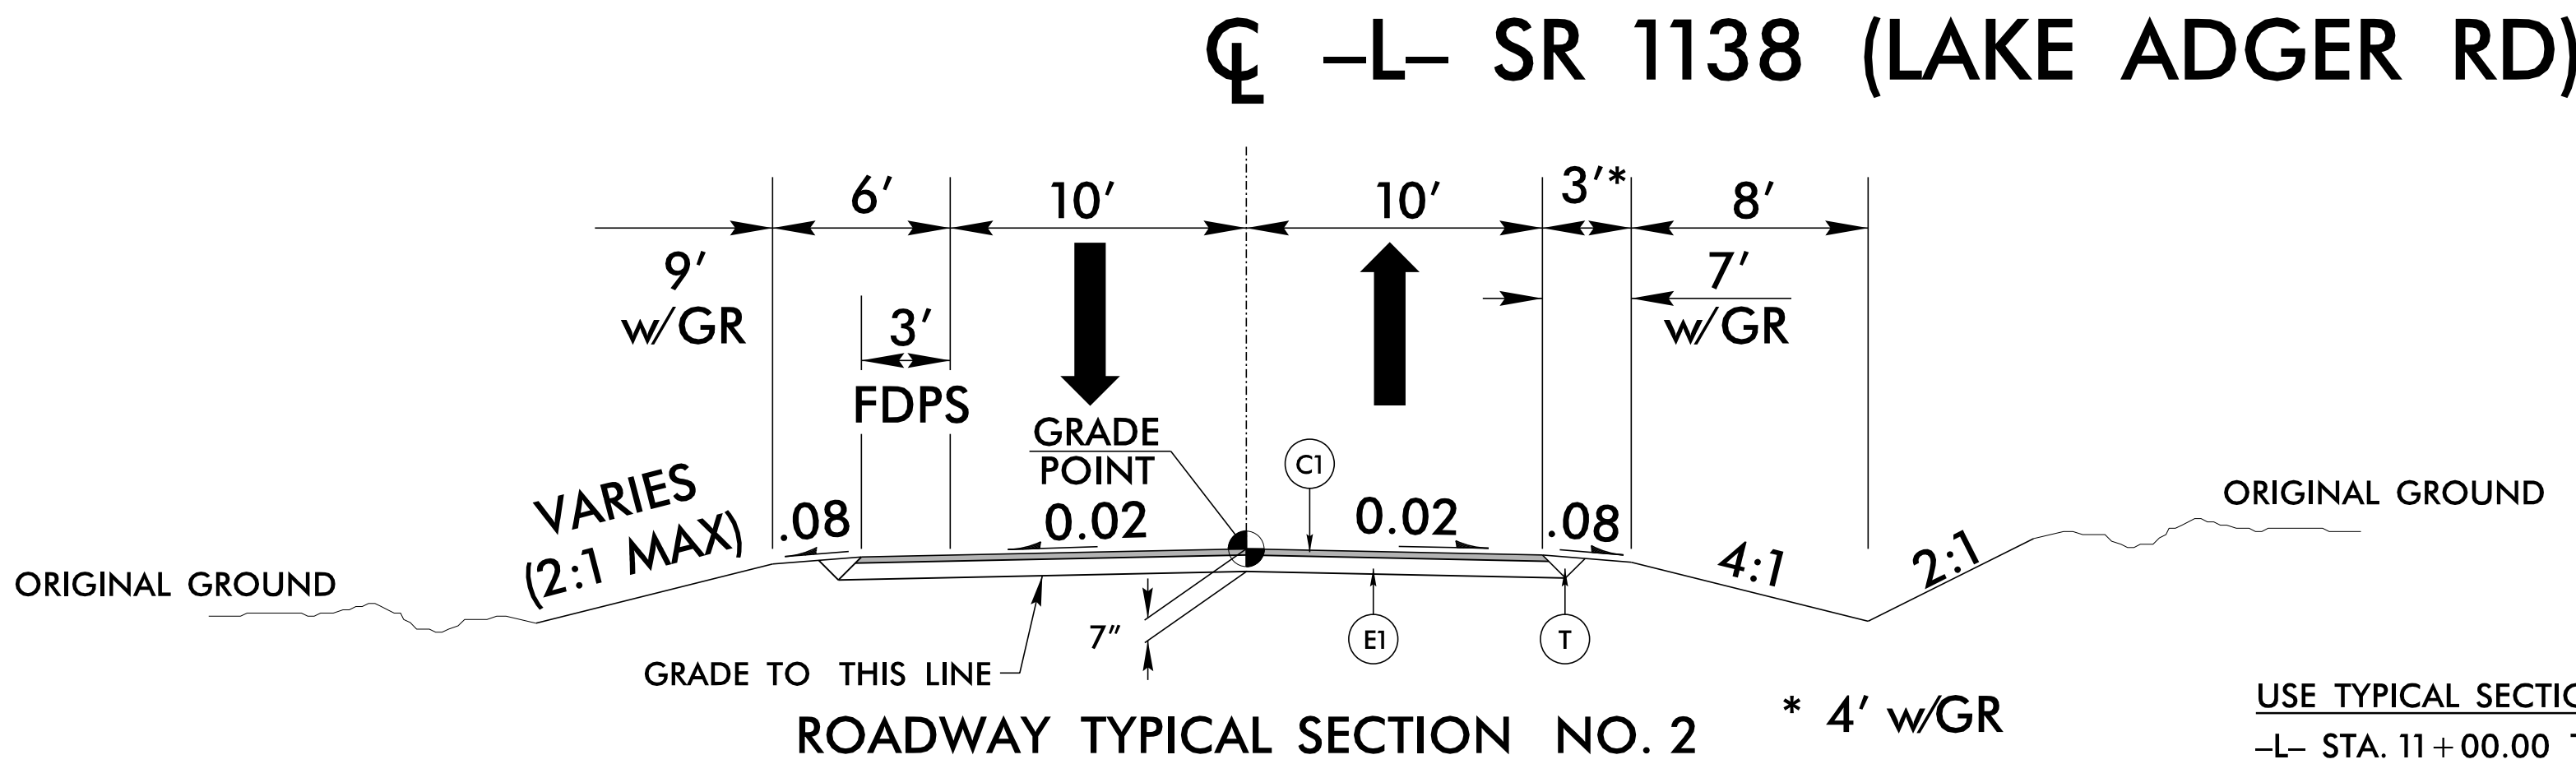

USE TYPICAL SECTION NO. 2  
-L- STA. 11+00.00 TO STA. 12+63.68  
-L- STA. 13+21.32 TO STA. 14+25.00

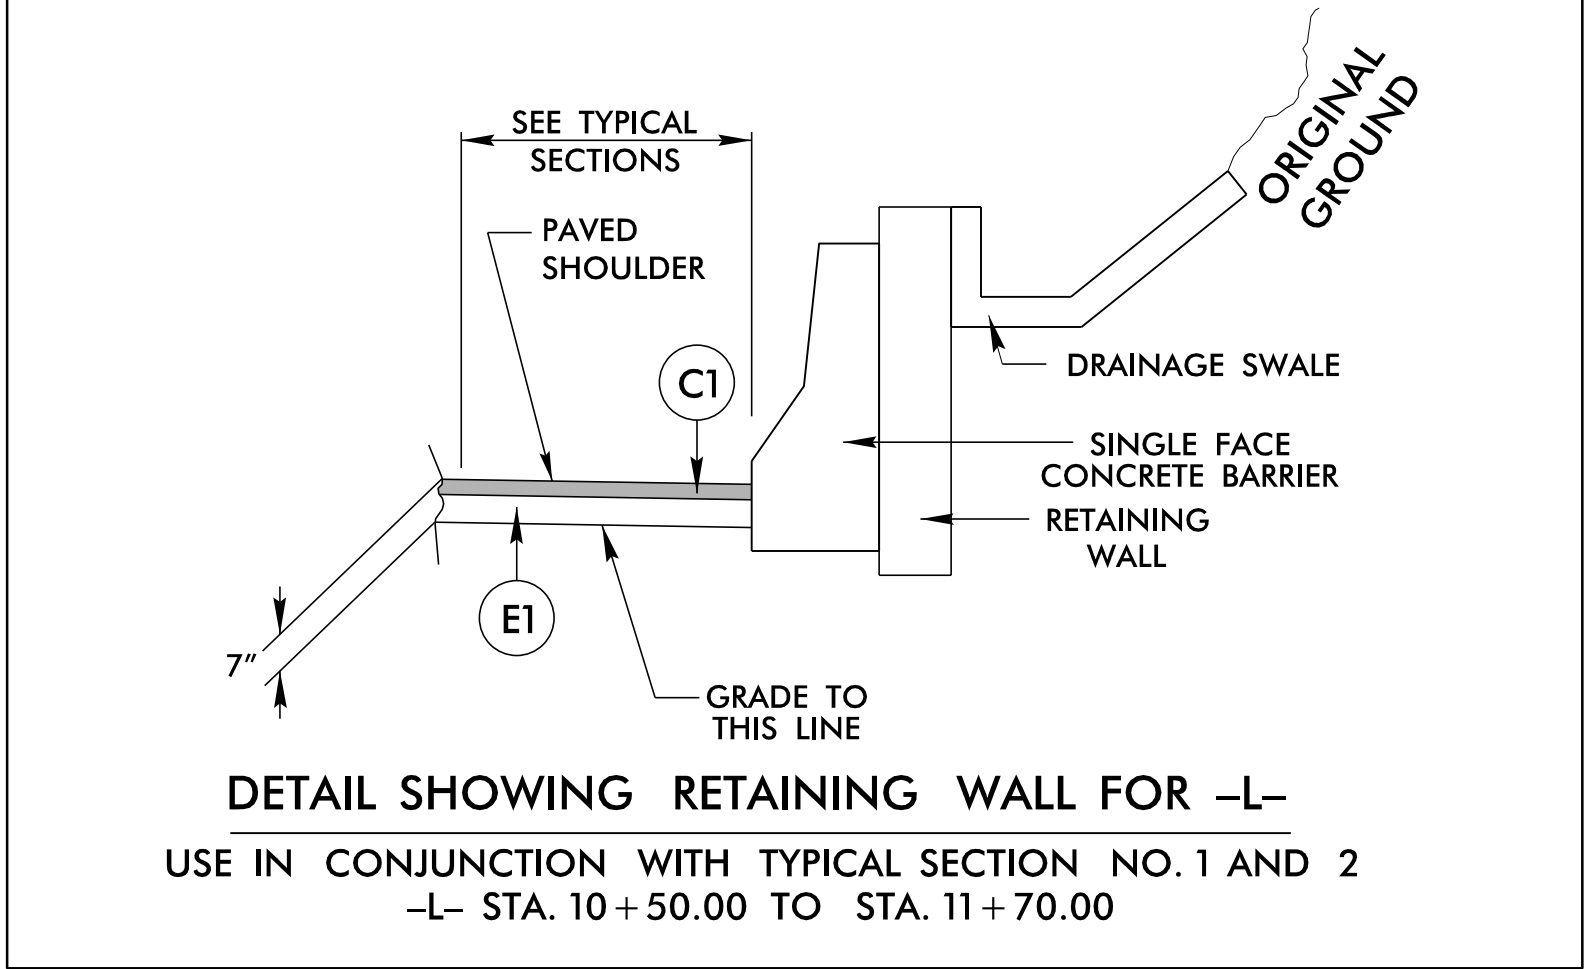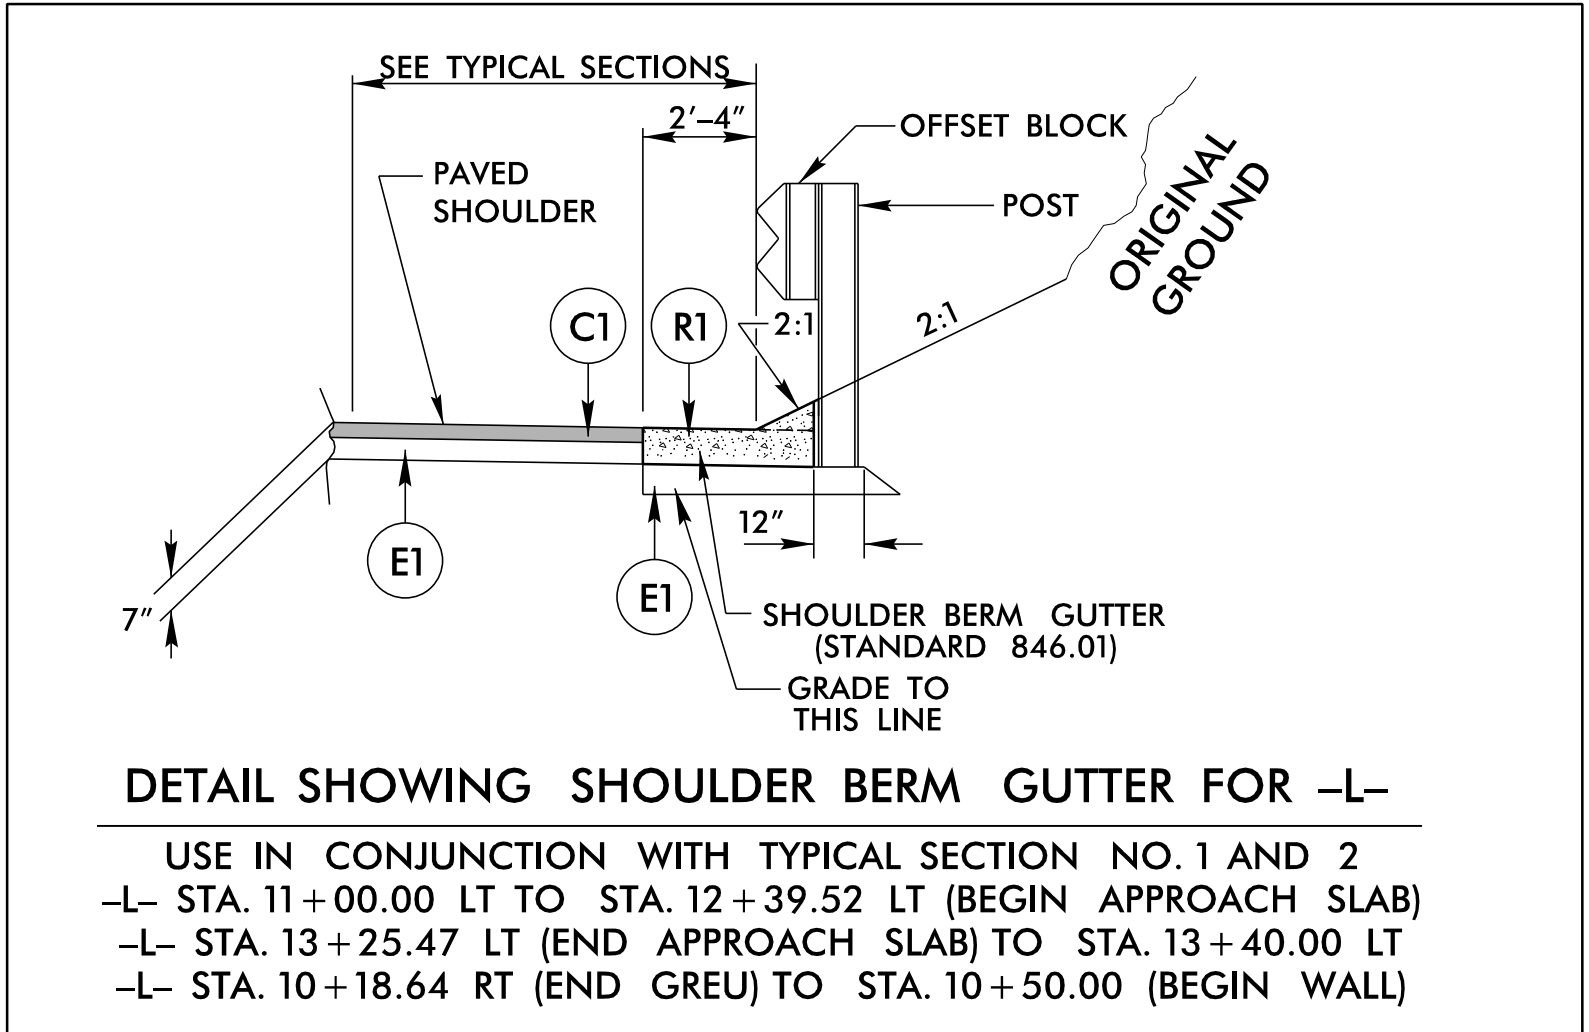

NOTES:  
SEE PLANS FOR TAPERS.  
MILL AS NEEDED.

9/30/2025  
R:\2025\Projects\193\_R0Y\_TYP.dgn  
E:\10000000