



SR 1305
HACKETT TOWN ROAD
WBS# 11C.097152

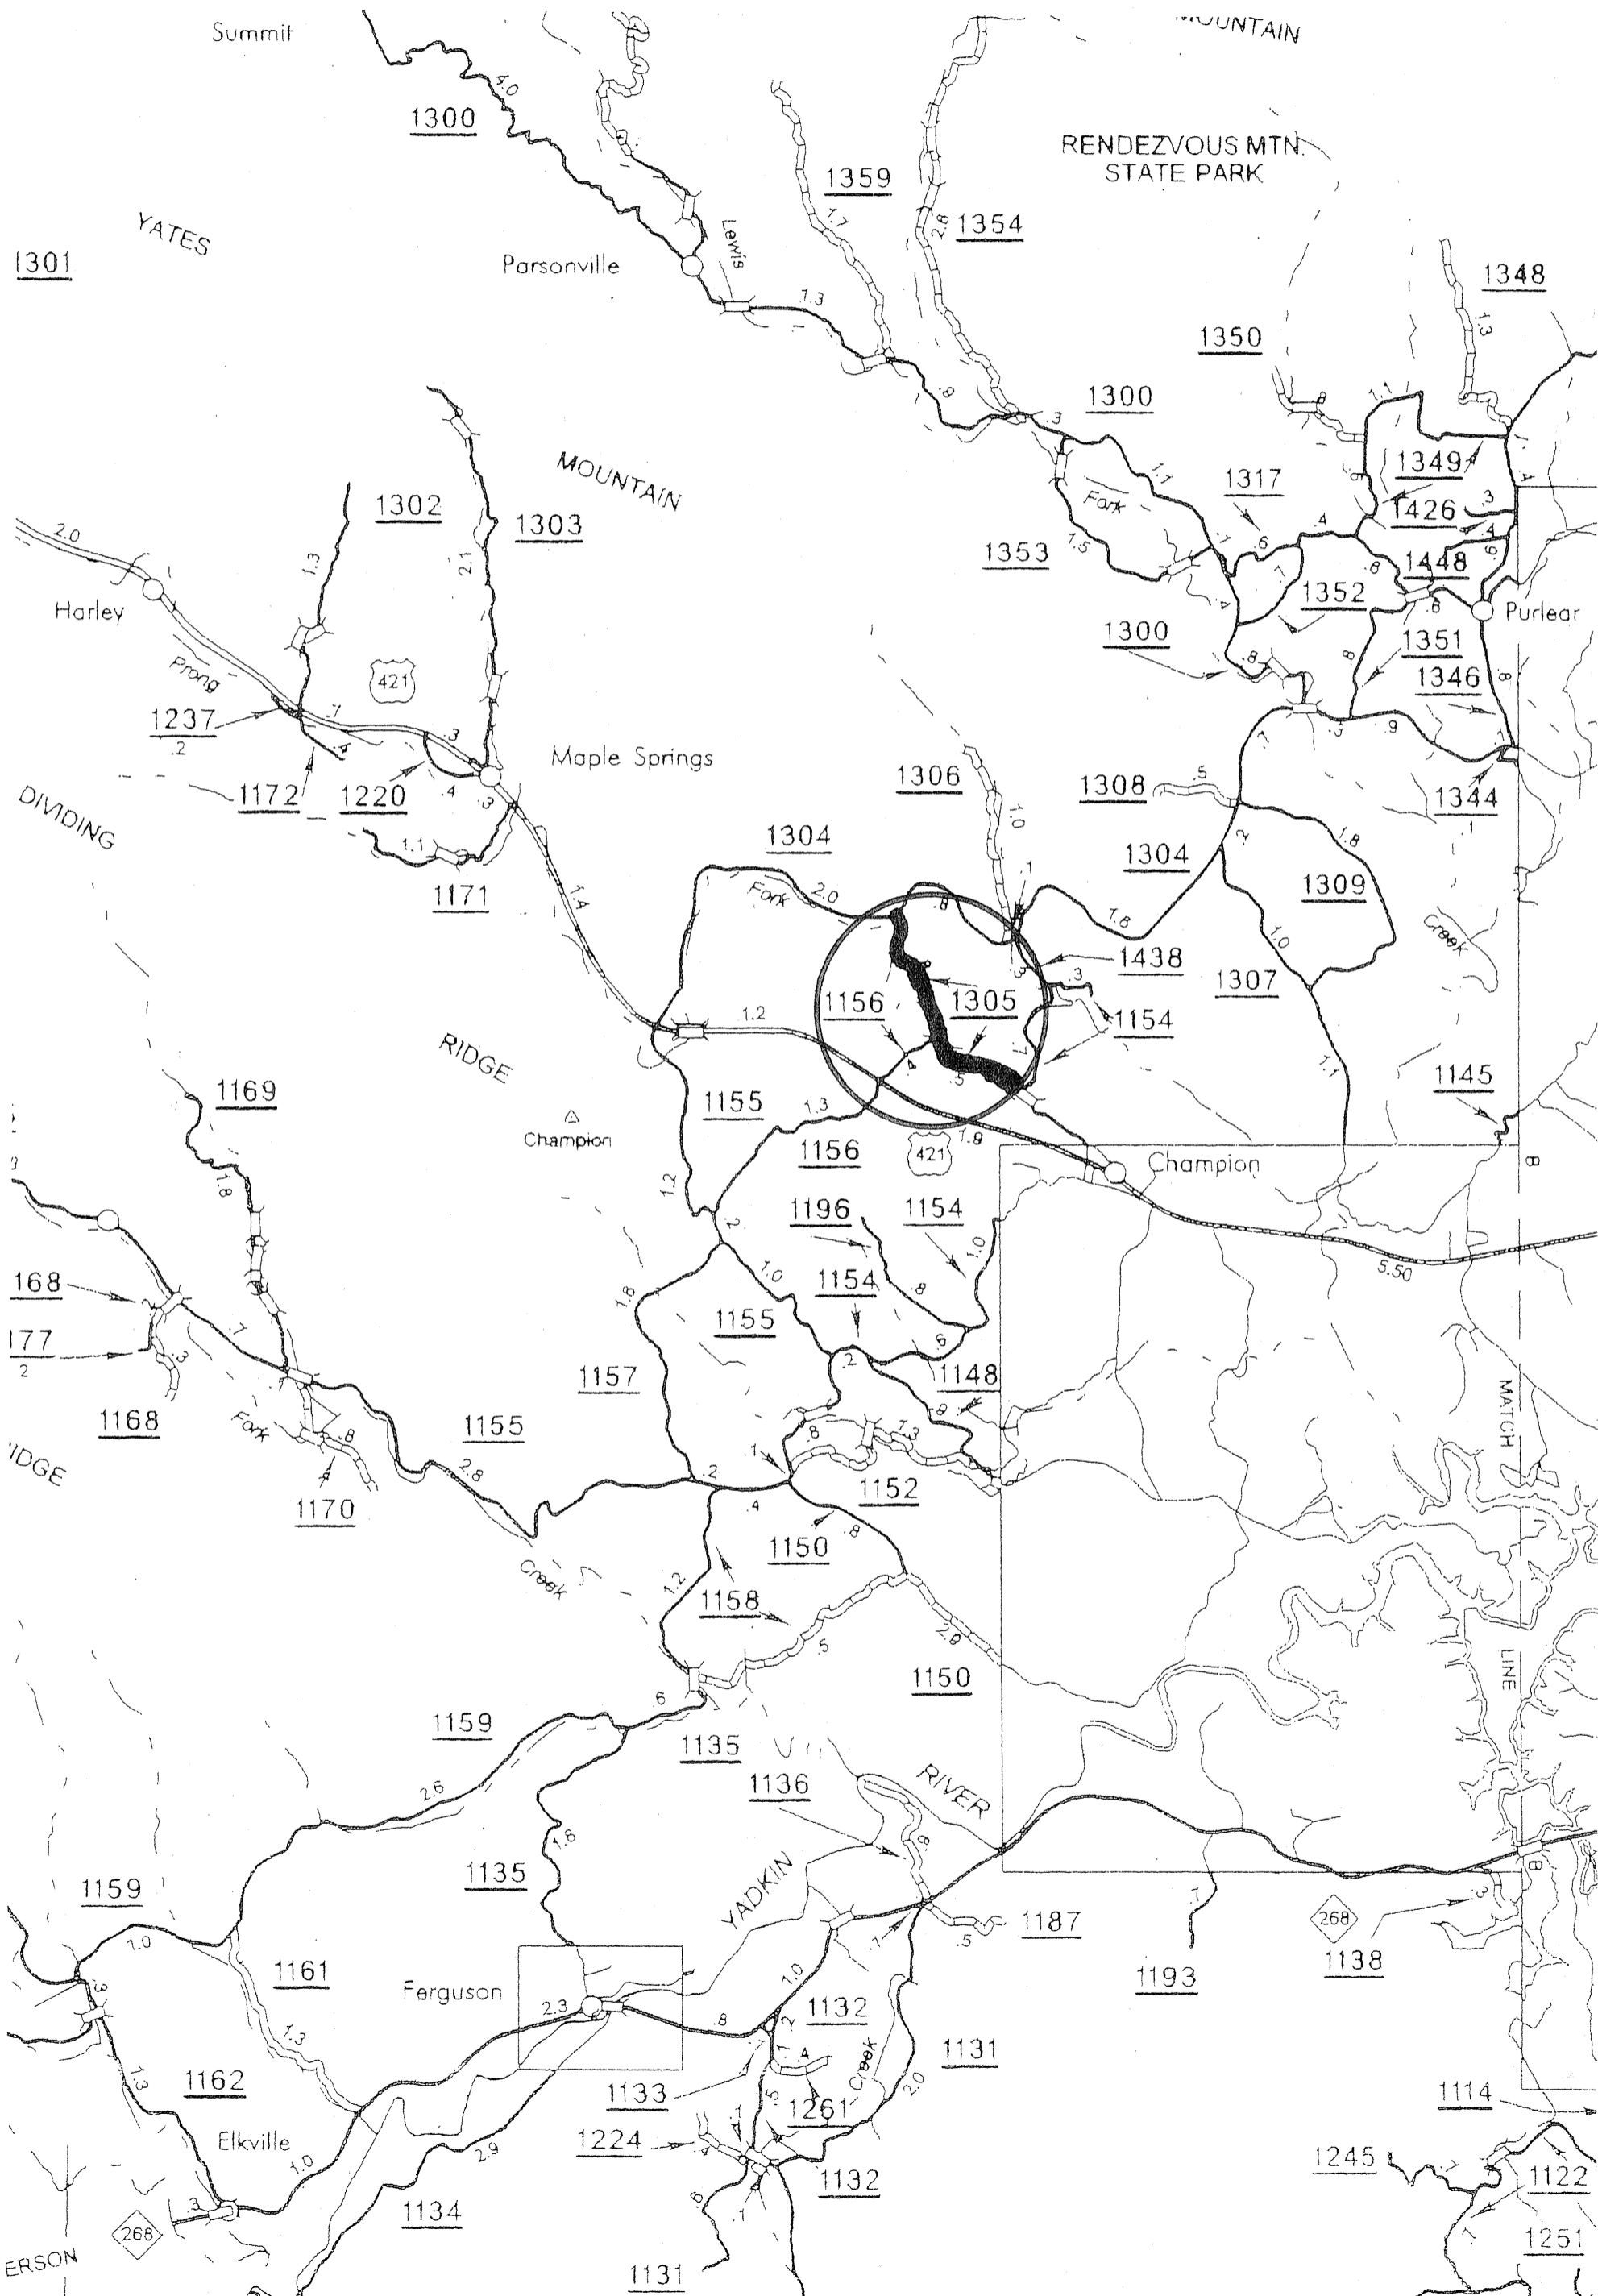

TYPICALS AND PAVEMENT SCHEDULES

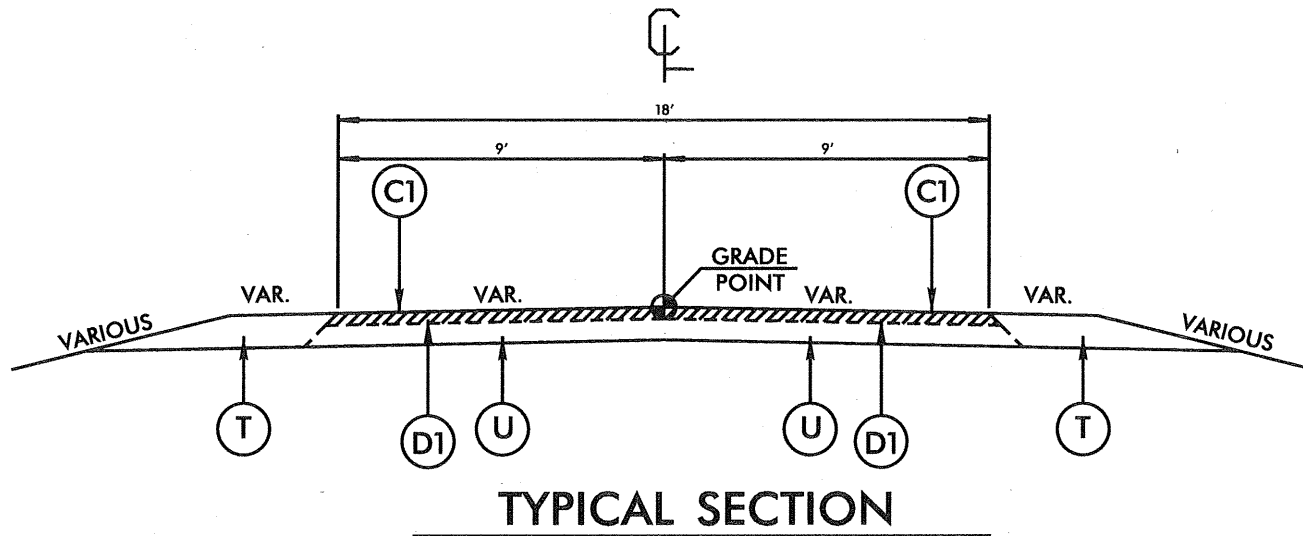

C1	ASPHALT SURFACE TREATMENT (TRIPLE SEAL)
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 228 LBS. PER SQ. YD.
U	EXISTING 8" AGGREGATE BASE COURSE.
T	PROPOSED SHOULDER MATERIAL

PROJECT NO.	SHEET NO.	TOTAL NO.
11C.097152		

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	LENGTH M	WIDTH FT	BORROW EXCAVATION CY	AGGREGATE BASE COURSE TONS	CONDITIONING EXISTING BASE MSY	INCIDENTAL STONE BASE TONS	SHOULDER RECONSTRUCTION SM	INTERMEDIATE COURSE, 119.0B TONS	ASPHALT BINDER FOR PLANT MIX TONS	ASPHALT SURFACE TREATMENT TRIPLE SEAL SY	EMULSION FOR ASPHALT SURFACE TREATMENT GAL	BLOTTING SAND TON	SEED & MULCHING AC	4810000000-E 4" WHITE PAINT LF	4810000000-E 4" YELLOW PAINT LF
11C.097152	Wilkes	1	SR 1305	FROM SR 1154 TO SR 1304	1	2	2WU	1.28	18	256	150	13.55	75	2.56	1,980	95	13,550	10,400	50	1.25	27,550	27,050
TOTAL FOR PROJ NO. 11C.097152							1.28			256	150	13.55	75	2.56	1,980	95	13,550	10,400	50	1.25	27,550	27,050