

REFERENCE: B-4635

PROJECT: 38446

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
GEOTECHNICAL ENGINEERING UNIT

**STRUCTURE**  
**SUBSURFACE INVESTIGATION**

COUNTY SAMPSON  
PROJECT DESCRIPTION BRIDGE NO. 9 ON -L- (US 13)  
OVER SOUTH RIVER OVERFLOW AT STA. 19+80.60

**CONTENTS**

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4-5	PROFILES
6-8	BORE LOGS

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-4635	1	8

**CAUTION NOTICE**

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
  - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

C.J. CORNETTE

S.N. ZIMARINO

R.E. SMITH

D.G. PINTER

INVESTIGATED BY T.C. BOTTOMS

DRAWN BY C.J. CORNETTE

CHECKED BY D.N. ARGENBRIGHT

SUBMITTED BY D.N. ARGENBRIGHT

DATE NOVEMBER 2018



DocuSigned by:  
Tyler Bottoms 6/4/2019

48A2D3BD08CF4A6...  
SIGNATURE DATE


**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

# NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT SUBSURFACE INVESTIGATION


## SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION	GRADATION	ROCK DESCRIPTION	TERMS AND DEFINITIONS																																																																																																																																																																																																																																																																																																																																																																																																																			
<p>SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 208, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i></p>																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>SOIL LEGEND AND AASHTO CLASSIFICATION</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th rowspan="2">GENERAL CLASS.</th> <th colspan="6">GRANULAR MATERIALS (≤ 35% PASSING #200)</th> <th colspan="4">SILT-CLAY MATERIALS (&gt; 35% PASSING #200)</th> <th colspan="2">ORGANIC MATERIALS</th> </tr> <tr> <th>A-1</th> <th>A-3</th> <th>A-2</th> <th>A-4</th> <th>A-5</th> <th>A-7</th> <th>A-1, A-2</th> <th>A-3</th> <th>A-4, A-5</th> <th>A-6, A-7</th> <th></th> <th></th> </tr> <tr> <td>GROUP CLASS.</td> <td>A-1-a</td> <td>A-1-b</td> <td>A-2-4</td> <td>A-2-5</td> <td>A-2-6</td> <td>A-2-7</td> <td></td> <td>A-7-5</td> <td>A-7-6</td> <td></td> <td></td> <td></td> </tr> <tr> <td>SYMBOL</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> </tr> <tr> <td>% PASSING #10 #40 #200</td> <td>50 MX 30 MX 15 MX</td> <td>50 MX 25 MX 10 MX</td> <td>51 MN 35 MX 35 MX 35 MX</td> <td>35 MX 35 MX 35 MX</td> <td>35 MX 35 MX 35 MX</td> <td>36 MN 36 MN 36 MN</td> <td>41 MN 41 MN 41 MN</td> <td>40 MX 40 MX 40 MX</td> <td>41 MN 41 MN 41 MN</td> <td>40 MX 40 MX 40 MX</td> <td>41 MN 41 MN 41 MN</td> <td>41 MN 41 MN 41 MN</td> <td></td> </tr> <tr> <td>MATERIAL PASSING #40 LL PI</td> <td>-</td> <td>6 MX</td> <td>-</td> <td>40 MX 10 MX</td> <td>41 MN 10 MX</td> <td>40 MX 11 MN</td> <td>40 MX 11 MN</td> <td>40 MX 11 MN</td> <td>40 MX 11 MN</td> <td>40 MX 11 MN</td> <td>40 MX 11 MN</td> <td>40 MX 11 MN</td> <td></td> </tr> <tr> <td>GROUP INDEX</td> <td>0</td> <td>0</td> <td>0</td> <td>4 MX</td> <td>8 MX</td> <td>12 MX</td> <td>16 MX</td> <td>NO MX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>USUAL TYPES OF MAJOR MATERIALS</td> <td>STONE FRAGS. GRAVEL, AND SAND</td> <td>FINE SAND</td> <td>SILTY OR CLAYEY GRAVEL AND SAND</td> <td>SILTY SOILS</td> <td>CLAYEY SOILS</td> <td colspan="2">SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER</td> <td colspan="4">HIGHLY ORGANIC SOILS</td> </tr> <tr> <td>GEN. RATING AS SUBGRADE</td> <td colspan="3">EXCELLENT TO GOOD</td> <td colspan="2">FAIR TO POOR</td> <td>FAIR TO POOR</td> <td>POOR</td> <td>UNSATURABLE</td> <td colspan="4"></td> </tr> <tr> <td colspan="13">           PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS &gt; LL - 30         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>CONSISTENCY OR DENSENESS</b></td> </tr> <tr> <td>PRIMARY SOIL TYPE</td> <td>COMPACTNESS OR CONSISTENCY</td> <td>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</td> <td>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT<sup>2</sup>)</td> </tr> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td>&lt; 4 4 TO 10 10 TO 30 30 TO 50 &gt; 50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td>&lt; 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 &gt; 30</td> <td>&lt; 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 &gt; 4</td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>TEXTURE OR GRAIN SIZE</b></td> </tr> <tr> <td>U.S. STD. SIEVE SIZE OPENING (MM)</td> <td>4</td> <td>10</td> <td>40</td> <td>60</td> <td>200</td> <td>270</td> </tr> <tr> <td></td> <td>4.76</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> <tr> <td>BOULDER (BLDR.)</td> <td>COBBLE (COB.)</td> <td>GRAVEL (GR.)</td> <td>COARSE SAND (CSE, SD.)</td> <td>FINE SAND (F SD.)</td> <td>SILT (SL.)</td> <td>CLAY (CL.)</td> </tr> <tr> <td>GRAIN SIZE</td> <td>MM 305</td> <td>75</td> <td>2.0</td> <td>0.25</td> <td>0.05</td> <td>0.005</td> </tr> <tr> <td></td> <td>IN. 12</td> <td>3</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>SOIL MOISTURE - CORRELATION OF TERMS</b></td> </tr> <tr> <td>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</td> <td>FIELD MOISTURE DESCRIPTION</td> <td colspan="2">GUIDE FOR FIELD MOISTURE DESCRIPTION</td> </tr> <tr> <td rowspan="4">LL PLASTIC RANGE (PI) PL</td> <td>LIQUID LIMIT (SAT.)</td> <td colspan="2">USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>- WET - (W)</td> <td colspan="2">SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td>OPTIMUM MOISTURE SHRINKAGE LIMIT</td> <td colspan="2">- MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td></td> <td colspan="2">- DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>PLASTICITY</b></td> </tr> <tr> <td>NON PLASTIC</td> <td>PLASTICITY INDEX (PI) 0-5</td> <td colspan="2">DRY STRENGTH VERY LOW</td> </tr> <tr> <td>SLIGHTLY PLASTIC</td> <td>6-15</td> <td colspan="2">SLIGHT</td> </tr> <tr> <td>MODERATELY PLASTIC</td> <td>16-25</td> <td colspan="2">MEDIUM</td> </tr> <tr> <td>HIGHLY PLASTIC</td> <td>26 OR MORE</td> <td colspan="2">HIGH</td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>COLOR</b></td> </tr> <tr> <td colspan="4">           DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>GRADATION</b></td> </tr> <tr> <td colspan="4"> <b>WELL GRADED</b> - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE.  <b>UNIFORMLY GRADED</b> - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE.  <b>GAP-GRADED</b> - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>ANGULARITY OF GRAINS</b></td> </tr> <tr> <td colspan="4">           THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>MINERALOGICAL COMPOSITION</b></td> </tr> <tr> <td colspan="4">           MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>COMPRESSIBILITY</b></td> </tr> <tr> <td colspan="4">           SLIGHTLY COMPRESSIBLE LL &lt; 31            MODERATELY COMPRESSIBLE LL = 31 - 50            HIGHLY COMPRESSIBLE LL &gt; 50         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>PERCENTAGE OF MATERIAL</b></td> </tr> <tr> <td colspan="4"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE 1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE 10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME 20 - 35%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>&gt; 10%</td> <td>&gt; 20%</td> <td>HIGHLY 35% AND ABOVE</td> </tr> </table> </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>GROUND WATER</b></td> </tr> <tr> <td colspan="4">  WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING   STATIC WATER LEVEL AFTER 24 HOURS   PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA   SPRING OR SEEP         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>MISCELLANEOUS SYMBOLS</b></td> </tr> <tr> <td colspan="4">  ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION   SOIL SYMBOL   ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT   INFERRERD SOIL BOUNDARY   INFERRERD ROCK LINE   ALLUVIAL SOIL BOUNDARY   25/025 DIP &amp; DIP DIRECTION OF ROCK STRUCTURES   SPT TEST BORING   AUGER BORING   CORE BORING   MONITORING WELL   PIEZOMETER INSTALLATION   SLOPE INDICATOR   CONE PENETROMETER TEST   SOUNDING ROD   TEST BORING WITH CORE   SPT N-VALUE         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>RECOMMENDATION SYMBOLS</b></td> </tr> <tr> <td colspan="4">  UNDERCUT   SHALLOW UNDERCUT   UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE   UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK   UNCLASSIFIED EXCAVATION - UNACCEPTABLE         </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>ABBREVIATIONS</b></td> </tr> <tr> <td colspan="4"> <table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;">           AR - AUGER REFUSAL            BT - BORING TERMINATED            CL - CLAY            CPT - CONE PENETRATION TEST            CSE - COARSE            DMT - DILATOMETER TEST            DPT - DYNAMIC PENETRATION TEST            e - VOID RATIO            F - FINE            FOSS. - FOSSILIFEROUS            FRAC. - FRACTURED, FRACTURES            FRAGS. - FRAGMENTS            HI. - HIGHLY         </td> <td style="vertical-align: top;">           MED. - MEDIUM            MICA - MICACEOUS            MOD. - MODERATELY            NP - NON PLASTIC            ORG. - ORGANIC            PMT - PRESSUREMETER TEST            SAP. - SAPROLITIC            SD. - SAND, SANDY            SL. - SILT, SILTY            SLI. - SLIGHTLY            TCR - TRICONE REFUSAL            w - MOISTURE CONTENT            V - VERY         </td> <td style="vertical-align: top;">           VST - VANE SHEAR TEST            WEA. - WEATHERED            γ - UNIT WEIGHT            γ<sub>d</sub> - DRY UNIT WEIGHT  <b>SAMPLE ABBREVIATIONS</b>            S - BULK            SS - SPLIT SPOON            ST - SHELBY TUBE            RS - ROCK            RT - RECOMPACTED TRIAXIAL            CBR - CALIFORNIA BEARING RATIO         </td> </tr> </table> </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>EQUIPMENT USED ON SUBJECT PROJECT</b></td> </tr> <tr> <td colspan="4"> <table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;"> <b>DRILL UNITS:</b>  <input checked="" type="checkbox"/> CME-45C   <input type="checkbox"/> CME-55   <input type="checkbox"/> CME-550   <input type="checkbox"/> VANE SHEAR TEST   <input type="checkbox"/> PORTABLE HOIST   <input type="checkbox"/> _____   <input type="checkbox"/> _____         </td> <td style="vertical-align: top;"> <b>ADVANCING TOOLS:</b>  <input type="checkbox"/> CLAY BITS  <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER  <input type="checkbox"/> 8" HOLLOW AUGERS  <input type="checkbox"/> HARD FACED FINGER BITS  <input type="checkbox"/> TUNG-CARBIDE INSERTS  <input checked="" type="checkbox"/> CASING w/ ADVANCER  <input checked="" type="checkbox"/> TRICONE 2 15/16" STEEL TEETH  <input type="checkbox"/> TRICONE _____ TUNG-CARB.  <input type="checkbox"/> CORE BIT   <input type="checkbox"/> _____         </td> <td style="vertical-align: top;"> <b>HAMMER TYPE:</b>  <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL   <b>CORE SIZE:</b>  <input type="checkbox"/> -B _____ <input type="checkbox"/> -H _____  <input type="checkbox"/> -N _____   <b>HAND TOOLS:</b>  <input type="checkbox"/> POST HOLE DIGGER  <input checked="" type="checkbox"/> HAND AUGER  <input type="checkbox"/> SOUNDING ROD  <input type="checkbox"/> VANE SHEAR TEST   <input type="checkbox"/> _____         </td> </tr> </table> </td> </tr> <tr> <td colspan="2" style="text-align: center;"><b>FRACTURE SPACING</b></td> <td colspan="2" style="text-align: center;"><b>BEDDING</b></td> </tr> <tr> <td colspan="2"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> </tr> </table> </td> <td colspan="2"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>THICKLY LAMINATED</td> <td>&lt; 0.008 - 0.03 FEET</td> </tr> <tr> <td>THINLY LAMINATED</td> <td>&lt; 0.008 FEET</td> </tr> </table> </td> </tr> <tr> <td colspan="4" style="text-align: center;"><b>INDURATION</b></td> </tr> <tr> <td colspan="4">           FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.         </td> </tr> <tr> <td colspan="2">FRIBLE</td> <td colspan="2">RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.</td> </tr> <tr> <td colspan="2">MODERATELY INDURATED</td> <td colspan="2">GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.</td> </tr> <tr> <td colspan="2">INDURATED</td> <td colspan="2">GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.</td> </tr> <tr> <td colspan="2">EXTREMELY INDURATED</td> <td colspan="2">SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.</td> </tr> <tr> <td colspan="4"> <b>NOTES:</b>            BENCH MARK: TBM-1 N=511725.1453 E=2108453.8111            DETOUR BORING ELEVATIONS OBTAINED FROM b4635_Is_tin.tin FILE            ELEVATION: I24,I7 FEET         </td> </tr> </table>				GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)						SILT-CLAY MATERIALS (> 35% PASSING #200)				ORGANIC MATERIALS		A-1	A-3	A-2	A-4	A-5	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7			GROUP CLASS.	A-1-a	A-1-b	A-2-4	A-2-5	A-2-6	A-2-7		A-7-5	A-7-6				SYMBOL	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	% PASSING #10 #40 #200	50 MX 30 MX 15 MX	50 MX 25 MX 10 MX	51 MN 35 MX 35 MX 35 MX	35 MX 35 MX 35 MX	35 MX 35 MX 35 MX	36 MN 36 MN 36 MN	41 MN 41 MN 41 MN	40 MX 40 MX 40 MX	41 MN 41 MN 41 MN	40 MX 40 MX 40 MX	41 MN 41 MN 41 MN	41 MN 41 MN 41 MN		MATERIAL PASSING #40 LL PI	-	6 MX	-	40 MX 10 MX	41 MN 10 MX	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN		GROUP INDEX	0	0	0	4 MX	8 MX	12 MX	16 MX	NO MX						USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. GRAVEL, AND SAND	FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND	SILTY SOILS	CLAYEY SOILS	SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS				GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD			FAIR TO POOR		FAIR TO POOR	POOR	UNSATURABLE					PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30													<b>CONSISTENCY OR DENSENESS</b>				PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT <sup>2</sup> )	GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4	<b>TEXTURE OR GRAIN SIZE</b>				U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.76	2.00	0.42	0.25	0.075	0.053	BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE, SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)	GRAIN SIZE	MM 305	75	2.0	0.25	0.05	0.005		IN. 12	3					<b>SOIL MOISTURE - CORRELATION OF TERMS</b>				SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION		LL PLASTIC RANGE (PI) PL	LIQUID LIMIT (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE		- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE		OPTIMUM MOISTURE SHRINKAGE LIMIT	- MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE			- DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE		<b>PLASTICITY</b>				NON PLASTIC	PLASTICITY INDEX (PI) 0-5	DRY STRENGTH VERY LOW		SLIGHTLY PLASTIC	6-15	SLIGHT		MODERATELY PLASTIC	16-25	MEDIUM		HIGHLY PLASTIC	26 OR MORE	HIGH		<b>COLOR</b>				DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.				<b>GRADATION</b>				<b>WELL GRADED</b> - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. <b>UNIFORMLY GRADED</b> - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. <b>GAP-GRADED</b> - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.				<b>ANGULARITY OF GRAINS</b>				THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.				<b>MINERALOGICAL COMPOSITION</b>				MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.				<b>COMPRESSIBILITY</b>				SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50				<b>PERCENTAGE OF MATERIAL</b>				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE 1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE 10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME 20 - 35%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>&gt; 10%</td> <td>&gt; 20%</td> <td>HIGHLY 35% AND ABOVE</td> </tr> </table>				ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%	HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE	<b>GROUND WATER</b>				WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP				<b>MISCELLANEOUS SYMBOLS</b>				ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRERD SOIL BOUNDARY INFERRERD ROCK LINE ALLUVIAL SOIL BOUNDARY 25/025 DIP & DIP DIRECTION OF ROCK STRUCTURES SPT TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR CONE PENETROMETER TEST SOUNDING ROD TEST BORING WITH CORE SPT N-VALUE				<b>RECOMMENDATION SYMBOLS</b>				UNDERCUT SHALLOW UNDERCUT UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK UNCLASSIFIED EXCAVATION - UNACCEPTABLE				<b>ABBREVIATIONS</b>				<table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;">           AR - AUGER REFUSAL            BT - BORING TERMINATED            CL - CLAY            CPT - CONE PENETRATION TEST            CSE - COARSE            DMT - DILATOMETER TEST            DPT - DYNAMIC PENETRATION TEST            e - VOID RATIO            F - FINE            FOSS. - FOSSILIFEROUS            FRAC. - FRACTURED, FRACTURES            FRAGS. - FRAGMENTS            HI. - HIGHLY         </td> <td style="vertical-align: top;">           MED. - MEDIUM            MICA - MICACEOUS            MOD. - MODERATELY            NP - NON PLASTIC            ORG. - ORGANIC            PMT - PRESSUREMETER TEST            SAP. - SAPROLITIC            SD. - SAND, SANDY            SL. - SILT, SILTY            SLI. - SLIGHTLY            TCR - TRICONE REFUSAL            w - MOISTURE CONTENT            V - VERY         </td> <td style="vertical-align: top;">           VST - VANE SHEAR TEST            WEA. - WEATHERED            γ - UNIT WEIGHT            γ<sub>d</sub> - DRY UNIT WEIGHT  <b>SAMPLE ABBREVIATIONS</b>            S - BULK            SS - SPLIT SPOON            ST - SHELBY TUBE            RS - ROCK            RT - RECOMPACTED TRIAXIAL            CBR - CALIFORNIA BEARING RATIO         </td> </tr> </table>				AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY	MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY	VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ <sub>d</sub> - DRY UNIT WEIGHT <b>SAMPLE ABBREVIATIONS</b> S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO	<b>EQUIPMENT USED ON SUBJECT PROJECT</b>				<table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;"> <b>DRILL UNITS:</b>  <input checked="" type="checkbox"/> CME-45C   <input type="checkbox"/> CME-55   <input type="checkbox"/> CME-550   <input type="checkbox"/> VANE SHEAR TEST   <input type="checkbox"/> PORTABLE HOIST   <input type="checkbox"/> _____   <input type="checkbox"/> _____         </td> <td style="vertical-align: top;"> <b>ADVANCING TOOLS:</b>  <input type="checkbox"/> CLAY BITS  <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER  <input type="checkbox"/> 8" HOLLOW AUGERS  <input type="checkbox"/> HARD FACED FINGER BITS  <input type="checkbox"/> TUNG-CARBIDE INSERTS  <input checked="" type="checkbox"/> CASING w/ ADVANCER  <input checked="" type="checkbox"/> TRICONE 2 15/16" STEEL TEETH  <input type="checkbox"/> TRICONE _____ TUNG-CARB.  <input type="checkbox"/> CORE BIT   <input type="checkbox"/> _____         </td> <td style="vertical-align: top;"> <b>HAMMER TYPE:</b>  <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL   <b>CORE SIZE:</b>  <input type="checkbox"/> -B _____ <input type="checkbox"/> -H _____  <input type="checkbox"/> -N _____   <b>HAND TOOLS:</b>  <input type="checkbox"/> POST HOLE DIGGER  <input checked="" type="checkbox"/> HAND AUGER  <input type="checkbox"/> SOUNDING ROD  <input type="checkbox"/> VANE SHEAR TEST   <input type="checkbox"/> _____         </td> </tr> </table>				<b>DRILL UNITS:</b> <input checked="" type="checkbox"/> CME-45C  <input type="checkbox"/> CME-55  <input type="checkbox"/> CME-550  <input type="checkbox"/> VANE SHEAR TEST  <input type="checkbox"/> PORTABLE HOIST  <input type="checkbox"/> _____  <input type="checkbox"/> _____	<b>ADVANCING TOOLS:</b> <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input checked="" type="checkbox"/> CASING w/ ADVANCER <input checked="" type="checkbox"/> TRICONE 2 15/16" STEEL TEETH <input type="checkbox"/> TRICONE _____ TUNG-CARB. <input type="checkbox"/> CORE BIT  <input type="checkbox"/> _____	<b>HAMMER TYPE:</b> <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL  <b>CORE SIZE:</b> <input type="checkbox"/> -B _____ <input type="checkbox"/> -H _____ <input type="checkbox"/> -N _____  <b>HAND TOOLS:</b> <input type="checkbox"/> POST HOLE DIGGER <input checked="" type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST  <input type="checkbox"/> _____	<b>FRACTURE SPACING</b>		<b>BEDDING</b>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> </tr> </table>		TERM	SPACING	VERY WIDE	MORE THAN 10 FEET	WIDE	3 TO 10 FEET	MODERATELY CLOSE	1 TO 3 FEET	CLOSE	0.16 TO 1 FOOT	VERY CLOSE	LESS THAN 0.16 FEET	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>THICKLY LAMINATED</td> <td>&lt; 0.008 - 0.03 FEET</td> </tr> <tr> <td>THINLY LAMINATED</td> <td>&lt; 0.008 FEET</td> </tr> </table>		TERM	THICKNESS	VERY THICKLY BEDDED	4 FEET	THICKLY BEDDED	1.5 - 4 FEET	THINLY BEDDED	0.16 - 1.5 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET	THICKLY LAMINATED	< 0.008 - 0.03 FEET	THINLY LAMINATED	< 0.008 FEET	<b>INDURATION</b>				FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.				FRIBLE		RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.		MODERATELY INDURATED		GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.		INDURATED		GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.		EXTREMELY INDURATED		SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.		<b>NOTES:</b> BENCH MARK: TBM-1 N=511725.1453 E=2108453.8111 DETOUR BORING ELEVATIONS OBTAINED FROM b4635_Is_tin.tin FILE ELEVATION: I24,I7 FEET			
GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)						SILT-CLAY MATERIALS (> 35% PASSING #200)				ORGANIC MATERIALS																																																																																																																																																																																																																																																																																																																																																																																																											
	A-1	A-3	A-2	A-4	A-5	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7																																																																																																																																																																																																																																																																																																																																																																																																												
GROUP CLASS.	A-1-a	A-1-b	A-2-4	A-2-5	A-2-6	A-2-7		A-7-5	A-7-6																																																																																																																																																																																																																																																																																																																																																																																																													
SYMBOL	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]																																																																																																																																																																																																																																																																																																																																																																																																										
% PASSING #10 #40 #200	50 MX 30 MX 15 MX	50 MX 25 MX 10 MX	51 MN 35 MX 35 MX 35 MX	35 MX 35 MX 35 MX	35 MX 35 MX 35 MX	36 MN 36 MN 36 MN	41 MN 41 MN 41 MN	40 MX 40 MX 40 MX	41 MN 41 MN 41 MN	40 MX 40 MX 40 MX	41 MN 41 MN 41 MN	41 MN 41 MN 41 MN																																																																																																																																																																																																																																																																																																																																																																																																										
MATERIAL PASSING #40 LL PI	-	6 MX	-	40 MX 10 MX	41 MN 10 MX	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN	40 MX 11 MN																																																																																																																																																																																																																																																																																																																																																																																																										
GROUP INDEX	0	0	0	4 MX	8 MX	12 MX	16 MX	NO MX																																																																																																																																																																																																																																																																																																																																																																																																														
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. GRAVEL, AND SAND	FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND	SILTY SOILS	CLAYEY SOILS	SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS																																																																																																																																																																																																																																																																																																																																																																																																														
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD			FAIR TO POOR		FAIR TO POOR	POOR	UNSATURABLE																																																																																																																																																																																																																																																																																																																																																																																																														
PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>CONSISTENCY OR DENSENESS</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT <sup>2</sup> )																																																																																																																																																																																																																																																																																																																																																																																																																			
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A																																																																																																																																																																																																																																																																																																																																																																																																																			
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																																																																																																																																																																																																																																																																																																																																																																			
<b>TEXTURE OR GRAIN SIZE</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																																																																																																																																																																																																																																																																																																																																
	4.76	2.00	0.42	0.25	0.075	0.053																																																																																																																																																																																																																																																																																																																																																																																																																
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE, SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																																																																																																																																																																																																																																																																																																																
GRAIN SIZE	MM 305	75	2.0	0.25	0.05	0.005																																																																																																																																																																																																																																																																																																																																																																																																																
	IN. 12	3																																																																																																																																																																																																																																																																																																																																																																																																																				
<b>SOIL MOISTURE - CORRELATION OF TERMS</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																																																																																																																																																																																																																																																																																																																																				
LL PLASTIC RANGE (PI) PL	LIQUID LIMIT (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																																																																																																																																																																																																																																																																																																																																				
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																																																																																																																																																																																																																																																																				
	OPTIMUM MOISTURE SHRINKAGE LIMIT	- MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																																																																																																																																																																																																																																																																																																																																				
		- DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																																																																																																																																																																																																																																																																				
<b>PLASTICITY</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
NON PLASTIC	PLASTICITY INDEX (PI) 0-5	DRY STRENGTH VERY LOW																																																																																																																																																																																																																																																																																																																																																																																																																				
SLIGHTLY PLASTIC	6-15	SLIGHT																																																																																																																																																																																																																																																																																																																																																																																																																				
MODERATELY PLASTIC	16-25	MEDIUM																																																																																																																																																																																																																																																																																																																																																																																																																				
HIGHLY PLASTIC	26 OR MORE	HIGH																																																																																																																																																																																																																																																																																																																																																																																																																				
<b>COLOR</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>GRADATION</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>WELL GRADED</b> - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. <b>UNIFORMLY GRADED</b> - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. <b>GAP-GRADED</b> - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>ANGULARITY OF GRAINS</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>MINERALOGICAL COMPOSITION</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>COMPRESSIBILITY</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>PERCENTAGE OF MATERIAL</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE 1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE 10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME 20 - 35%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>&gt; 10%</td> <td>&gt; 20%</td> <td>HIGHLY 35% AND ABOVE</td> </tr> </table>				ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%	HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE																																																																																																																																																																																																																																																																																																																																																																																															
ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																																																																																																																																																																																																																																																																																																																																			
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%																																																																																																																																																																																																																																																																																																																																																																																																																			
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%																																																																																																																																																																																																																																																																																																																																																																																																																			
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%																																																																																																																																																																																																																																																																																																																																																																																																																			
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE																																																																																																																																																																																																																																																																																																																																																																																																																			
<b>GROUND WATER</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>MISCELLANEOUS SYMBOLS</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRERD SOIL BOUNDARY INFERRERD ROCK LINE ALLUVIAL SOIL BOUNDARY 25/025 DIP & DIP DIRECTION OF ROCK STRUCTURES SPT TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR CONE PENETROMETER TEST SOUNDING ROD TEST BORING WITH CORE SPT N-VALUE																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>RECOMMENDATION SYMBOLS</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
UNDERCUT SHALLOW UNDERCUT UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK UNCLASSIFIED EXCAVATION - UNACCEPTABLE																																																																																																																																																																																																																																																																																																																																																																																																																						
<b>ABBREVIATIONS</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
<table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;">           AR - AUGER REFUSAL            BT - BORING TERMINATED            CL - CLAY            CPT - CONE PENETRATION TEST            CSE - COARSE            DMT - DILATOMETER TEST            DPT - DYNAMIC PENETRATION TEST            e - VOID RATIO            F - FINE            FOSS. - FOSSILIFEROUS            FRAC. - FRACTURED, FRACTURES            FRAGS. - FRAGMENTS            HI. - HIGHLY         </td> <td style="vertical-align: top;">           MED. - MEDIUM            MICA - MICACEOUS            MOD. - MODERATELY            NP - NON PLASTIC            ORG. - ORGANIC            PMT - PRESSUREMETER TEST            SAP. - SAPROLITIC            SD. - SAND, SANDY            SL. - SILT, SILTY            SLI. - SLIGHTLY            TCR - TRICONE REFUSAL            w - MOISTURE CONTENT            V - VERY         </td> <td style="vertical-align: top;">           VST - VANE SHEAR TEST            WEA. - WEATHERED            γ - UNIT WEIGHT            γ<sub>d</sub> - DRY UNIT WEIGHT  <b>SAMPLE ABBREVIATIONS</b>            S - BULK            SS - SPLIT SPOON            ST - SHELBY TUBE            RS - ROCK            RT - RECOMPACTED TRIAXIAL            CBR - CALIFORNIA BEARING RATIO         </td> </tr> </table>				AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY	MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY	VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ <sub>d</sub> - DRY UNIT WEIGHT <b>SAMPLE ABBREVIATIONS</b> S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO																																																																																																																																																																																																																																																																																																																																																																																																																
AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY	MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY	VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ <sub>d</sub> - DRY UNIT WEIGHT <b>SAMPLE ABBREVIATIONS</b> S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO																																																																																																																																																																																																																																																																																																																																																																																																																				
<b>EQUIPMENT USED ON SUBJECT PROJECT</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
<table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;"> <b>DRILL UNITS:</b>  <input checked="" type="checkbox"/> CME-45C   <input type="checkbox"/> CME-55   <input type="checkbox"/> CME-550   <input type="checkbox"/> VANE SHEAR TEST   <input type="checkbox"/> PORTABLE HOIST   <input type="checkbox"/> _____   <input type="checkbox"/> _____         </td> <td style="vertical-align: top;"> <b>ADVANCING TOOLS:</b>  <input type="checkbox"/> CLAY BITS  <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER  <input type="checkbox"/> 8" HOLLOW AUGERS  <input type="checkbox"/> HARD FACED FINGER BITS  <input type="checkbox"/> TUNG-CARBIDE INSERTS  <input checked="" type="checkbox"/> CASING w/ ADVANCER  <input checked="" type="checkbox"/> TRICONE 2 15/16" STEEL TEETH  <input type="checkbox"/> TRICONE _____ TUNG-CARB.  <input type="checkbox"/> CORE BIT   <input type="checkbox"/> _____         </td> <td style="vertical-align: top;"> <b>HAMMER TYPE:</b>  <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL   <b>CORE SIZE:</b>  <input type="checkbox"/> -B _____ <input type="checkbox"/> -H _____  <input type="checkbox"/> -N _____   <b>HAND TOOLS:</b>  <input type="checkbox"/> POST HOLE DIGGER  <input checked="" type="checkbox"/> HAND AUGER  <input type="checkbox"/> SOUNDING ROD  <input type="checkbox"/> VANE SHEAR TEST   <input type="checkbox"/> _____         </td> </tr> </table>				<b>DRILL UNITS:</b> <input checked="" type="checkbox"/> CME-45C  <input type="checkbox"/> CME-55  <input type="checkbox"/> CME-550  <input type="checkbox"/> VANE SHEAR TEST  <input type="checkbox"/> PORTABLE HOIST  <input type="checkbox"/> _____  <input type="checkbox"/> _____	<b>ADVANCING TOOLS:</b> <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input checked="" type="checkbox"/> CASING w/ ADVANCER <input checked="" type="checkbox"/> TRICONE 2 15/16" STEEL TEETH <input type="checkbox"/> TRICONE _____ TUNG-CARB. <input type="checkbox"/> CORE BIT  <input type="checkbox"/> _____	<b>HAMMER TYPE:</b> <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL  <b>CORE SIZE:</b> <input type="checkbox"/> -B _____ <input type="checkbox"/> -H _____ <input type="checkbox"/> -N _____  <b>HAND TOOLS:</b> <input type="checkbox"/> POST HOLE DIGGER <input checked="" type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST  <input type="checkbox"/> _____																																																																																																																																																																																																																																																																																																																																																																																																																
<b>DRILL UNITS:</b> <input checked="" type="checkbox"/> CME-45C  <input type="checkbox"/> CME-55  <input type="checkbox"/> CME-550  <input type="checkbox"/> VANE SHEAR TEST  <input type="checkbox"/> PORTABLE HOIST  <input type="checkbox"/> _____  <input type="checkbox"/> _____	<b>ADVANCING TOOLS:</b> <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input checked="" type="checkbox"/> CASING w/ ADVANCER <input checked="" type="checkbox"/> TRICONE 2 15/16" STEEL TEETH <input type="checkbox"/> TRICONE _____ TUNG-CARB. <input type="checkbox"/> CORE BIT  <input type="checkbox"/> _____	<b>HAMMER TYPE:</b> <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL  <b>CORE SIZE:</b> <input type="checkbox"/> -B _____ <input type="checkbox"/> -H _____ <input type="checkbox"/> -N _____  <b>HAND TOOLS:</b> <input type="checkbox"/> POST HOLE DIGGER <input checked="" type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST  <input type="checkbox"/> _____																																																																																																																																																																																																																																																																																																																																																																																																																				
<b>FRACTURE SPACING</b>		<b>BEDDING</b>																																																																																																																																																																																																																																																																																																																																																																																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> </tr> </table>		TERM	SPACING	VERY WIDE	MORE THAN 10 FEET	WIDE	3 TO 10 FEET	MODERATELY CLOSE	1 TO 3 FEET	CLOSE	0.16 TO 1 FOOT	VERY CLOSE	LESS THAN 0.16 FEET	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>THICKLY LAMINATED</td> <td>&lt; 0.008 - 0.03 FEET</td> </tr> <tr> <td>THINLY LAMINATED</td> <td>&lt; 0.008 FEET</td> </tr> </table>		TERM	THICKNESS	VERY THICKLY BEDDED	4 FEET	THICKLY BEDDED	1.5 - 4 FEET	THINLY BEDDED	0.16 - 1.5 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET	THICKLY LAMINATED	< 0.008 - 0.03 FEET	THINLY LAMINATED	< 0.008 FEET																																																																																																																																																																																																																																																																																																																																																																																									
TERM	SPACING																																																																																																																																																																																																																																																																																																																																																																																																																					
VERY WIDE	MORE THAN 10 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
WIDE	3 TO 10 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
MODERATELY CLOSE	1 TO 3 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
CLOSE	0.16 TO 1 FOOT																																																																																																																																																																																																																																																																																																																																																																																																																					
VERY CLOSE	LESS THAN 0.16 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
TERM	THICKNESS																																																																																																																																																																																																																																																																																																																																																																																																																					
VERY THICKLY BEDDED	4 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
THICKLY BEDDED	1.5 - 4 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
THINLY BEDDED	0.16 - 1.5 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
THICKLY LAMINATED	< 0.008 - 0.03 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
THINLY LAMINATED	< 0.008 FEET																																																																																																																																																																																																																																																																																																																																																																																																																					
<b>INDURATION</b>																																																																																																																																																																																																																																																																																																																																																																																																																						
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.																																																																																																																																																																																																																																																																																																																																																																																																																						
FRIBLE		RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.																																																																																																																																																																																																																																																																																																																																																																																																																				
MODERATELY INDURATED		GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.																																																																																																																																																																																																																																																																																																																																																																																																																				
INDURATED		GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.																																																																																																																																																																																																																																																																																																																																																																																																																				
EXTREMELY INDURATED		SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																																																																																																																																																																																																																																																																				
<b>NOTES:</b> BENCH MARK: TBM-1 N=511725.1453 E=2108453.8111 DETOUR BORING ELEVATIONS OBTAINED FROM b4635_Is_tin.tin FILE ELEVATION: I24,I7 FEET																																																																																																																																																																																																																																																																																																																																																																																																																						


SKEW = 90°

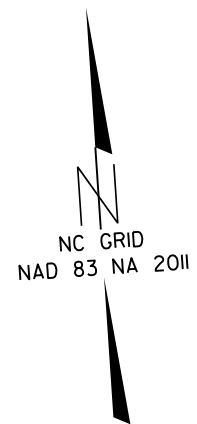

18 61 20 21

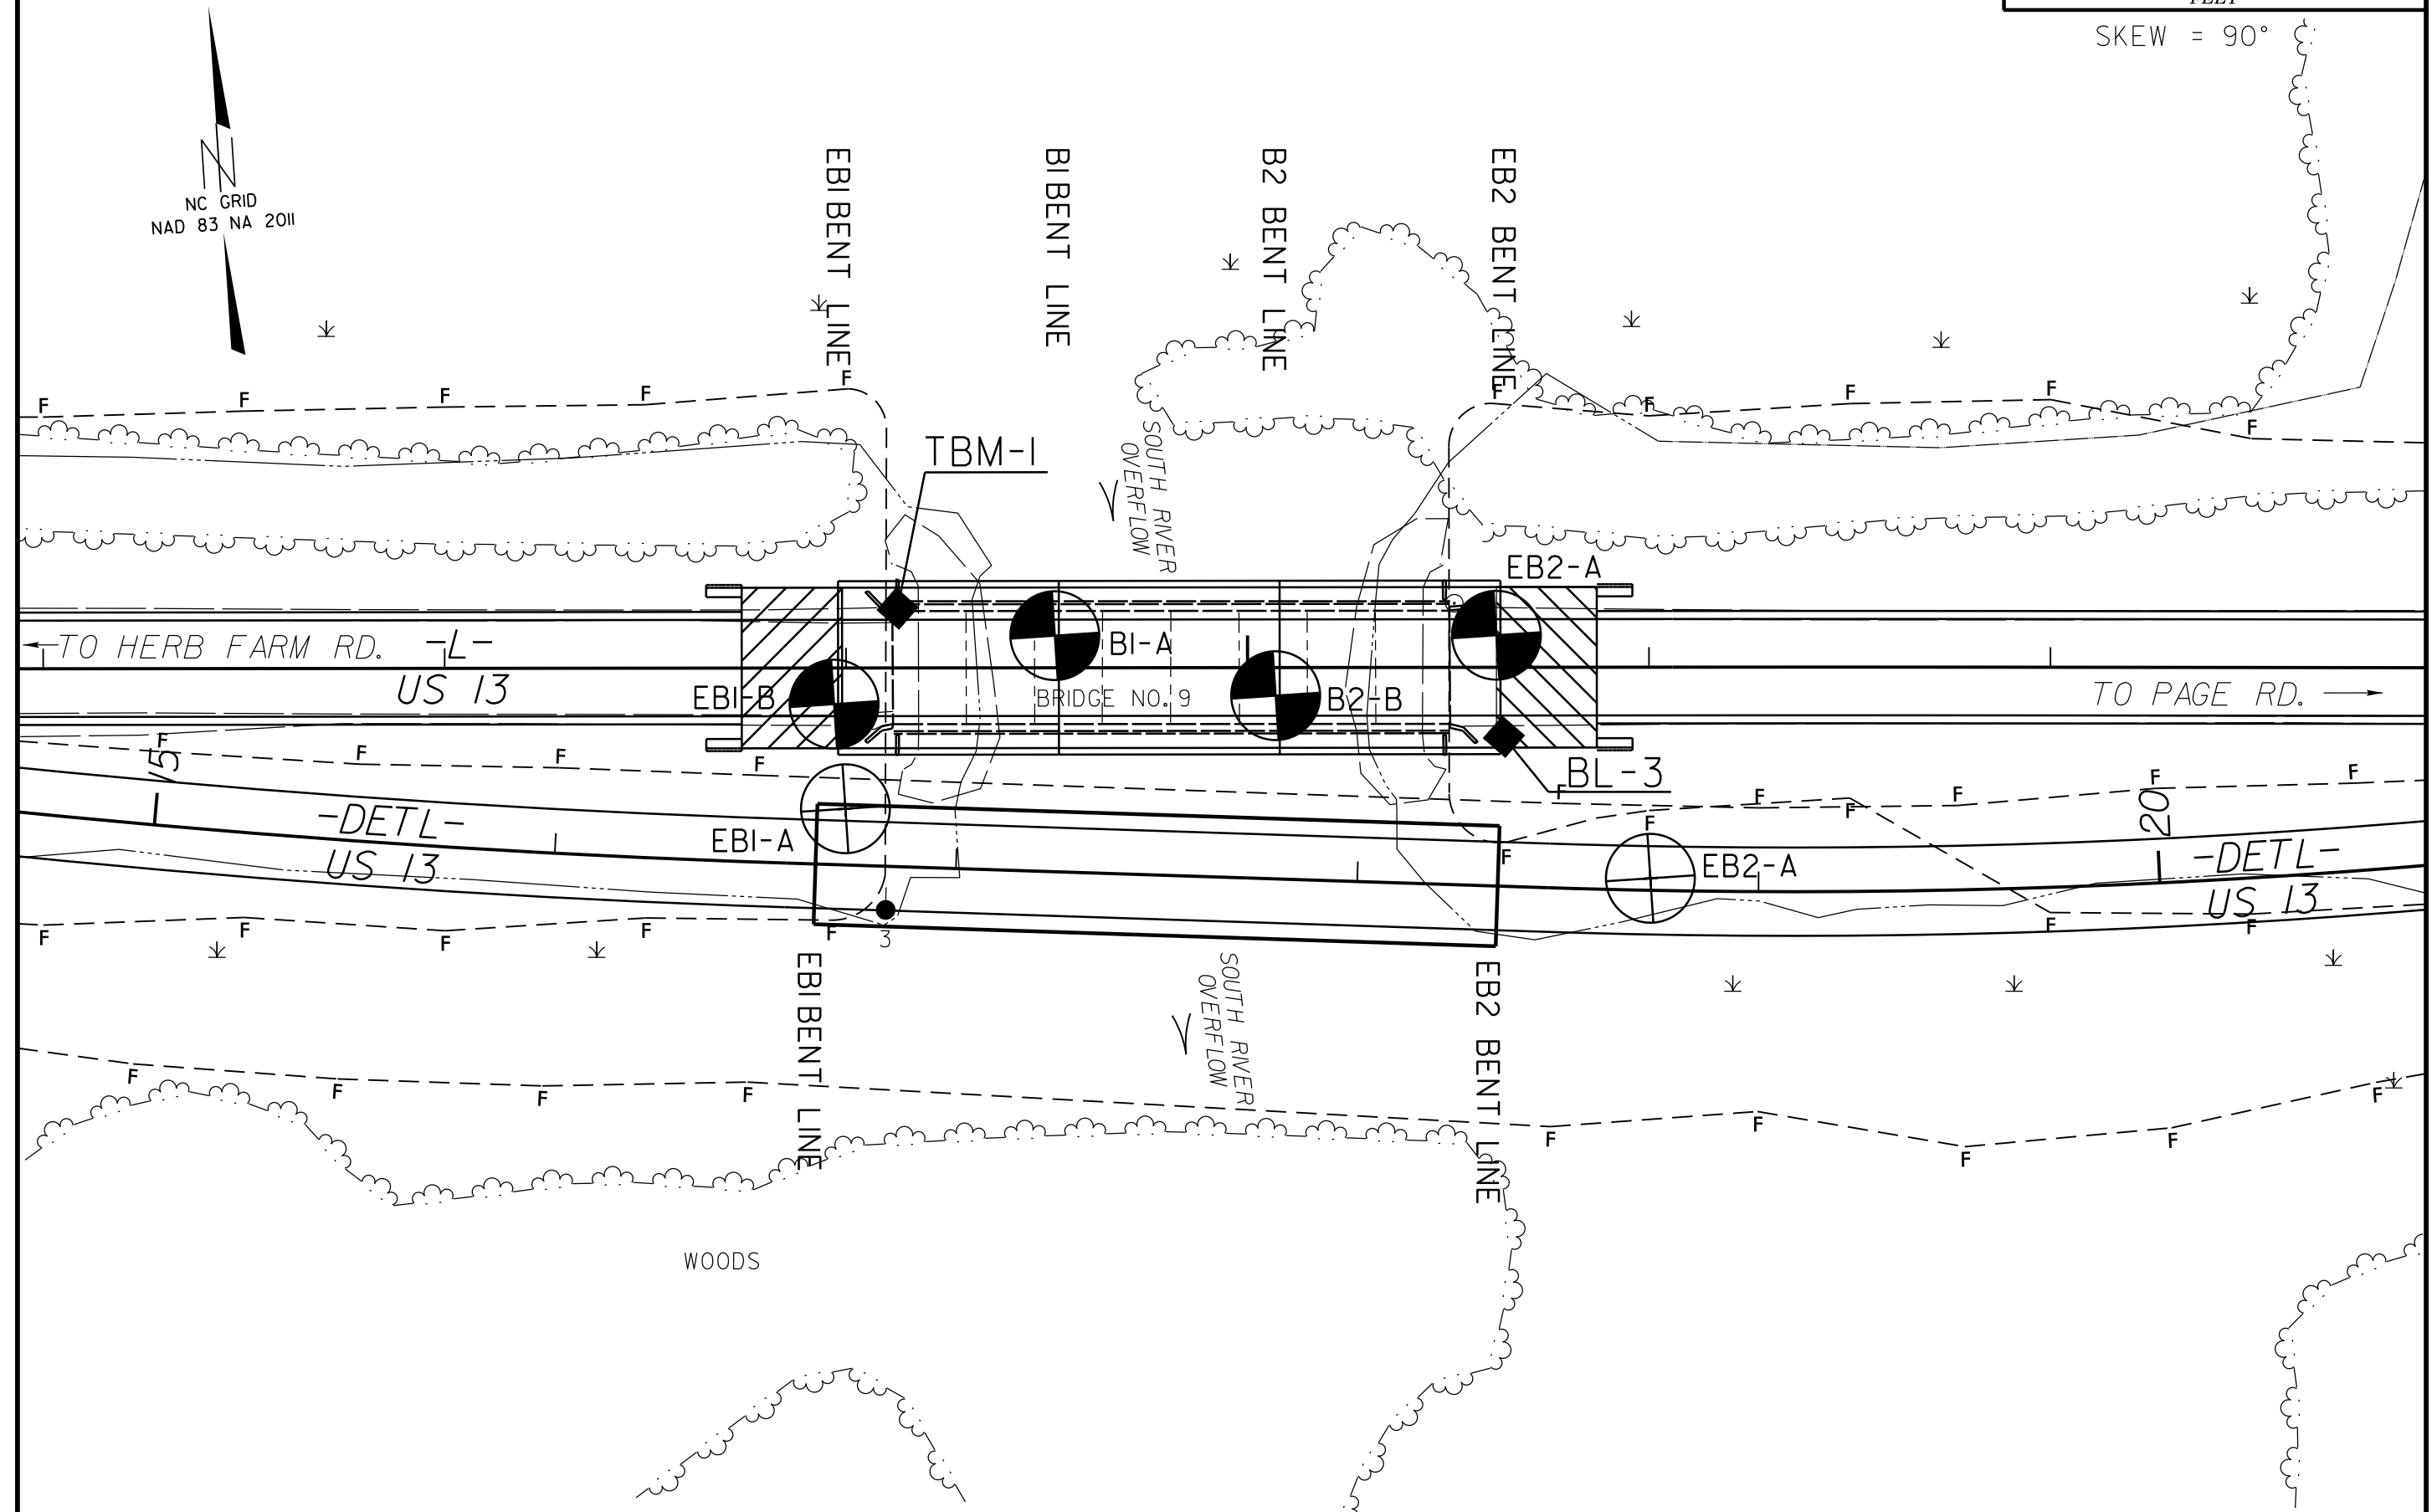

# PROFILE THROUGH BORINGS PROJECTED ALONG -L-

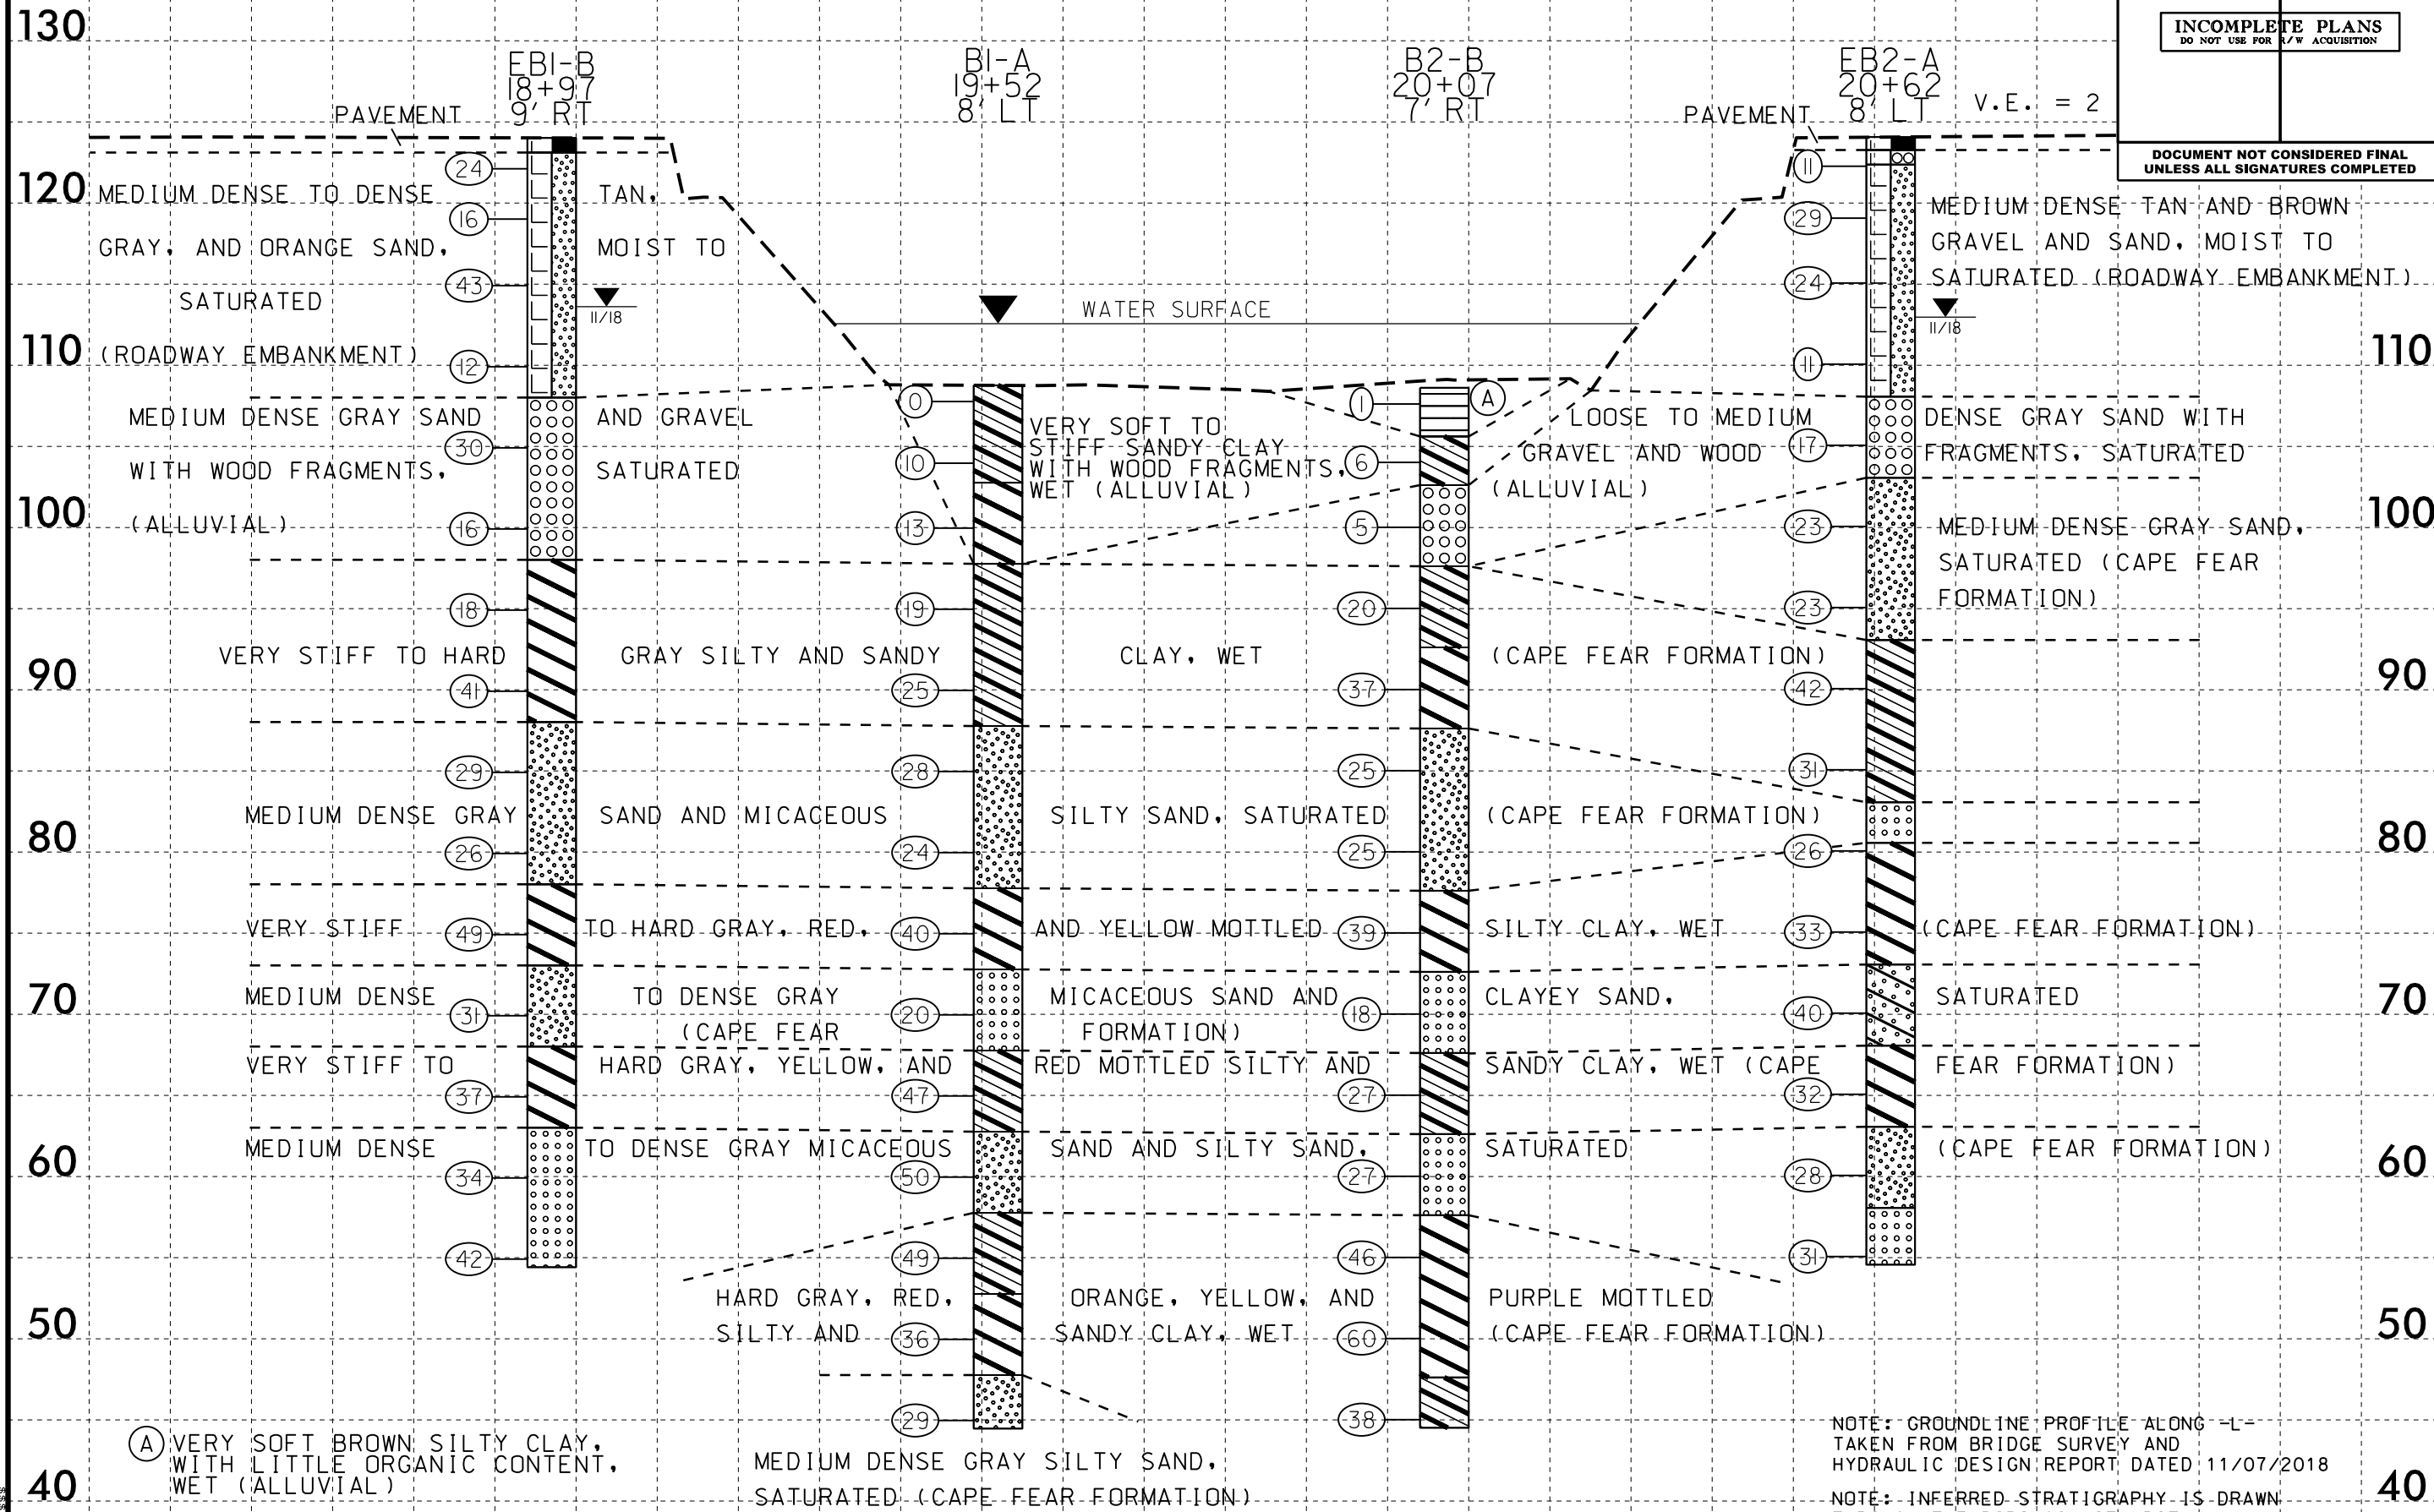

NOTE: GROUNDLINE PROFILE ALONG -L- TAKEN FROM BRIDGE SURVEY AND HYDRAULIC DESIGN REPORT DATED 11/07/2018

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO THE PROFILE


5/14/99  
 30-NOV-2018 08:35  
 S:\EPROJ\Greenville  
 Investigation\TIP\B4635\_GEO\_BRDG\CADD\_GEOTECH\PlanProf\B4635\_GEO\_BRDG\_PFL.L.DET.L.dgn  
 \$\$\$\$ STRAND \$\$\$

5/14/99

PROJECT REFERENCE NO. <b>B-4635</b>	SHEET NO. <b>5</b>
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
<b>INCOMPLETE PLANS</b> DO NOT USE FOR R/W ACQUISITION	
<b>DOCUMENT NOT CONSIDERED FINAL</b> UNLESS ALL SIGNATURES COMPLETED	

### PROFILE THROUGH BORINGS PROJECTED ALONG -DETL-

V.E. = 2

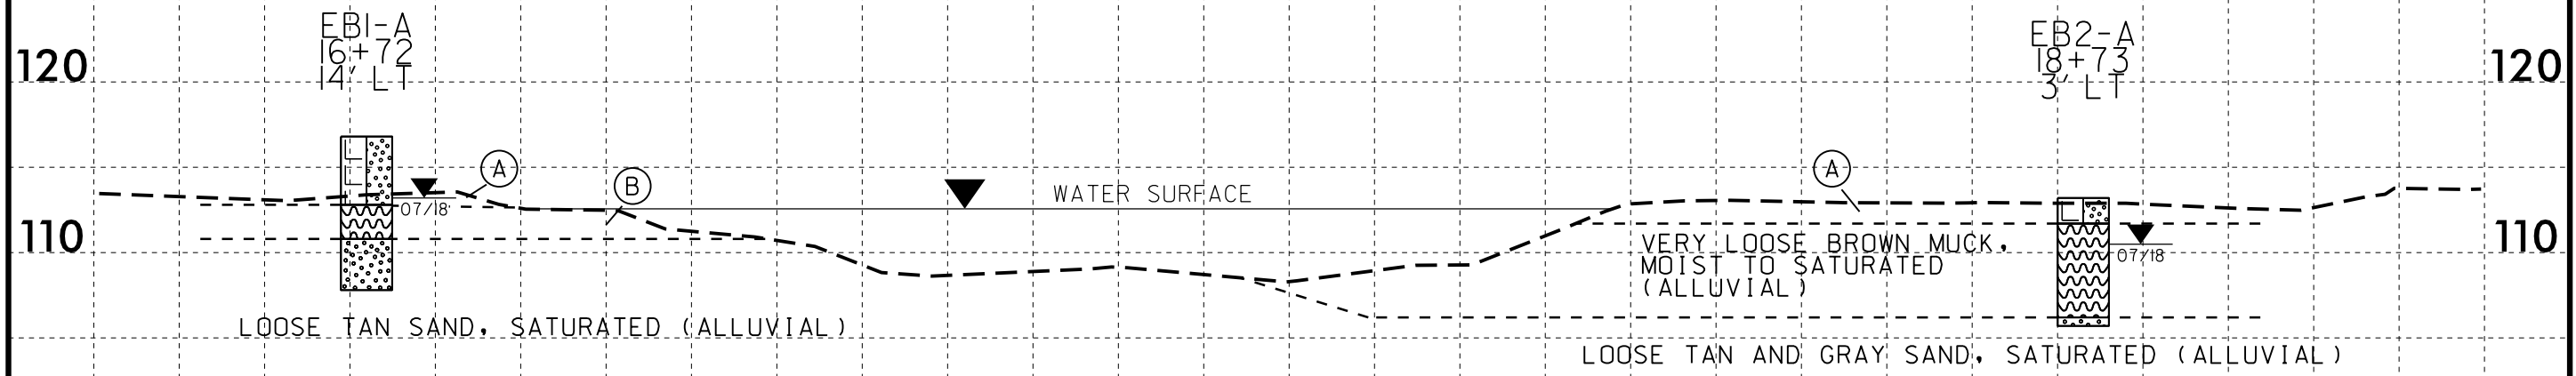

LOOSE TAN SAND, SATURATED (ALLUVIAL)

VERY LOOSE BROWN MUCK, MOIST TO SATURATED (ALLUVIAL)  
LOOSE TAN AND GRAY SAND, SATURATED (ALLUVIAL)

- (A) LOOSE TAN SAND, MOIST TO SATURATED (ROADWAY EMBANKMENT)
- (B) VERY LOOSE BROWN MUCK, SATURATED (ALLUVIAL)

NOTE: GROUNDLINE PROFILE ALONG -L- TAKEN FROM BRIDGE SURVEY AND HYDRAULIC DESIGN REPORT DATED 11/07/2018

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO THE PROFILE

30-NOV-2018 08:36 S:\EPCOR\Greenville\_Investigation\TIP\B4635\_GEO\_BRDG\CADD\_GEO\TECH\Plan\Prof\B4635\_GEO\_BRDG\_PFL-L-DETL.dgn

17

18

19

# GEOTECHNICAL BORING REPORT

## BORE LOG

WBS 38446.1.2		TIP B-4635		COUNTY SAMPSON		GEOLOGIST Zimarino, S. N.	
SITE DESCRIPTION BRIDGE NUMBER 9 ON -L- (US 13) OVER SOUTH RIVER OVERFLOW AT STA. 19+80							GROUND WTR (ft)
BORING NO. EB1-B		STATION 18+97		OFFSET 9 ft RT		ALIGNMENT -L-	
COLLAR ELEV. 124.0 ft		TOTAL DEPTH 69.6 ft		NORTHING 511,702		EASTING 2,108,436	
DRILL RIG/HAMMER EFF./DATE GFO0075 CME-45C 89% 08/13/2018		DRILL METHOD Mud Rotary		HAMMER TYPE Automatic			
DRILLER Smith, R. E.		START DATE 11/14/18		COMP. DATE 11/14/18		SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
125	123.1	0.9	6	11	13								124.0 GROUND SURFACE 123.1 ROADWAY EMBANKMENT PAVEMENT ROADWAY EMBANKMENT GRAY, TAN, AND ORANGE SAND, MOIST TO SATURATED	0.0 0.9
120	120.0	4.0	5	8	8									
115	115.9	8.1	12	20	23									
110	110.9	13.1	5	6	6									
105	105.9	18.1	2	6	24								108.0 ALLUVIAL GRAY SAND AND GRAVEL WITH WOOD FRAGMENTS, SATURATED	18.0
100	100.9	23.1	5	8	8									
95	95.9	28.1	6	8	10								98.0 COASTAL PLAIN GRAY SILTY CLAY, WET (CAPE FEAR FORMATION)	26.0
90	90.9	33.1	12	17	24									
85	85.9	38.1	10	14	15								88.0 COASTAL PLAIN GRAY SAND, SATURATED (CAPE FEAR FORMATION)	36.0
80	80.9	43.1	10	10	16									
75	75.9	48.1	14	21	28								78.0 COASTAL PLAIN GRAY AND YELLOW SILTY CLAY, WET (CAPE FEAR FORMATION)	46.0
70	70.9	53.1	10	15	16								73.0 COASTAL PLAIN GRAY SAND, SATURATED (CAPE FEAR FORMATION)	51.0
65	65.9	58.1	12	16	21								68.0 COASTAL PLAIN GRAY, YELLOW, AND RED MOTTLED SILTY CLAY, WET (CAPE FEAR FORMATION)	56.0
60	60.9	63.1	16	16	18								63.0 COASTAL PLAIN GRAY MICACEOUS SAND, SATURATED (CAPE FEAR FORMATION)	61.0
55	55.9	68.1	10	19	23								54.4 Boring Terminated at Elevation 54.4 ft in Dense Sand	69.6

NCDOT BORE DOUBLE B4635\_GEO\_BRDG.GPJ NC\_DOT.GDT 11/30/18

WBS 38446.1.2		TIP B-4635		COUNTY SAMPSON		GEOLOGIST Cornette, C. J.	
SITE DESCRIPTION BRIDGE NUMBER 9 ON -L- (US 13) OVER SOUTH RIVER OVERFLOW AT STA. 19+80							GROUND WTR (ft)
BORING NO. B1-A		STATION 19+52		OFFSET 8 ft LT		ALIGNMENT -L-	
COLLAR ELEV. 108.6 ft		TOTAL DEPTH 64.3 ft		NORTHING 511,716		EASTING 2,108,492	
DRILL RIG/HAMMER EFF./DATE GFO0075 CME-45C 89% 08/13/2018		DRILL METHOD Mud Rotary		HAMMER TYPE Automatic			
DRILLER Smith, R. E.		START DATE 11/20/18		COMP. DATE 11/21/18		SURFACE WATER DEPTH 3.8ft	


  

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
110	108.6	0.0	2	0	0								108.6 GROUND SURFACE	0.0
105	104.8	3.8	WOH	4	6								ALLUVIAL GRAY SANDY AND SILTY CLAY WITH WOOD FRAGMENTS AND GRAVEL, WET	6.0
100	100.8	7.8	3	6	7								97.6 COASTAL PLAIN GRAY SANDY CLAY, WET (CAPE FEAR FORMATION)	11.0
95	95.8	12.8	6	7	12									
90	90.8	17.8	6	11	14								87.6 COASTAL PLAIN GRAY MICACEOUS SILTY SAND, SATURATED (CAPE FEAR FORMATION)	21.0
85	85.8	22.8	8	12	16									
80	80.8	27.8	12	14	10									
75	75.8	32.8	12	18	22								77.6 COASTAL PLAIN GRAY, RED, AND YELLOW MOTTLED SILTY CLAY, WET (CAPE FEAR FORMATION)	31.0
70	70.8	37.8	8	10	10								72.6 COASTAL PLAIN GRAY SAND, SATURATED (CAPE FEAR FORMATION)	36.0
65	65.8	42.8	14	22	25								67.6 COASTAL PLAIN GRAY SANDY CLAY, WET (CAPE FEAR FORMATION)	41.0
60	60.8	47.8	12	24	26								62.6 COASTAL PLAIN GRAY MICACEOUS SAND, SATURATED (CAPE FEAR FORMATION)	46.0
55	55.8	52.8	16	22	27								57.6 COASTAL PLAIN GRAY, ORANGE, RED, AND YELLOW SANDY AND SILTY MOTTLED CLAY, WET (CAPE FEAR FORMATION)	51.0
50	50.8	57.8	9	15	21									
45	45.8	62.8	7	12	17								47.6 COASTAL PLAIN GRAY SILTY SAND, SATURATED (CAPE FEAR FORMATION)	61.0
													44.3 Boring Terminated at Elevation 44.3 ft in Medium Dense Sand	64.3


# GEOTECHNICAL BORING REPORT

## BORE LOG

WBS 38446.1.2		TIP B-4635		COUNTY SAMPSON		GEOLOGIST Zimarino, S. N.	
SITE DESCRIPTION BRIDGE NUMBER 9 ON -L- (US 13) OVER SOUTH RIVER OVERFLOW AT STA. 19+80							GROUND WTR (ft)
BORING NO. B2-B		STATION 20+07		OFFSET 7 ft RT		ALIGNMENT -L-	
COLLAR ELEV. 108.5 ft		TOTAL DEPTH 64.1 ft		NORTHING 511,697		EASTING 2,108,546	
DRILL RIG/HAMMER EFF./DATE GFO0075 CME-45C 89% 08/13/2018			DRILL METHOD Mud Rotary			HAMMER TYPE Automatic	
DRILLER Smith, R. E.		START DATE 11/20/18		COMP. DATE 11/20/18		SURFACE WATER DEPTH 4.0ft	

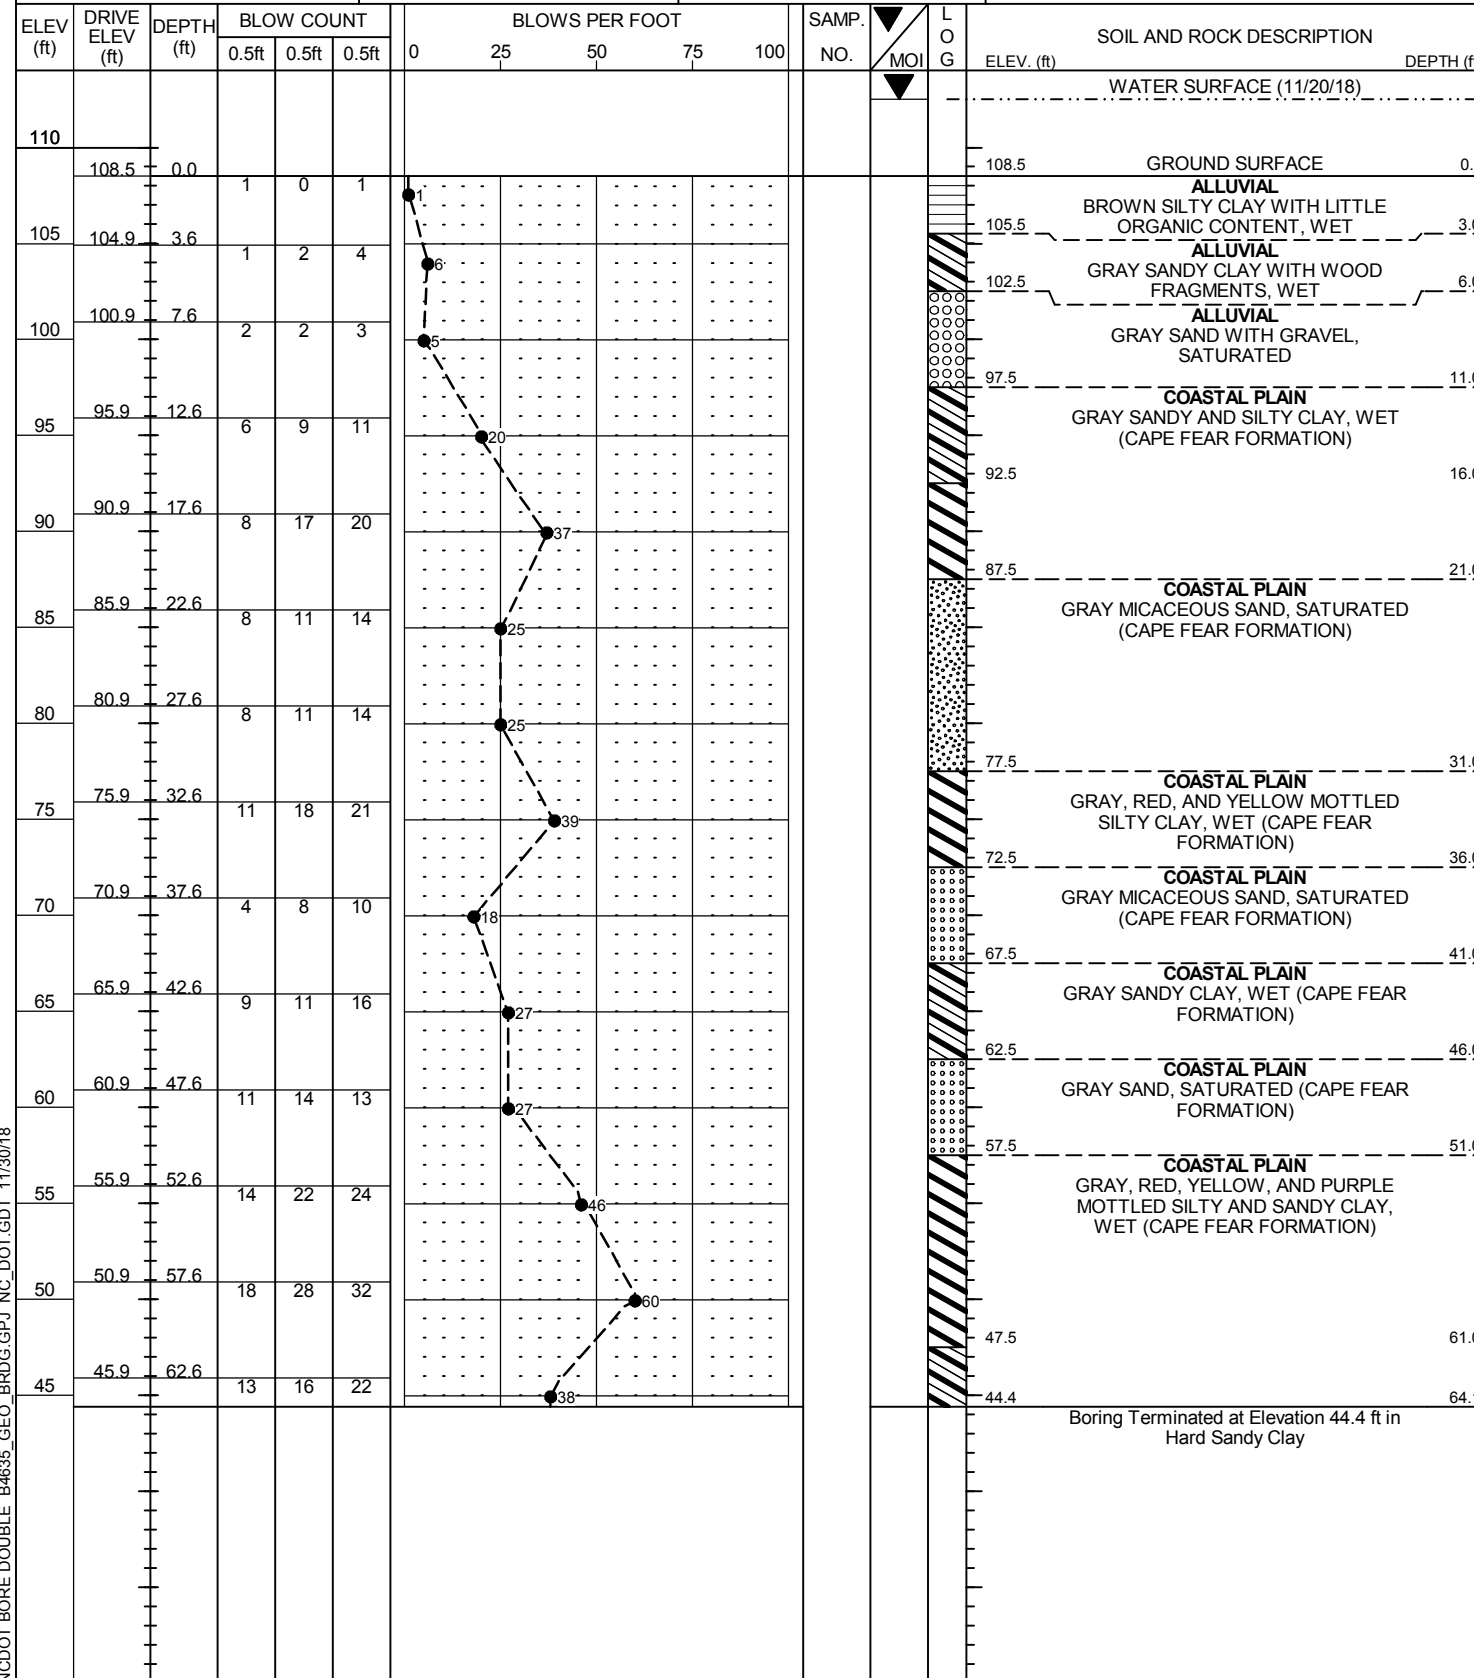

WBS 38446.1.2		TIP B-4635		COUNTY SAMPSON		GEOLOGIST Zimarino, S. N.	
SITE DESCRIPTION BRIDGE NUMBER 9 ON -L- (US 13) OVER SOUTH RIVER OVERFLOW AT STA. 19+80							GROUND WTR (ft)
BORING NO. EB2-A		STATION 20+62		OFFSET 8 ft LT		ALIGNMENT -L-	
COLLAR ELEV. 124.0 ft		TOTAL DEPTH 69.5 ft		NORTHING 511,709		EASTING 2,108,602	
DRILL RIG/HAMMER EFF./DATE GFO0075 CME-45C 89% 08/13/2018			DRILL METHOD Mud Rotary			HAMMER TYPE Automatic	
DRILLER Smith, R. E.		START DATE 11/19/18		COMP. DATE 11/19/18		SURFACE WATER DEPTH N/A	

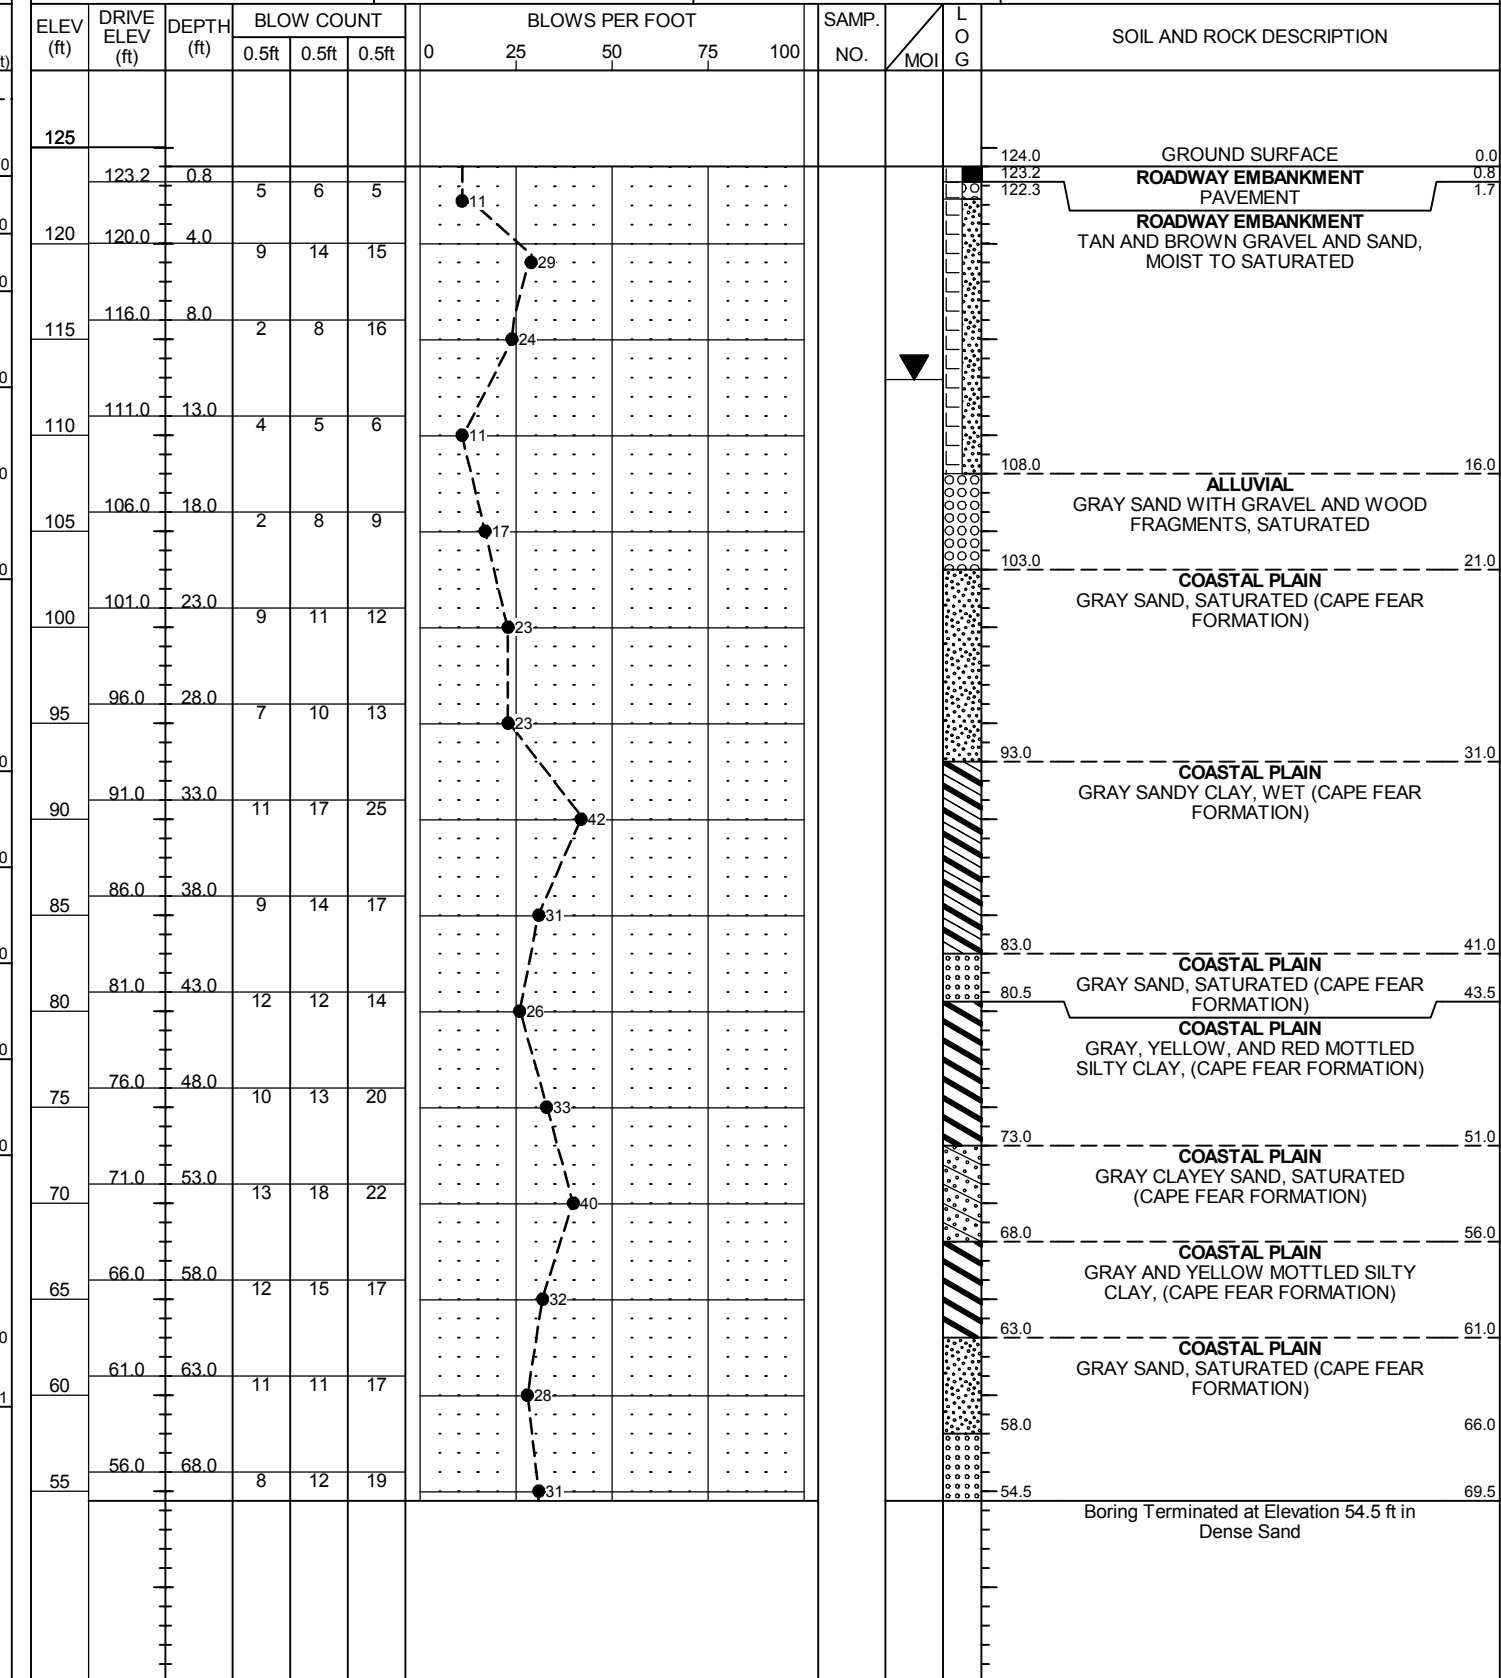

NCDOT BORE DOUBLE B4635\_GEO\_BRDG.GPJ NC\_DOT.GDT 11/30/18

# GEOTECHNICAL BORING REPORT

## BORE LOG

WBS 38446.1.2		TIP B-4635		COUNTY SAMPSON		GEOLOGIST Cornette, C. J.									
SITE DESCRIPTION BRIDGE NUMBER 9 ON -L- (US 13) OVER SOUTH RIVER OVERFLOW AT STA. 19+80							GROUND WTR (ft)								
BORING NO. EB1-A DETOUR		STATION 16+72		OFFSET 14 ft LT		ALIGNMENT -DETL-									
COLLAR ELEV. 116.8 ft		TOTAL DEPTH 9.0 ft		NORTHING 511,676		EASTING 2,108,438									
DRILL RIG/HAMMER EFF./DATE N/A		DRILL METHOD Hand Auger		HAMMER TYPE Automatic											
DRILLER Edmondson, J. M.		START DATE 07/03/18		COMP. DATE 07/03/18		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
120															
														116.8	GROUND SURFACE 0.0
															ROADWAY EMBANKMENT
															LOOSE TAN SAND, MOIST TO SATURATED
115														112.8	ALLUVIAL
															SOFT BROWN MUCK, SATURATED
														110.8	ALLUVIAL
															LOOSE TAN SAND, SATURATED
110														107.8	ALLUVIAL
															LOOSE TAN SAND, SATURATED
															Boring Terminated at Elevation 107.8 ft in Loose Sand

WBS 38446.1.2		TIP B-4635		COUNTY SAMPSON		GEOLOGIST Cornette, C. J.									
SITE DESCRIPTION BRIDGE NUMBER 9 ON -L- (US 13) OVER SOUTH RIVER OVERFLOW AT STA. 19+80							GROUND WTR (ft)								
BORING NO. EB2-A DETOUR		STATION 18+73		OFFSET 3 ft LT		ALIGNMENT -DETL-									
COLLAR ELEV. 113.2 ft		TOTAL DEPTH 7.5 ft		NORTHING 511,646		EASTING 2,108,636									
DRILL RIG/HAMMER EFF./DATE N/A		DRILL METHOD Hand Auger		HAMMER TYPE Automatic											
DRILLER Edmondson, J. M.		START DATE 07/02/18		COMP. DATE 07/02/18		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
														113.2	GROUND SURFACE 0.0
														111.7	ROADWAY EMBANKMENT
															LOOSE TAN AND BROWN SAND, MOIST
															ALLUVIAL
															SOFT BROWN MUCK, MOIST TO SATURATED
														106.2	ALLUVIAL
														105.7	LOOSE TAN SAND, SATURATED
															Boring Terminated at Elevation 105.7 ft in Loose Sand

NCDOT BORE DOUBLE B4635\_GEO\_BRDG.GPJ NC\_DOT.GDT 11/30/18