



PAVEMENT SCHEDULE

WBS ELEMENT NUMBER: 3CR.20671.146

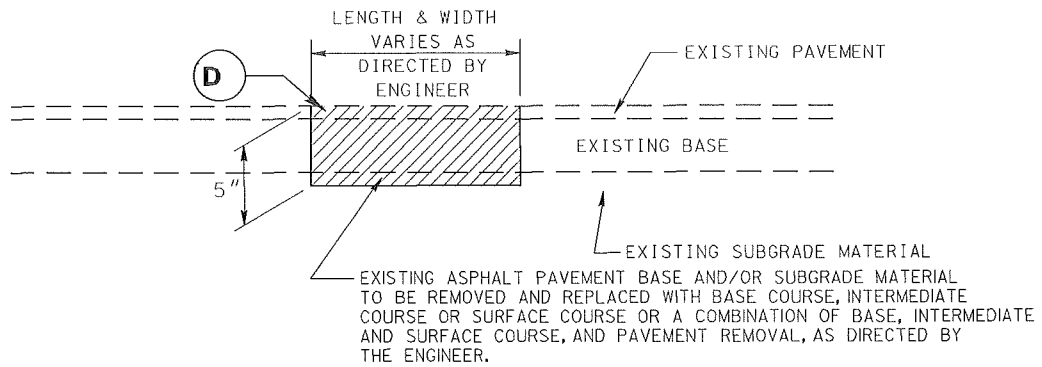


TYPICAL SECTION NO. 1
USE ON MAP NO. 1 AND MAP NO.2 AS DESIGNATED

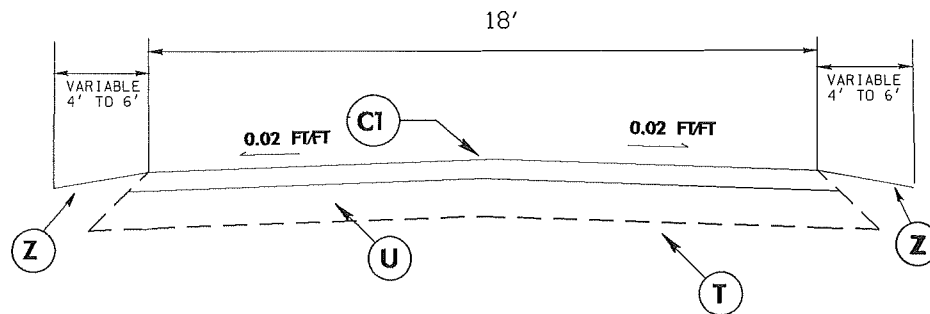

TYPICAL SECTION NO. 2
LEVELING IN VARIOUS LOCATIONS




USE FOR MAPS 1, 2 & 3

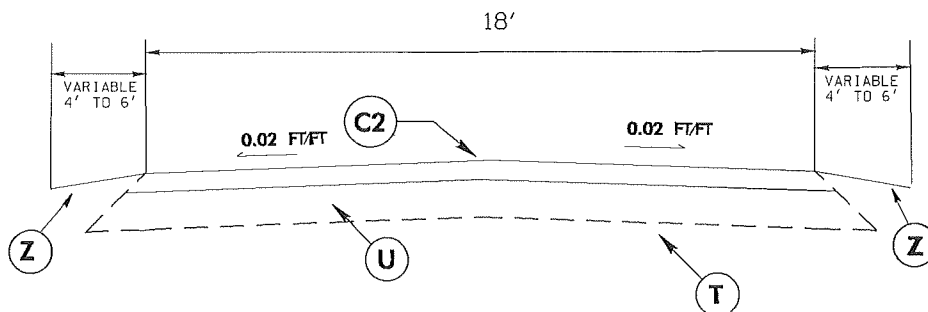

TYPICAL SECTION NO. 3
OVERLAYS IN VARIOUS LOCATIONS


USE FOR MAPS 1, 2 & 3

PAVEMENT SCHEDULE
WBS ELEMENT NUMBER: 3CR.20671.146

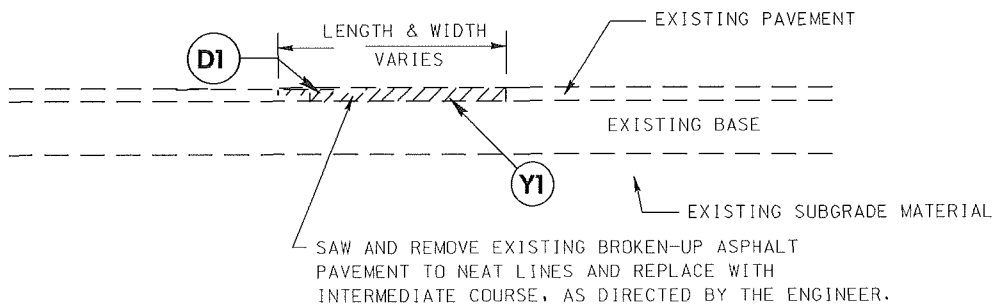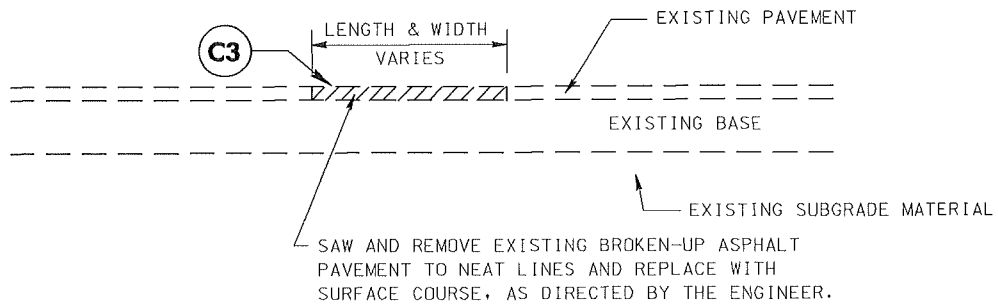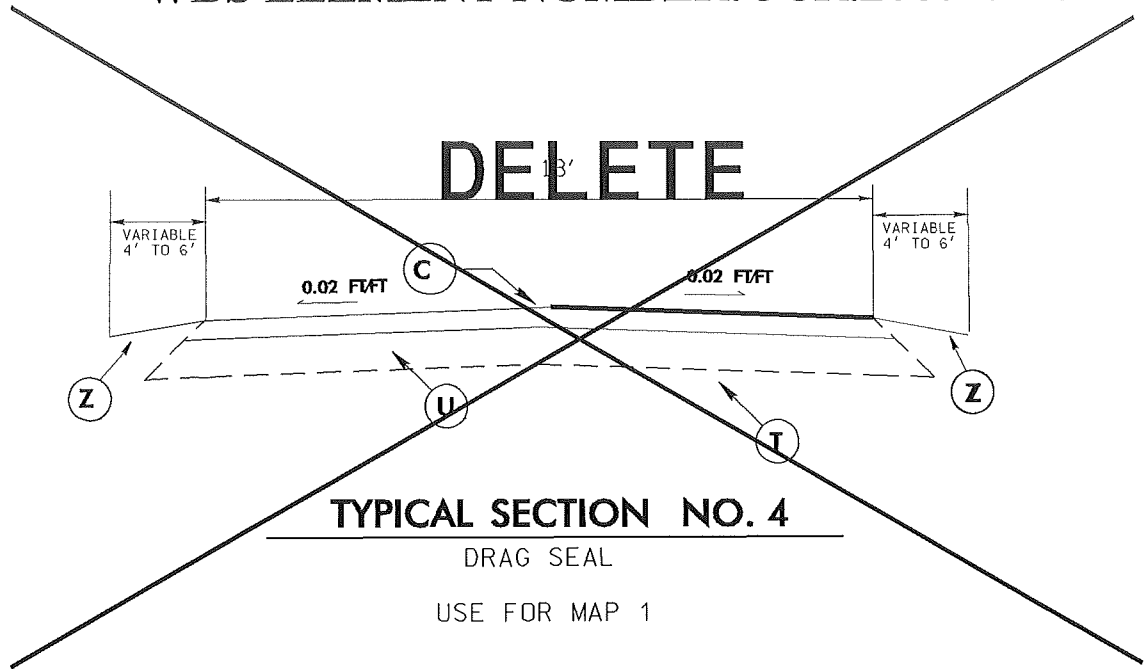


PAVEMENT SCHEDULE

WBS ELEMENT NUMBER: 3CR.20671.146

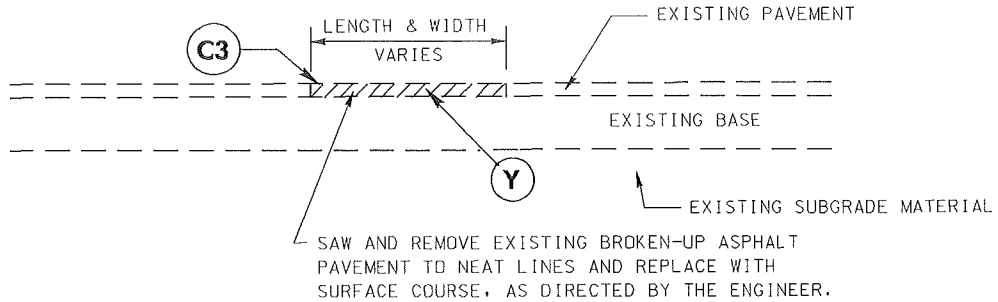

TYPICAL SECTION NO. 7


USE FOR MAPS 8 THRU 16

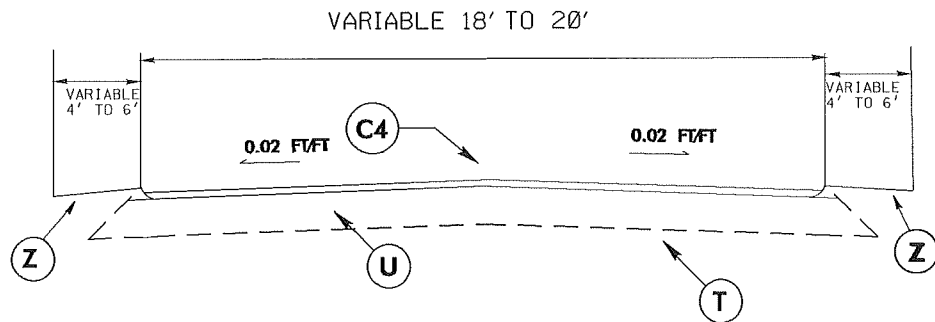

TYPICAL SECTION NO. 8

RESURFACE

USE FOR MAPS 8 THRU 16

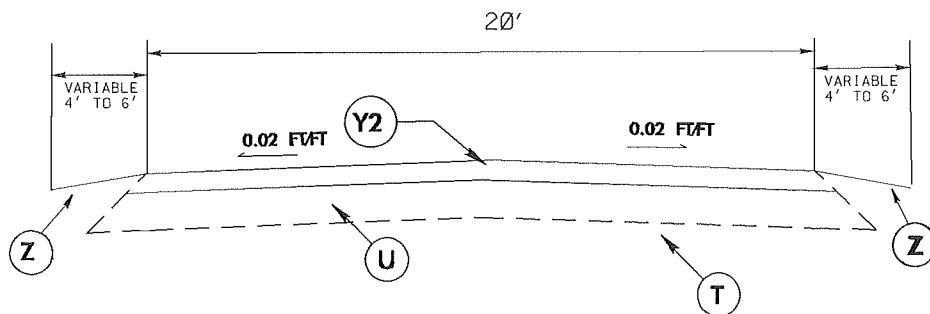


TYPICAL SECTION NO. 9

USE FOR MAP 17

PAVEMENT SCHEDULE

WBS ELEMENTS: 3CR.20671.146

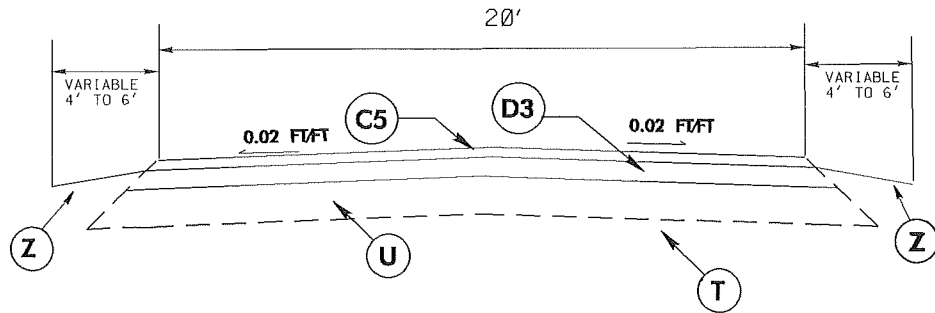

TYPICAL SECTION NO. 10

USE FOR MAP 17

PAVEMENT SCHEDULE

WBS ELEMENTS: 3CR.20671.146

C1	PROP. APPROX. 1 1/2 " ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. (LEVELING)
C2	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. (OVERLAYS)
C3	PROP. APPROX. 1 1/2 " ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. (MILL PATCHING)
C4	PROP. APPROX. 1 1/2 " ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. (RESURFACING)
C5	PROP. APPROX. 3/4 " ASPHALT CONCRETE SURFACE COURSE, TYPE S4.75A, AT AN AVERAGE RATE OF 75 LBS. PER SQ. YD.
D	PROP. APPROX. 5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I 19.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD. (FULL DEPTH PATCHING)
D1	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I 19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. (MILL PATCHING)
D2	PROP. APPROX. 2 1/2 " ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I 19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
T	EXISTING SUBGRADE MATERIAL
U	EXISTING PAVEMENT
Y	MILL 1.5" FOR MILL PATCH
Y1	MILL 2.5" FOR MILL PATCH
Y2	MILL 2"
Z	SHOULDER RECONSTRUCTION