


GUARDRAIL MULCHING DETAIL USE AS DIRECTED BY FIELD ENGINEER

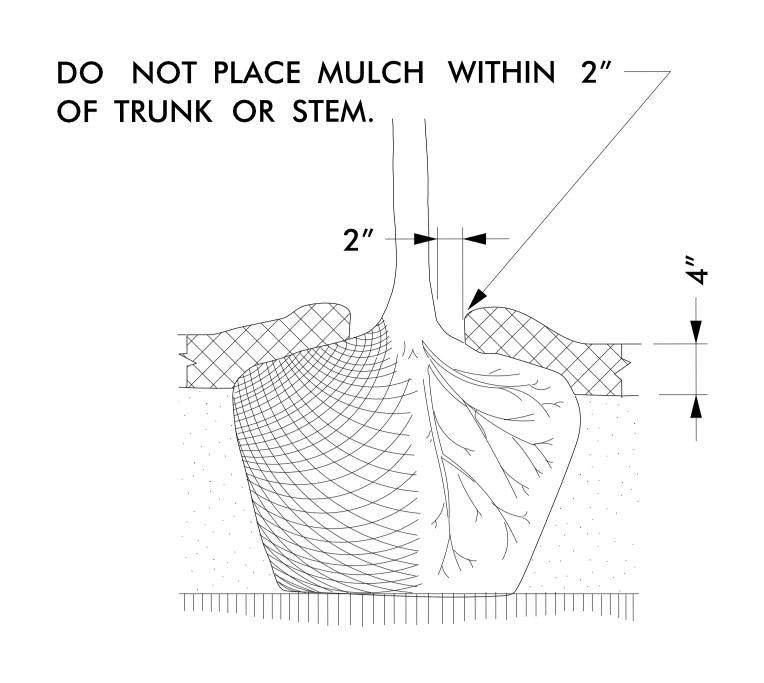

MULCH DETAIL

NOTES:

SCHEDULE FOR PLANT HOLE SIZE: PLANT HOLE WIDTH (X) TO BE TWICE THE ROOT BALL SIZE OR CONTAINER DIAMETER.

SEE STANDARD SPECIFICATIONS FOR PLANT BED FUMIGATION AND HERBICIDAL TREATMENT.

APPLY FERTILIZER AT PLANTING TIME IN THE FORM OF A SLOW RELEASE PELLET OR TABLET. APPLY AT RATE RECOMMENDED BY MANUFACTURER. BOTH RATE AND FORMULATION MUST BE APPROVED BY FIELD ENGINEER PRIOR TO APPLICATION.

REMOVE WIRE BASKET AND FOLD BURLAP BACK FROM TOP OF ROOT BALL BEFORE BACKFILLING IS COMPLETE.

ALL PRUNING TO FOLLOW STANDARD ARBORICULTURAL PRACTICES AS SPECIFIED BY INTERNATIONAL SOCIETY OF ARBORICULTURE.

DO NOT ATTEMPT TO STRAIGHTEN A TREE THAT HAS BEEN PLANTED AT AN ANGLE WITH THE USE OF STAKING OR GUYING. DIG TREE AND REPLANT TO UPRIGHT POSITION.

ROADWAY MIN. 12" DEEP CLASS "A" STONE ON FILTER FABRIC LINER IN DITCH. PLACE STONE FLUSH WITH DITCH GRADE FOR MAXINUM WATER FLOW.

CLASS "A" STONE DITCH LINING DETAIL

Plans Drawn By: **BRM** AS NOTED

ROADWAY

31 / 2012 Sheet Description

T.I.P. # 43534.1.1 Sheet # L-2


(TREES 6'-10')

USE AS DIRECTED BY FIELD ENGINEER

AND 14 GAUGE WIRE OR RUBBER HOSE FLEXIBLE TIE MATERIAL SECTION APPROVED BY ENGINEER. 14 GAUGE STEEL WIRE STRANDS -TWISTED AROUND EACH OTHER UNTIL WIRES ARE TAUT. 1 3/4" x 1 3/4" WOODEN STAKE, 18-24" LG. STAKE TO BE 4-6" ABOVE GRADE 1 3/4" x 1 3/4" WOODEN STAKE PLAN VIEW PLAN VIEW STAKING DETAIL GUYING DETAIL

(TREES 10' OR LARGER)

USE AS DIRECTED BY FIELD ENGINEER

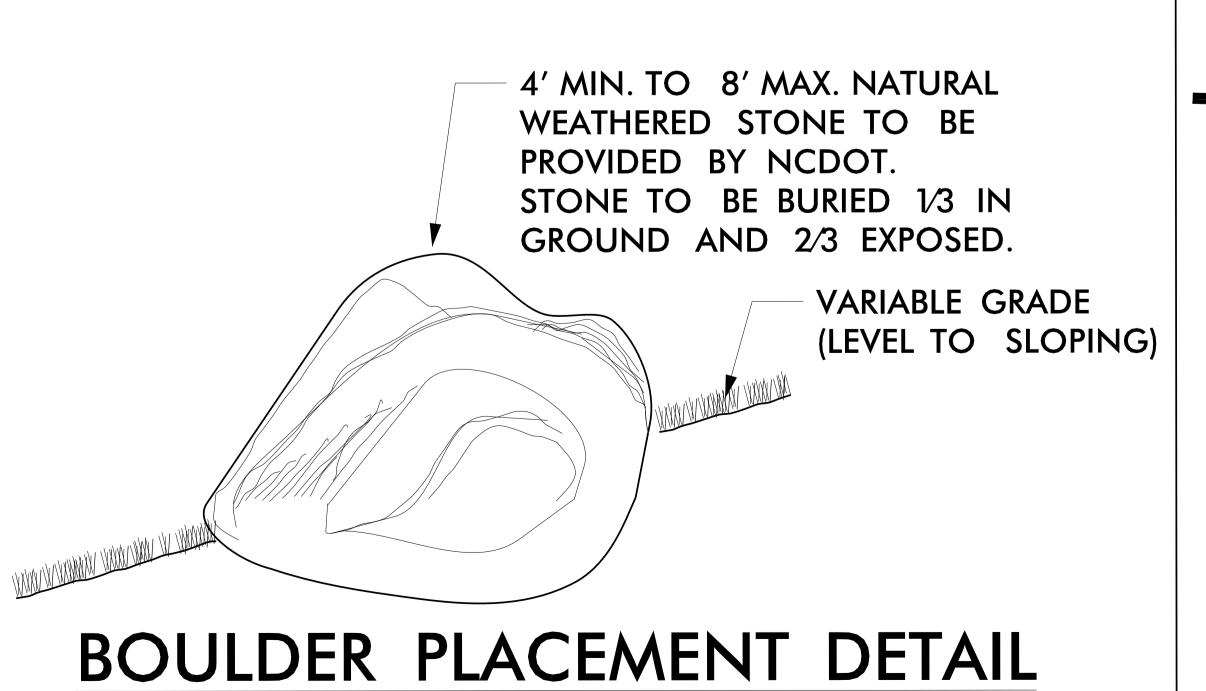

TYPICAL

SCALE: NTS

Planting Details