



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

JOSH STEIN
GOVERNOR

DANIEL H. JOHNSON
SECRETARY

June 18, 2026

Addendum No. 1

RE: **DD00522**
Wayne County

To Whom It May Concern:


Reference is made to the above-mentioned project. The following changes have been made:

1. The Typical Sections incorrectly show the depth of the ACSC S9.5B as 1 ¼" instead of 1 ½". Please remove the Typical Sections in the proposal and replace with the attached sheets.

This sheet and attachments shall be made a part of the plans and bid documents and shall be submitted with the bid. Bids submitted without the addenda and attachments will be considered non-responsive.


If there are any questions, please contact me at (252) 640-6433.

Sincerely,

DocuSigned by:

BD9FE36C1AA642B... 06/18/2026


Vickie P. Gardner
Division Four Contract Engineer

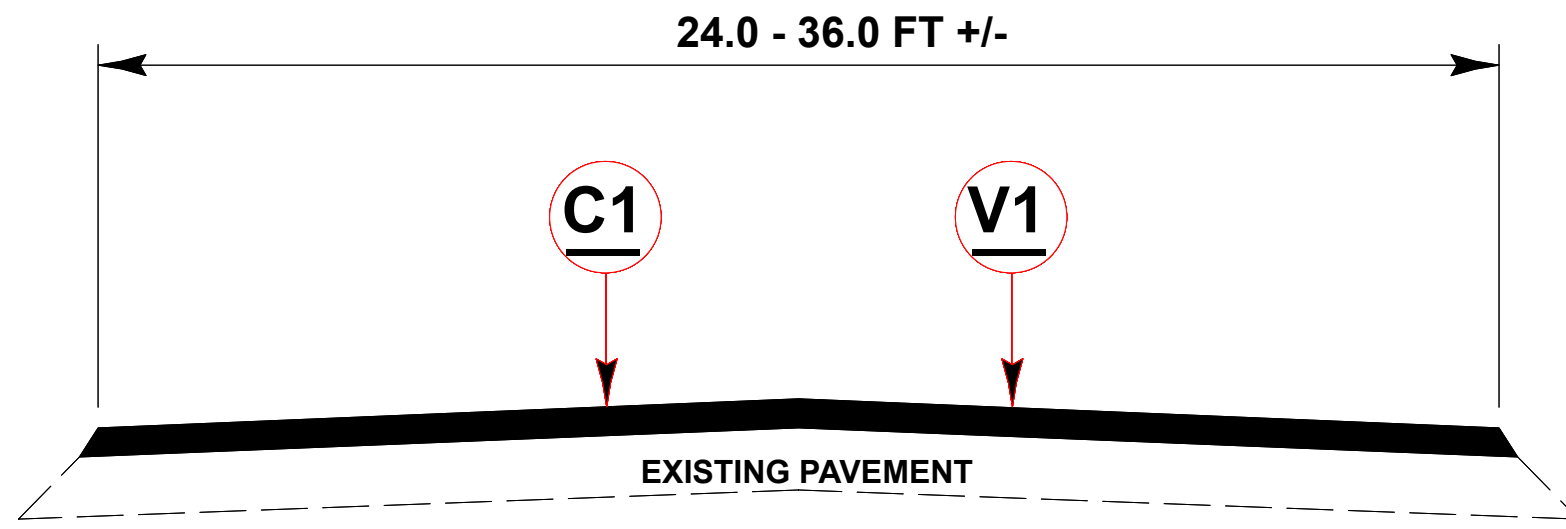VPG/
Attachment




TYPICAL SECTION # 1
MAP(S) # 1

GENERAL NOTES	
1	State Forces Will Be Responsible for Shoulder Reconstruction for Maps # 1-2 & 5-6
2	Contractor Will Be Responsible for Shoulder Reconstruction for Maps # 3 & 4
3	Patching of Existing Pavement To Be Completed by Contractor On All Maps

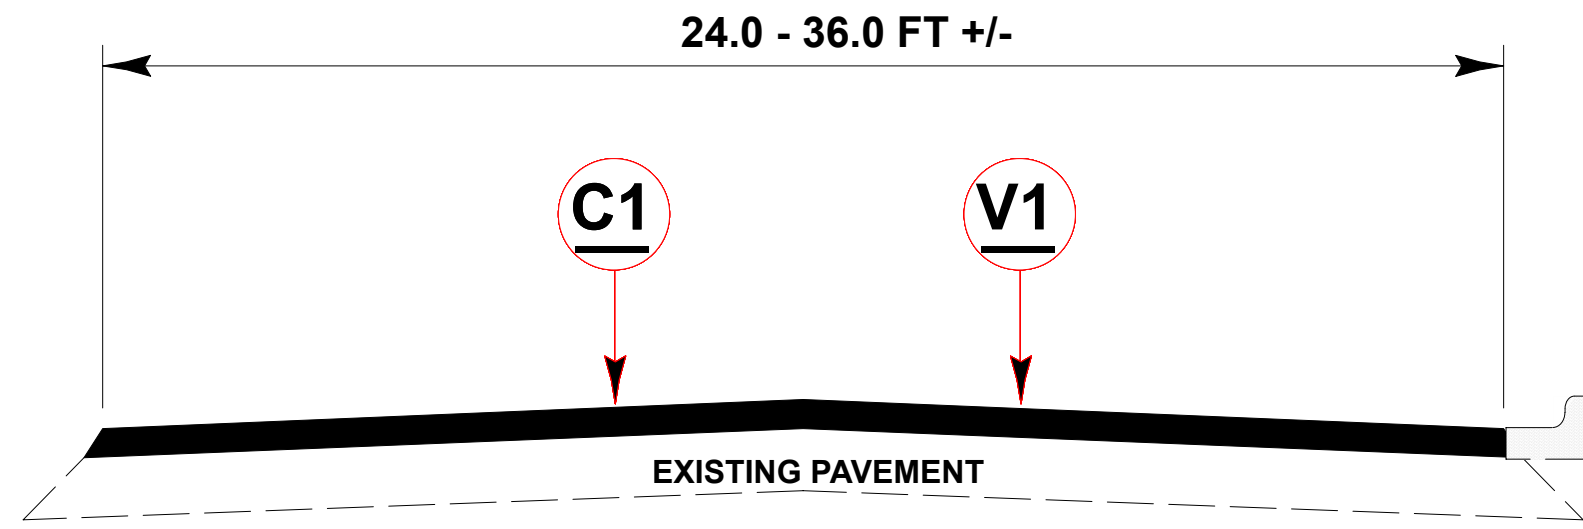

TYPICAL SECTION # 2
MAP(S) # 1


PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
C2	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YARD
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS PER SQ YARD
E2	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS PER SQ YARD
V1	MILL ASPHALT SHOULDER PAVEMENT 1-1/2" DEPTH
V2	MILL ASPHALT PAVEMENT 4" DEPTH
T1	SHOULDER RECONSTRUCTION

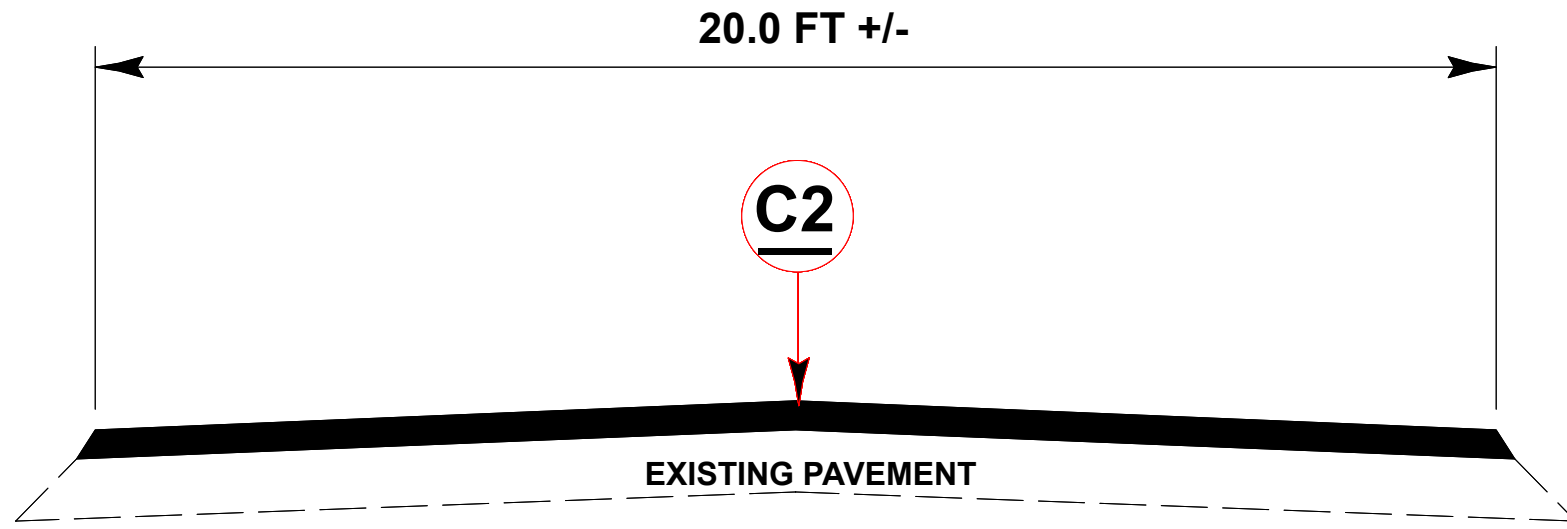


TYPICAL SECTION # 3
MAP(S) # 2 & 5 - 6

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
C2	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YARD
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS PER SQ YARD
E2	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS PER SQ YARD
V1	MILL ASPHALT SHOULDER PAVEMENT 1-1/2" DEPTH
V2	MILL ASPHALT PAVEMENT 4" DEPTH
T1	SHOULDER RECONSTRUCTION

GENERAL NOTES	
1	State Forces Will Be Responsible for Shoulder Reconstruction for Maps # 1-2 & 5-6
2	Contractor Will Be Responsible for Shoulder Reconstruction for Maps # 3 & 4
3	Patching of Existing Pavement To Be Completed by Contractor On All Maps

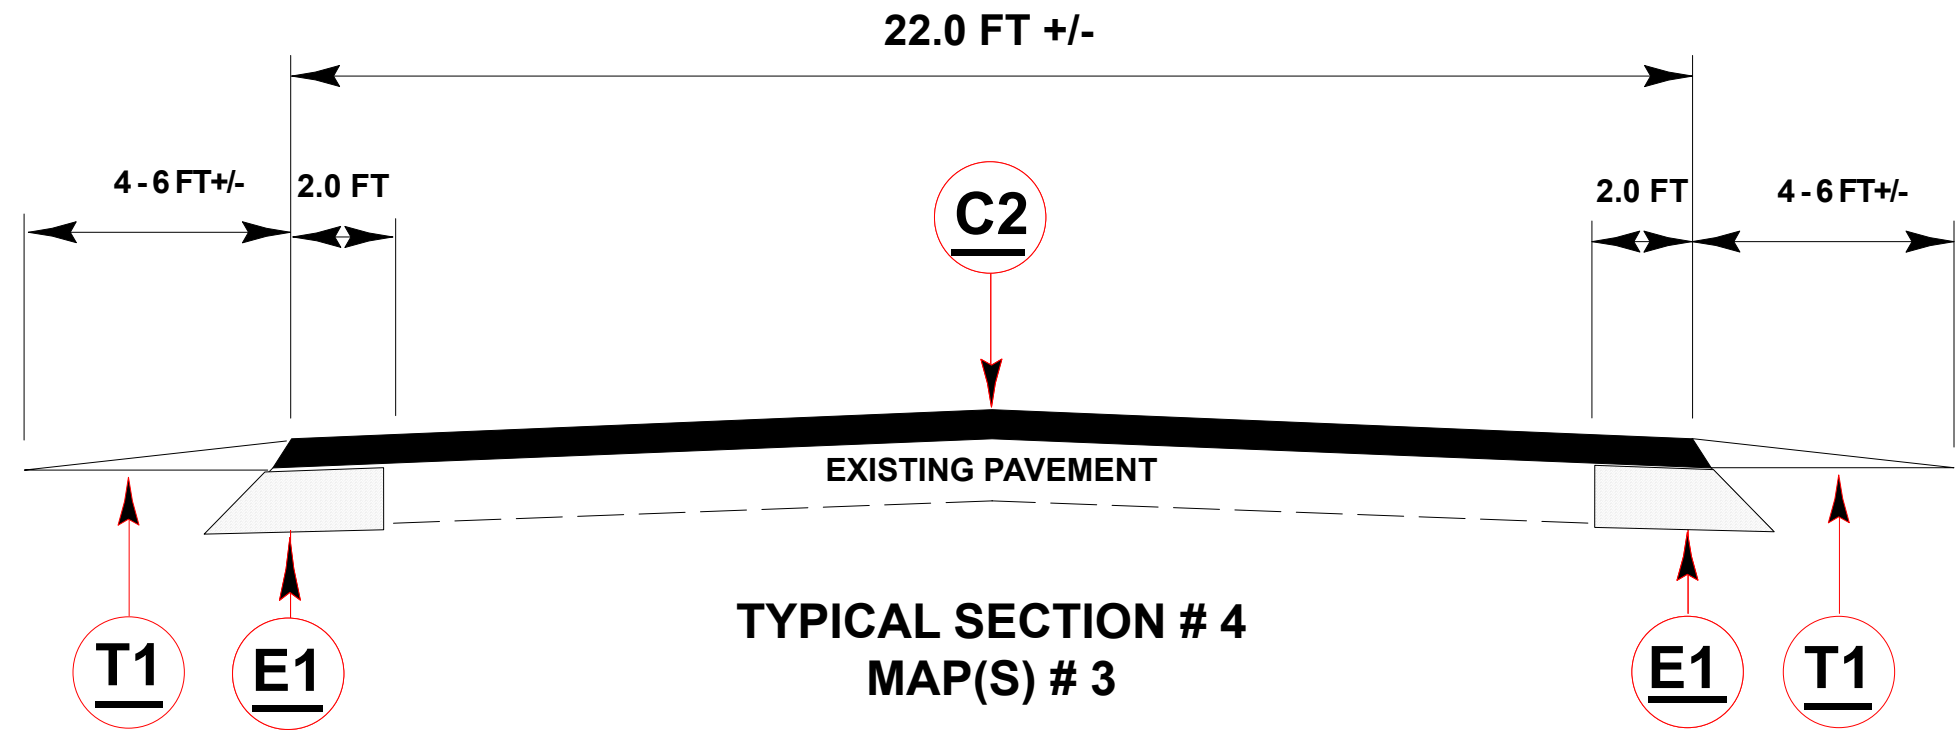

TYPICAL SECTION # 4
MAP(S) # 3

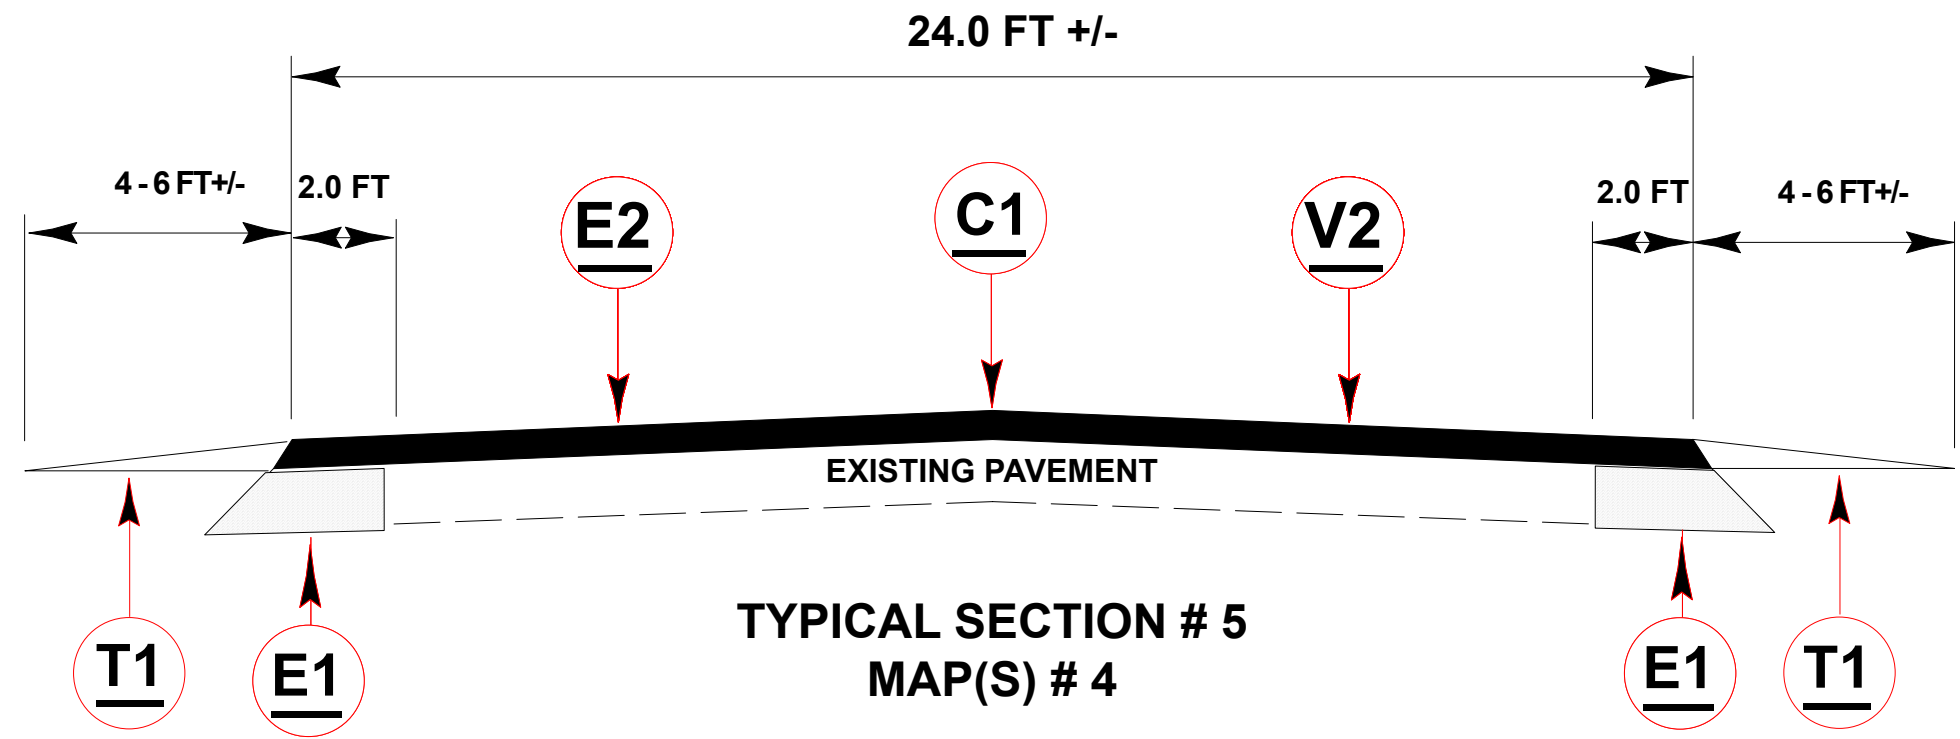

GENERAL NOTES	
1	State Forces Will Be Responsible for Shoulder Reconstruction for Maps # 1-2 & 5-6
2	Contractor Will Be Responsible for Shoulder Reconstruction for Maps # 3 & 4
3	Patching of Existing Pavement To Be Completed by Contractor On All Maps

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
C2	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YARD
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS PER SQ YARD
E2	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS PER SQ YARD
V1	MILL ASPHALT SHOULDER PAVEMENT 1-1/2" DEPTH
V2	MILL ASPHALT PAVEMENT 4" DEPTH
T1	SHOULDER RECONSTRUCTION