

See Sheet 1-A For Index of Sheets


STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

FRANKLIN COUNTY

**LOCATION: BRIDGE NO. 23 ON SR 1105
(MAYS CROSSROADS ROAD) OVER CEDAR CREEK**



TYPE OF WORK: GRADING, DRAINAGE, PAVING & STRUCTURE

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	17BP.5.R.30	1	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	
17BP.5.R.30		P.E.	
17BP.5.R.30		RW	
17BP.5.R.30		CONST.	

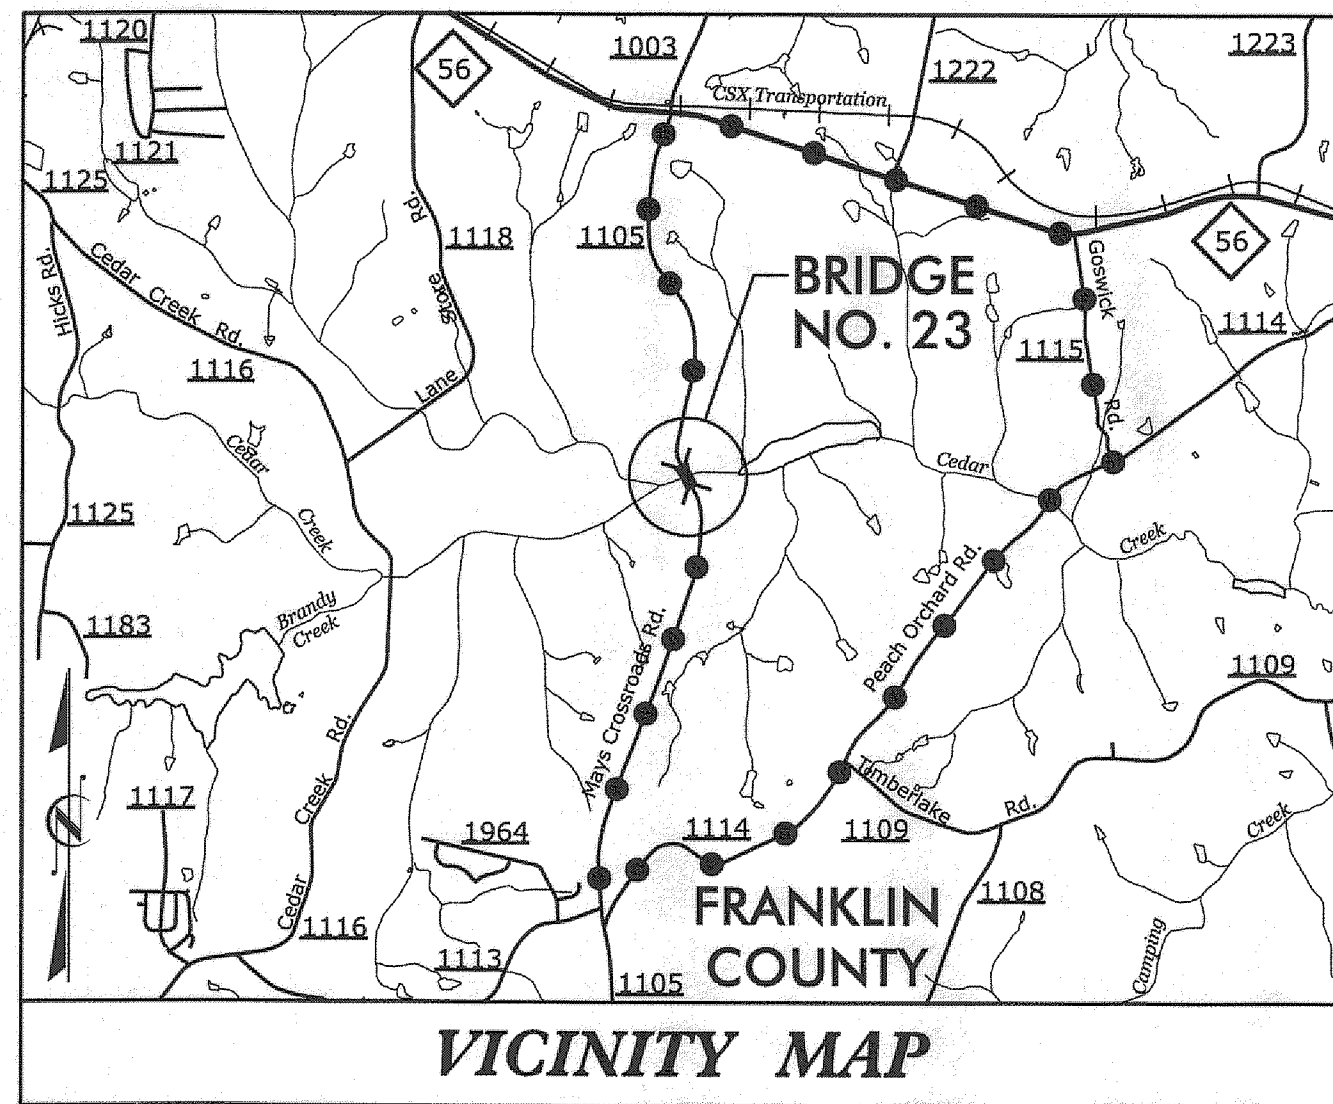

VICINITY MAP


THIS PROJECT IS NOT WITHIN ANY MUNICIPAL BOUNDARY
●●●●● DENOTES DETOUR ROUTE

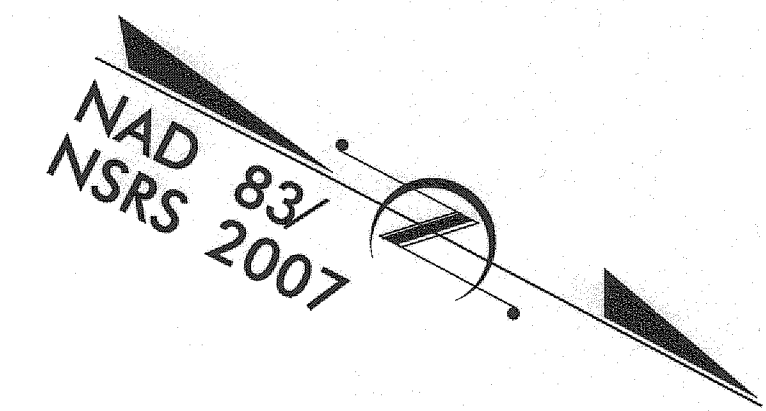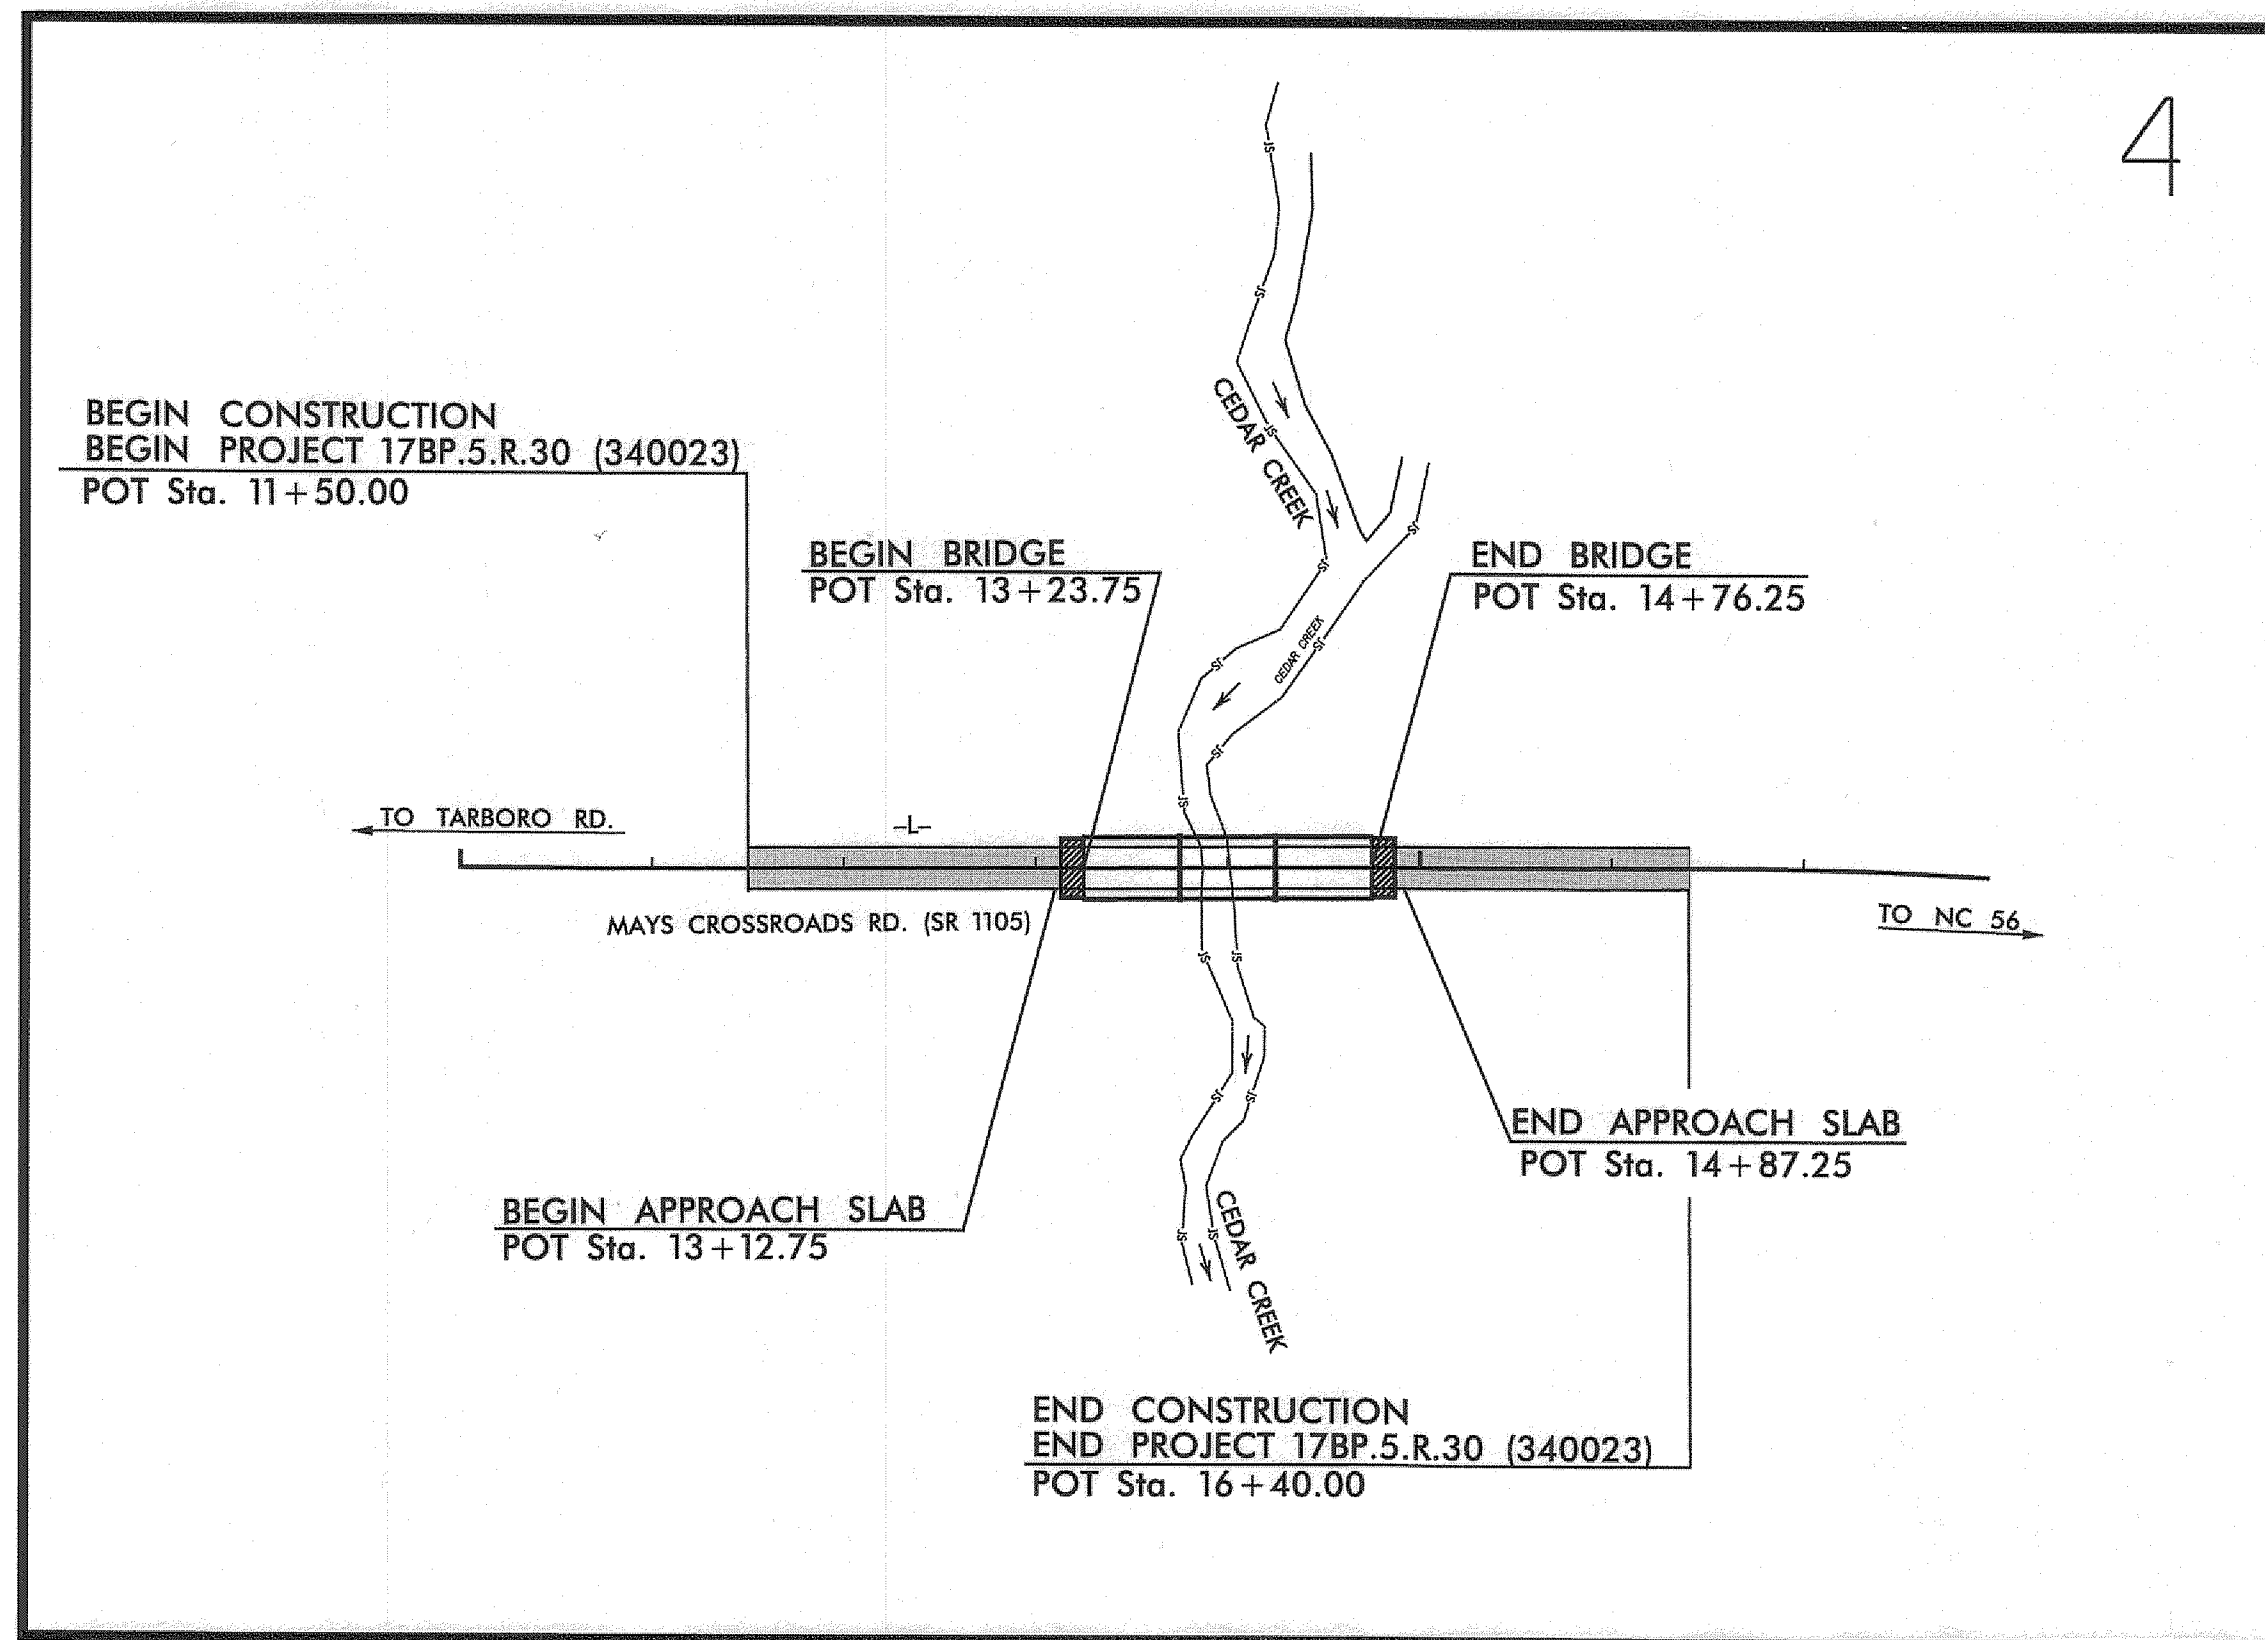

TIP PROJECT: 17BP.5.R.30

CONTRACT:

CLEARING ON THIS PROJECT SHALL BE PERFORMED TO THE LIMITS ESTABLISHED BY METHOD III

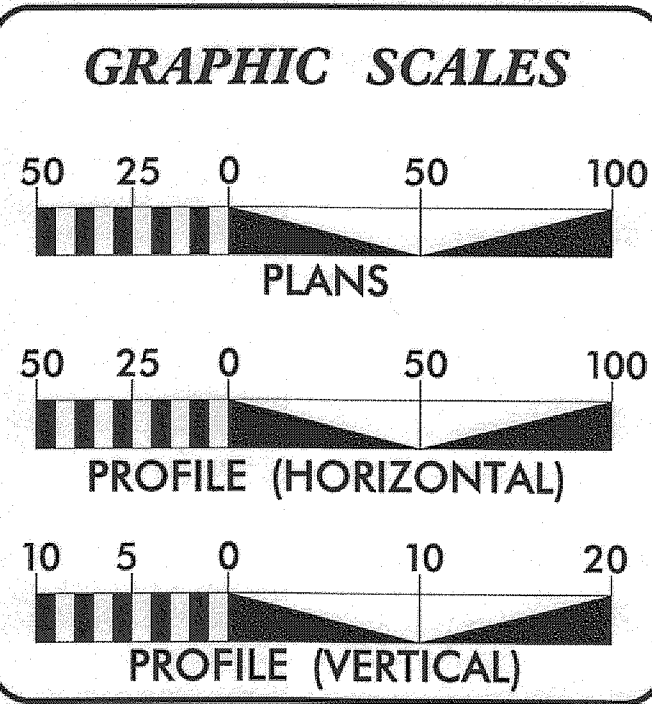

DESIGN DATA

ADT 2012 =	1400
ADT 2025 =	3000
DHV =	10 %
D =	50 %
T =	6 % *
V =	50 MPH
* TTST =	N/A DUAL N/A
FUNC CLASS =	MINOR COLLECTOR
	SUB-REGIONAL TIER

PROJECT LENGTH

LENGTH ROADWAY STATE PROJECT 17BP.5.R.30	=	0.064 MILES
LENGTH STRUCTURE STATE PROJECT 17BP.5.R.30	=	0.029 MILES
TOTAL LENGTH STATE PROJECT 17BP.5.R.30	=	0.093 MILES

PREPARED FOR THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION IN THE OFFICE OF:

ICA Engineering
5121 Kingdom Way, Suite 100, Raleigh, NC 27607, NC License No. P-9988

2012 STANDARD SPECIFICATIONS

RIGHT OF WAY DATE: JUNE 2012

LETTING DATE:

David C. Waller, PE
PROJECT ENGINEER

HYDRAULICS ENGINEER

Signature: *John J. Corbin*

ROADWAY DESIGN ENGINEER

Signature: *David C. Waller*

Professional Engineer Seals for John J. Corbin (Seal 34364) and David C. Waller (Seal 22606).

DIVISION OF HIGHWAYS STATE OF NORTH CAROLINA

STATE HIGHWAY DESIGN ENGINEER

10/24/2014 R:\Roggiway\Proj\17BP.5.R.30\17BP.5.R.30.dgn ICA ENGINEERING, INC.

Note: Not to Scale

*S.U.E. = Subsurface Utility Engineering

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

CONVENTIONAL PLAN SHEET SYMBOLS

BOUNDARIES AND PROPERTY:

State Line	_____
County Line	_____
Township Line	_____
City Line	_____
Reservation Line	_____
Property Line	_____
Existing Iron Pin	○
Property Corner	→
Property Monument	□
Parcel/Sequence Number	(23)
Existing Fence Line	-x-x-x-
Proposed Woven Wire Fence	○
Proposed Chain Link Fence	□
Proposed Barbed Wire Fence	◇
Existing Wetland Boundary	-w-l-b-
Proposed Wetland Boundary	w-l-b
Existing Endangered Animal Boundary	-e-a-b-
Existing Endangered Plant Boundary	-e-p-b-

BUILDINGS AND OTHER CULTURE:

Gas Pump Vent or U/G Tank Cap	○
Sign	○
Well	○
Small Mine	✕
Foundation	□
Area Outline	□
Cemetery	□
Building	□
School	□
Church	□
Dam	□

HYDROLOGY:

Stream or Body of Water	_____
Hydro, Pool or Reservoir	□
Jurisdictional Stream	-j-s-
Buffer Zone 1	-b-z-1-
Buffer Zone 2	-b-z-2-
Flow Arrow	←
Disappearing Stream	→
Spring	○
Wetland	_____
Proposed Lateral, Tail, Head Ditch	_____
False Sump	□

RAILROADS:

Standard Gauge	_____
RR Signal Milepost	○
Switch	□
RR Abandoned	_____
RR Dismantled	_____

RIGHT OF WAY:

Baseline Control Point	◆
Existing Right of Way Marker	△
Existing Right of Way Line	_____
Proposed Right of Way Line	_____
Proposed Right of Way Line with Iron Pin and Cap Marker	_____
Proposed Right of Way Line with Concrete or Granite Marker	_____
Existing Control of Access	○
Proposed Control of Access	○
Existing Easement Line	-e-
Proposed Temporary Construction Easement	-e-
Proposed Temporary Drainage Easement	-t-d-e-
Proposed Permanent Drainage Easement	-p-d-e-
Proposed Permanent Drainage / Utility Easement	-d-u-e-
Proposed Permanent Utility Easement	-p-u-e-
Proposed Temporary Utility Easement	-t-u-e-
Proposed Permanent Easement with Iron Pin and Cap Marker	◆

ROADS AND RELATED FEATURES:

Existing Edge of Pavement	_____
Existing Curb	_____
Proposed Slope Stakes Cut	-c-
Proposed Slope Stakes Fill	-f-
Proposed Wheel Chair Ramp	WCR
Existing Metal Guardrail	_____
Proposed Guardrail	_____
Existing Cable Guiderail	_____
Proposed Cable Guiderail	_____
Equality Symbol	⊕
Pavement Removal	_____

VEGETATION:

Single Tree	○
Single Shrub	○
Hedge	_____
Woods Line	_____
Orchard	_____
Vineyard	_____

EXISTING STRUCTURES:

MAJOR:	
Bridge, Tunnel or Box Culvert	_____
Bridge Wing Wall, Head Wall and End Wall	_____
MINOR:	
Head and End Wall	_____
Pipe Culvert	_____
Footbridge	_____
Drainage Box: Catch Basin, DI or JB	□
Paved Ditch Gutter	_____
Storm Sewer Manhole	○
Storm Sewer	-s-

UTILITIES:

POWER:	
Existing Power Pole	●
Proposed Power Pole	○
Existing Joint Use Pole	●
Proposed Joint Use Pole	○
Power Manhole	○
Power Line Tower	□
Power Transformer	□
U/G Power Cable Hand Hole	□
H-Frame Pole	●
Recorded U/G Power Line	-p-
Designated U/G Power Line (S.U.E.*)	-p-

TELEPHONE:

Existing Telephone Pole	●
Proposed Telephone Pole	○
Telephone Manhole	○
Telephone Booth	□
Telephone Pedestal	□
Telephone Cell Tower	□
U/G Telephone Cable Hand Hole	□
Recorded U/G Telephone Cable	-t-
Designated U/G Telephone Cable (S.U.E.*)	-t-
Recorded U/G Telephone Conduit	-tc-
Designated U/G Telephone Conduit (S.U.E.*)	-tc-
Recorded U/G Fiber Optics Cable	-t fo-
Designated U/G Fiber Optics Cable (S.U.E.*)	-t fo-

WATER:

Water Manhole	○
Water Meter	○
Water Valve	⊗
Water Hydrant	⊕
Recorded U/G Water Line	-w-
Designated U/G Water Line (S.U.E.*)	-w-
Above Ground Water Line	-a/g water-

TV:

TV Satellite Dish	□
TV Pedestal	□
TV Tower	⊗
U/G TV Cable Hand Hole	□
Recorded U/G TV Cable	-tv-
Designated U/G TV Cable (S.U.E.*)	-tv-
Recorded U/G Fiber Optic Cable	-tv fo-
Designated U/G Fiber Optic Cable (S.U.E.*)	-tv fo-

GAS:

Gas Valve	◇
Gas Meter	⊕
Recorded U/G Gas Line	-g-
Designated U/G Gas Line (S.U.E.*)	-g-
Above Ground Gas Line	-a/g gas-

SANITARY SEWER:

Sanitary Sewer Manhole	⊕
Sanitary Sewer Cleanout	⊕
U/G Sanitary Sewer Line	-ss-
Above Ground Sanitary Sewer	-a/g sanitary sewer-
Recorded SS Forced Main Line	-fss-
Designated SS Forced Main Line (S.U.E.*)	-fss-

MISCELLANEOUS:

Utility Pole	●
Utility Pole with Base	□
Utility Located Object	○
Utility Traffic Signal Box	□
Utility Unknown U/G Line	-util-
U/G Tank; Water, Gas, Oil	□
A/G Tank; Water, Gas, Oil	□
U/G Test Hole (S.U.E.*)	⊗
Abandoned According to Utility Records	AATUR
End of Information	E.O.I.




5/14/99



PROJECT REFERENCE NO. 17BP.5.R.30	SHEET NO. 2
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER


PAVEMENT SCHEDULE	
(C)	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
(CI)	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1 1/2" IN DEPTH.
(D)	PROP. APPROX. 3 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 399 LBS. PER SQ. YD.
(DI)	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.
(E)	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
(EI)	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
(T)	EARTH MATERIAL
(W)	PAVEMENT WEDGING

NOTE: FULL DEPTH PAVED SHOULDER REQUIRED AT GUARDRAIL LOCATIONS (SEE FULL DEPTH PAVED SHOULDER DETAIL)

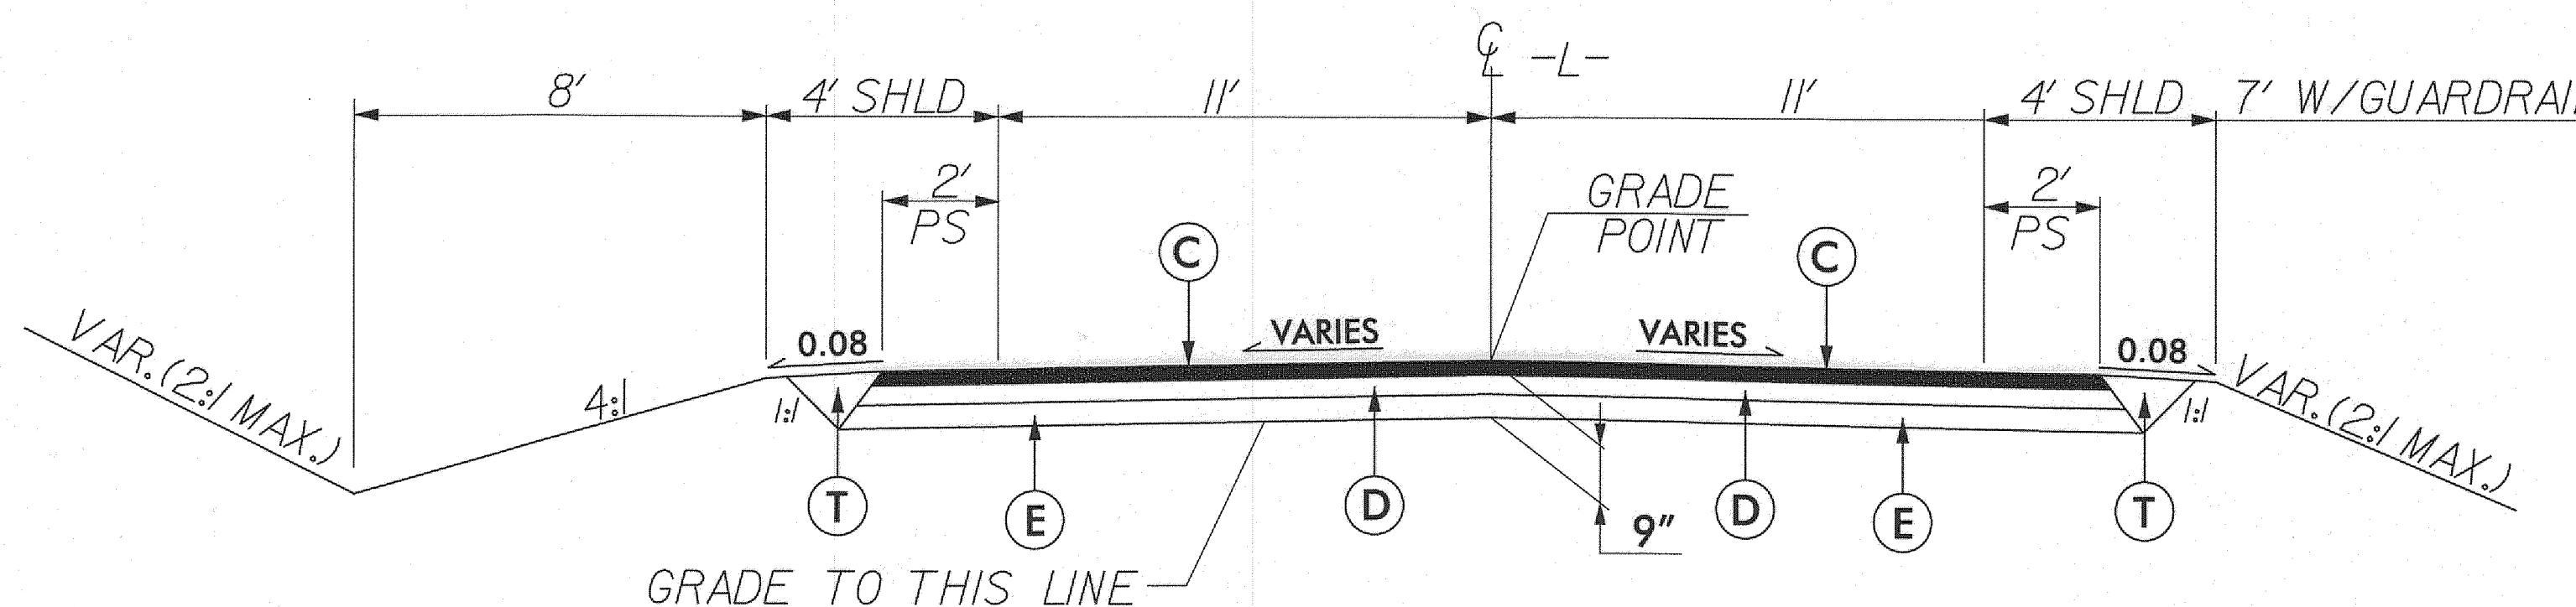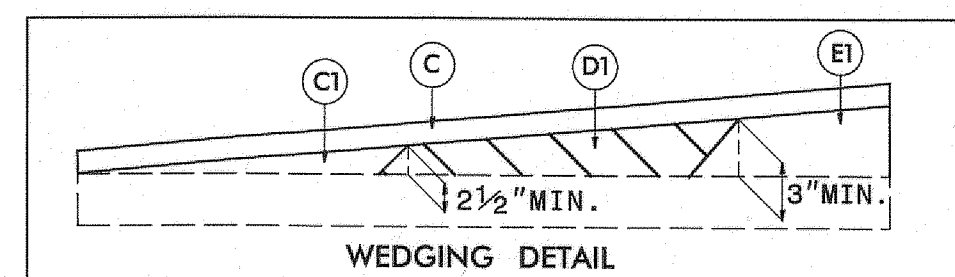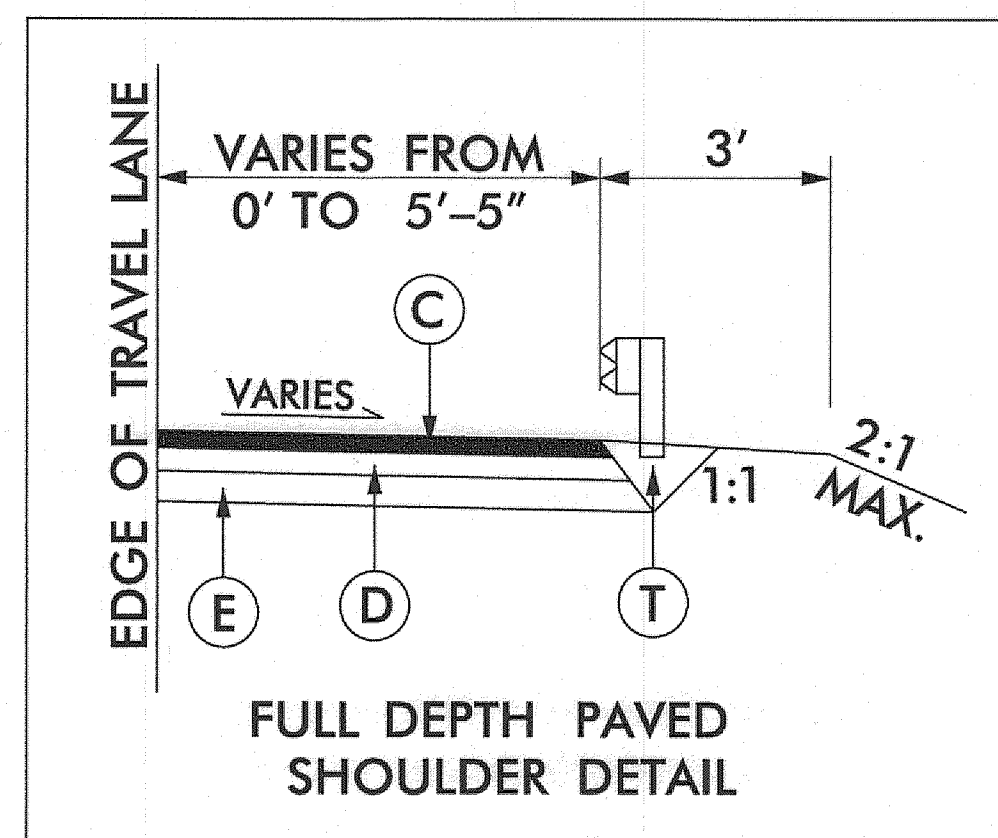

TYPICAL SECTION No. 1

-L- STA 11+50.00 TO -L- STA 13+23.75 (BRIDGE)
 -L- STA 14+76.25 (BRIDGE) TO -L- STA 16+40.00

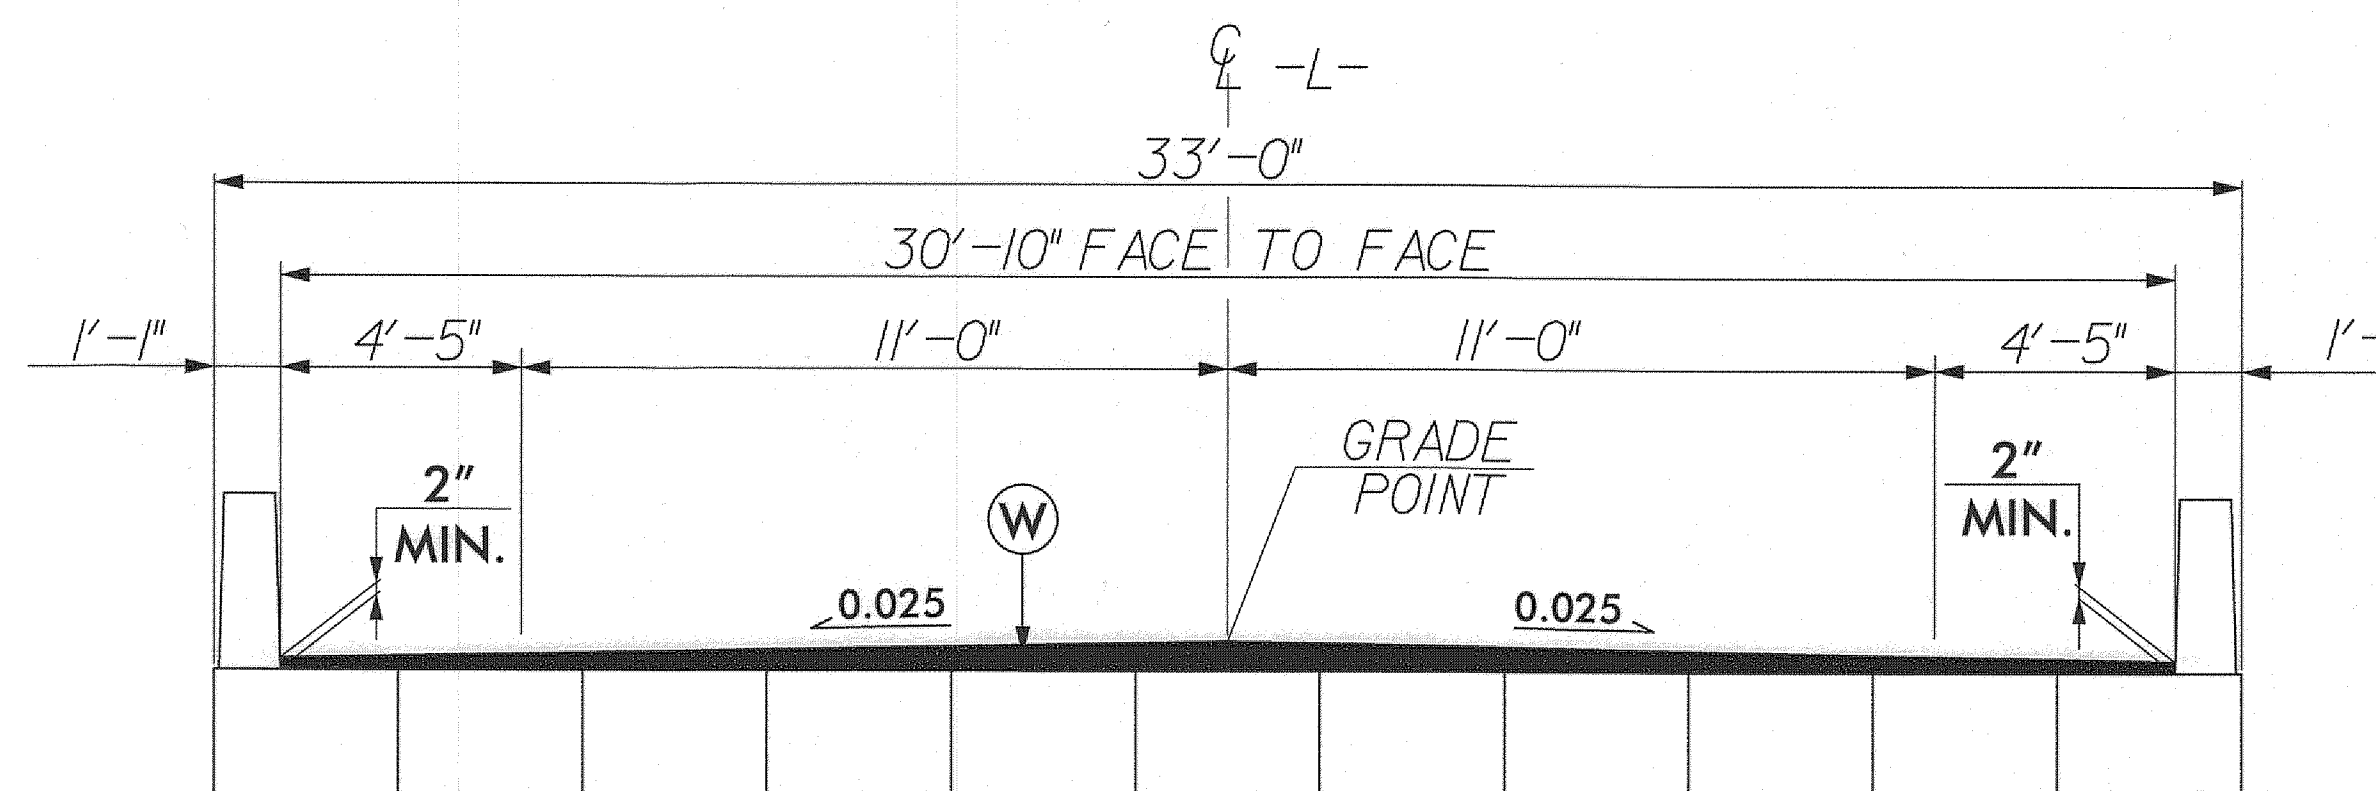

TYPICAL SECTION OF STRUCTURE

-L- STA 13+23.75 TO -L- STA 14+76.25

PROJECT NO. 17BP.5.R.30
 COUNTY: FRANKLIN
 STATION: 14+00.00 -L- (90 SKEW)
 REPLACES BRIDGE NO. 23

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

BRIDGE NO. 23 ON SR 1105
 OVER CEDAR CREEK

10/24/2014 P:\Projects\17BP.5.R.30\340023-r.dwg tjr.dgn ICA ENGINEERING, INC.

DATUM DESCRIPTION

THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY NCDOT FOR MONUMENT "34-0023-1" WITH NAD 83/NSRS 2007 STATE PLANE GRID COORDINATES OF NORTHING: 843723.829(ft) EASTING: 2174943.314(ft) ELEVATION: 323.869(ft) THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT (GROUND TO GRID) IS: 1.0000374164 THE N.C. LAMBERT GRID BEARING AND LOCALIZED HORIZONTAL GROUND DISTANCE FROM "34-0023-1" TO -L- STATION IS

ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES VERTICAL DATUM USED IS NAVD 88




-L- COORDINATE LIST			DESC.	NORTHING	EASTING	ELEVATION	-L- STATION	OFFSET
10+00	N	845210.49	BL-1	843723.83	2174943.31	323.87'		
11+00	N	845299.72	BL-2	842797.59	2174673.90	344.03'		
12+00	N	845388.54	BL-3	845019.66	2174971.55	273.75'		
13+00	N	845477.32	BL-4	845630.25	2174627.78	261.67'	14+83.99	22.62' LT
14+00	N	845566.10	BL-5	846133.31	2174430.45	281.40'		

BM-1
-L- STA 14+91.05 145.21' LT
R/R SPIKE SET IN 22" OAK TREE
ELEV = 257.75'

-L-
 PI Sta 10+73.08 PI Sta 17+21.01
 $\Delta = 0' 50' 14.5" (LT)$ $\Delta = 3' 54' 44.7" (RT)$
 $D = 0' 34' 22.6"$ $D = 2' 36' 15.7"$
 $L = 146.15'$ $L = 150.23'$
 $T = 73.08'$ $T = 75.14'$
 $R = 10,000.00'$ $R = 2,200.00'$
 $Se = 0.025$ $Se = Ex1st.$




PROJECT REFERENCE NO. 17BP.5.R.30	SHEET NO. 4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER DAVID C. WALKER SEAL 22606 10-24-14	HYDRAULICS ENGINEER LAWRENCE J. CONNER SEAL 34364 10/24/14

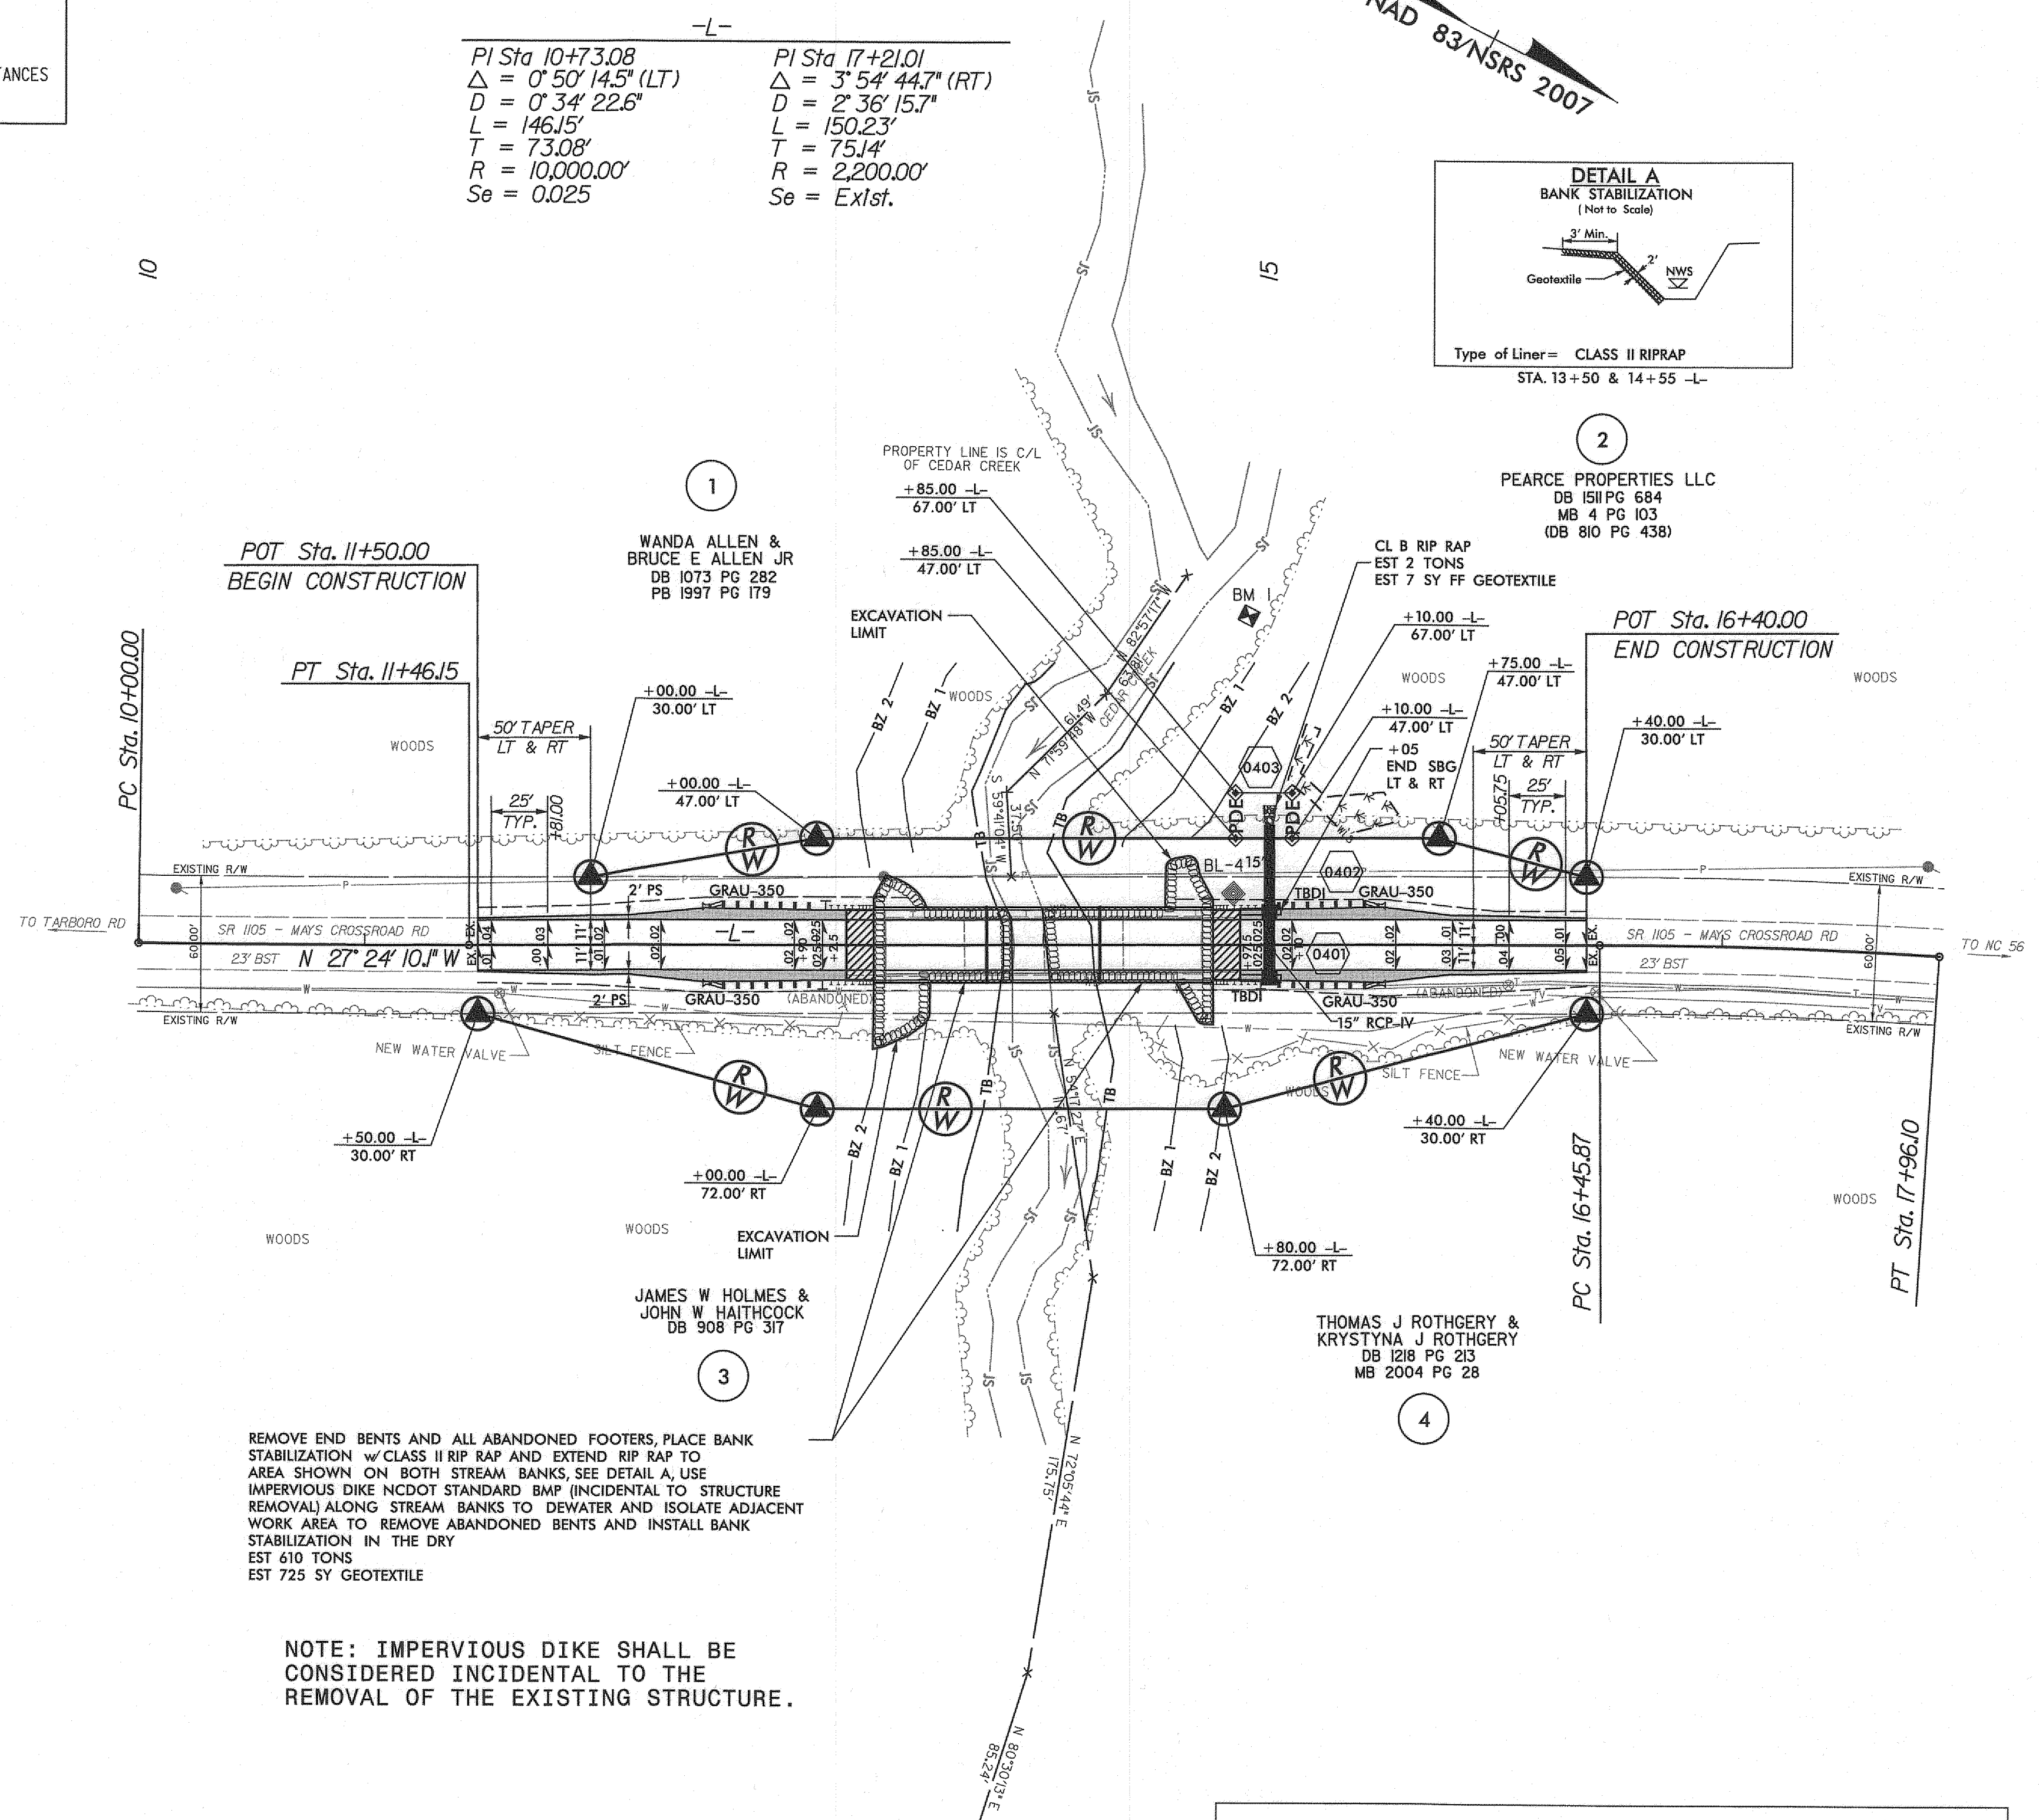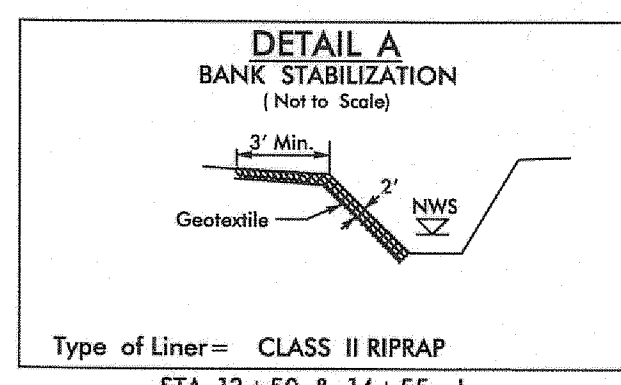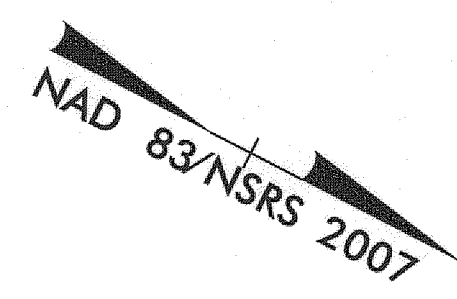

REMOVE END BENTS AND ALL ABANDONED FOOTERS, PLACE BANK STABILIZATION w/ CLASS II RIP RAP AND EXTEND RIP RAP TO AREA SHOWN ON BOTH STREAM BANKS, SEE DETAIL A, USE IMPERVIOUS DIKE NCDOT STANDARD BMP (INCIDENTAL TO STRUCTURE REMOVAL) ALONG STREAM BANKS TO DEWATER AND ISOLATE ADJACENT WORK AREA TO REMOVE ABANDONED BENTS AND INSTALL BANK STABILIZATION IN THE DRY EST 610 TONS EST 725 SY GEOTEXTILE

NOTE: IMPERVIOUS DIKE SHALL BE CONSIDERED INCIDENTAL TO THE REMOVAL OF THE EXISTING STRUCTURE.

PARCEL INDEX	
PARCEL NO.	PROPERTY OWNER NAME
1	WANDA ALLEN & BRUCE E ALLEN JR
2	PEARCE PROPERTIES LLC
3	JAMES W HOLMES & JOHN W HAITHCOCK
4	THOMAS J ROTHGERY & KRYSZYNA J ROTHGERY

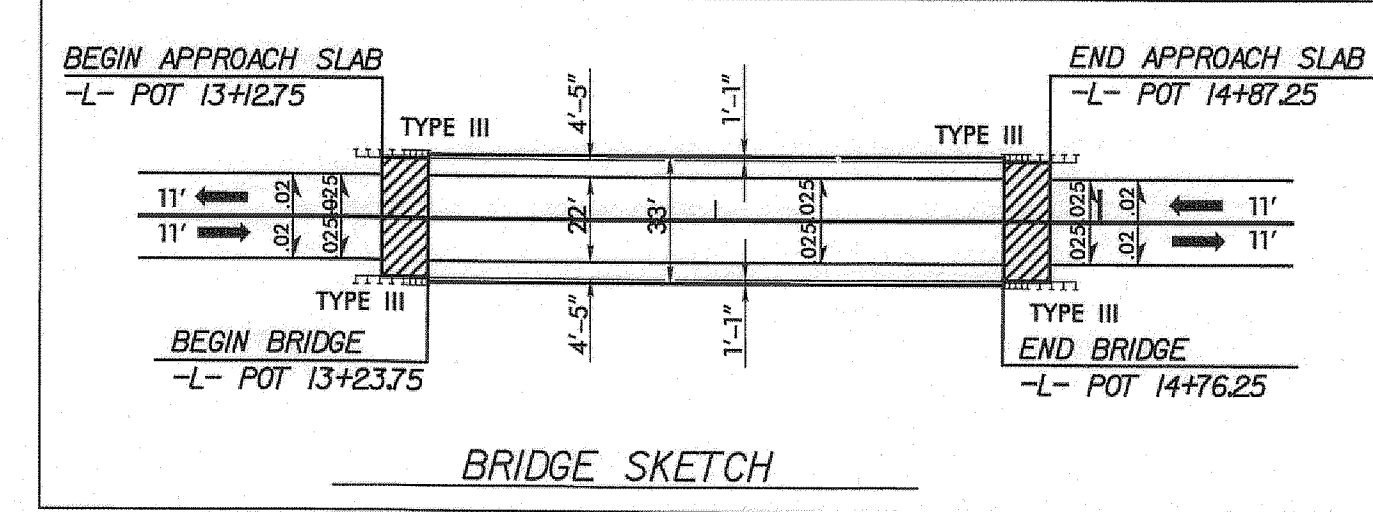

PROJECT NO. 17BP.5.R.30
COUNTY: FRANKLIN
STATION: 14+00.00 -L- (90 SKEW)
REPLACES BRIDGE NO. 23

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

BRIDGE NO. 23 ON SR 1105
OVER CEDAR CREEK

REVISIONS						SHEET NO.
NO.	BY	DATE	NO.	BY	DATE	4
1			3			TOTAL SHEETS
2			4			

5/14/1995
10/24/2014
R:\Projects\17BP.5.R.30\17BP.5.R.30.dwg
ICB - ENGINEERING

5/14/99




PROJECT REFERENCE NO. 17BP.5.R.30	SHEET NO. 5
ROADWAY DESIGN ENGINEER DAVID C. WALKER 10-24-14	HYDRAULICS ENGINEER ANTHONY J. CORNER 10/24/14

BRIDGE HYDRAULIC DATA

DESIGN DISCHARGE = 4300 CFS
 DESIGN FREQUENCY = 25 YRS
 DESIGN HW ELEVATION = 261.4 FT
 BASE DISCHARGE = 6000 CFS
 BASE FREQUENCY = 100 YRS
 BASE HW ELEVATION = 263.2 FT
 OVERTOPPING DISCHARGE = 6500 CFS
 OVERTOPPING FREQUENCY = 25+ YRS
 OVERTOPPING ELEVATION = 264.1 FT

DATE OF SURVEY = 5/23/12
 W.S. ELEVATION AT DATE OF SURVEY = 252.7 FT

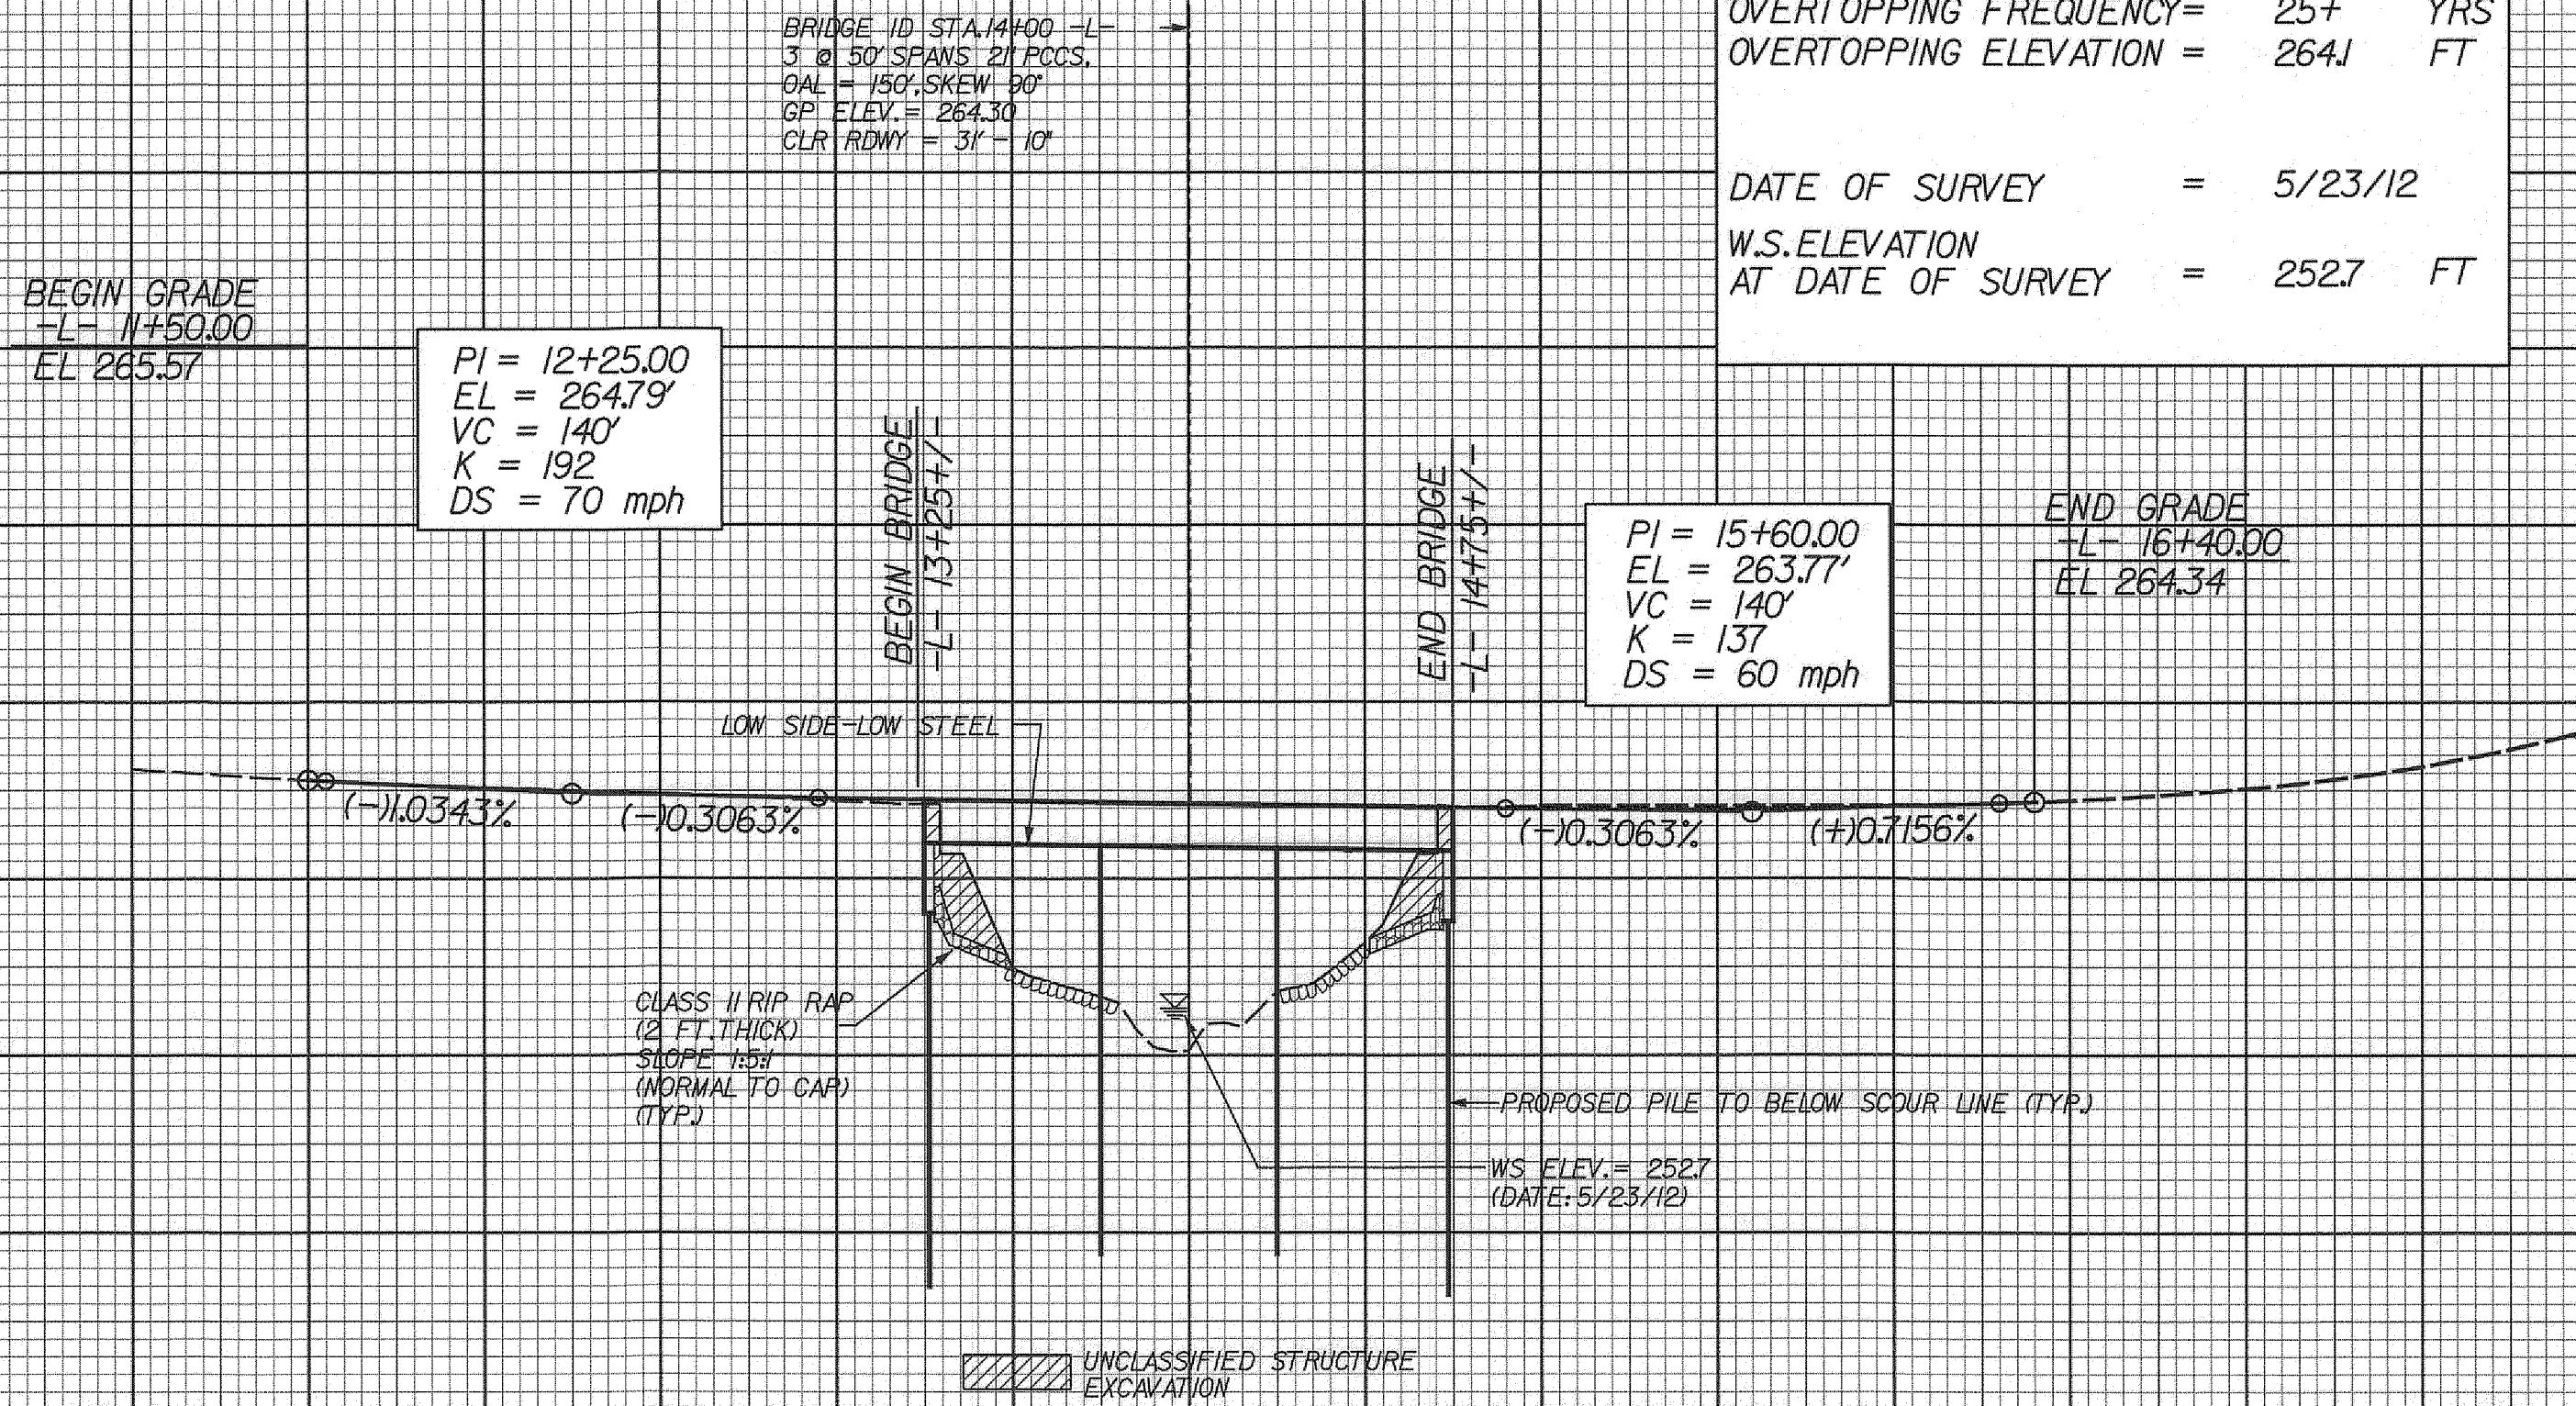

PROJECT NO. 17BP.5.R.30
 COUNTY: FRANKLIN
 STATION: 14+00.00 -L- (90 SKEW)
 REPLACES BRIDGE NO. 23

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

BRIDGE NO. 23 ON SR 1105
 OVER CEDAR CREEK

REVISIONS						SHEET NO.
NO.	BY	DATE	NO.	BY	DATE	5
1			3			TOTAL SHEETS
2			4			

10/24/2014 10:24:23 AM C:\Users\psh05\OneDrive\Documents\Projects\17BP.5.R.30\17BP.5.R.30.dgn

10 11 12 13 14 15 16 17

GENERAL NOTES

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS, AND ROADWAY DETAILS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS OR RESULT IN DUPLICATE OR UNDESIRE OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING, OR REMOVAL OF DEVICES AS DIRECTED BY THE ENGINEER.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT EXCEPT WHEN OTHERWISE NOTED IN THE PLAN OR DIRECTED BY THE ENGINEER.

LANE AND SHOULDER CLOSURE REQUIREMENTS

- A) WHEN PERSONNEL AND/OR EQUIPMENT ARE WORKING WITHIN 15 FT OF AN OPEN TRAVEL LANE, CLOSE THE NEAREST OPEN SHOULDER USING ROADWAY STANDARD DRAWING NO. 1101.04 UNLESS THE WORK AREA IS PROTECTED BY BARRIER OR GUARDRAIL OR A LANE CLOSURE IS INSTALLED.

TRAFFIC PATTERN ALTERATIONS

- B) NOTIFY THE ENGINEER THIRTY (30) CALENDAR DAYS PRIOR TO ANY TRAFFIC PATTERN ALTERATION.

SIGNING

- C) PROVIDE SIGNING AND DEVICES REQUIRED TO CLOSE THE ROAD ACCORDING TO THE ROADWAY STANDARD DRAWINGS AND TRAFFIC CONTROL PLANS.

PROVIDE SIGNING REQUIRED FOR THE OFF-SITE DETOUR ROUTE AS SHOWN IN THE TRAFFIC CONTROL PLANS.

- D) COVER OR REMOVE ALL SIGNS AND DEVICES REQUIRED TO CLOSE THE ROAD WHEN ROAD CLOSURE IS NOT IN OPERATION.

COVER OR REMOVE ALL SIGNS REQUIRED FOR THE OFF-SITE DETOUR WHEN THE DETOUR IS NOT IN OPERATION.

- E) ENSURE ALL NECESSARY SIGNING IS IN PLACE PRIOR TO ALTERING ANY TRAFFIC PATTERN.

TRAFFIC CONTROL DEVICES

- F) PLACE TYPE III BARRICADES, WITH "ROAD CLOSED" SIGN R11-2 ATTACHED, OF SUFFICIENT LENGTH TO CLOSE ENTIRE ROADWAY.

PAVEMENT MARKING AND MARKERS

- G) INSTALL PAVEMENT MARKINGS ON THE FINAL SURFACE AS FOLLOWS:

<u>ROAD NAME</u>	<u>MARKING</u>
SR 1105 (MAYS CROSSROADS RD)	PAINT

- H) INSTALL PAVEMENT MARKINGS ON THE FINAL SURFACE ACCORDING TO THE ROADWAY STANDARDS.

- I) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

MISCELLANEOUS

- J) MAINTAIN ACCESS TO ALL RESIDENCES AND BUSINESSES BETWEEN THE CLOSURE POINTS AT ALL TIMES DURING CONSTRUCTION.

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

<u>STD. NO.</u>	<u>TITLE</u>
1101.03	TEMPORARY ROAD CLOSURES
1101.04	TEMPORARY SHOULDER CLOSURES
1110.02	PORTABLE WORK ZONE SIGNS
1145.01	BARRICADES
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES AND MOUNTING
1262.01	GUARDRAIL END DELINEATION

PHASING

STEP 1

USING ROADWAY STANDARD DRAWING NUMBER 1101.04, SHEET 1 OF 1, INSTALL ALL DETOUR SIGNING KEEPING SIGNS COVERED.

INSTALL AND ACTIVATE CMS BOARDS 14 DAYS BEFORE CLOSING SR 1105 (MAYS CROSSROADS) IN STEP 2.

STEP 2

PRIOR TO CLOSING SR 1105 (MAYS CROSSROADS RD.), UNCOVER ALL DETOUR SIGNING AND OPEN DETOUR TO TRAFFIC.

USING ROADWAY STANDARD DRAWING NUMBER 1101.03, SHEET 1 OF 9, CLOSE SR 1105 (MAYS CROSSROADS RD.).

STEP 3

DISMANTLE AND REMOVE EXISTING BRIDGE.

STEP 4

COMPLETE CONSTRUCTION OF PROPOSED STRUCTURE, APPROACH ROADWAY TIE-INS, AND ASSOCIATED ITEMS.

STEP 5



PLACE FINAL PAVEMENT MARKINGS ON SR 1105 (MAYS CROSSROADS RD.) AND OPEN TO TRAFFIC.


STEP 6

USING ROADWAY STANDARD DRAWING NUMBER 1101.04, SHEET 1 OF 1, REMOVE ALL DETOUR SIGNING AND ALL TRAFFIC CONTROL DEVICES.

FINAL PAVEMENT MARKING SCHEDULE

<u>DESCRIPTION</u>	<u>PAY ITEM</u>
WHITE EDGELINE (2X)	PAINT (4")
DOUBLE YELLOW CENTER LINE (2X)	PAINT (4")

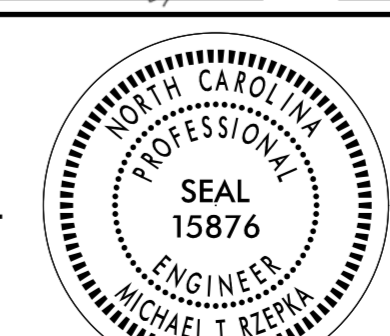
APPROVED: <i>Michael T. Rzepka</i>	DATE: 10-13-14	GENERAL NOTES, PHASING, ROADWAY STANDARD DRAWINGS FINAL PAVEMENT MARKING SCHEDULE	
SEAL 	SCALE: NONE		
	DATE: OCT '14	REVISIONS	
	DWG. BY: YTM		
	DESIGN BY: AKP		
REVIEWED BY: MTR	CADD FILE		

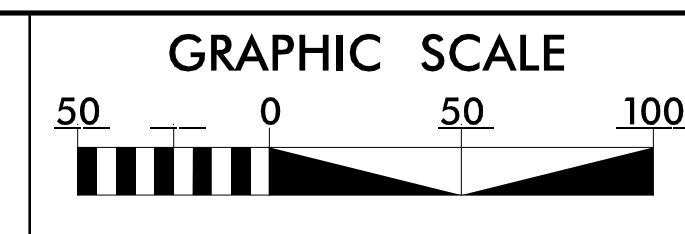

PROJECT REFERENCE NO.	SHEET NO.
17-BP-5.R.30	EC-1/CONST.4
RW SHEET NO.	
ROADSIDE ENVIRONMENTAL PROJECT ENGINEER	


LEVEL III CERTIFIED BY:
ALEXANDER SNIDER, E.I.
CERTIFICATION NUMBER: 3064
ISSUED: APRIL 9, 2013

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 4

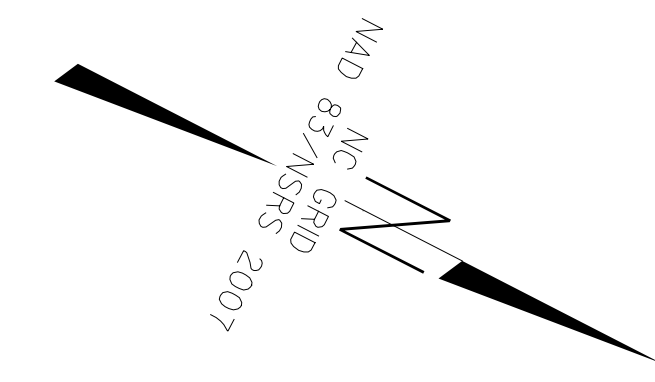

EROSION AND SEDIMENT CONTROL MEASURES

Std. #	Description	Symbol
1605.01	Temporary Silt Fence	
1606.01	Special Sediment Control Fence	/// /// ///

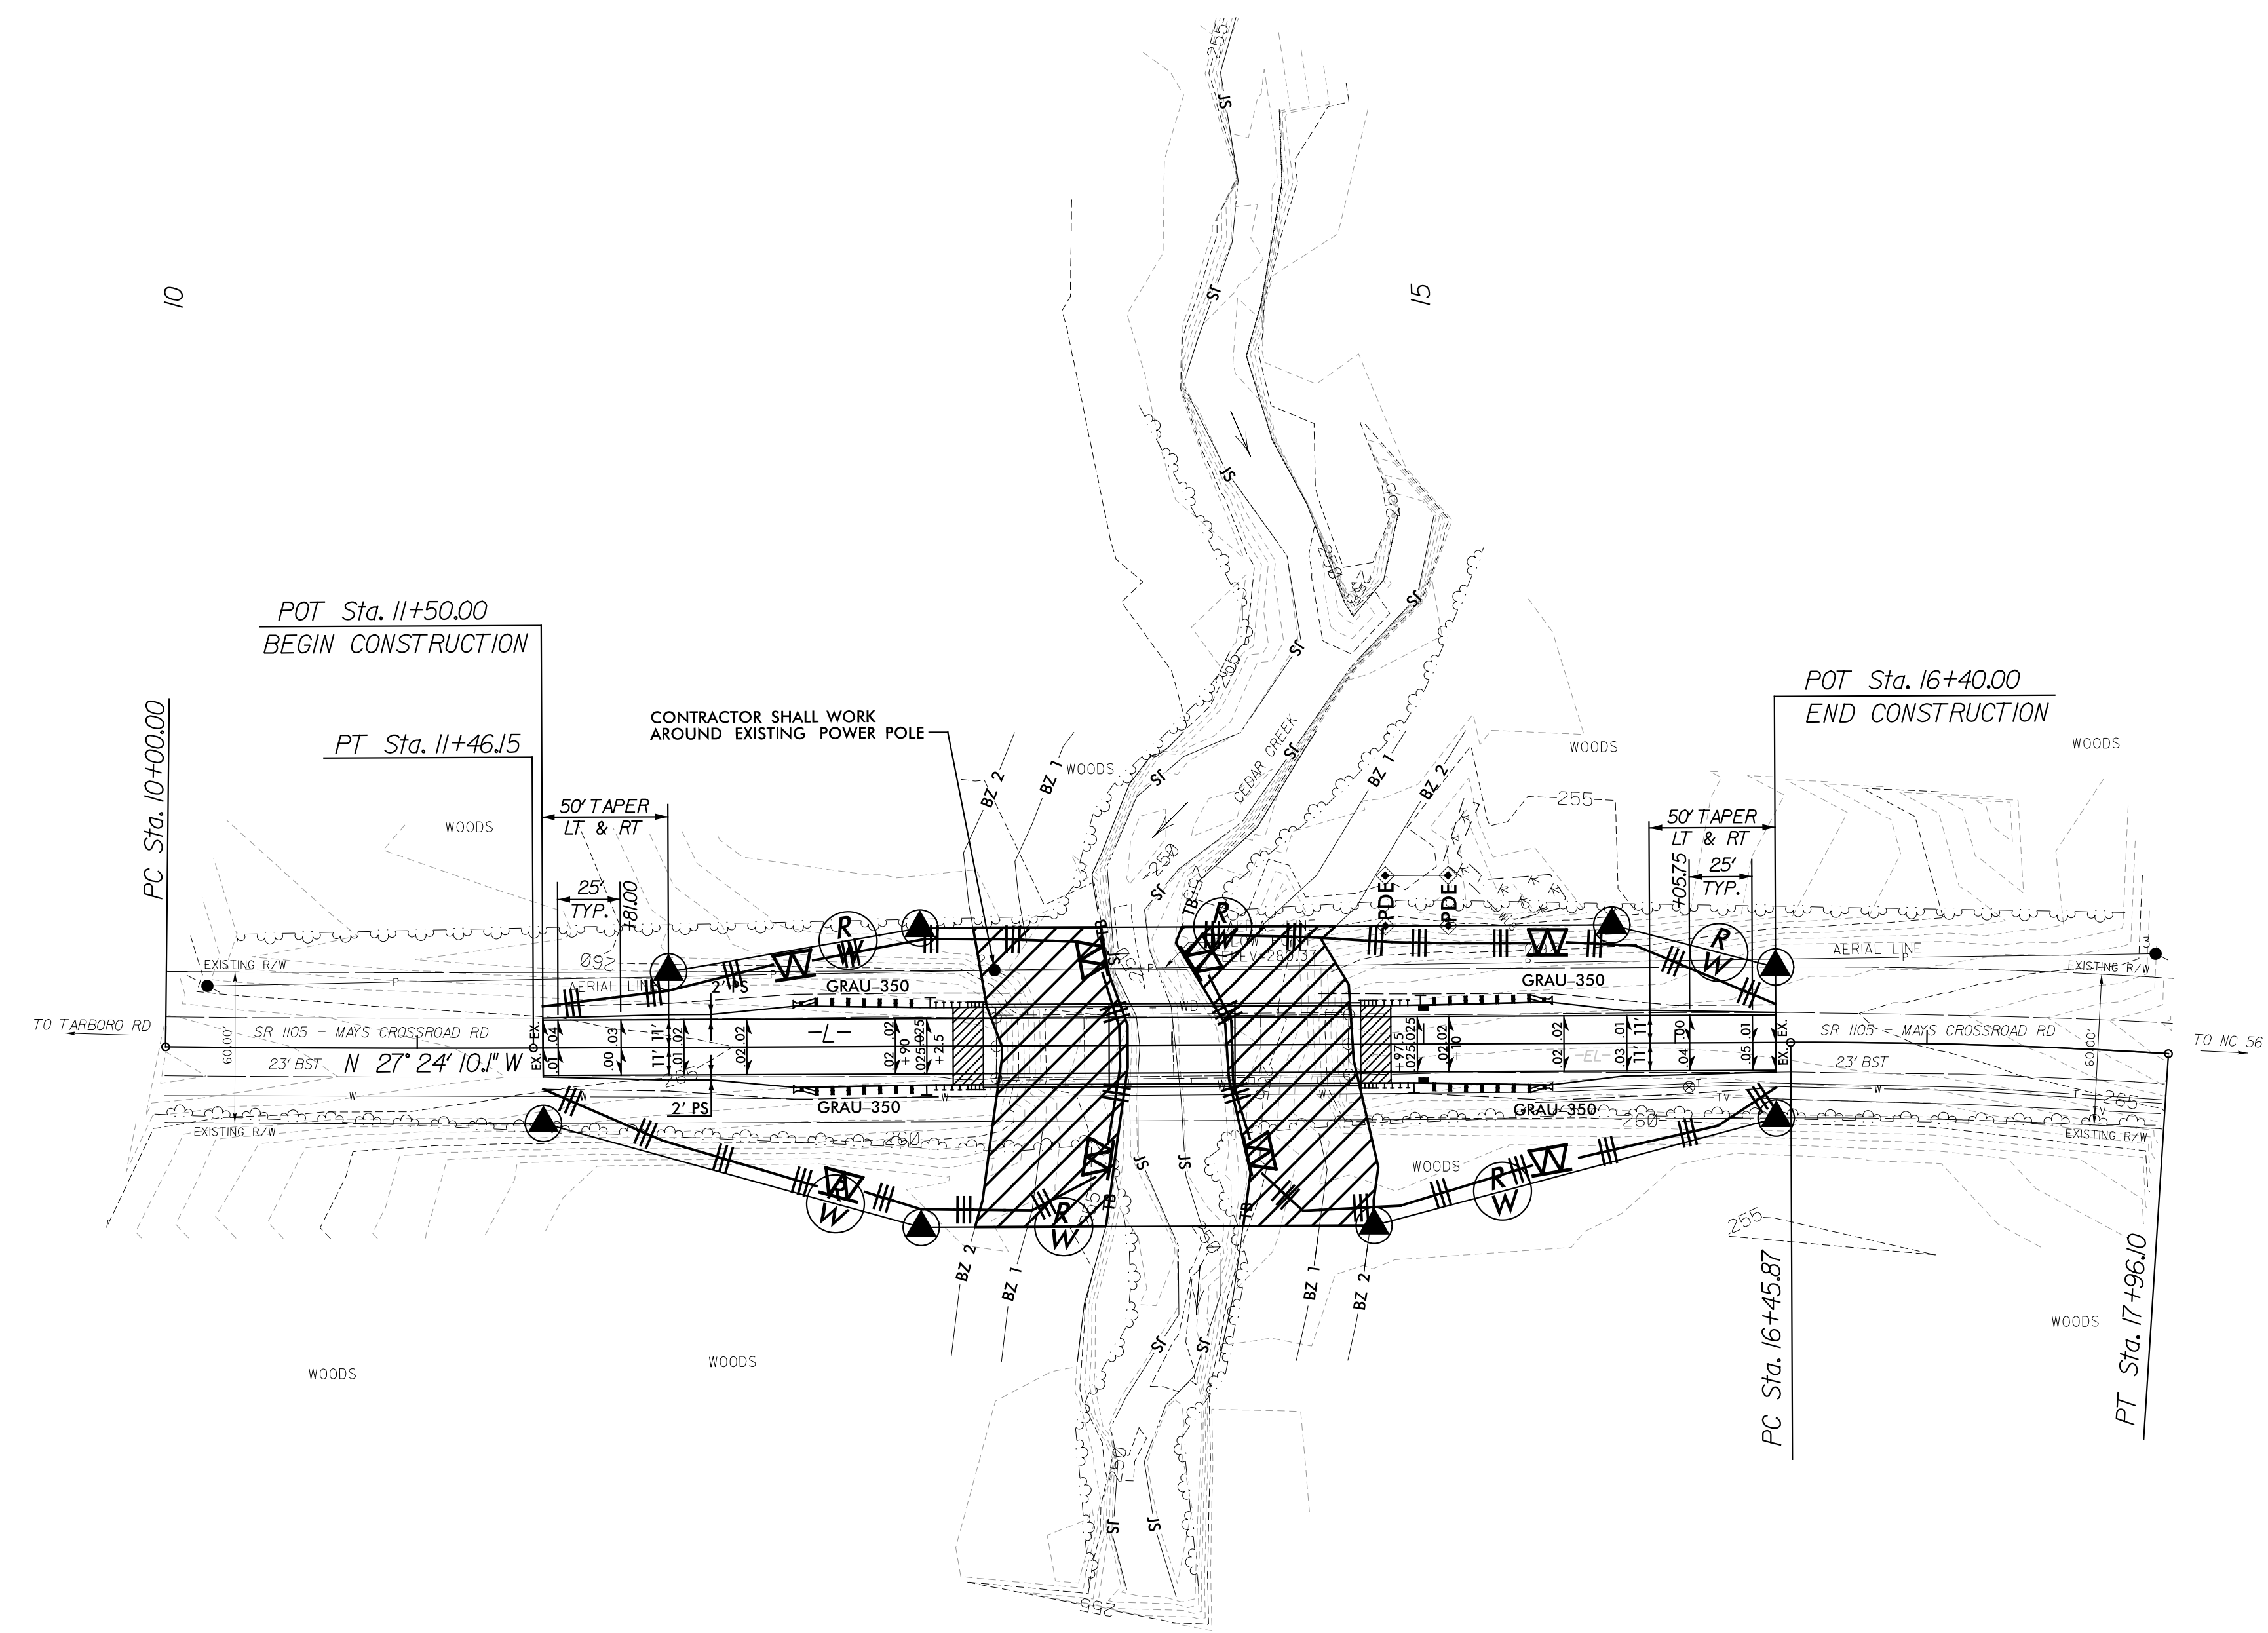

ALEXANDER SNIDER, E.I.
ROADSIDE ENVIRONMENTAL ENGINEER
3064
LEVEL III CERTIFICATION NUMBER
TRENTON J. CORMIER, P.E.
ROADSIDE ENVIRONMENTAL PROJECT ENGINEER
118
LEVEL III CERTIFICATION NUMBER

 ENVIRONMENTALLY SENSITIVE AREA
SEE PROJECT SPECIAL PROVISIONS

NOTE:
ALL EROSION CONTROL DEVICES SHOWN ARE LOCATED
WITHIN EXISTING RW OR EASEMENT.


THESE EROSION AND SEDIMENT CONTROL PLANS COMPLY
WITH THE REGULATIONS SET FORTH BY THE
NCG-010000 GENERAL CONSTRUCTION PERMIT EFFECTIVE AUGUST 3, 2011
ISSUED BY THE NORTH CAROLINA DEPARTMENT OF ENVIRONMENT AND
NATURAL RESOURCES DIVISION OF WATER QUALITY.

Prepared in the Office of:
FLORENCE & HUTCHESON
5121 KINGDOM WAY, SUITE 100
RALEIGH NC 27607
NC License No: F-0258
2012 STANDARD SPECIFICATIONS

- Roadway Standard Drawings
- The following roadway english standards as appear in "Roadway Standard Drawings"- Roadway Design Unit - N. C. Department of Transportation - Raleigh, N. C., dated January 2012 and the latest revision thereto are applicable to this project and by reference hereby are considered a part of these plans.
- | | |
|--|--|
| 1604.01 Railroad Erosion Control Detail | 1632.01 Rock Inlet Sediment Trap Type A |
| 1605.01 Temporary Silt Fence | 1632.02 Rock Inlet Sediment Trap Type B |
| 1606.01 Special Sediment Control Fence | 1632.03 Rock Inlet Sediment Trap Type C |
| 1607.01 Gravel Construction Entrance | 1633.01 Temporary Rock Silt Check Type A |
| 1622.01 Temporary Berms and Slope Drains | 1633.02 Temporary Rock Silt Check Type B |
| 1630.01 Riser Basin | 1634.01 Temporary Rock Sediment Dam Type A |
| 1630.02 Silt Basin Type B | 1634.02 Temporary Rock Sediment Dam Type B |
| 1630.03 Temporary Silt Ditch | 1635.01 Rock Pipe Inlet Sediment Trap Type A |
| 1630.04 Stilling Basin | 1635.02 Rock Pipe Inlet Sediment Trap Type B |
| 1630.05 Temporary Diversion | 1640.01 Coir Fiber Baffle |
| 1630.06 Special Stilling Basin | 1645.01 Temporary Stream Crossing |
| 1631.01 Matting Installation | |

 **Florence & Hutcheson**
CONSULTING ENGINEERS
5121 Kingdom Way, Suite 100 Raleigh, NC 27607
NC License No: F-0258



4/9/2013 R:\Hydro\Projects\Erosion_Control\cadd\Franklin-023_hyd_erosion_c&g.dgn K. & Associates, P.C.

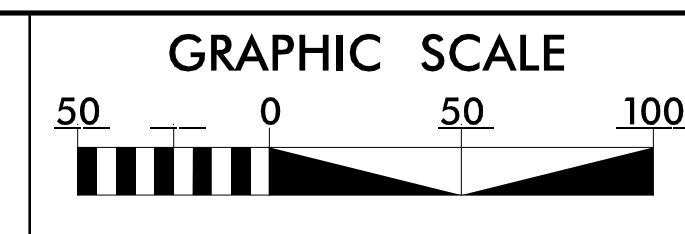

PROJECT REFERENCE NO. 17.BP.5.R.30
 SHEET NO. EC-2/CONST.4
 RW SHEET NO.
 ROADSIDE ENVIRONMENTAL PROJECT ENGINEER


LEVEL III CERTIFIED BY:
 ALEXANDER SNIDER, E.I.
 CERTIFICATION NUMBER: 3064
 ISSUED: APRIL 9, 2013

FINAL EROSION CONTROL FOR
 CONSTRUCTION SHEET 4

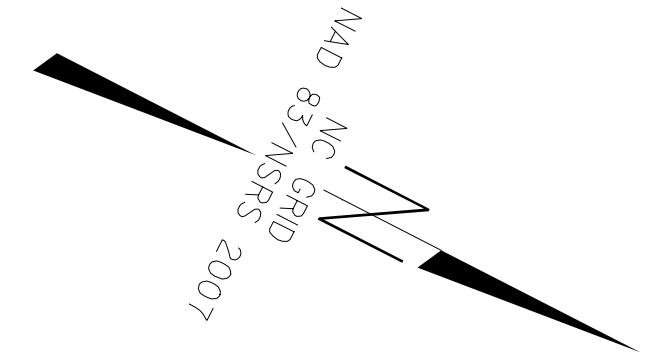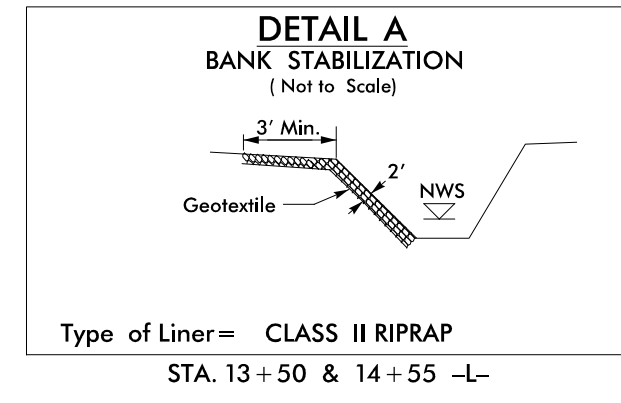

EROSION AND SEDIMENT CONTROL MEASURES

Std. #	Description	Symbol
1605.01	Temporary Silt Fence	
1606.01	Special Sediment Control Fence	▲▲▲▲▲▲▲▲
1632.03	Rock Inlet Sediment Trap: Type C	C

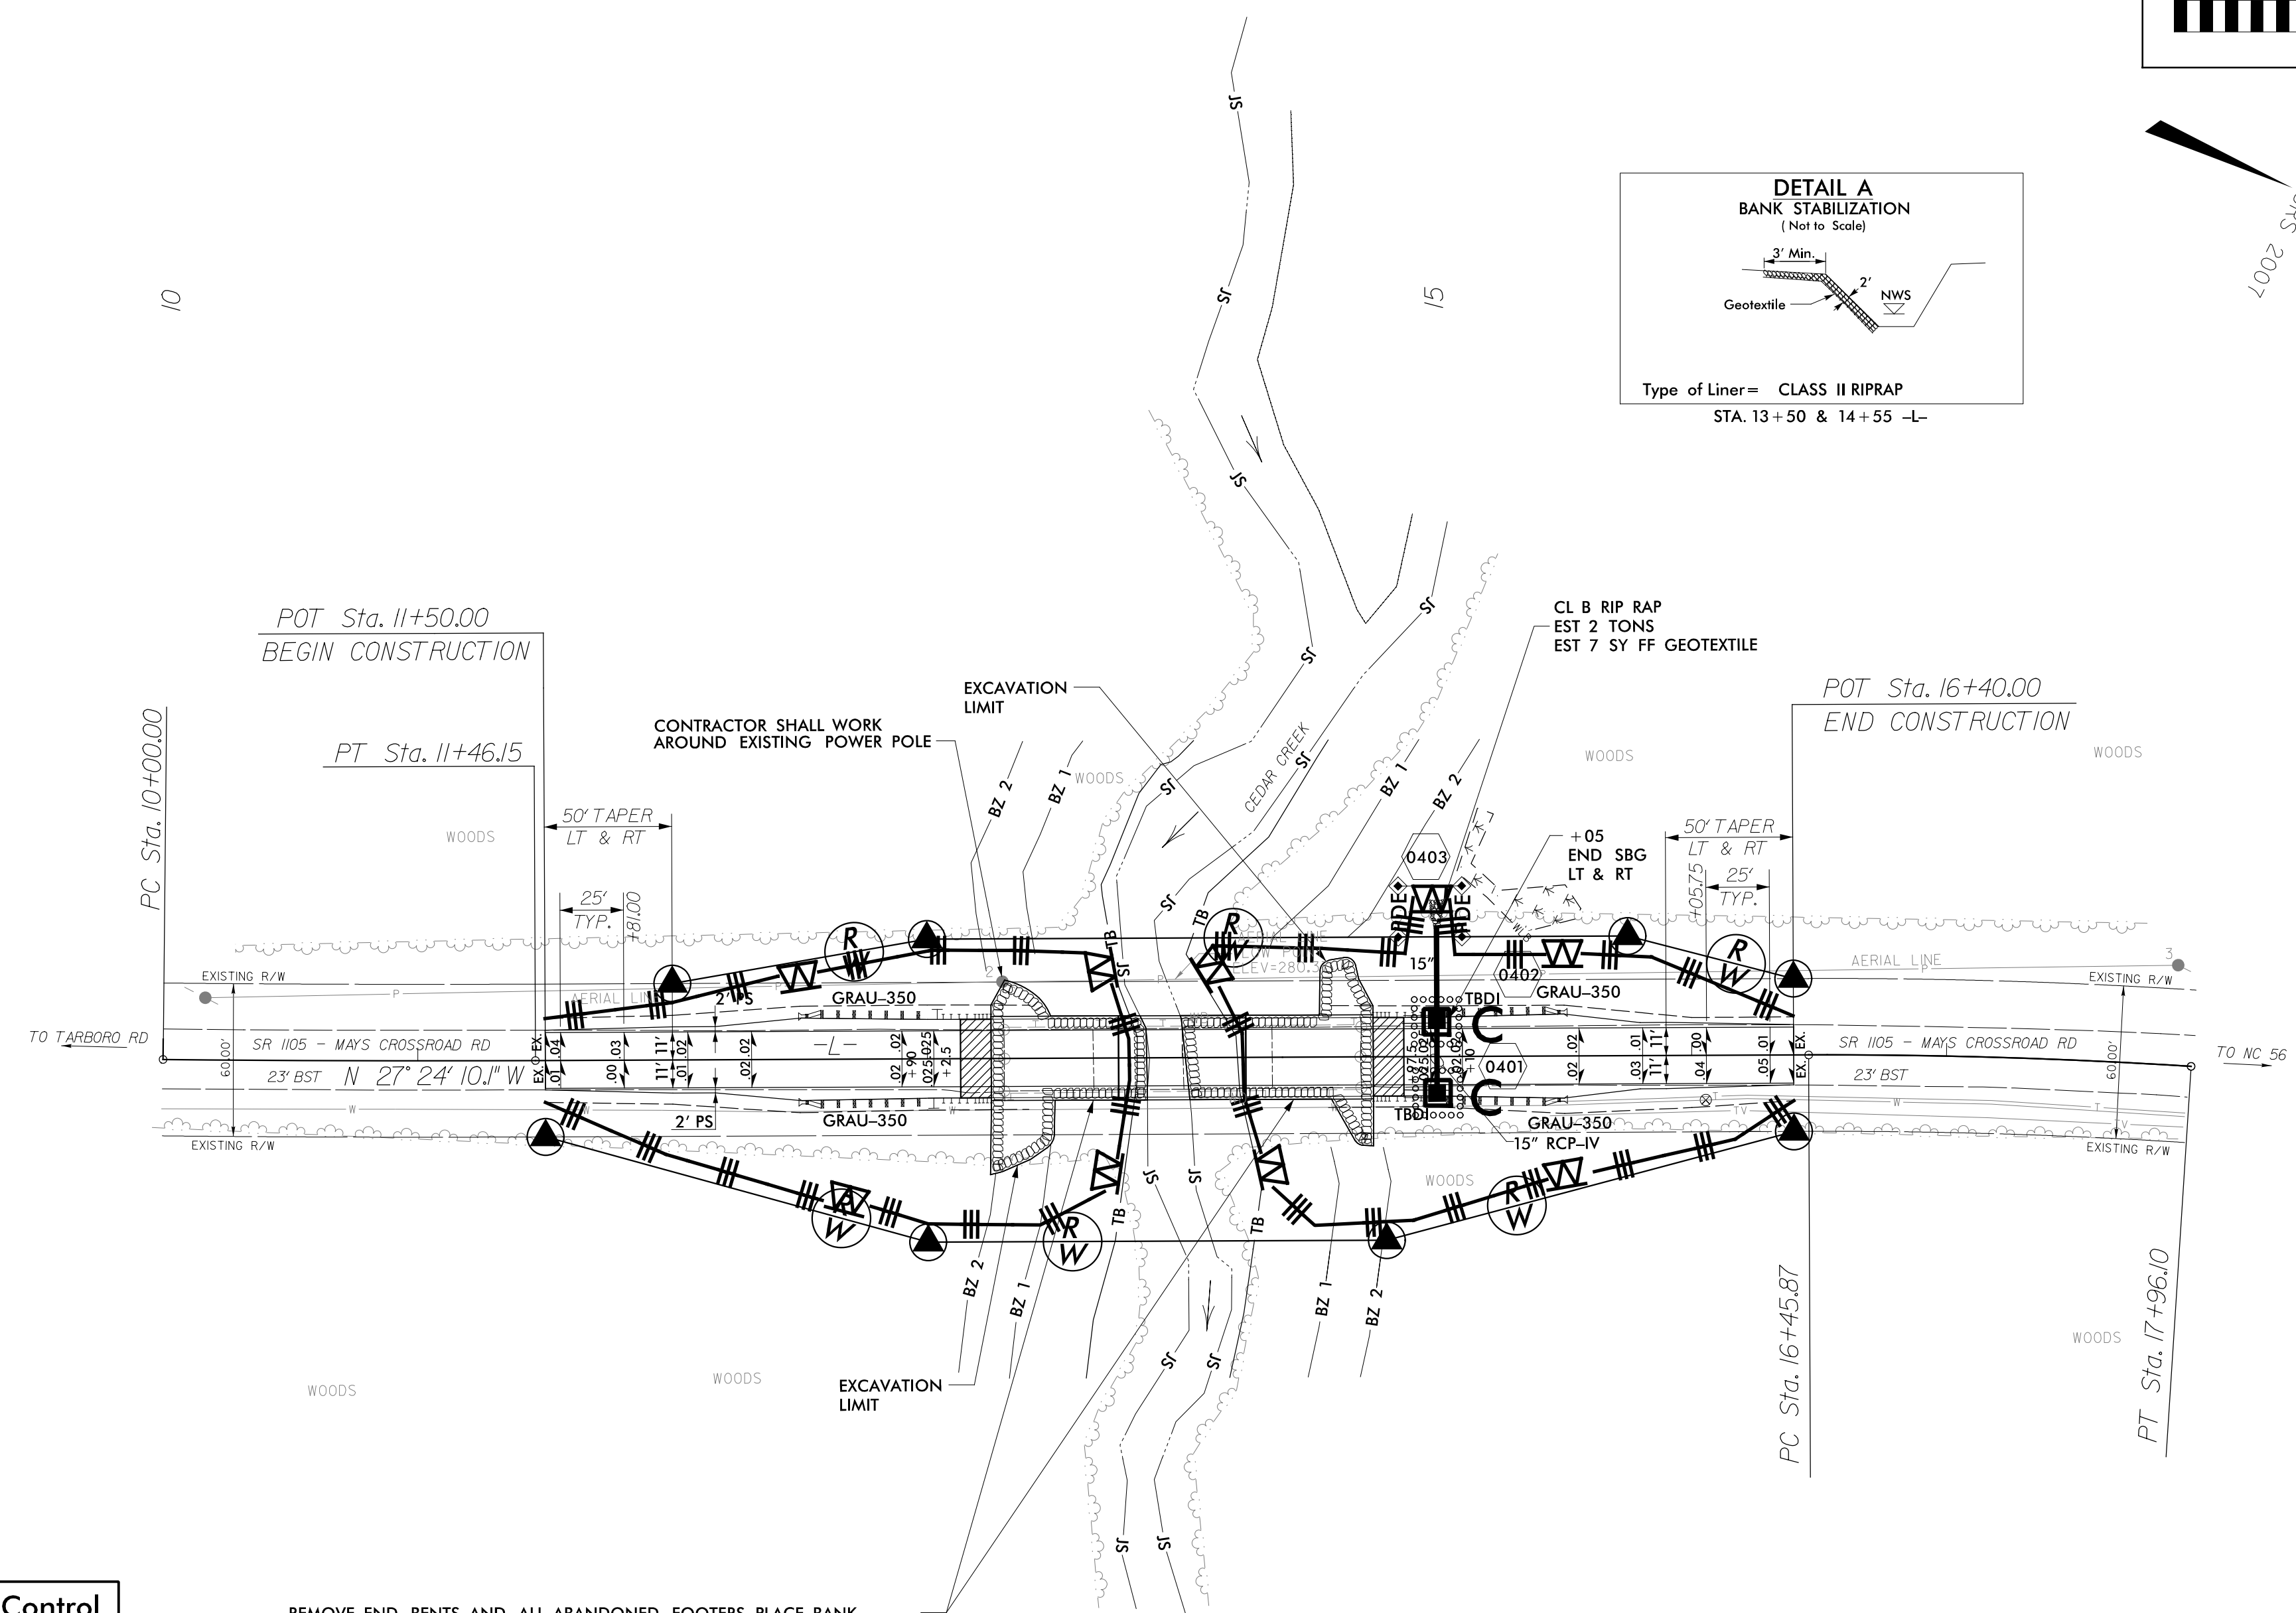

Place Matting for Erosion Control
 on 2:1 Slope

Contractor will install impervious dike to dewater both streambanks to allow for removal of existing footers in the dry
 Use "NCDOT Best Management Practices for Construction and Maintenance Activities" manual for isolation and dewatering operations

REMOVE END BENTS AND ALL ABANDONED FOOTERS, PLACE BANK STABILIZATION w/ CLASS II RIP RAP AND EXTEND RIP RAP TO AREA SHOWN ON BOTH STREAM BANKS, SEE DETAIL A, USE IMPERVIOUS DIKE NCDOT STANDARD BMP (INCIDENTAL TO STRUCTURE REMOVAL) ALONG STREAM BANKS TO DEWATER AND ISOLATE ADJACENT WORK AREA TO REMOVE ABANDONED BENTS AND INSTALL BANK STABILIZATION IN THE DRY
 EST 610 TONS
 EST 725 SY GEOTEXTILE

NOTE: IMPERVIOUS DIKE SHALL BE CONSIDERED INCIDENTAL TO THE REMOVAL OF THE EXISTING STRUCTURE.

THESE EROSION AND SEDIMENT CONTROL PLANS COMPLY WITH THE REGULATIONS SET FORTH BY THE NCG-010000 GENERAL CONSTRUCTION PERMIT EFFECTIVE AUGUST 3, 2011 ISSUED BY THE NORTH CAROLINA DEPARTMENT OF ENVIRONMENT AND NATURAL RESOURCES DIVISION OF WATER QUALITY.

Prepared in the Office of:
FLORENCE & HUTCHESON
 5121 KINGDOM WAY, SUITE 100
 RALEIGH NC 27607
 NC License No: F-0258
2012 STANDARD SPECIFICATIONS

- Roadway Standard Drawings
- The following roadway english standards as appear in "Roadway Standard Drawings"- Roadway Design Unit - N. C. Department of Transportation - Raleigh, N. C., dated January 2012 and the latest revision thereto are applicable to this project and by reference hereby are considered a part of these plans.
- | | |
|--|--|
| 1604.01 Railroad Erosion Control Detail | 1632.01 Rock Inlet Sediment Trap Type A |
| 1605.01 Temporary Silt Fence | 1632.02 Rock Inlet Sediment Trap Type B |
| 1606.01 Special Sediment Control Fence | 1632.03 Rock Inlet Sediment Trap Type C |
| 1607.01 Gravel Construction Entrance | 1633.01 Temporary Rock Silt Check Type A |
| 1622.01 Temporary Berms and Slope Drains | 1633.02 Temporary Rock Silt Check Type B |
| 1630.01 Riser Basin | 1634.01 Temporary Rock Sediment Dam Type A |
| 1630.02 Silt Basin Type B | 1634.02 Temporary Rock Sediment Dam Type B |
| 1630.03 Temporary Silt Ditch | 1635.01 Rock Pipe Inlet Sediment Trap Type A |
| 1630.04 Stilling Basin | 1635.02 Rock Pipe Inlet Sediment Trap Type B |
| 1630.05 Temporary Diversion | 1640.01 Coir Fiber Baffle |
| 1630.06 Special Stilling Basin | 1645.01 Temporary Stream Crossing |
| 1631.01 Matting Installation | |

NOTE: ALL EROSION CONTROL DEVICES SHOWN ARE LOCATED WITHIN EXISTING RW OR EASEMENT.



ALEXANDER SNIDER, E.I.
 ROADSIDE ENVIRONMENTAL ENGINEER
 3064
 LEVEL III CERTIFICATION NUMBER
 TRENTON J. CORMIER, P.E.
 ROADSIDE ENVIRONMENTAL PROJECT ENGINEER
 118
 LEVEL III CERTIFICATION NUMBER

4/9/2013 RA\Hydro\Projects\Erosion_Control\cadd\Franklin-023_hyd_erosion_final.dgn K. K. Associates, P.C.

DIVISION OF HIGHWAYS
STATE OF NORTH CAROLINA


SOIL STABILIZATION TIMEFRAMES

<i>SITE DESCRIPTION</i>	<i>STABILIZATION TIME</i>	<i>TIMEFRAME EXCEPTIONS</i>
PERIMETER DIKES, SWALES, DITCHES AND SLOPES	7 DAYS	NONE
HIGH QUALITY WATER (HQW) ZONES	7 DAYS	NONE
SLOPES STEEPER THAN 3:1	7 DAYS	IF SLOPES ARE 10' OR LESS IN LENGTH AND ARE NOT STEEPER THAN 2:1, 14 DAYS ARE ALLOWED.
SLOPES 3:1 OR FLATTER	14 DAYS	7 DAYS FOR SLOPES GREATER THAN 50' IN LENGTH.
ALL OTHER AREAS WITH SLOPES FLATTER THAN 4:1	14 DAYS	NONE, EXCEPT FOR PERIMETERS AND HQW ZONES.

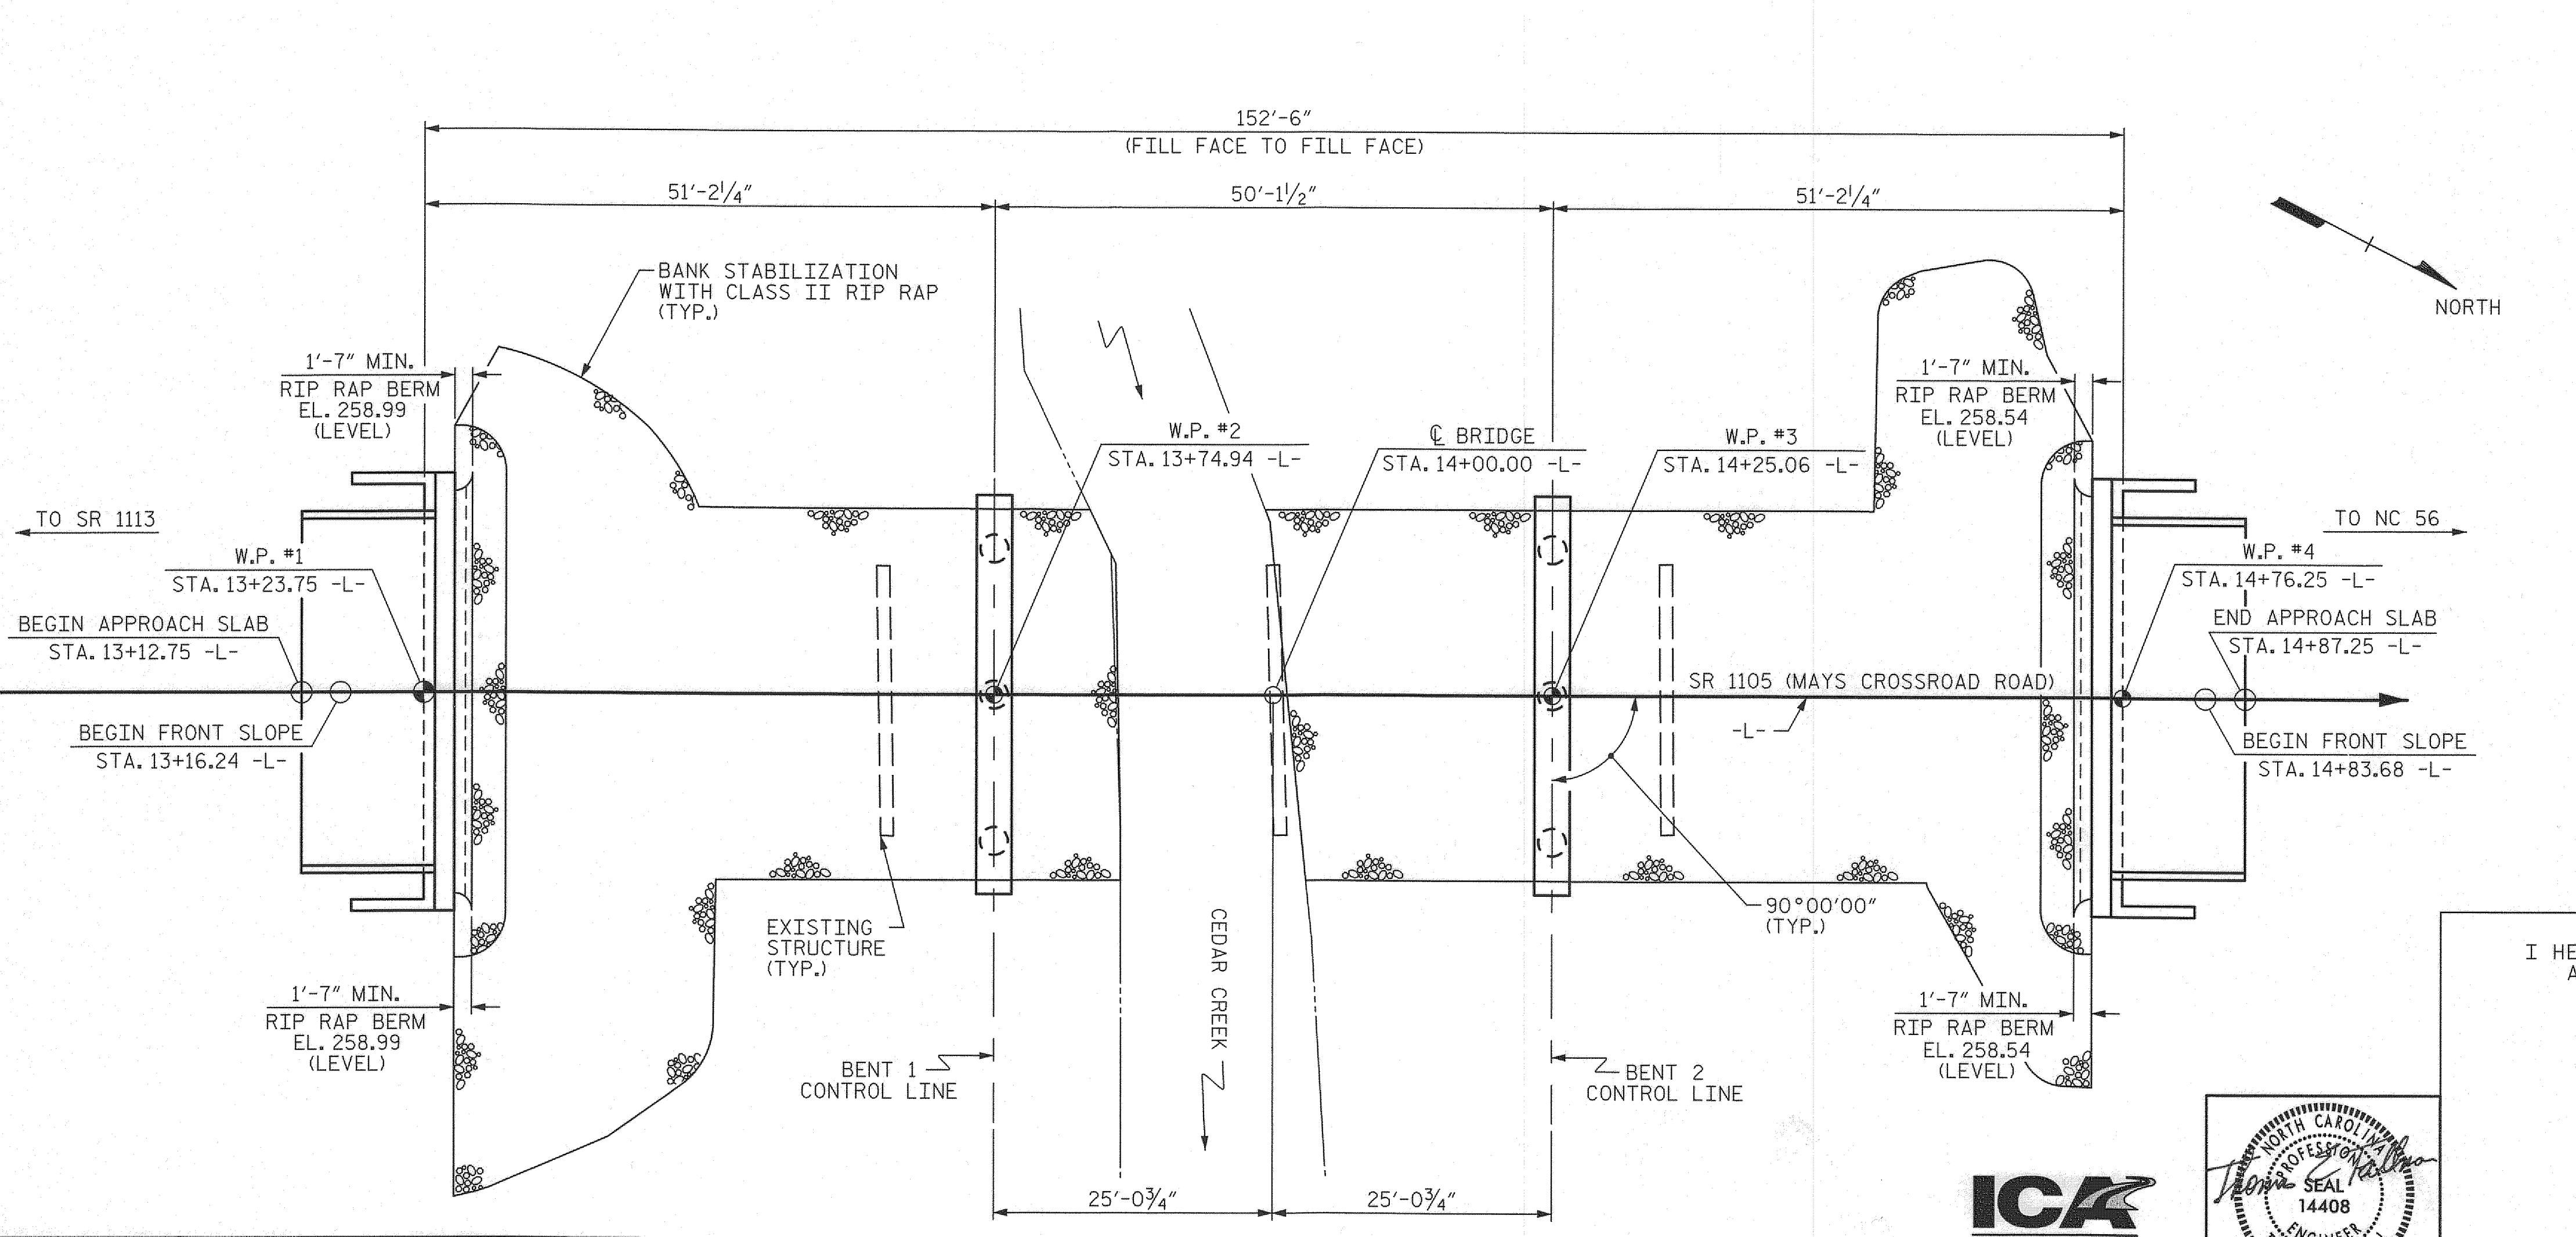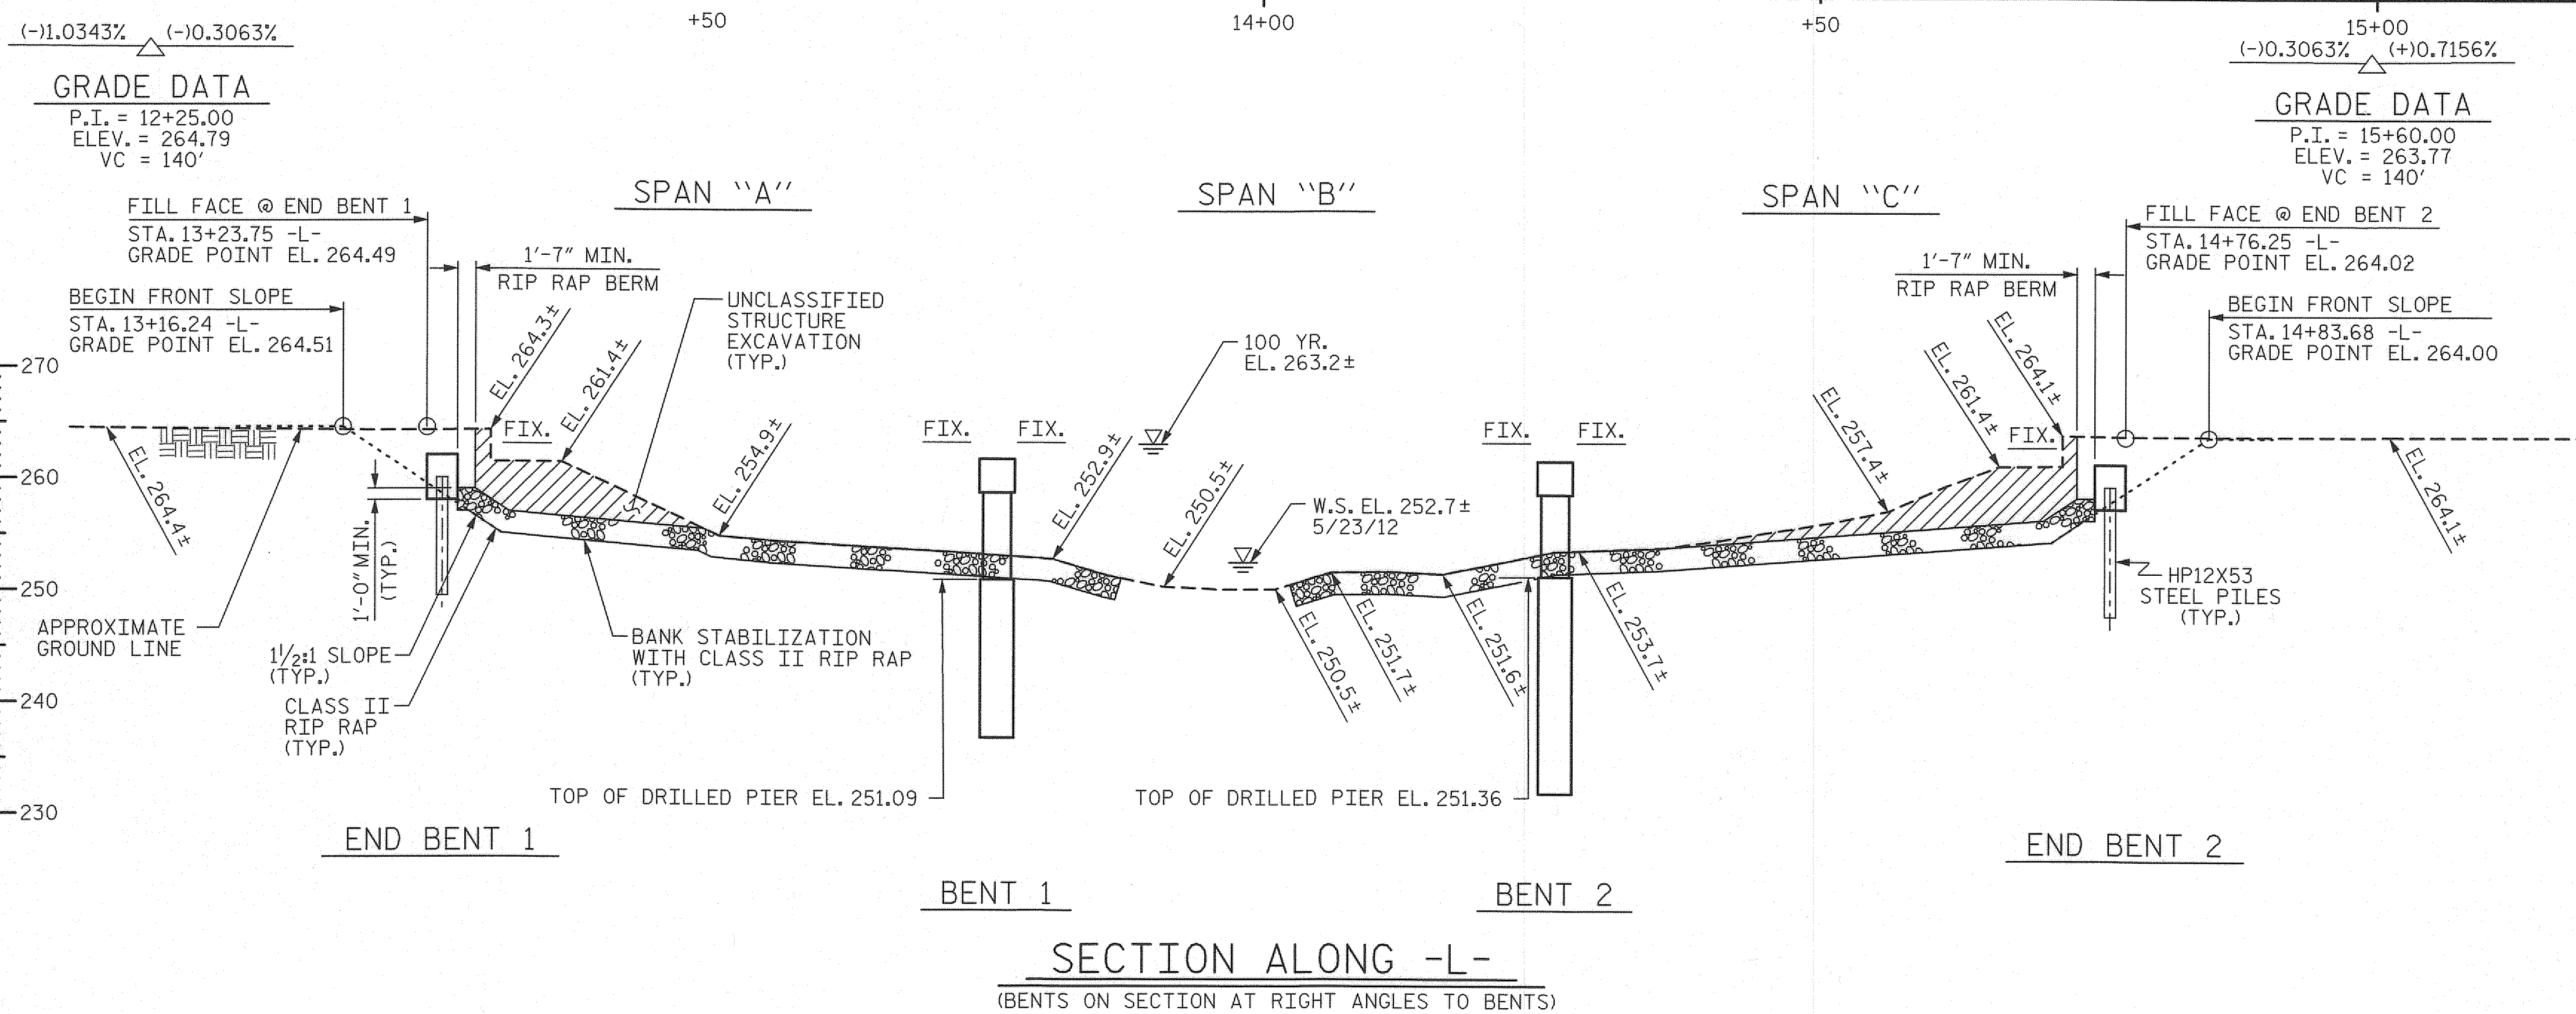

DRAWN BY : D. H. CARTER DATE : OCT 2012
 CHECKED BY : J. E. MONDOLFI DATE : OCT 2012
 DESIGN ENGINEER OF RECORD : T. E. TALLMAN DATE : FEB 2014

PLAN
 (PILES NOT SHOWN FOR CLARITY)

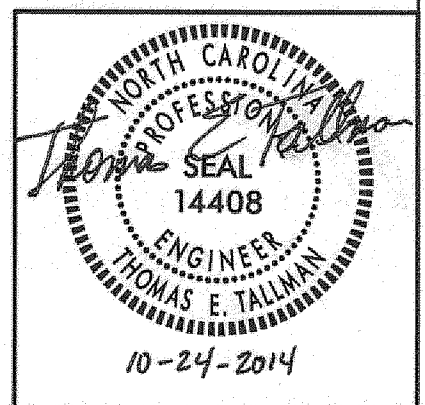

NOTES

ASSUMED LIVE LOAD = HL-93 OR ALTERNATE LOADING.

THIS BRIDGE HAS BEEN DESIGNED IN ACCORDANCE WITH THE REQUIREMENTS OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS.

FOR OTHER DESIGN DATA AND GENERAL NOTES, SEE SHEET SN.

INASMUCH AS THE PAINT SYSTEM ON THE EXISTING STRUCTURAL STEEL CONTAINS LEAD, THE CONTRACTOR'S ATTENTION IS DIRECTED TO ARTICLE 107-1 OF THE STANDARD SPECIFICATIONS. ANY COST RESULTING FROM COMPLIANCE WITH APPLICABLE STATE OR FEDERAL REGULATIONS PERTAINING TO HANDLING OF MATERIALS CONTAINING LEAD BASED PAINT SHALL BE INCLUDED IN THE BID PRICE FOR "REMOVAL OF EXISTING STRUCTURE AT STATION 14+00.00 -L-".

THE MATERIAL IN THE CROSS HATCHED AREA SHALL BE EXCAVATED FOR A DISTANCE OF 30 FEET EACH SIDE OF CENTERLINE ROADWAY AS DIRECTED BY THE ENGINEER. THIS WORK WILL BE PAID FOR AS "UNCLASSIFIED STRUCTURE EXCAVATION", LUMP SUM. SEE SECTION 412 OF THE STANDARD SPECIFICATIONS.

BOTTOM OF EXCAVATION IS AT APPROXIMATE ELEVATION 255.0.

THE SUBSTRUCTURE OF THE EXISTING BRIDGE INDICATED ON THE PLANS IS FROM THE BEST INFORMATION AVAILABLE. SINCE THIS INFORMATION IS SHOWN FOR THE CONVENIENCE OF THE CONTRACTOR, THE CONTRACTOR SHALL HAVE NO CLAIM WHATSOEVER AGAINST THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION FOR ANY DELAYS OR ADDITIONAL COST INCURRED BASED ON DIFFERENCES BETWEEN THE EXISTING BRIDGE SUBSTRUCTURE SHOWN ON THE PLANS AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

REMOVAL OF THE EXISTING BRIDGE SHALL BE PERFORMED SO AS NOT TO ALLOW DEBRIS TO FALL INTO THE WATER. THE CONTRACTOR SHALL REMOVE THE BRIDGE AND SUBMIT PLANS FOR DEMOLITION IN ACCORDANCE WITH ARTICLE 402-2 OF THE STANDARD SPECIFICATIONS.

THE EXISTING STRUCTURE CONSISTING OF ONE 35.5 FOOT, TWO 35.0 FOOT AND ONE 35.5 FOOT LONG STEEL BEAM SPANS; 25.0' CLEAR ROADWAY; 2" ASPHALT WEARING SURFACE ON TIMBER DECK ON TIMBER END & INTERIOR BENTS ON TIMBER CAPS ON TIMBER PILES LOCATED ON THE PROPOSED ALIGNMENT SHALL BE REMOVED. THE EXISTING BRIDGE IS PRESENTLY NOT POSTED FOR LOAD LIMIT.

FOR EROSION CONTROL MEASURES, SEE EROSION CONTROL PLANS.

ASPHALT WEARING SURFACE IS INCLUDED IN ROADWAY QUANTITY ON ROADWAY PLANS.

THIS STRUCTURE HAS BEEN DESIGNED IN ACCORDANCE WITH HEC 18, "EVALUATING SCOUR AT BRIDGES", MAY, 2001.

FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.

FOR CRANE SAFETY, SEE SPECIAL PROVISIONS.


FOR GROUT FOR STRUCTURES, SEE SPECIAL PROVISIONS.

FOR FALSEWORK AND FORMWORK, SEE SPECIAL PROVISIONS.

NOTES CONTINUED ON SHEET S-2.

PROJECT NO. 17BP.5.R.30
 FRANKLIN COUNTY
 STATION: 14+00.00 -L-
 SHEET 1 OF 3 REPLACES BRIDGE NO. 23


I HEREBY CERTIFY THESE PLANS ARE THE AS-BUILT PLANS

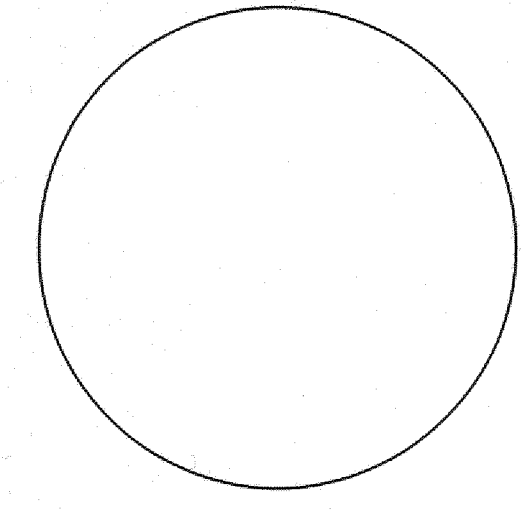

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH					
GENERAL DRAWING					
BRIDGE ON SR 1105 OVER CEDAR CREEK					
REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		
					SHEET NO. S-1
					TOTAL SHEETS 17

10/24/2014
 P:\Lib\Projects\Div05\30-Franklin\23 Structures\Plans\17BP.5.R.30_sd.dgn
 ICA Engineering

BENCH MARK : #1, RR SPIKE IN 22" OAK, STA. 14+91.05 -L-, 145.21' LT, EL. 257.75

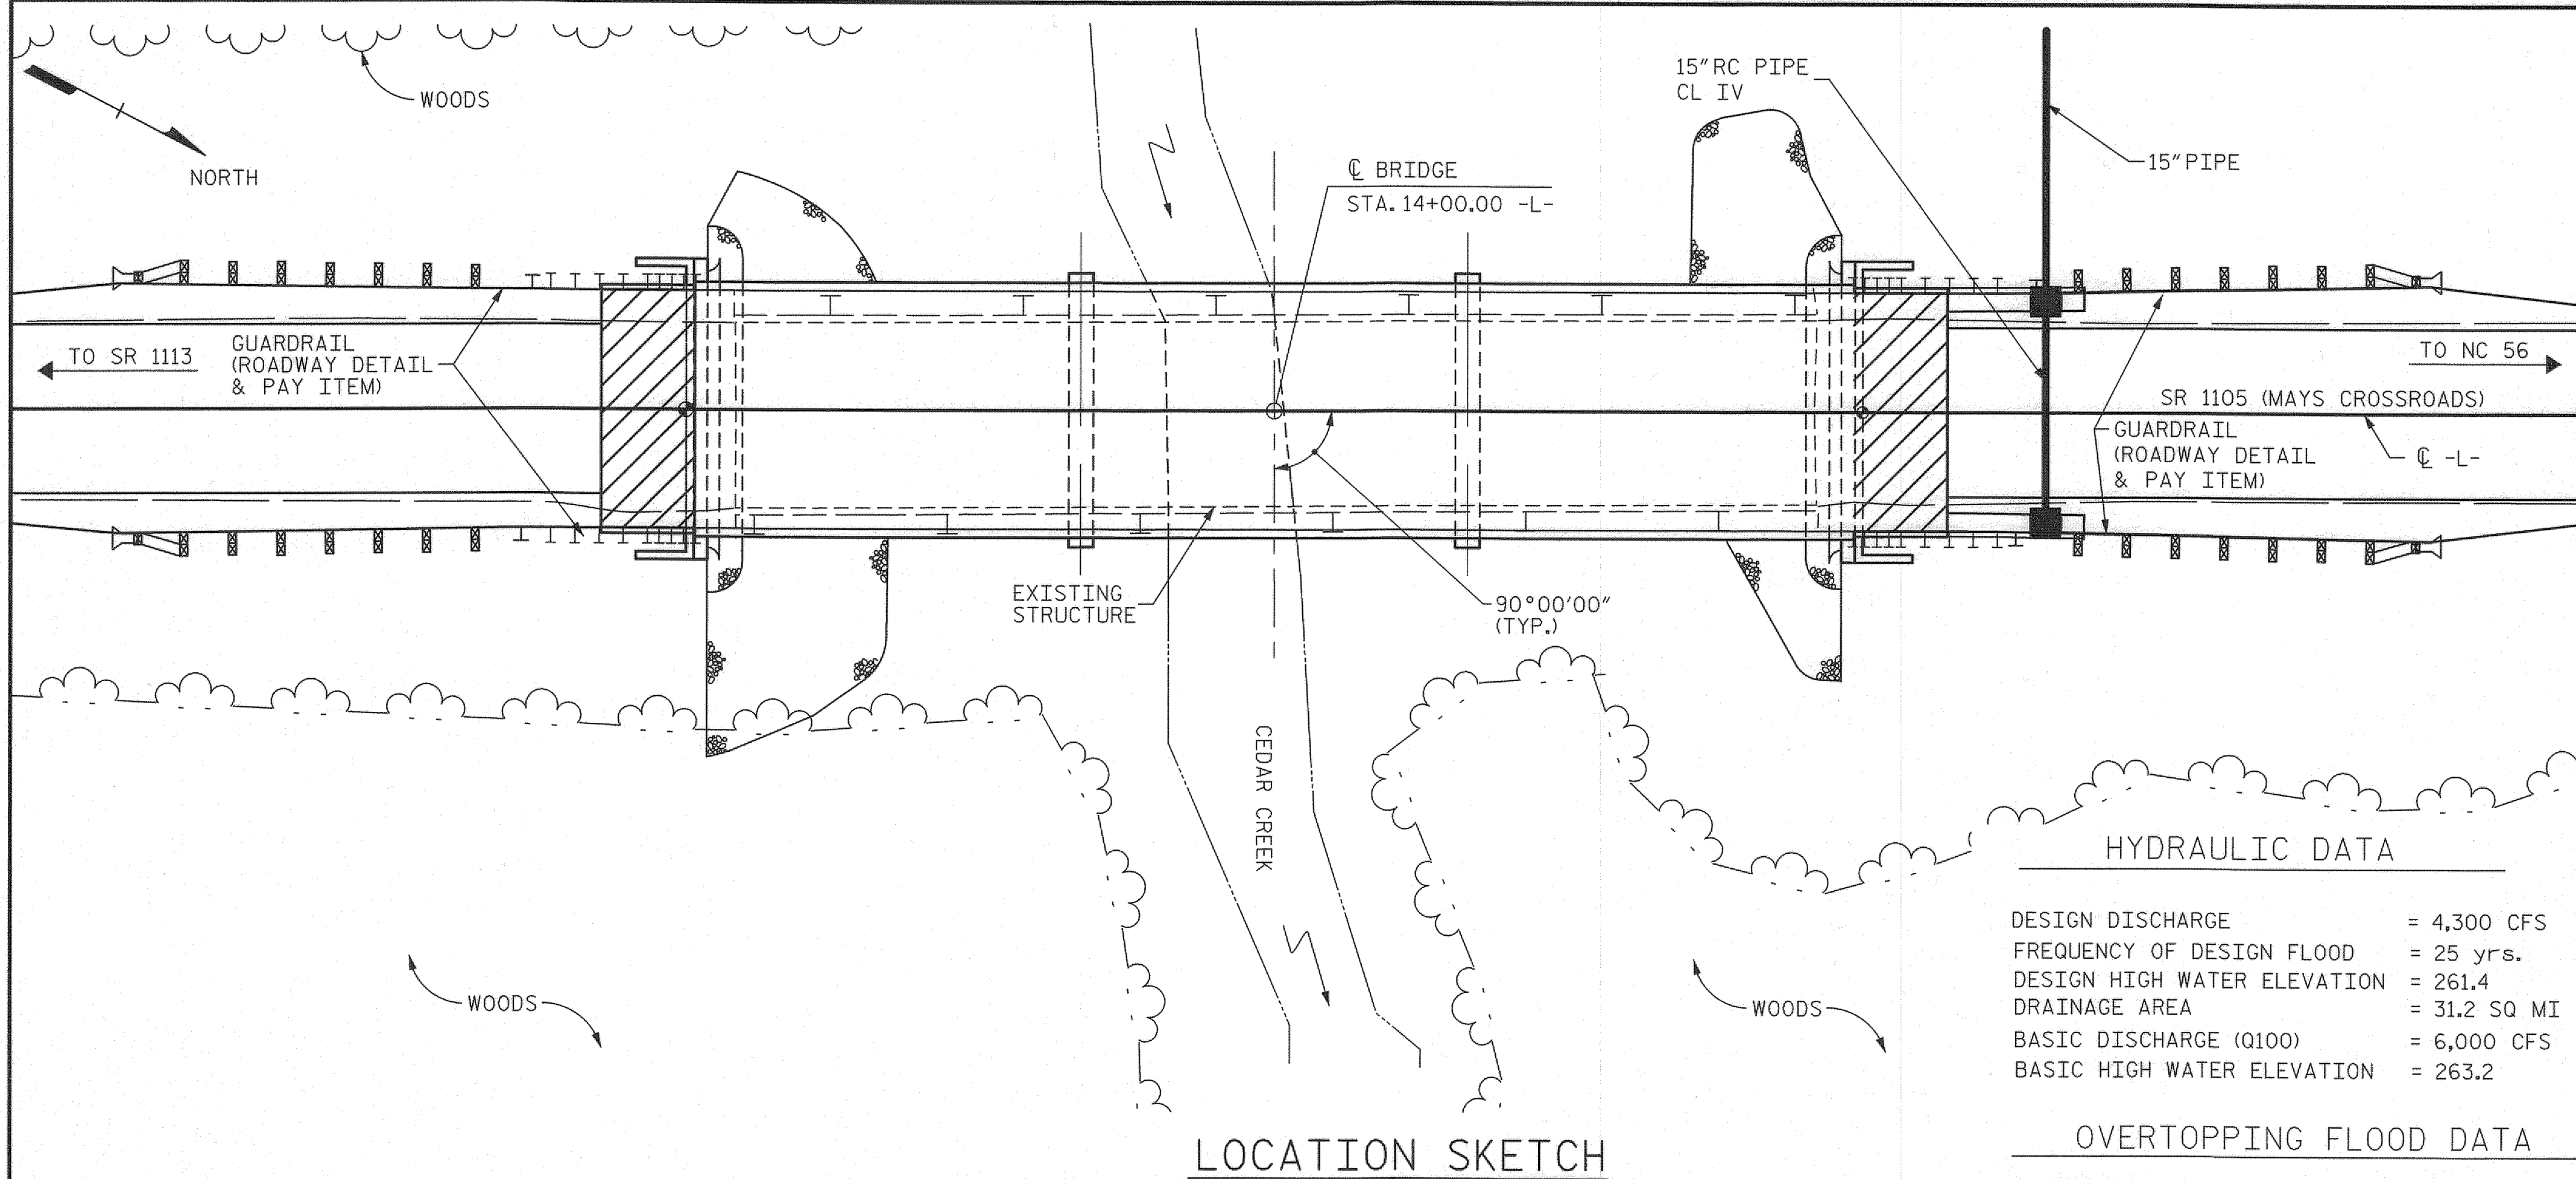

LOCATION SKETCH

NOTE:
FOR UTILITY INFORMATION, SEE
UTILITY PLANS AND SPECIAL PROVISIONS.

HYDRAULIC DATA

DESIGN DISCHARGE	= 4,300 CFS
FREQUENCY OF DESIGN FLOOD	= 25 yrs.
DESIGN HIGH WATER ELEVATION	= 261.4
DRAINAGE AREA	= 31.2 SQ MI
BASIC DISCHARGE (Q100)	= 6,000 CFS
BASIC HIGH WATER ELEVATION	= 263.2

OVERTOPPING FLOOD DATA

OVERTOPPING DISCHARGE	= 6,500 CFS
FREQUENCY OF OVERTOPPING FLOOD	= 25 yrs.+
OVERTOPPING FLOOD ELEVATION	= 264.1

NOTES

FOUNDATION RECOMMENDATIONS:
FOR PILES, SEE SECTION 450 OF THE STANDARD SPECIFICATIONS.
PILES AT END BENT NO.1 AND END BENT NO.2 ARE DESIGNED FOR A FACTORED RESISTANCE OF 67 TONS PER PILE.
DRIVE PILES AT END BENT NO.1 AND END BENT NO.2 TO A REQUIRED DRIVING RESISTANCE OF 115 TONS PER PILE.
STEEL H-PILE POINTS ARE REQUIRED FOR STEEL H-PILES AT END BENT NO.1 AND END BENT NO.2. FOR STEEL PILE POINTS, SEE SECTION 450 OF THE STANDARD SPECIFICATIONS.
PILE EXCAVATION IS REQUIRED TO INSTALL PILES AT END BENT NO.1. EXCAVATE HOLES AT PILE LOCATIONS TO ELEVATION 248 FT. FOR PILE EXCAVATION, SEE SECTION 450 OF THE STANDARD SPECIFICATIONS.
CONCRETE OR GROUT IS REQUIRED TO FILL HOLES FOR PILE EXCAVATION AT END BENT NO.1.
FOR DRILLED PIERS, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.
DRILLED PIERS AT BENT NO.1 ARE DESIGNED FOR A FACTORED RESISTANCE OF 360 TONS PER PIER. CHECK FIELD CONDITIONS FOR THE REQUIRED TIP RESISTANCE OF 40 TSF.
DRILLED PIERS AT BENT NO.2 ARE DESIGNED FOR A FACTORED RESISTANCE OF 360 TONS PER PIER. CHECK FIELD CONDITIONS FOR THE REQUIRED TIP RESISTANCE OF 40 TSF.
INSTALL DRILLED PIERS AT BENT NO.1 THAT EXTEND TO AN ELEVATION NO HIGHER THAN 237 FT (L&C) AND 240 FT (R) AND SATISFY THE REQUIRED TIP RESISTANCE.
INSTALL DRILLED PIERS AT BENT NO.2 THAT EXTEND TO AN ELEVATION NO HIGHER THAN 235 FT (L) AND 232 FT (C&R) AND SATISFY THE REQUIRED TIP RESISTANCE.
PERMANENT STEEL CASINGS MAY BE REQUIRED FOR DRILLED PIERS AT BENT NO.1. IF REQUIRED, DO NOT EXTEND PERMANENT CASINGS BELOW ELEVATION 247 FT WITHOUT PRIOR APPROVAL FROM THE ENGINEER. THE ENGINEER WILL DETERMINE THE NEED FOR PERMANENT CASINGS.
PERMANENT STEEL CASINGS MAY BE REQUIRED FOR DRILLED PIERS AT BENT NO.2. IF REQUIRED, DO NOT EXTEND PERMANENT CASINGS BELOW ELEVATION 244 FT (L) AND 238 FT (C&R) WITHOUT PRIOR APPROVAL FROM THE ENGINEER. THE ENGINEER WILL DETERMINE THE NEED FOR PERMANENT CASINGS.
THE SCOUR CRITICAL ELEVATION FOR BENT NO.1 IS ELEVATION 245 FT. SCOUR CRITICAL ELEVATIONS ARE USED TO MONITOR POSSIBLE SCOUR PROBLEMS DURING THE LIFE OF THE STRUCTURE.
THE SCOUR CRITICAL ELEVATION FOR BENT NO.2 IS ELEVATION 242 FT. SCOUR CRITICAL ELEVATIONS ARE USED TO MONITOR POSSIBLE SCOUR PROBLEMS DURING THE LIFE OF THE STRUCTURE.
SPT MAY BE REQUIRED FOR DRILLED PIERS AT BENT NO.1 AND BENT NO.2. FOR SPT TESTING, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.
CSL TUBES ARE REQUIRED AND CSL TESTING MAY BE REQUIRED FOR DRILLED PIERS AT BENT NO.1 AND BENT NO.2. FOR CSL TESTING, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.
SID INSPECTIONS MAY BE REQUIRED FOR DRILLED PIERS. THE ENGINEER WILL DETERMINE THE NEED FOR SID INSPECTIONS. FOR SID INSPECTIONS, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.
THE CONTRACT UNIT PRICE FOR 36" DIAMETER DRILLED PIERS WILL BE FULL COMPENSATION FOR DRILLING THROUGH ANY MATERIALS ENCOUNTERED.

TOTAL BILL OF MATERIAL


	REMOVAL OF EXISTING STRUCTURE STA. 14+00.00 -L-	PILE EXCAVATION IN SOIL	PILE EXCAVATION NOT IN SOIL	3'-0" DIA DRILLED PIERS	PERMANENT STEEL CASING FOR 3'-0" DIA. DRILLED PIER	SID INSPECTION	CSL TESTING	SPT TESTING	UNCLASSIFIED STRUCTURE EXCAVATION STA. 14+00.00 -L-	CLASS A CONCRETE	BRIDGE APPROACH SLABS STA. 14+00.00 -L-	REINFORCING STEEL	SPIRAL COLUMN REINFORCING STEEL	HP 12 X 53 STEEL PILES	STEEL PILE POINTS	VERTICAL CONCRETE BARRIER RAIL	RIP RAP CLASS II	GEOTEXTILE FOR DRAINAGE	ELASTOMERIC BEARINGS	3'-0" X 1'-9" PRESTRESSED CONCRETE CORED SLABS		
	LUMP SUM	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	EA.	EA.	EA.	LUMP SUM	CU. YDS.	LUMP SUM	LB.	LB.	NO.	LIN. FT.	NO.	LIN. FT.	TON	SQ. YD.	LUMP SUM	NO.	LIN. FT.
SUPERSTRUCTURE																					33	1650
END BENT NO. 1		46	24							21.6		2,636		7	70	7		24	27			
BENT NO. 1				39.5	18					16.9		8,468	1,117									
BENT NO. 2				55.3	42					16.7		9,251	1,362									
END BENT NO. 2										21.6		2,636		7	175	7		23	26			
TOTAL	LUMP SUM	46	24	94.8	60	1	1	1	LUMP SUM	76.8	LUMP SUM	22,991	2,479	14	245	14	300.75	47	53	LUMP SUM	33	1650

PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-

SHEET 2 OF 3

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

GENERAL DRAWING
BRIDGE ON SR 1105
OVER CEDAR CREEK

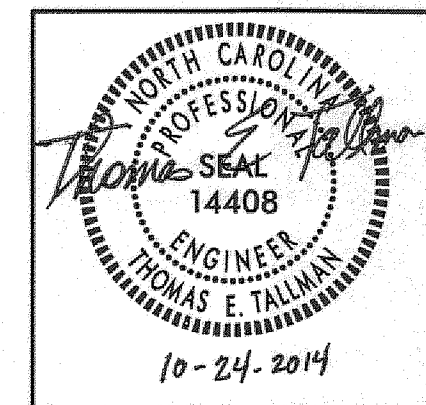

DRAWN BY : D. H. CARTER DATE : OCT 2012
CHECKED BY : J. E. MONDOLFI DATE : OCT 2012
DESIGN ENGINEER OF RECORD: T. E. TALLMAN DATE : FEB 2014

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-2
1			3			TOTAL SHEETS 17
2			4			

10/24/2014 P:\Libraries\Projects\10530-Franklin\17BP.5.R.30\Drawings\17BP.5.R.30.LS.dgn ICA Engineering

LOAD AND RESISTANCE FACTOR RATING (LRFD) SUMMARY FOR PRESTRESSED CONCRETE GIRDERS

LEVEL	VEHICLE	WEIGHT (W) (TONS)	CONTROLLING LOAD RATING	MINIMUM RATING FACTORS (RF)	TONS = W X RF	STRENGTH I LIMIT STATE										SERVICE III LIMIT STATE					COMMENT NUMBER			
						MOMENT					SHEAR					MOMENT								
						LIVELOAD FACTORS	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (FT)	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (FT)	LIVELOAD FACTORS	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN		GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (FT)	
DESIGN LOAD RATING	HL-93(Inv)	N/A	1	1.394	--	1.75	0.276	1.57	50'	EL	24.5	0.531	1.39	50'	EL	2.45	0.80	0.276	1.44	50'	EL	24.5		
	HL-93(Opr)	N/A	--	1.807	--	1.35	0.276	2.03	50'	EL	24.5	0.531	1.81	50'	EL	2.45	N/A	--	--	--	--	--		
	HS-20(Inv)	36.000	2	1.667	60.007	1.75	0.276	1.95	50'	EL	24.5	0.531	1.67	50'	EL	2.45	0.80	0.276	1.79	50'	EL	24.5		
	HS-20(Opr)	36.000	--	2.161	77.787	1.35	0.276	2.52	50'	EL	24.5	0.531	2.16	50'	EL	2.45	N/A	--	--	--	--	--		
LEGAL LOAD RATING	SV	SNSH	13.500	--	3.635	49.079	1.4	0.276	4.95	50'	EL	24.5	0.531	4.7	50'	EL	2.45	0.80	0.276	3.64	50'	EL	24.5	
		SNGARBS2	20.000	--	2.871	57.42	1.4	0.276	3.91	50'	EL	24.5	0.531	3.42	50'	EL	2.45	0.80	0.276	2.87	50'	EL	24.5	
		SNAGRIS2	22.000	--	2.778	61.109	1.4	0.276	3.78	50'	EL	19.6	0.531	3.21	50'	EL	2.45	0.80	0.276	2.78	50'	EL	24.5	
		SNCOTTS3	27.250	--	1.814	49.418	1.4	0.276	2.47	50'	EL	24.5	0.531	2.36	50'	EL	2.45	0.80	0.276	1.81	50'	EL	24.5	
		SNAGGRS4	34.925	--	1.577	55.063	1.4	0.276	2.15	50'	EL	24.5	0.531	2.01	50'	EL	2.45	0.80	0.276	1.58	50'	EL	24.5	
		SNS5A	35.550	--	1.537	54.657	1.4	0.276	2.09	50'	EL	24.5	0.531	2.07	50'	EL	2.45	0.80	0.276	1.54	50'	EL	24.5	
		SNS6A	39.950	--	1.438	57.43	1.4	0.276	1.96	50'	EL	24.5	0.531	1.91	50'	EL	2.45	0.80	0.276	1.44	50'	EL	24.5	
	TTST	SNS7B	42.000	--	1.370	57.54	1.4	0.276	1.87	50'	EL	24.5	0.531	1.91	50'	EL	2.45	0.80	0.276	1.37	50'	EL	24.5	
		TNAGRIT3	33.000	--	1.761	58.118	1.4	0.276	2.4	50'	EL	24.5	0.531	2.25	50'	EL	2.45	0.80	0.276	1.76	50'	EL	24.5	
		TNT4A	33.075	--	1.777	58.759	1.4	0.276	2.42	50'	EL	24.5	0.531	2.17	50'	EL	2.45	0.80	0.276	1.78	50'	EL	24.5	
		TNT6A	41.600	--	1.480	61.558	1.4	0.276	2.01	50'	EL	24.5	0.531	2.08	50'	EL	2.45	0.80	0.276	1.48	50'	EL	24.5	
		TNT7A	42.000	--	1.502	63.087	1.4	0.276	2.05	50'	EL	24.5	0.531	1.94	50'	EL	2.45	0.80	0.276	1.50	50'	EL	24.5	
		TNT7B	42.000	--	1.566	65.773	1.4	0.276	2.13	50'	EL	24.5	0.531	1.84	50'	EL	2.45	0.80	0.276	1.49	50'	EL	24.5	
		TNAGRIT4	43.000	--	1.486	63.902	1.4	0.276	2.02	50'	EL	24.5	0.531	1.77	50'	EL	2.45	0.80	0.276	1.39	50'	EL	24.5	
TNAGT5A	45.000	--	1.388	62.47	1.4	0.276	1.89	50'	EL	24.5	0.531	1.8	50'	EL	2.45	0.80	0.276	1.39	50'	EL	24.5			
TNAGT5B	45.000	3	1.360	61.206	1.4	0.276	1.85	50'	EL	24.5	0.531	1.68	50'	EL	2.45	0.80	0.276	1.36	50'	EL	24.5			

LOAD FACTORS:

DESIGN LOAD RATING FACTORS	LIMIT STATE	γ _{DC}	γ _{DW}
	STRENGTH I	1.25	1.50
	SERVICE III	1.00	1.00

NOTES:

MINIMUM RATING FACTORS ARE BASED ON THE STRENGTH I AND SERVICE III LIMIT STATES.

ALLOWABLE STRESSES FOR SERVICE III LIMIT STATE ARE AS REQUIRED FOR DESIGN.

COMMENTS:

- 1.
- 2.
- 3.
- 4.

CONTROLLING LOAD RATING

1 DESIGN LOAD RATING (HL-93)


2 DESIGN LOAD RATING (HS-20)

3 LEGAL LOAD RATING **

** SEE CHART FOR VEHICLE TYPE

GIRDER LOCATION

I - INTERIOR GIRDER
EL - EXTERIOR LEFT GIRDER
ER - EXTERIOR RIGHT GIRDER

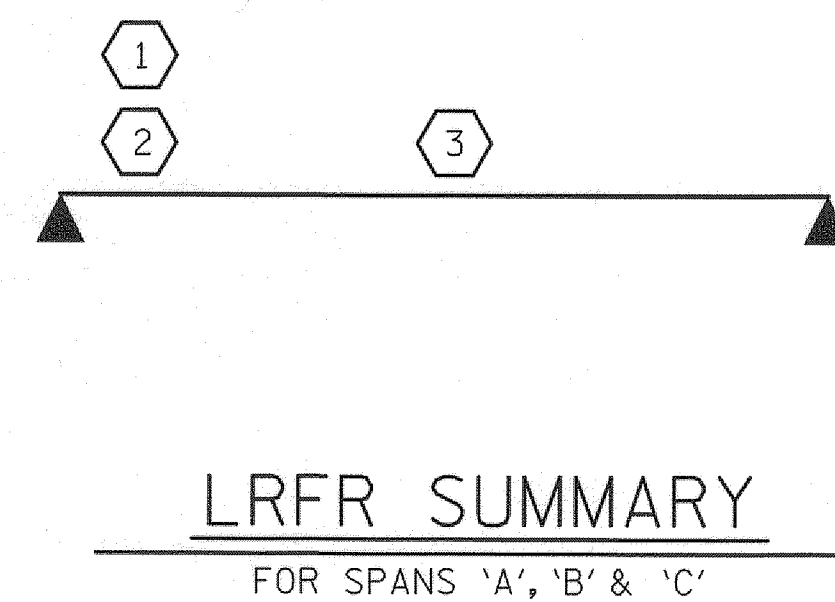

PROJECT NO. 17BP.5.R.30


FRANKLIN COUNTY

STATION: 14+00.00 -L-

SHEET 3 OF 3


STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
STANDARD
LRFR SUMMARY FOR
50' CORED SLAB UNIT
90° SKEW
(NON-INTERSTATE TRAFFIC)

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-3
1			3			TOTAL SHEETS
2			4			17

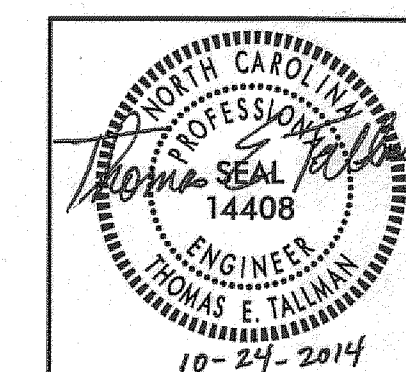


STD. NO. 21LRFR1_90S.50L

ASSEMBLED BY : M. T. MOBLEY DATE : 10/12
CHECKED BY : J. E. MONDOLFI DATE : 10/12
DRAWN BY : CVC 6/10
CHECKED BY : DNS 6/10

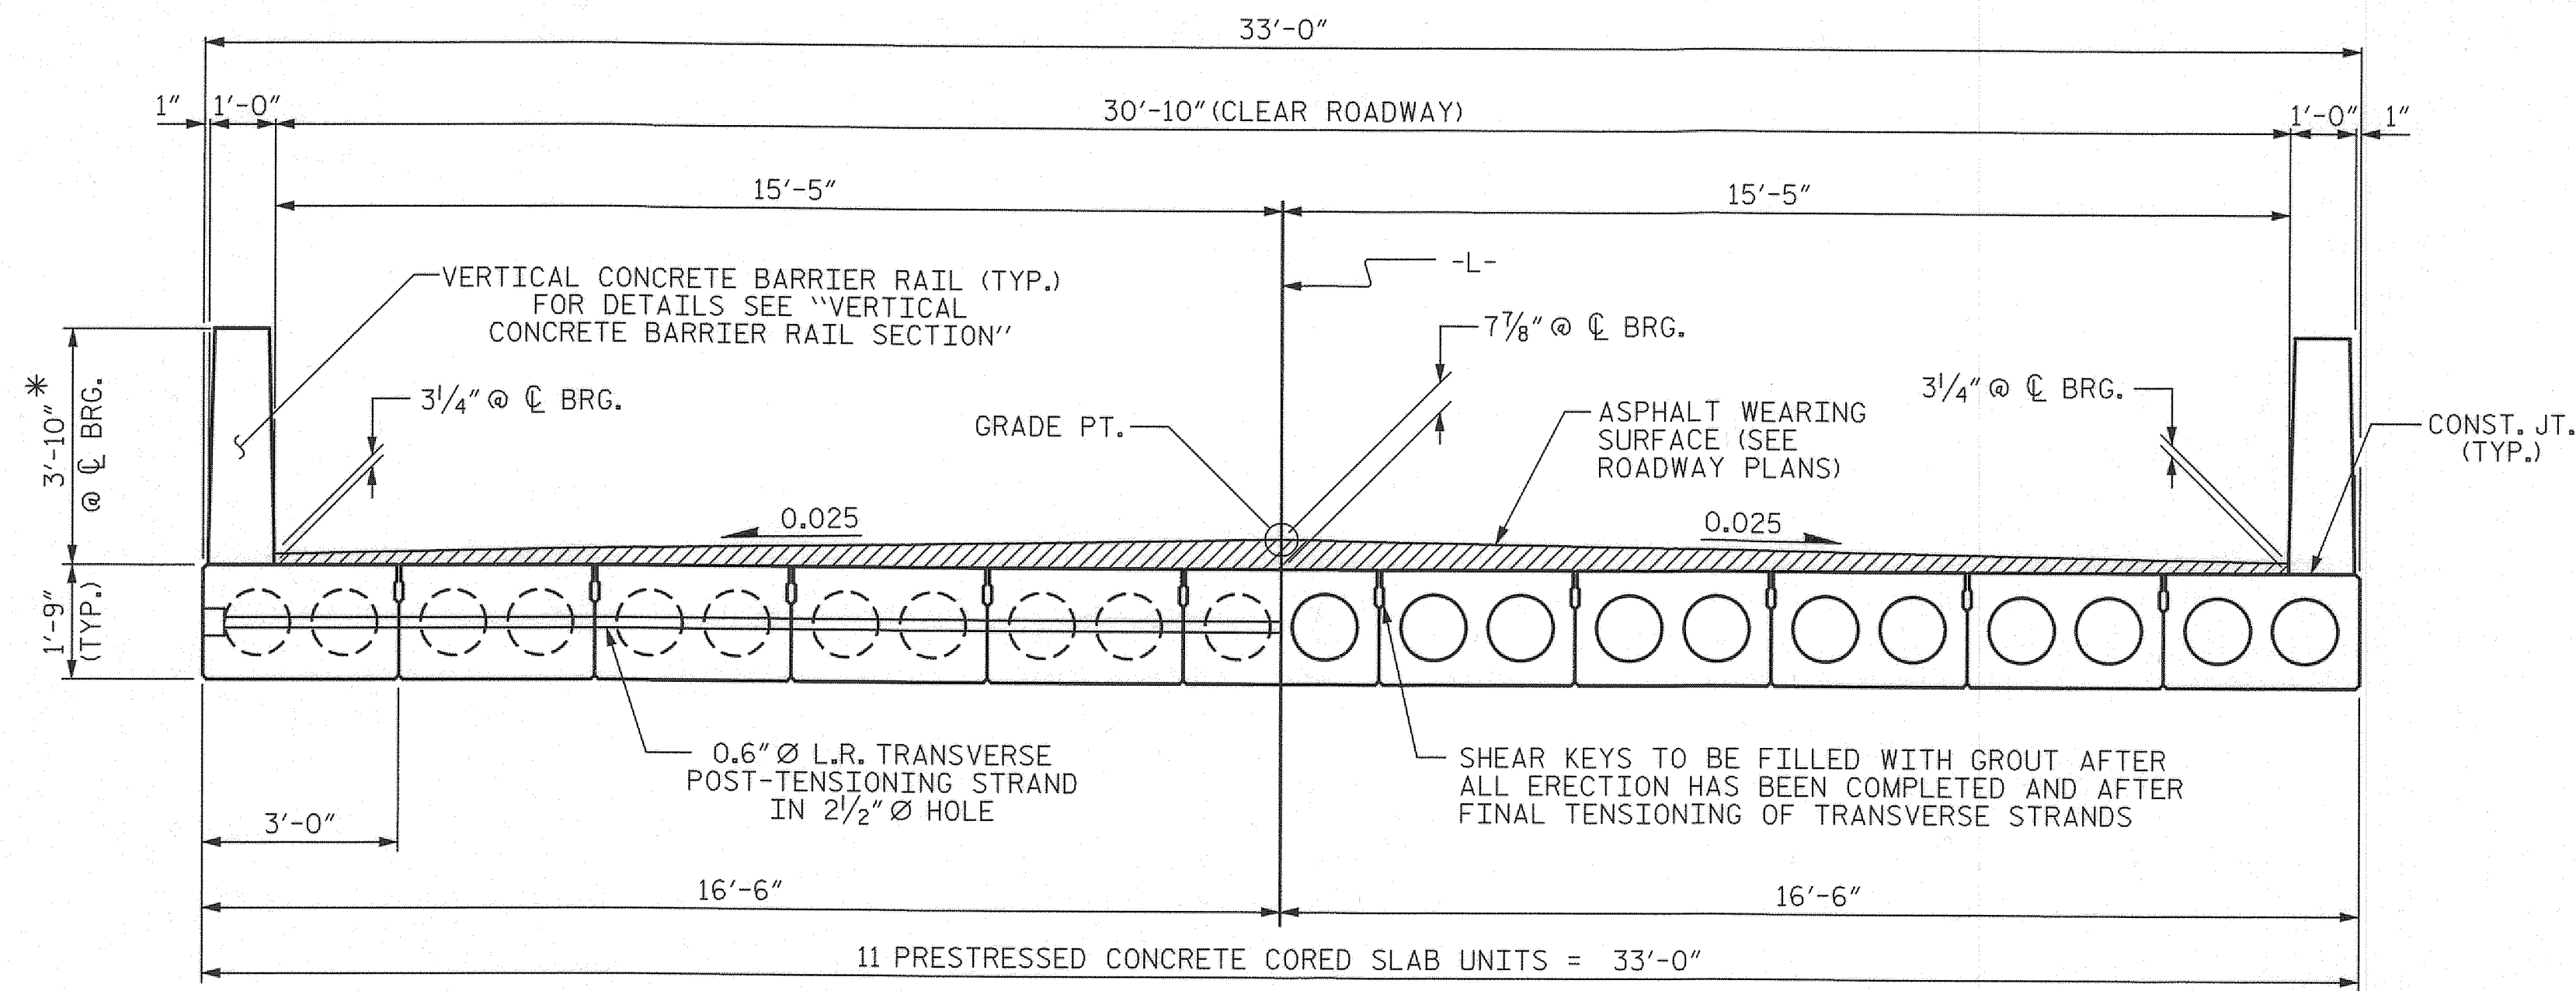


HALF SECTION AT INTERMEDIATE DIAPHRAGMS
HALF SECTION THROUGH VOIDS
TYPICAL SECTION

* - THE MAXIMUM BARRIER RAIL HEIGHT AND ASPHALT THICKNESS IS SHOWN. THE HEIGHT OF THE BARRIER RAIL AND ASPHALT THICKNESS VARIES WHILE THE TOP OF THE BARRIER RAIL FOLLOWS THE PROFILE OF THE GUTTERLINE. FOR RAIL HEIGHT DETAILS, AND ASPHALT THICKNESS SEE THE "VERTICAL CONCRETE BARRIER RAIL SECTION" DETAIL.

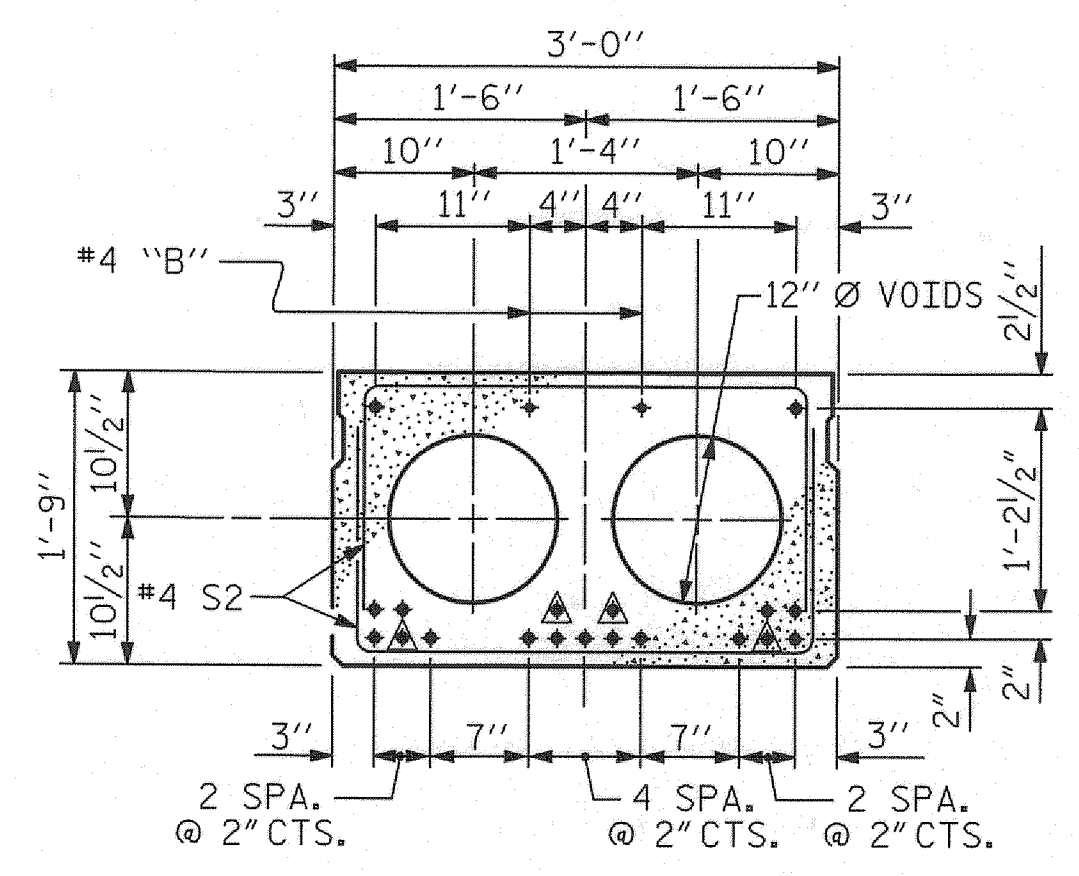


INTERIOR SLAB SECTION (50' UNIT)
(19 STRANDS REQUIRED)
0.6" Ø LOW RELAXATION STRAND LAYOUT

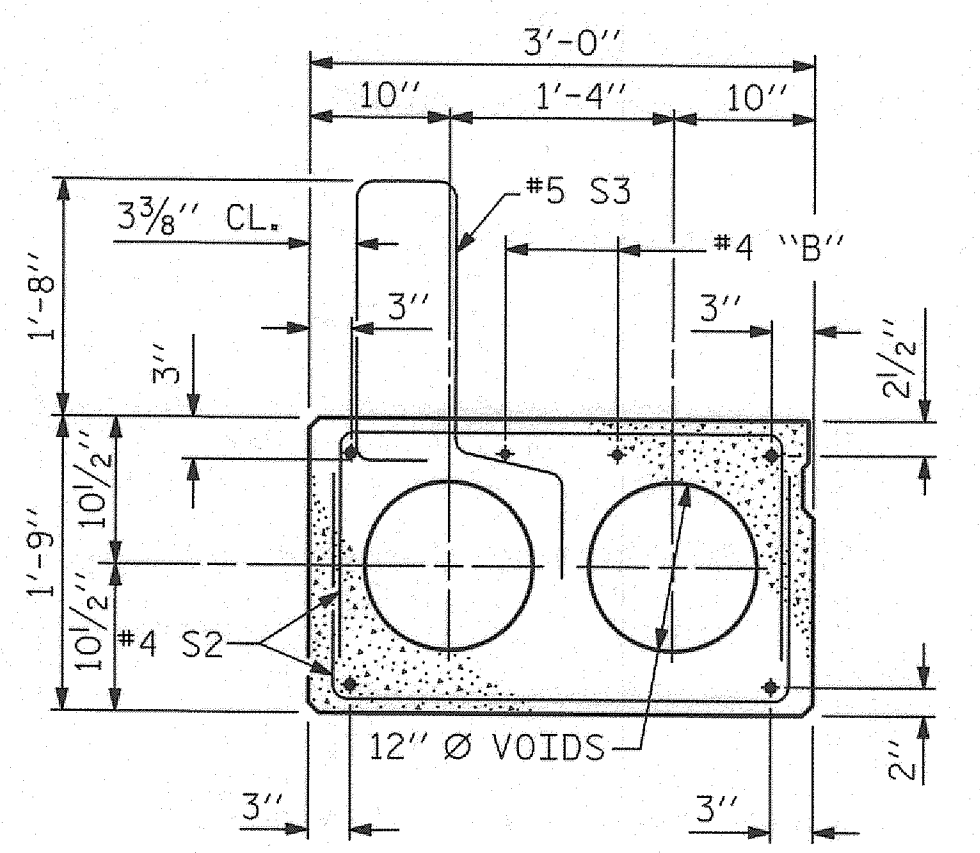


EXT. SLAB SECTION
(FOR PRESTRESSED STRAND LAYOUT, SEE INTERIOR SLAB SECTION.)


- DEBONDING LEGEND**
- ▲ BOND SHALL BE BROKEN ON THESE STRANDS FOR A DISTANCE OF 6'-0" FROM END OF CORED SLAB UNIT. SEE STANDARD SPECIFICATIONS, ARTICLE 1078-7.
 - BOND SHALL BE BROKEN ON THESE STRANDS FOR A DISTANCE OF 2'-0" FROM END OF CORED SLAB UNIT. SEE STANDARD SPECIFICATIONS, ARTICLE 1078-7.
 - OPTIONAL FULL LENGTH DEBONDED STRANDS. THESE STRANDS ARE NOT REQUIRED. IF THE FABRICATOR CHOOSES TO INCLUDE THESE STRANDS IN THE CORED SLAB UNIT, THE STRANDS SHALL BE DEBONDED FOR THE FULL LENGTH OF THE UNIT AT NO ADDITIONAL COST. SEE STANDARD SPECIFICATIONS, ARTICLE 1078-7.

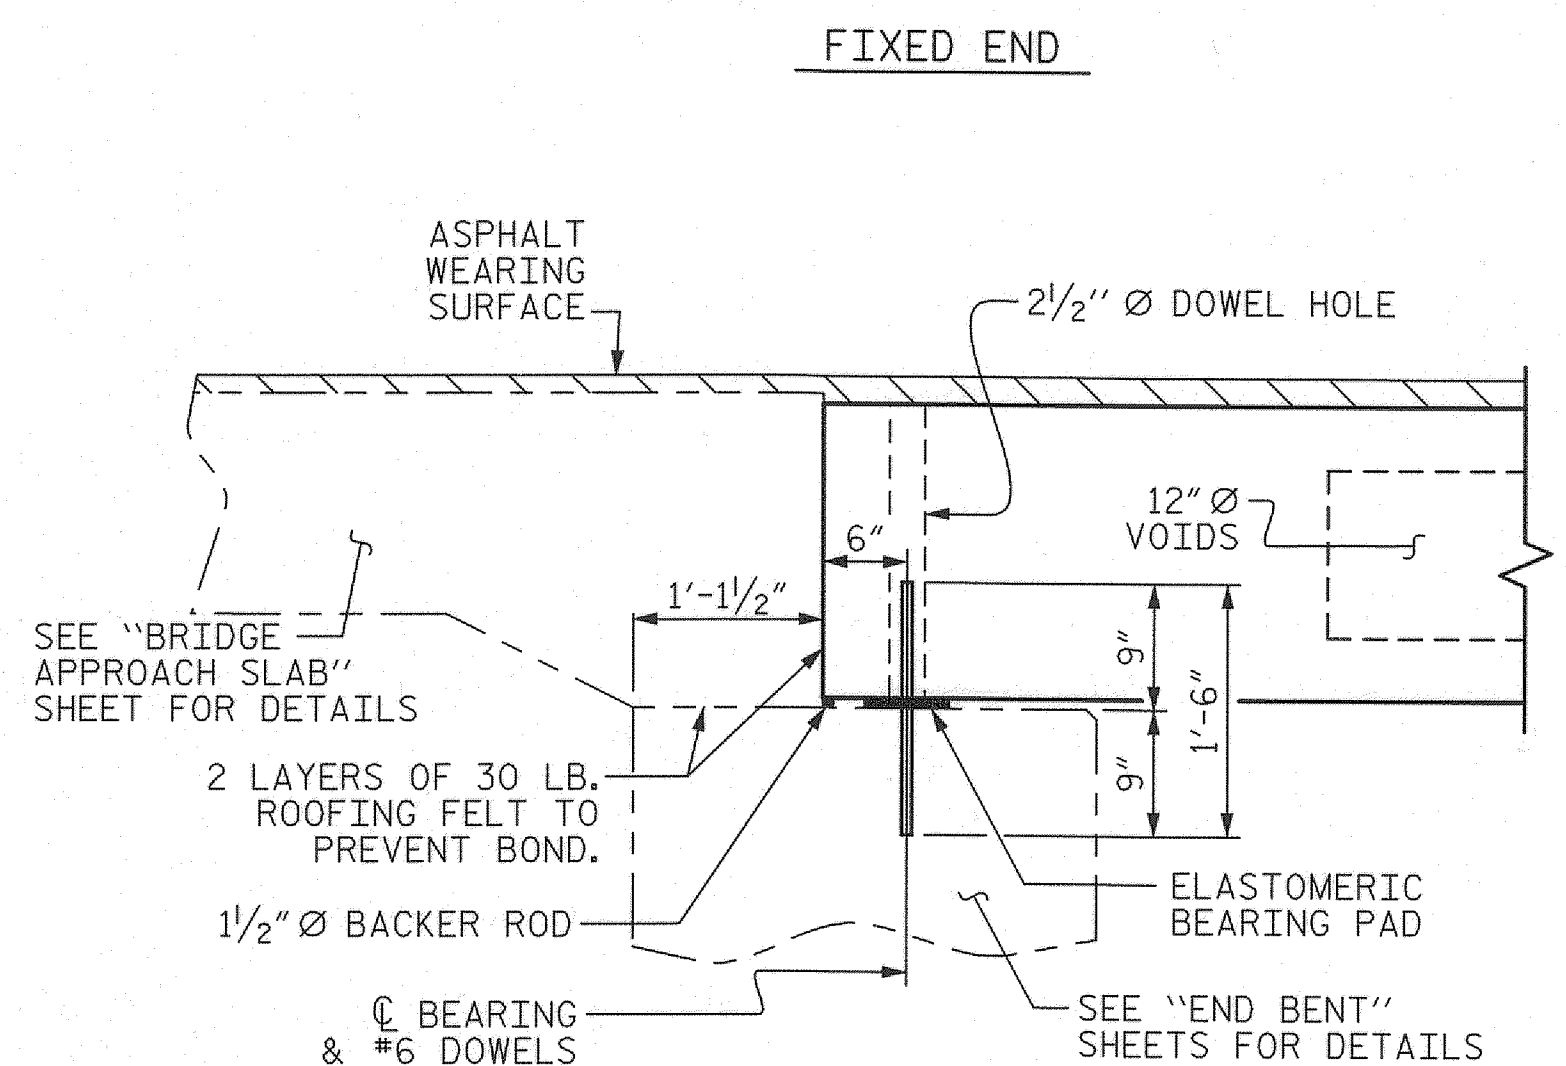


SECTION AT END BENT

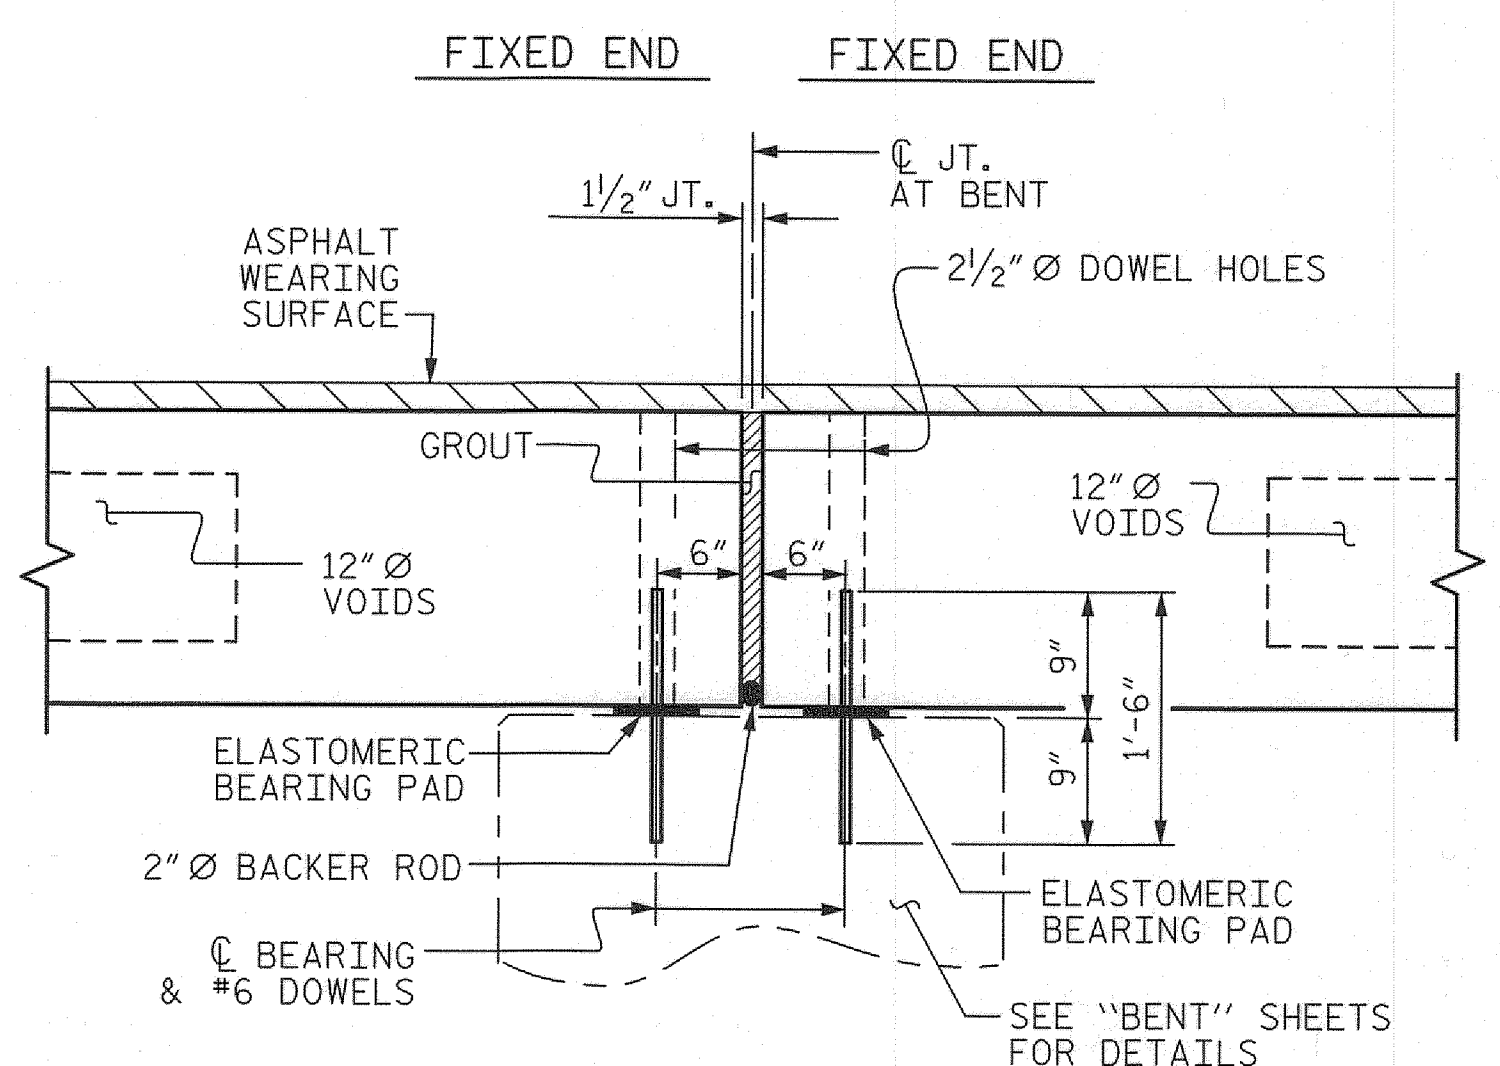


SECTION AT BENT

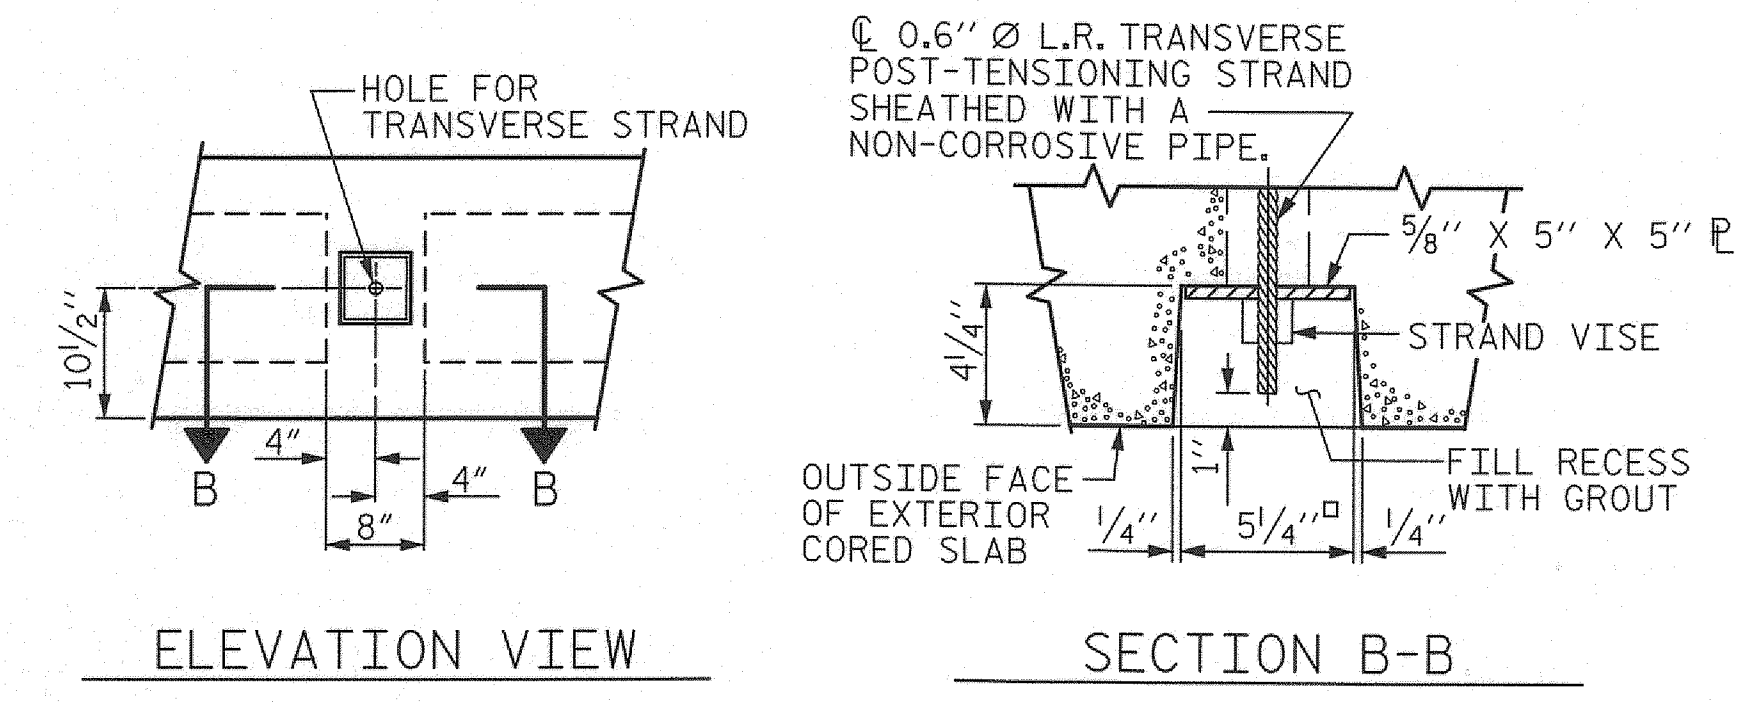

ELEVATION VIEW
SECTION B-B
GROUTED RECESS AT END OF POST-TENSIONED STRAND OF CORED SLABS

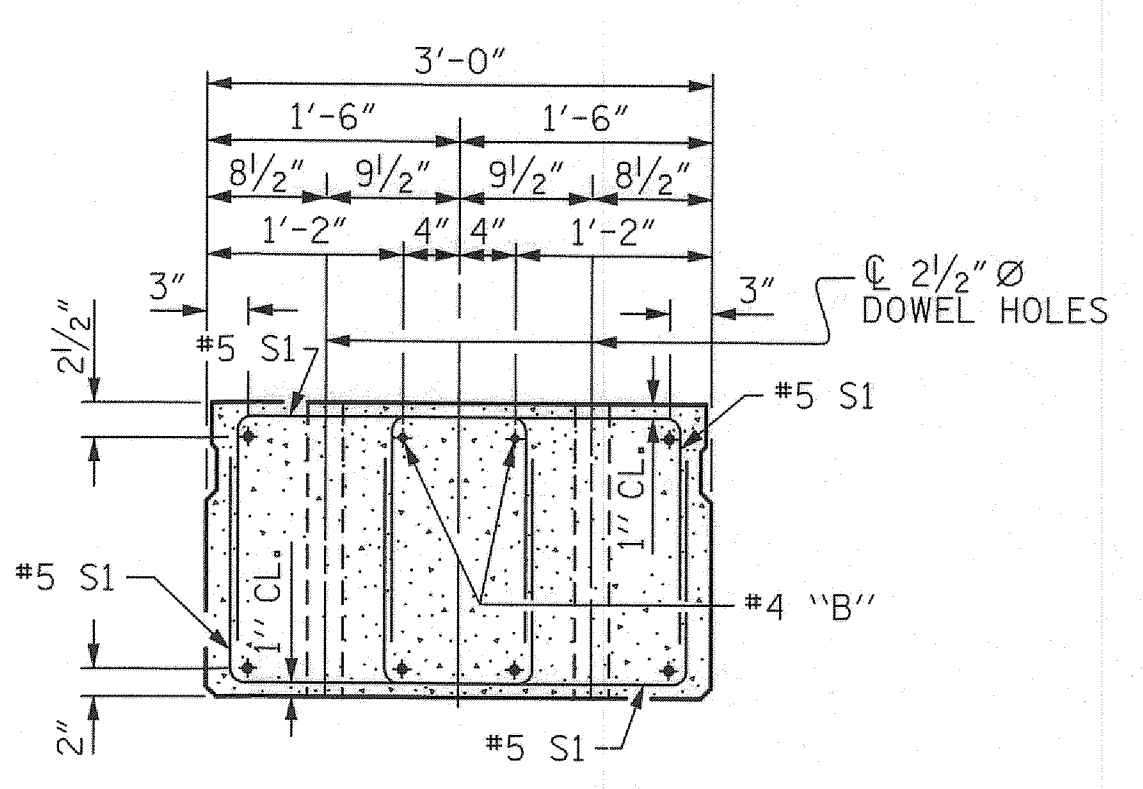


END ELEVATION
SHOWING PLACEMENT OF DOUBLE STIRRUPS AND LOCATION OF DOWEL HOLES. (STRAND LAYOUT NOT SHOWN.)
INTERIOR SLAB UNIT SHOWN-EXTERIOR SLAB UNIT SIMILAR EXCEPT SHEAR KEY LOCATION.

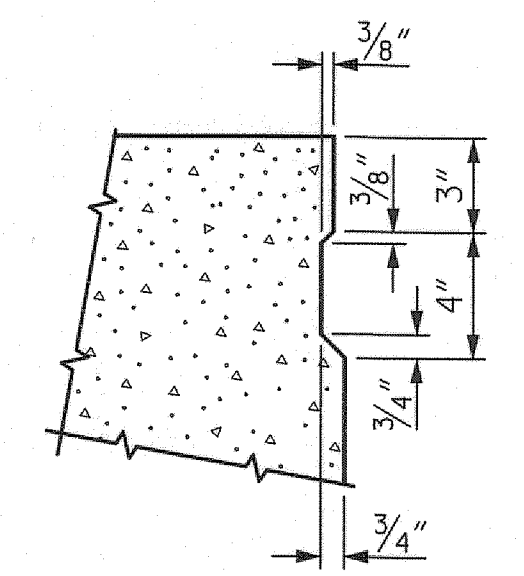

SHEAR KEY DETAIL
NOTE: OMIT SHEAR KEY ON OUTSIDE FACE OF EXTERIOR CORED SLABS.



10/24/2014 P:\LIB\Projects\10105_30_Franklin\Structures\Plans\17BP.5.R.30_s.d.sht4.dgn ICA Engineering Inc

ASSEMBLED BY : M. T. MOBLEY	DATE : 10/12
CHECKED BY : J. E. MONDOLFI	DATE : 10/12
DRAWN BY : DGE	5/09
CHECKED BY : BCH	6/09
REV. 12/11	MAA/AAC

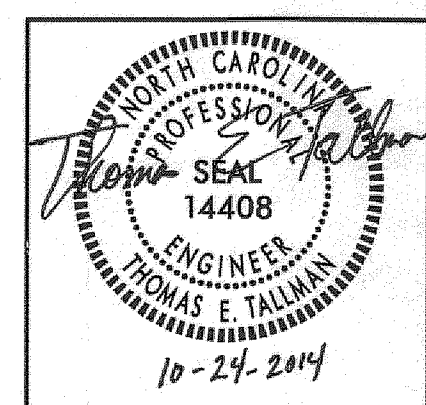

PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-
SHEET 1 OF 3

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH					
STANDARD 3'-0" X 1'-9" PRESTRESSED CONCRETE CORED SLAB UNIT 90° SKEW					
REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		
					SHEET NO. S-4
					TOTAL SHEETS 17

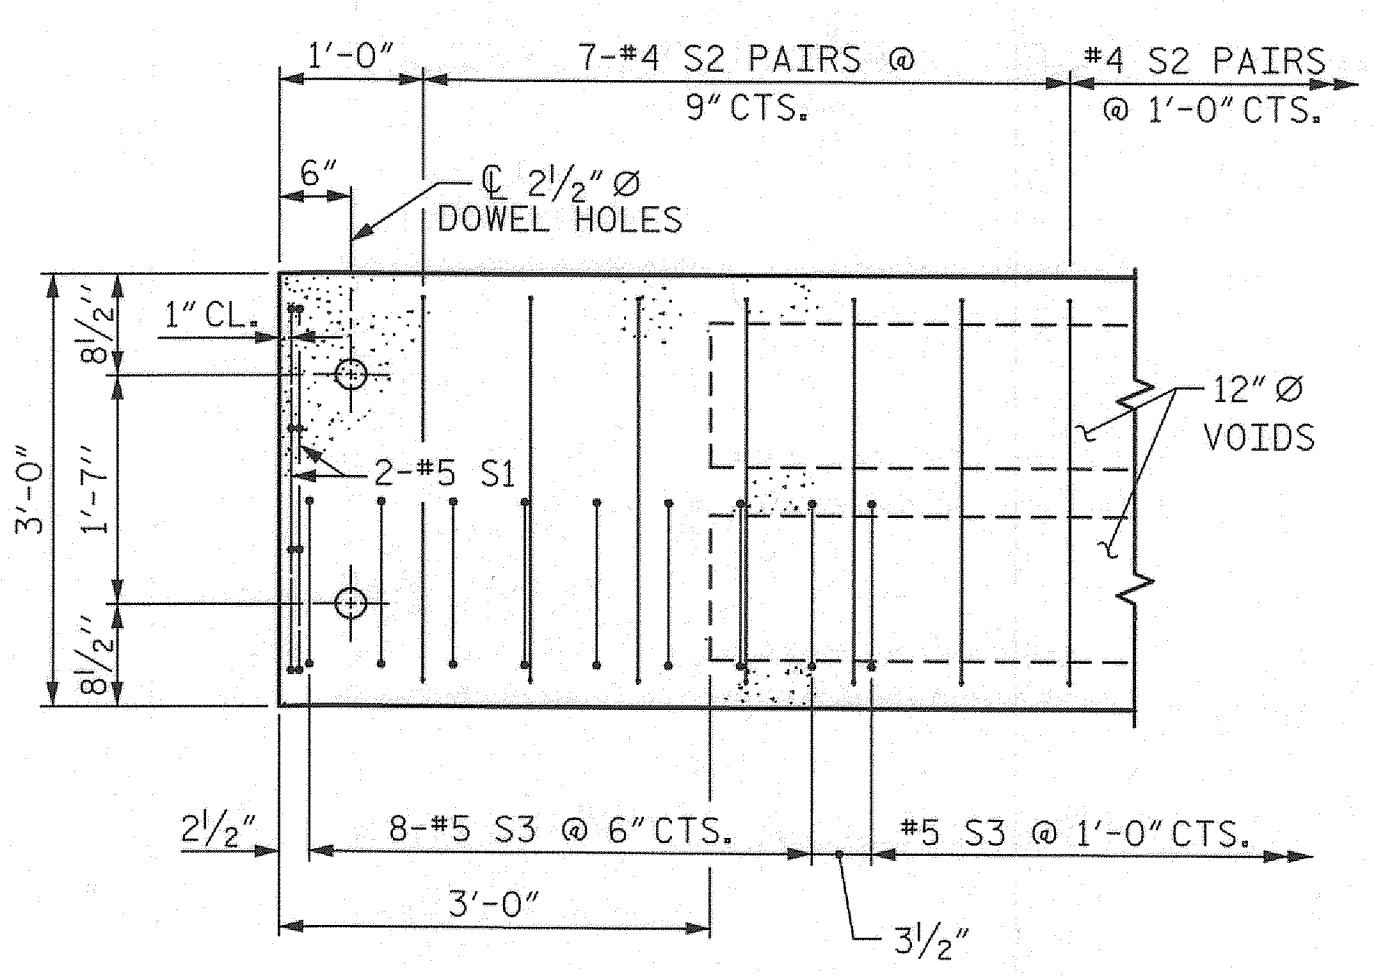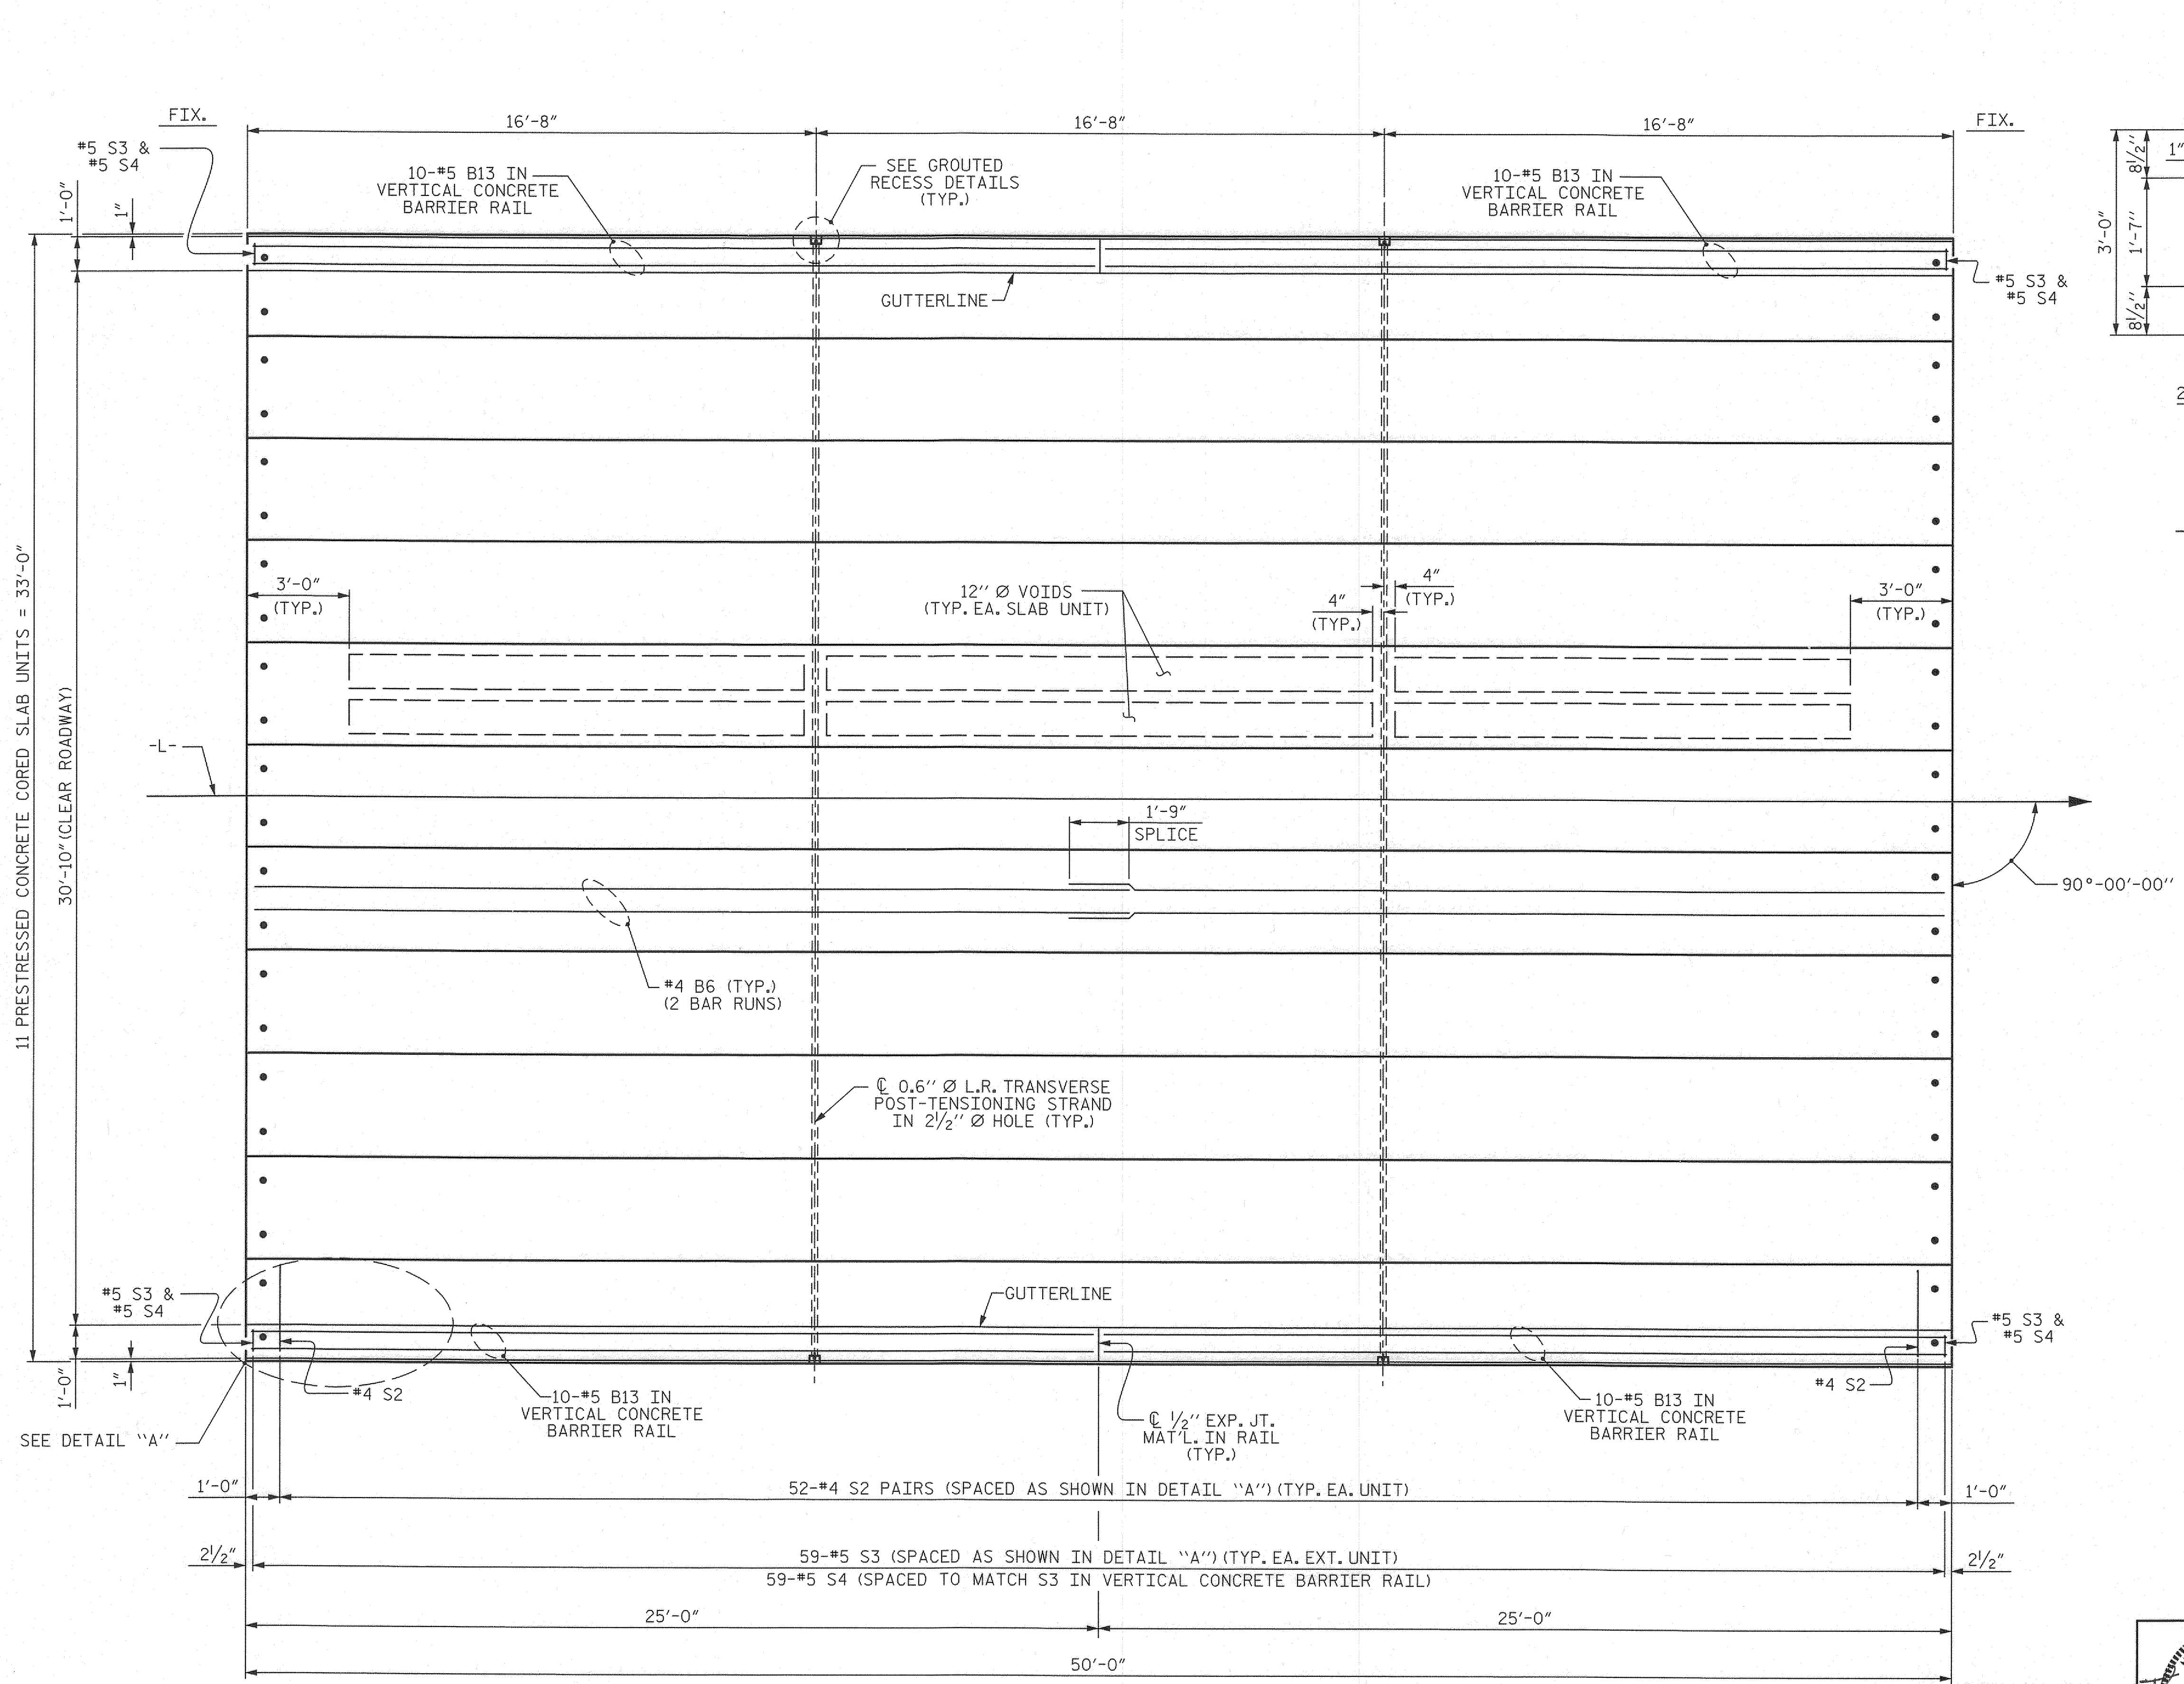

DETAIL "A"
 NOTE: EXTERIOR UNIT SHOWN - INTERIOR UNIT SIMILAR EXCEPT OMIT #5 S3 BARS.


PLAN OF UNIT

PROJECT NO. 17BP.5.R.30
 FRANKLIN COUNTY
 STATION: 14+00.00 -L-
 SHEET 2 OF 3

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH


PLAN OF 50' UNIT
 30'-10" CLEAR ROADWAY
 90° SKEW

REVISIONS						SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	S-5	
1			3			TOTAL SHEETS 17	
2			4				


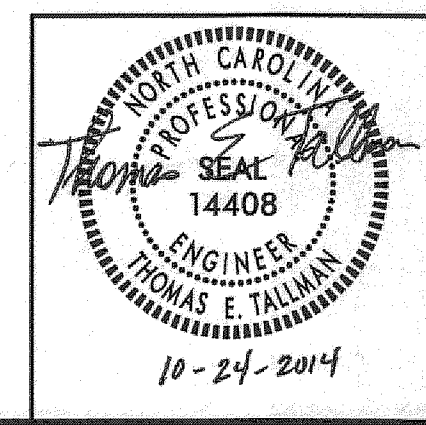


10/24/2014
 P:\L\Projects\10105\30-Franklin\Structures\Plans\17BP.5.R.30.ecd.sht5.dgn
 ICA Engineering


ASSEMBLED BY : M. T. MOBLEY DATE : 10/12
 CHECKED BY : J. E. MONDOLFI DATE : 10/12
 DRAWN BY : DGE 3/09 REV. 12/5/11 MAA/AAC
 CHECKED BY : BCH 3/09

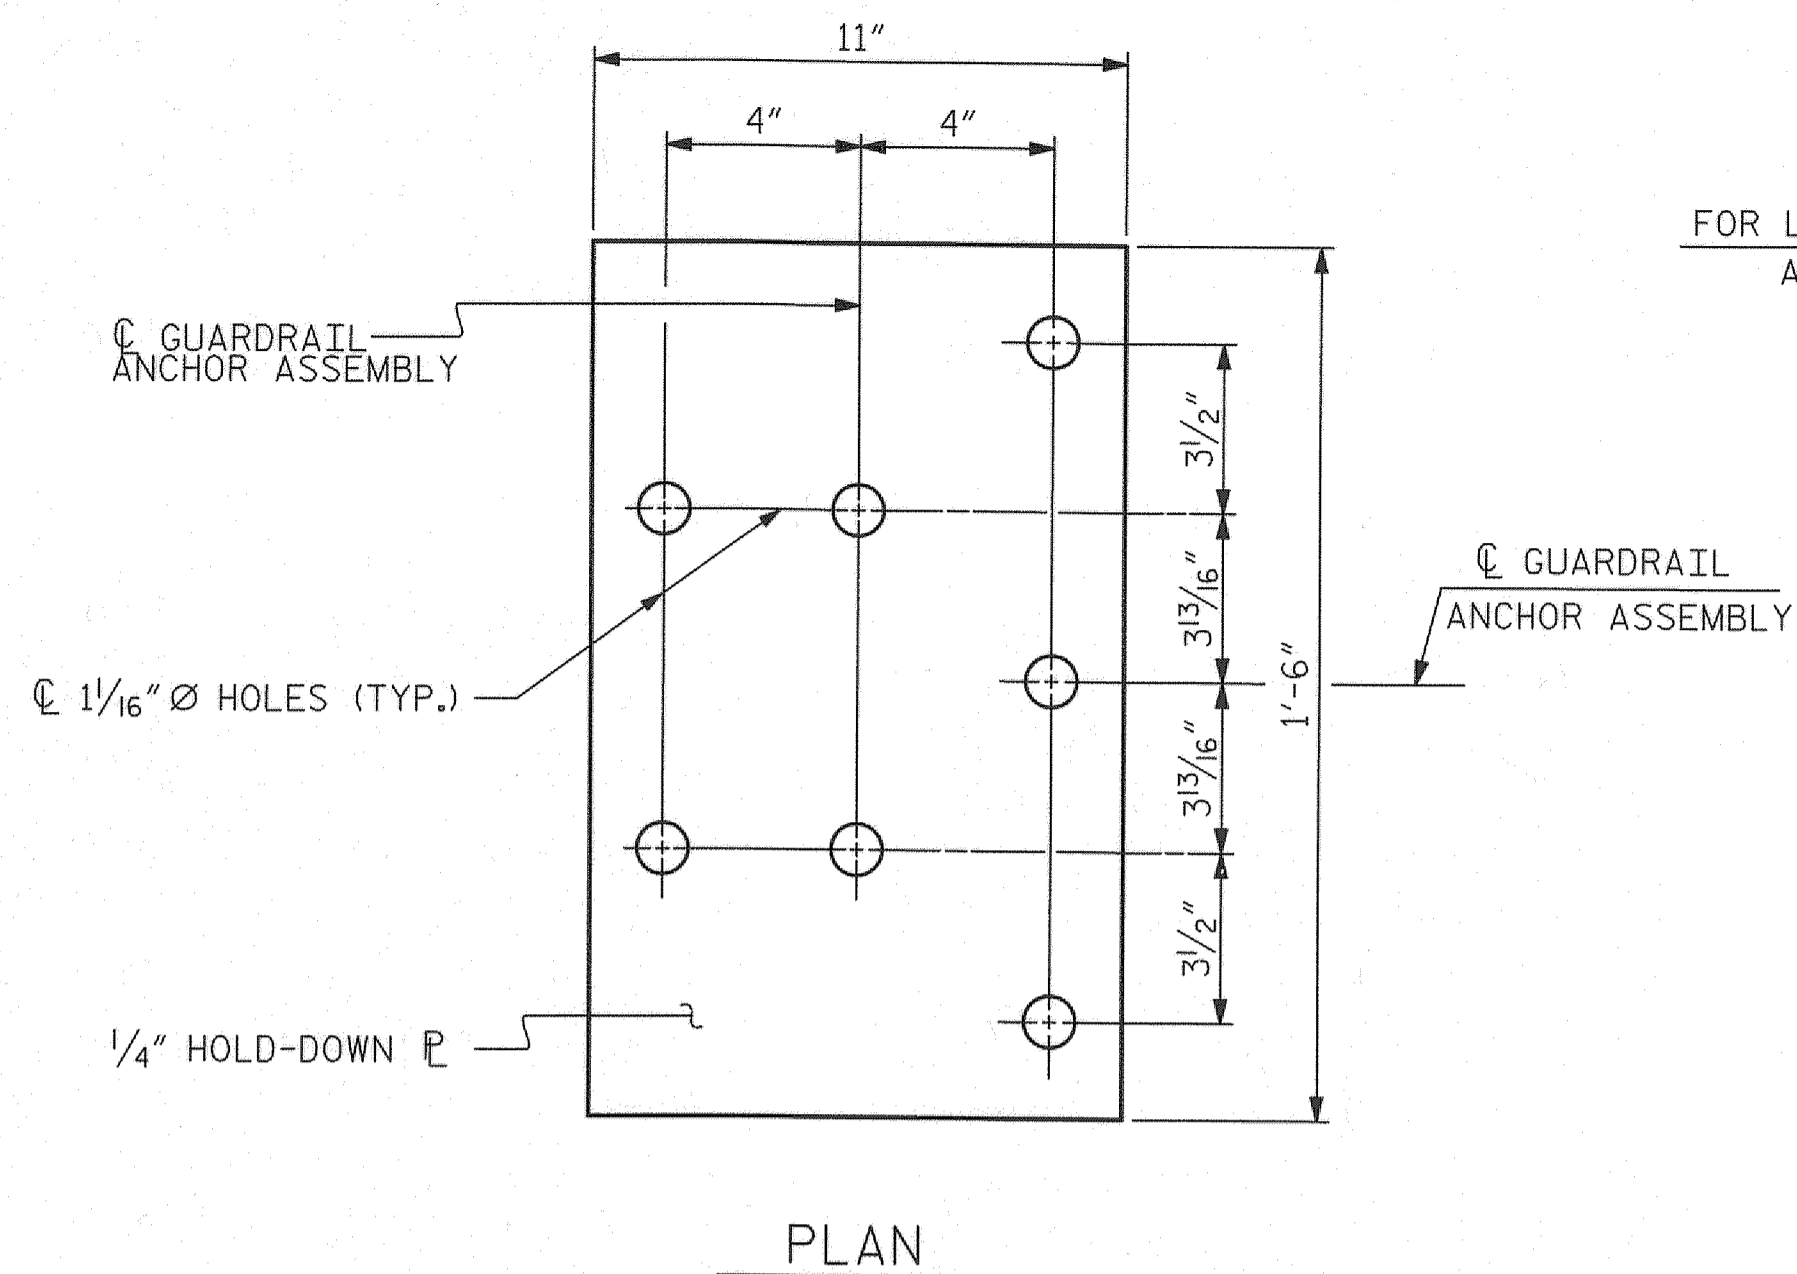

FOR LOCATION OF GUARDRAIL ANCHOR ASSEMBLY, SEE "PLAN" BELOW

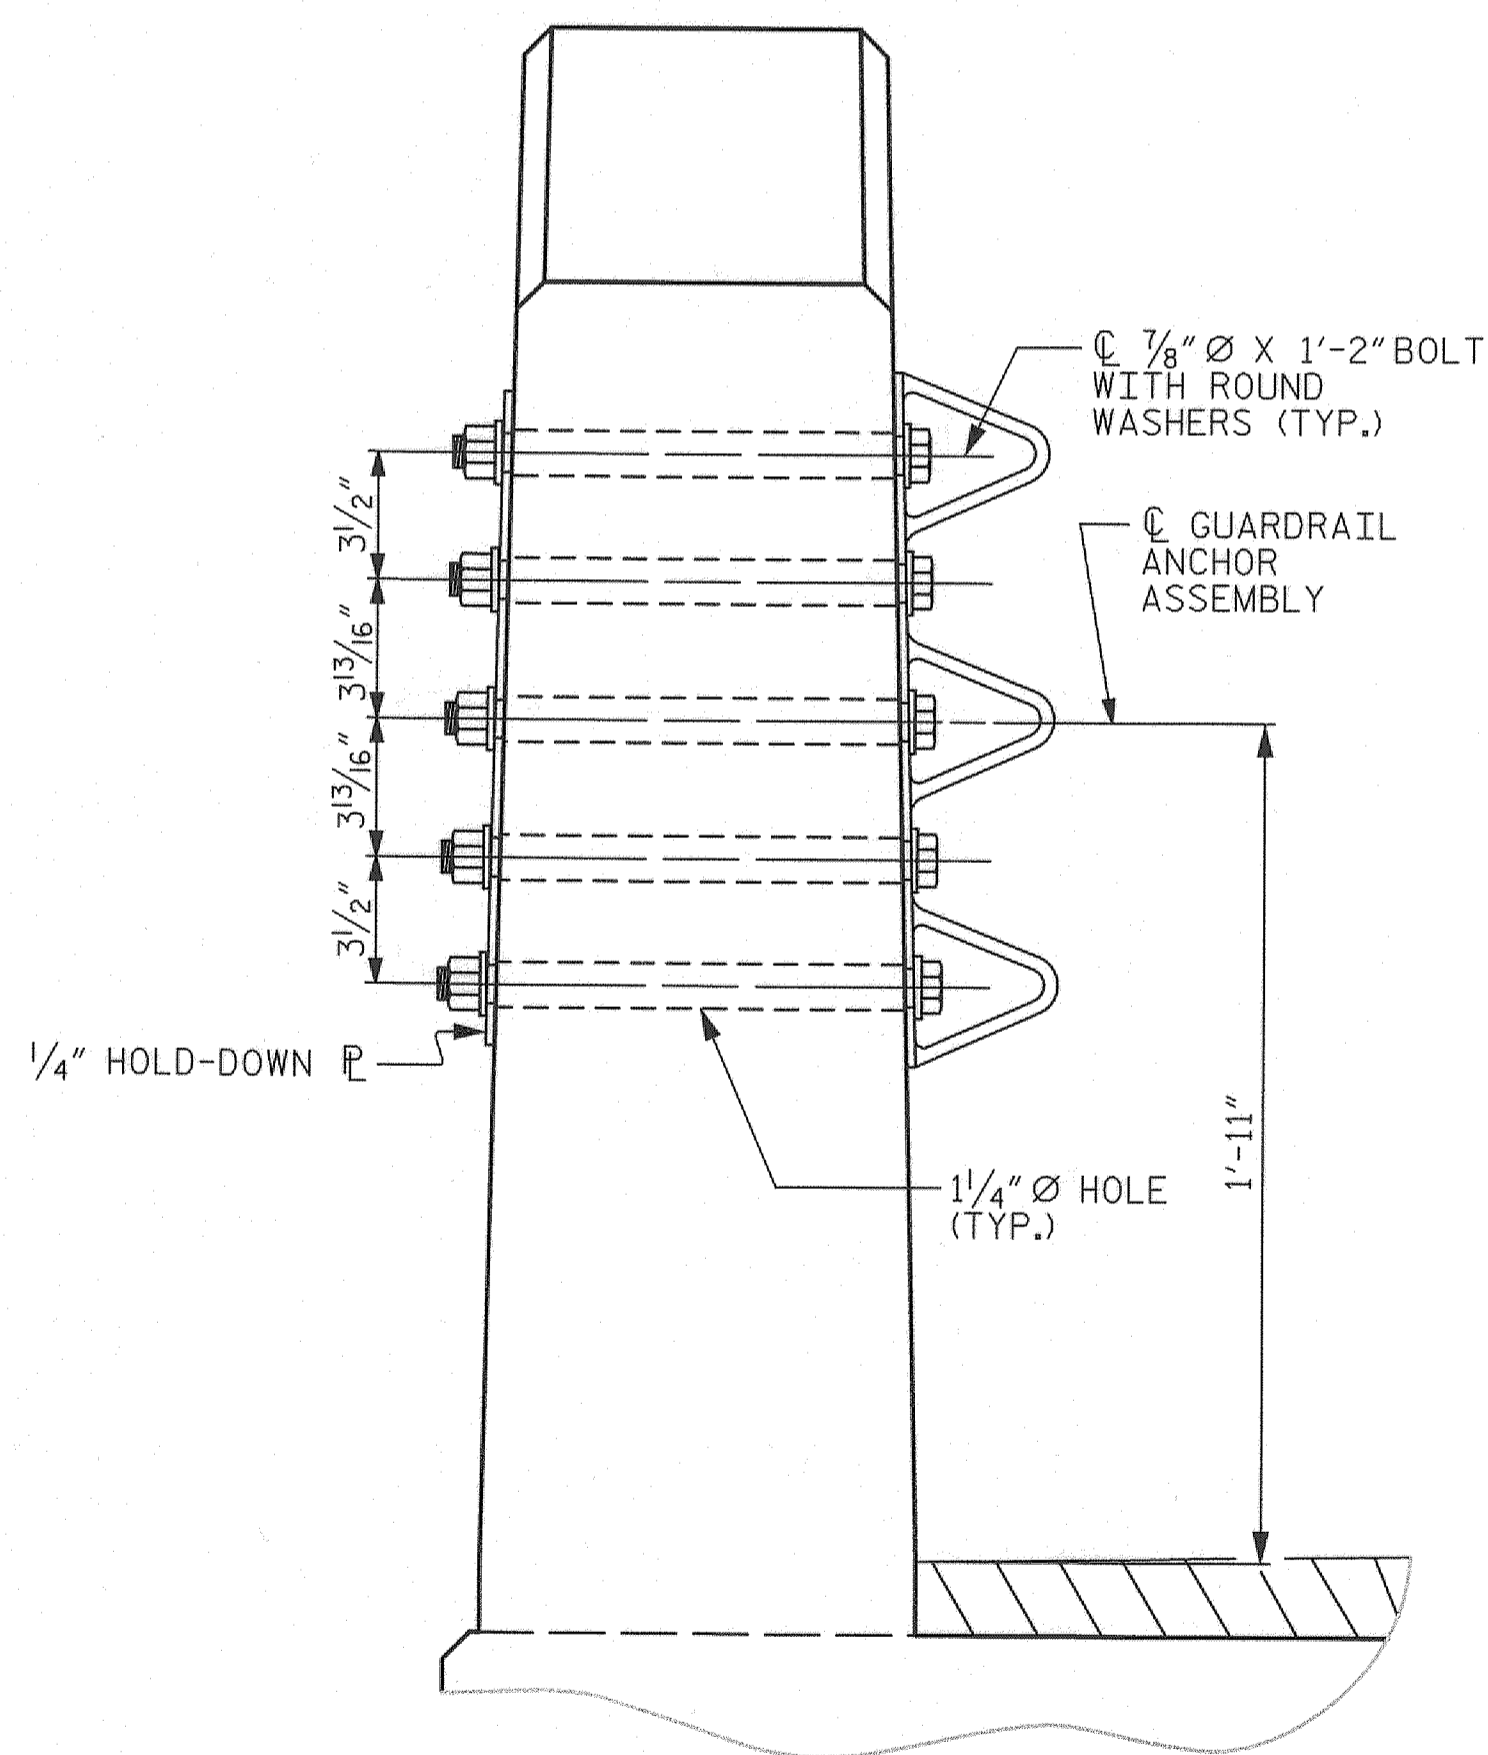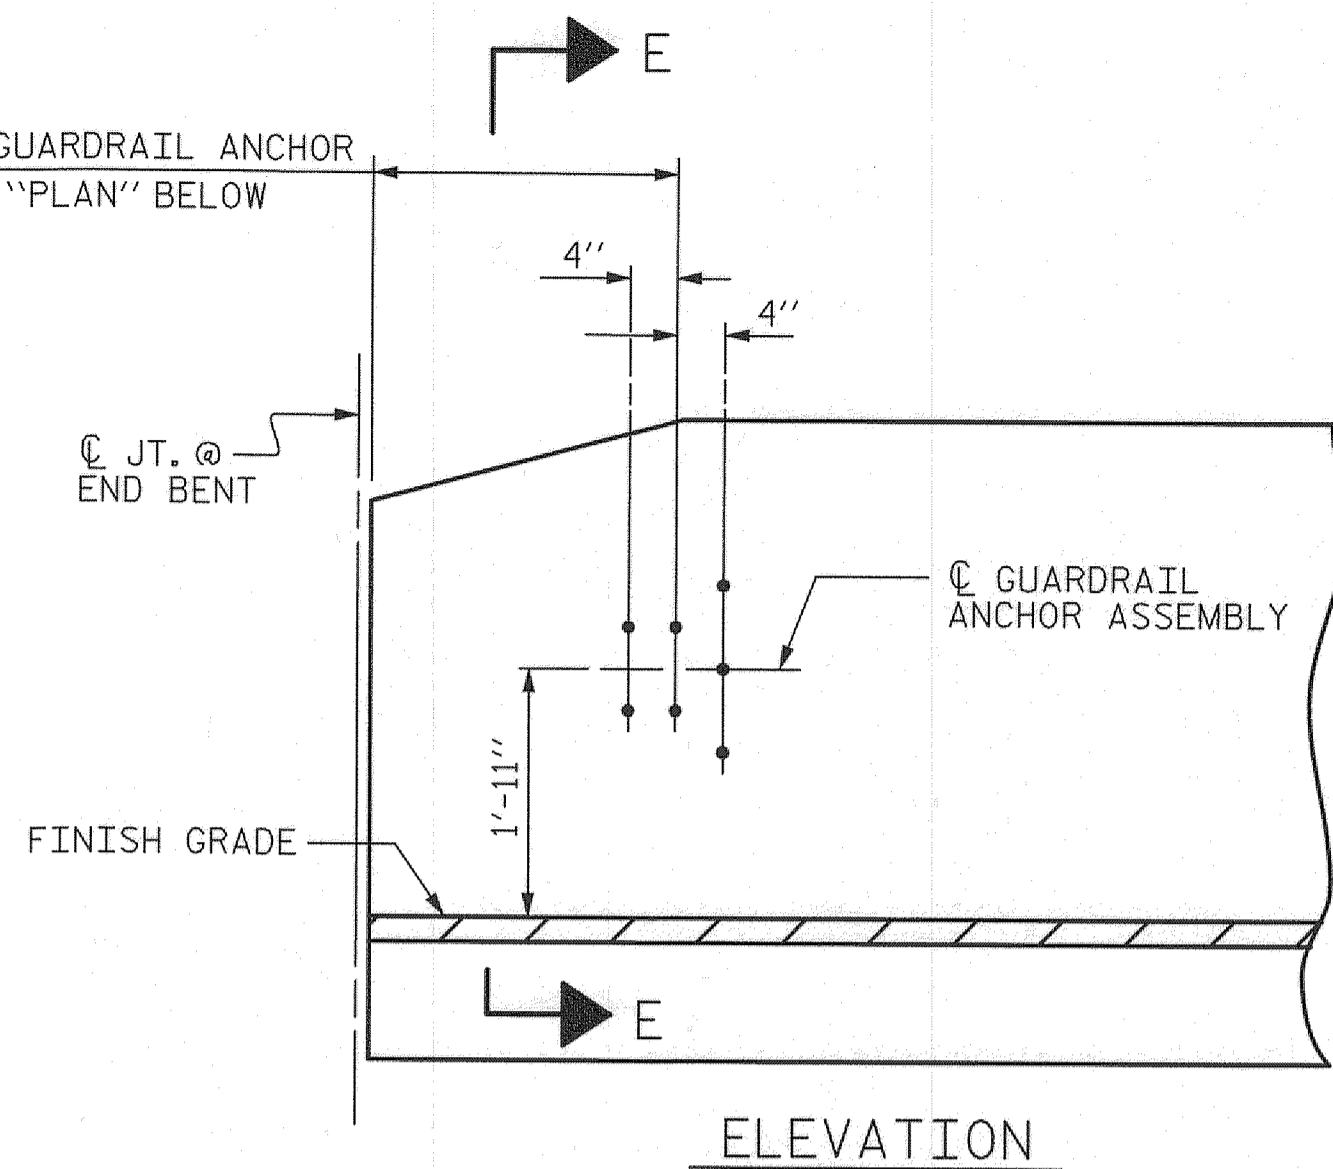


GUARDRAIL ANCHOR ASSEMBLY DETAILS

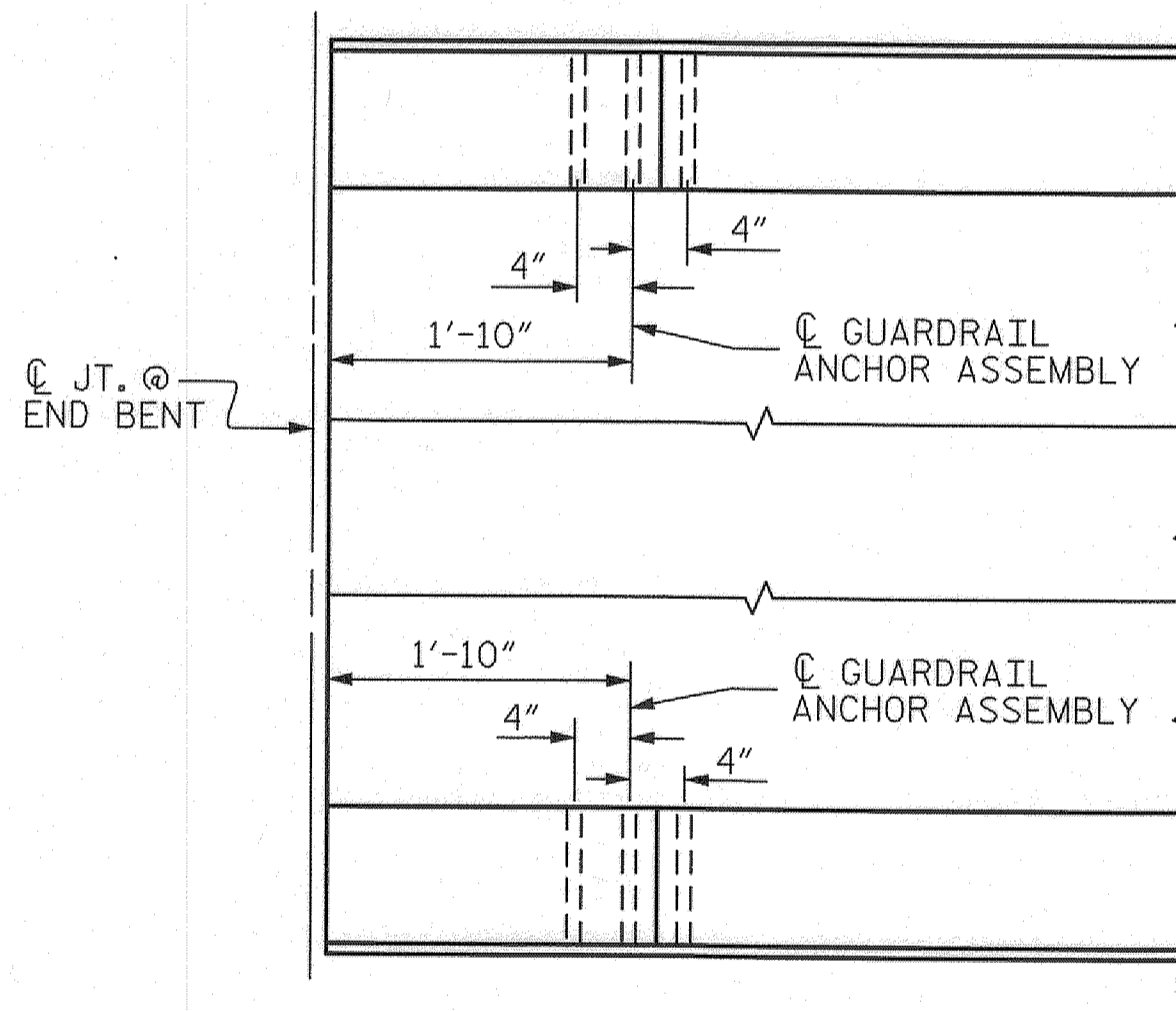

LOCATION OF ANCHORS FOR GUARDRAIL

END BENT #1 SHOWN, END BENT #2 SIMILAR.

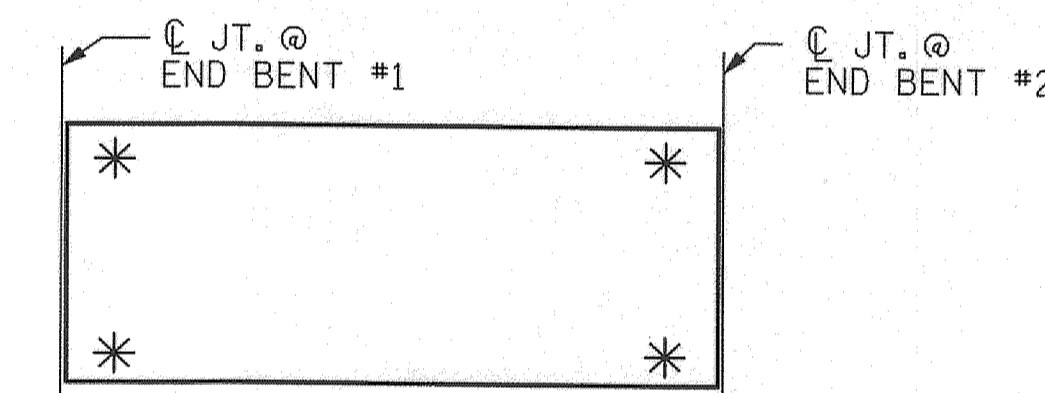

SKETCH SHOWING POINTS OF ATTACHMENT

* DENOTES GUARDRAIL ANCHOR ASSEMBLY

NOTES

THE GUARDRAIL ANCHOR ASSEMBLY SHALL CONSIST OF A 1/4" HOLD DOWN PLATE AND 7 - 7/8" Ø BOLTS WITH NUTS AND WASHERS.

THE HOLD-DOWN PLATE SHALL CONFORM TO AASHTO M270 GRADE 36. AFTER FABRICATION, THE HOLD-DOWN PLATE SHALL BE HOT-DIP GALVANIZED IN ACCORDANCE WITH AASHTO M111.

BOLTS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A307 AND NUTS SHALL CONFORM TO THE REQUIREMENTS OF AASHTO M291. BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED. (AT THE CONTRACTOR'S OPTION, STAINLESS STEEL BOLTS, NUTS AND WASHERS MAY BE USED AS AN ALTERNATE FOR THE 7/8" Ø GALVANIZED BOLTS, NUTS AND WASHERS. THEY SHALL CONFORM TO OR EXCEED THE MECHANICAL REQUIREMENTS OF ASTM A307. THE USE OF THIS ALTERNATE SHALL BE APPROVED BY THE ENGINEER.)

THE GUARDRAIL ANCHOR ASSEMBLY IS REQUIRED AT ALL POINTS WHERE APPROACH GUARDRAIL IS TO BE ATTACHED TO THE END OF BARRIER RAIL. FOR POINTS OF ATTACHMENT, SEE SKETCH.

AFTER INSTALLATION, THE EXPOSED THREAD OF THE BOLT SHALL BE BURRED WITH A SHARP POINTED TOOL.

THE COST OF THE GUARDRAIL ANCHOR ASSEMBLY SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE BID FOR VERTICAL CONCRETE BARRIER RAIL.

THE VERTICAL REINFORCING BARS MAY BE SHIFTED SLIGHTLY IN THE VERTICAL CONCRETE BARRIER RAIL TO CLEAR ASSEMBLY BOLTS.

THE 1/4" Ø HOLES SHALL BE FORMED OR DRILLED WITH A CORE BIT. IMPACT TOOLS WILL NOT BE PERMITTED. ANY CONCRETE DAMAGED BY THIS WORK SHALL BE REPAIRED TO THE SATISFACTION OF THE ENGINEER.


PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
STANDARD
GUARDRAIL ANCHORAGE
FOR VERTICAL CONCRETE
BARRIER RAIL

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-7
1			3			TOTAL SHEETS
2			4			17



f/k/a Florence & Hutcherson, Inc.
5121 Kingdom Way, Suite 100 Raleigh, NC 27607
NC License No: F-0288

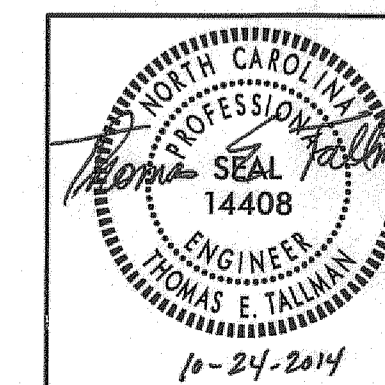

STD. NO. GRA3

10/24/2014 P:\17BP\Projects\Div05_30\Franklin\Structures\Plans\17BP_5.R.30_std_sht7.dgn ICA Engineering

ASSEMBLED BY : D. H. CARTER	DATE : FEB 2014
CHECKED BY : T. E. TALLMAN	DATE : FEB 2014
DRAWN BY : MAA 5/10	REV. 10/1/11 MAA/GM
CHECKED BY : GM 5/10	REV. 12/5/11 MAA/GM
	REV. 6/13 MAA/GM


NOTES

STIRRUPS IN CAP MAY BE SHIFTED AS NECESSARY TO CLEAR DOWELS.


THE CONCRETE IN THE SHADED AREA OF THE WING SHALL BE Poured AFTER THE VERTICAL CONCRETE BARRIER RAIL IS CAST IF SLIP FORMING IS USED.

FOR PILE SPLICE DETAILS, SEE SHEET 4 OF 4.

FOR WING DETAILS, SEE SHEET 3 OF 4.

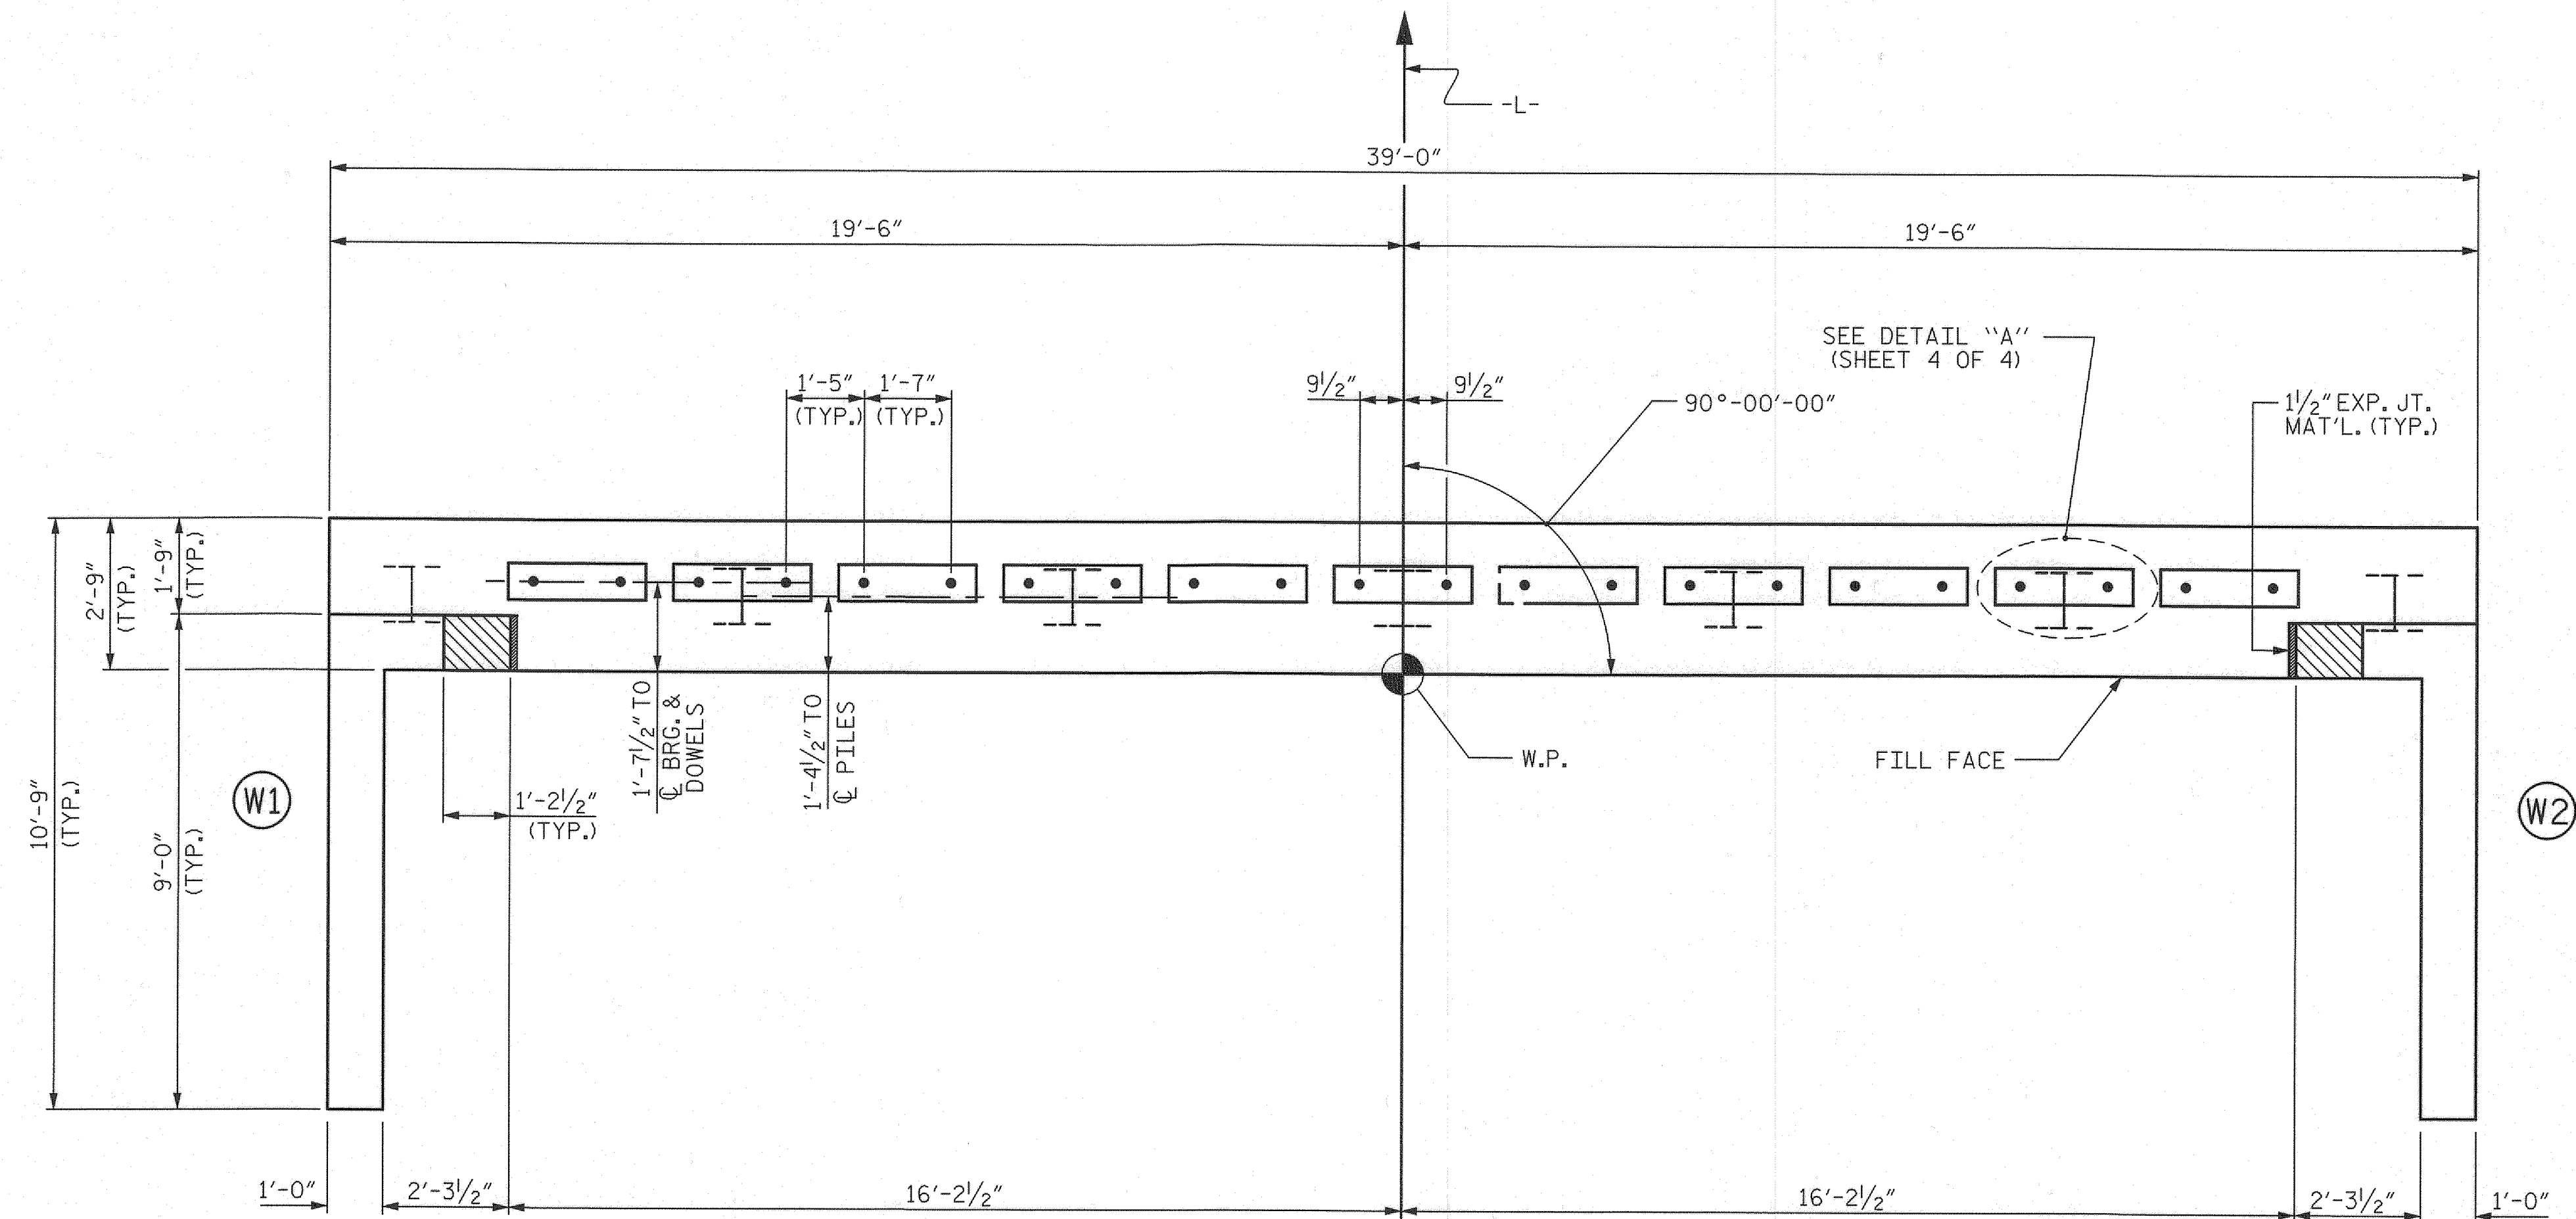

PLAN

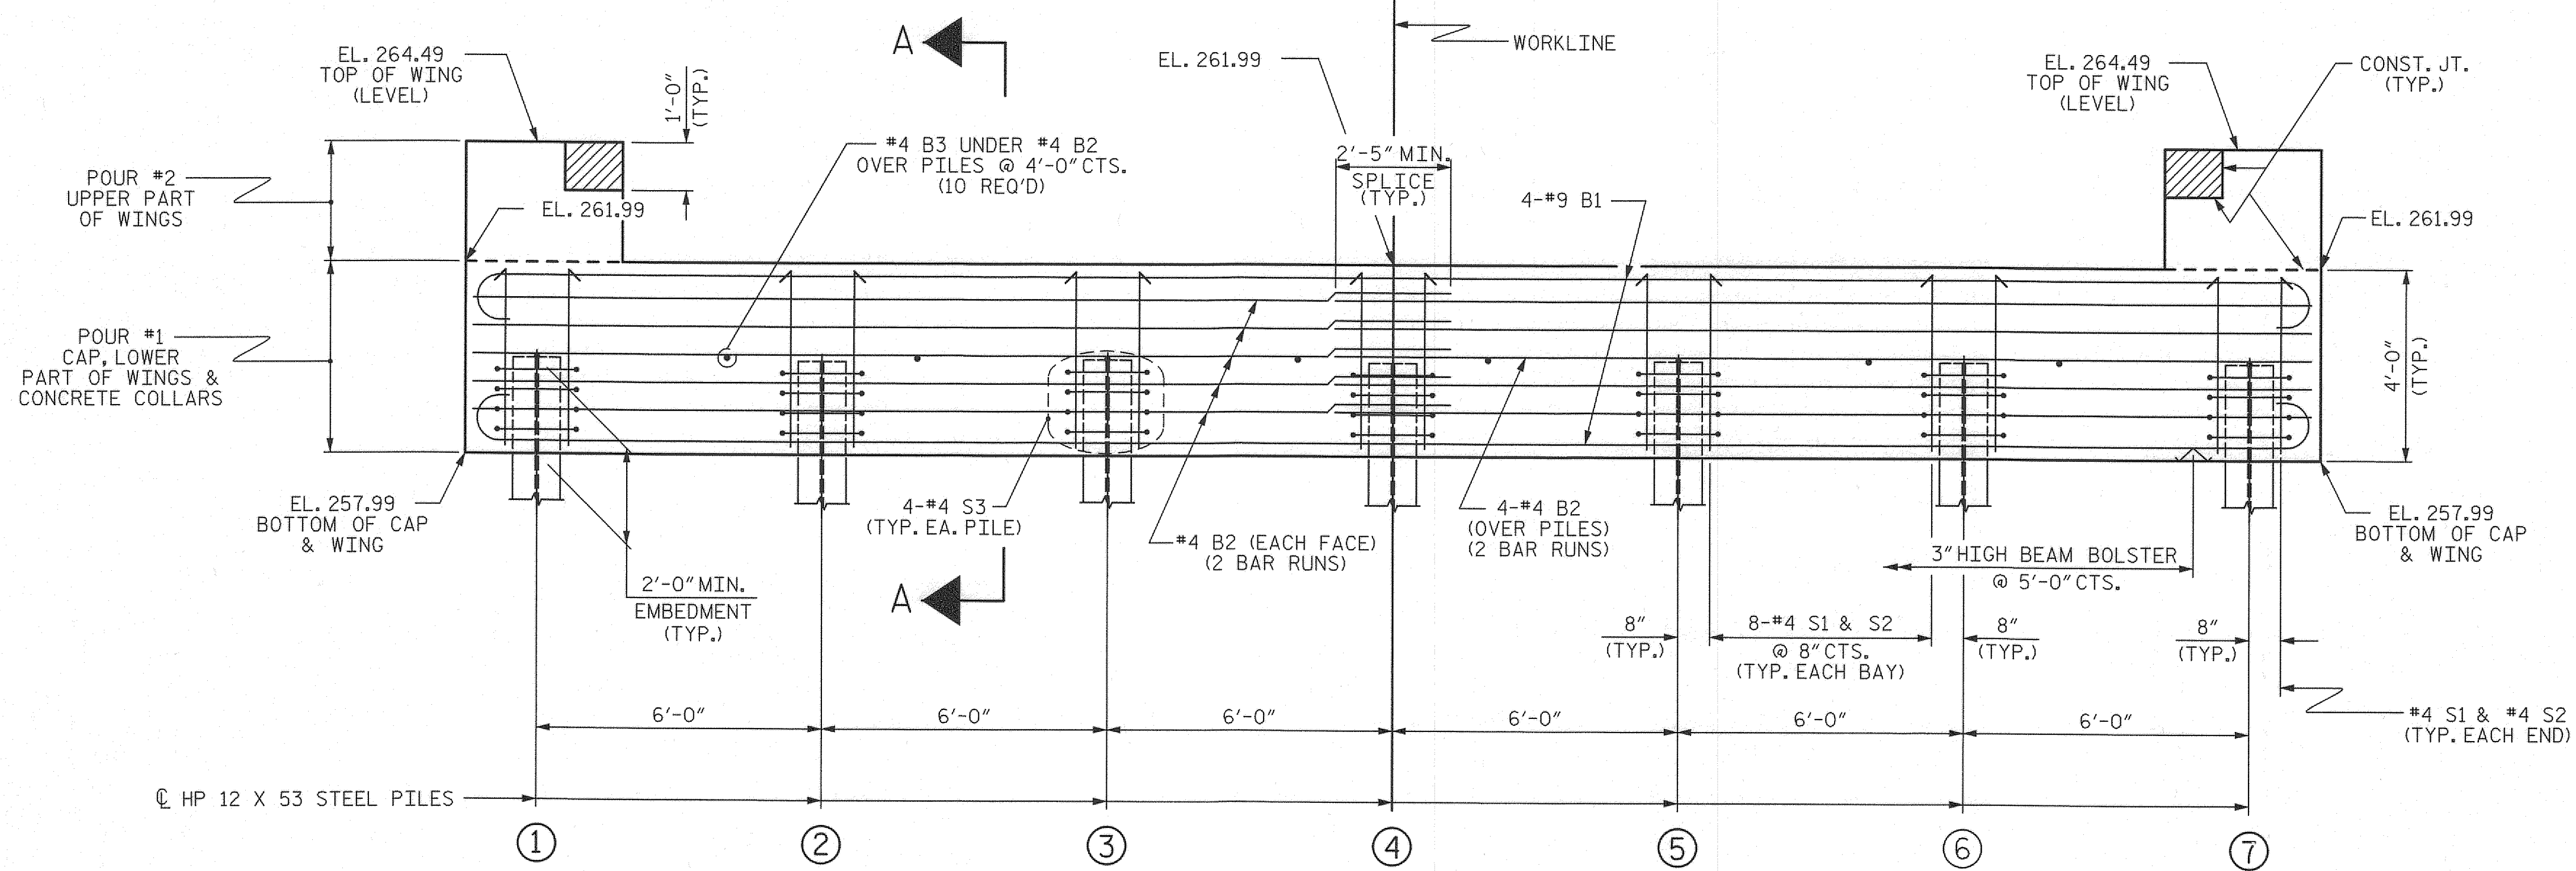

ELEVATION

WINGS NOT SHOWN FOR CLARITY.
FOR SECTION A-A, SEE SHEET 4 OF 4.
CONCRETE COLLARS FOR STEEL PILES NOT SHOWN IN PLAN AND ELEVATION VIEWS FOR CLARITY.
SEE "CORROSION PROTECTION FOR STEEL PILES DETAIL", SHEET 4 OF 4.


PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-

SHEET 1 OF 4

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

SUBSTRUCTURE
END BENT No. 1

REVISIONS						SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	S-8	
1			3			TOTAL SHEETS 17	
2			4				

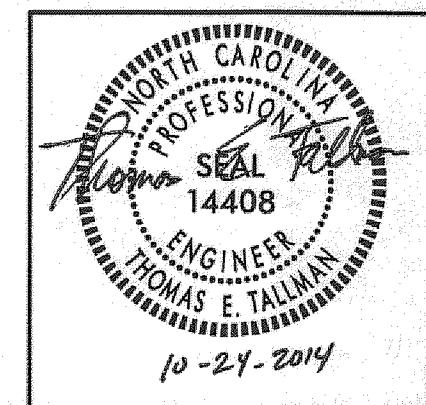

10/24/2014 P:\Libraries\Projects\Div05\30_Franklin\Substructures\Plans\17BP.5.R.30_s.dwg

ASSEMBLED BY : M. T. MOBLEY DATE : 10/12
CHECKED BY : J. E. MONDOLFI DATE : 10/12
DRAWN BY : WJH 12/11
CHECKED BY : AAC 12/11


NOTES

STIRRUPS IN CAP MAY BE SHIFTED AS NECESSARY TO CLEAR DOWELS.


THE CONCRETE IN THE SHADED AREA OF THE WING SHALL BE POURED AFTER THE VERTICAL CONCRETE BARRIER RAIL IS CAST IF SLIP FORMING IS USED.

FOR PILE SPLICE DETAILS, SEE SHEET 4 OF 4.

FOR WING DETAILS, SEE SHEET 3 OF 4.

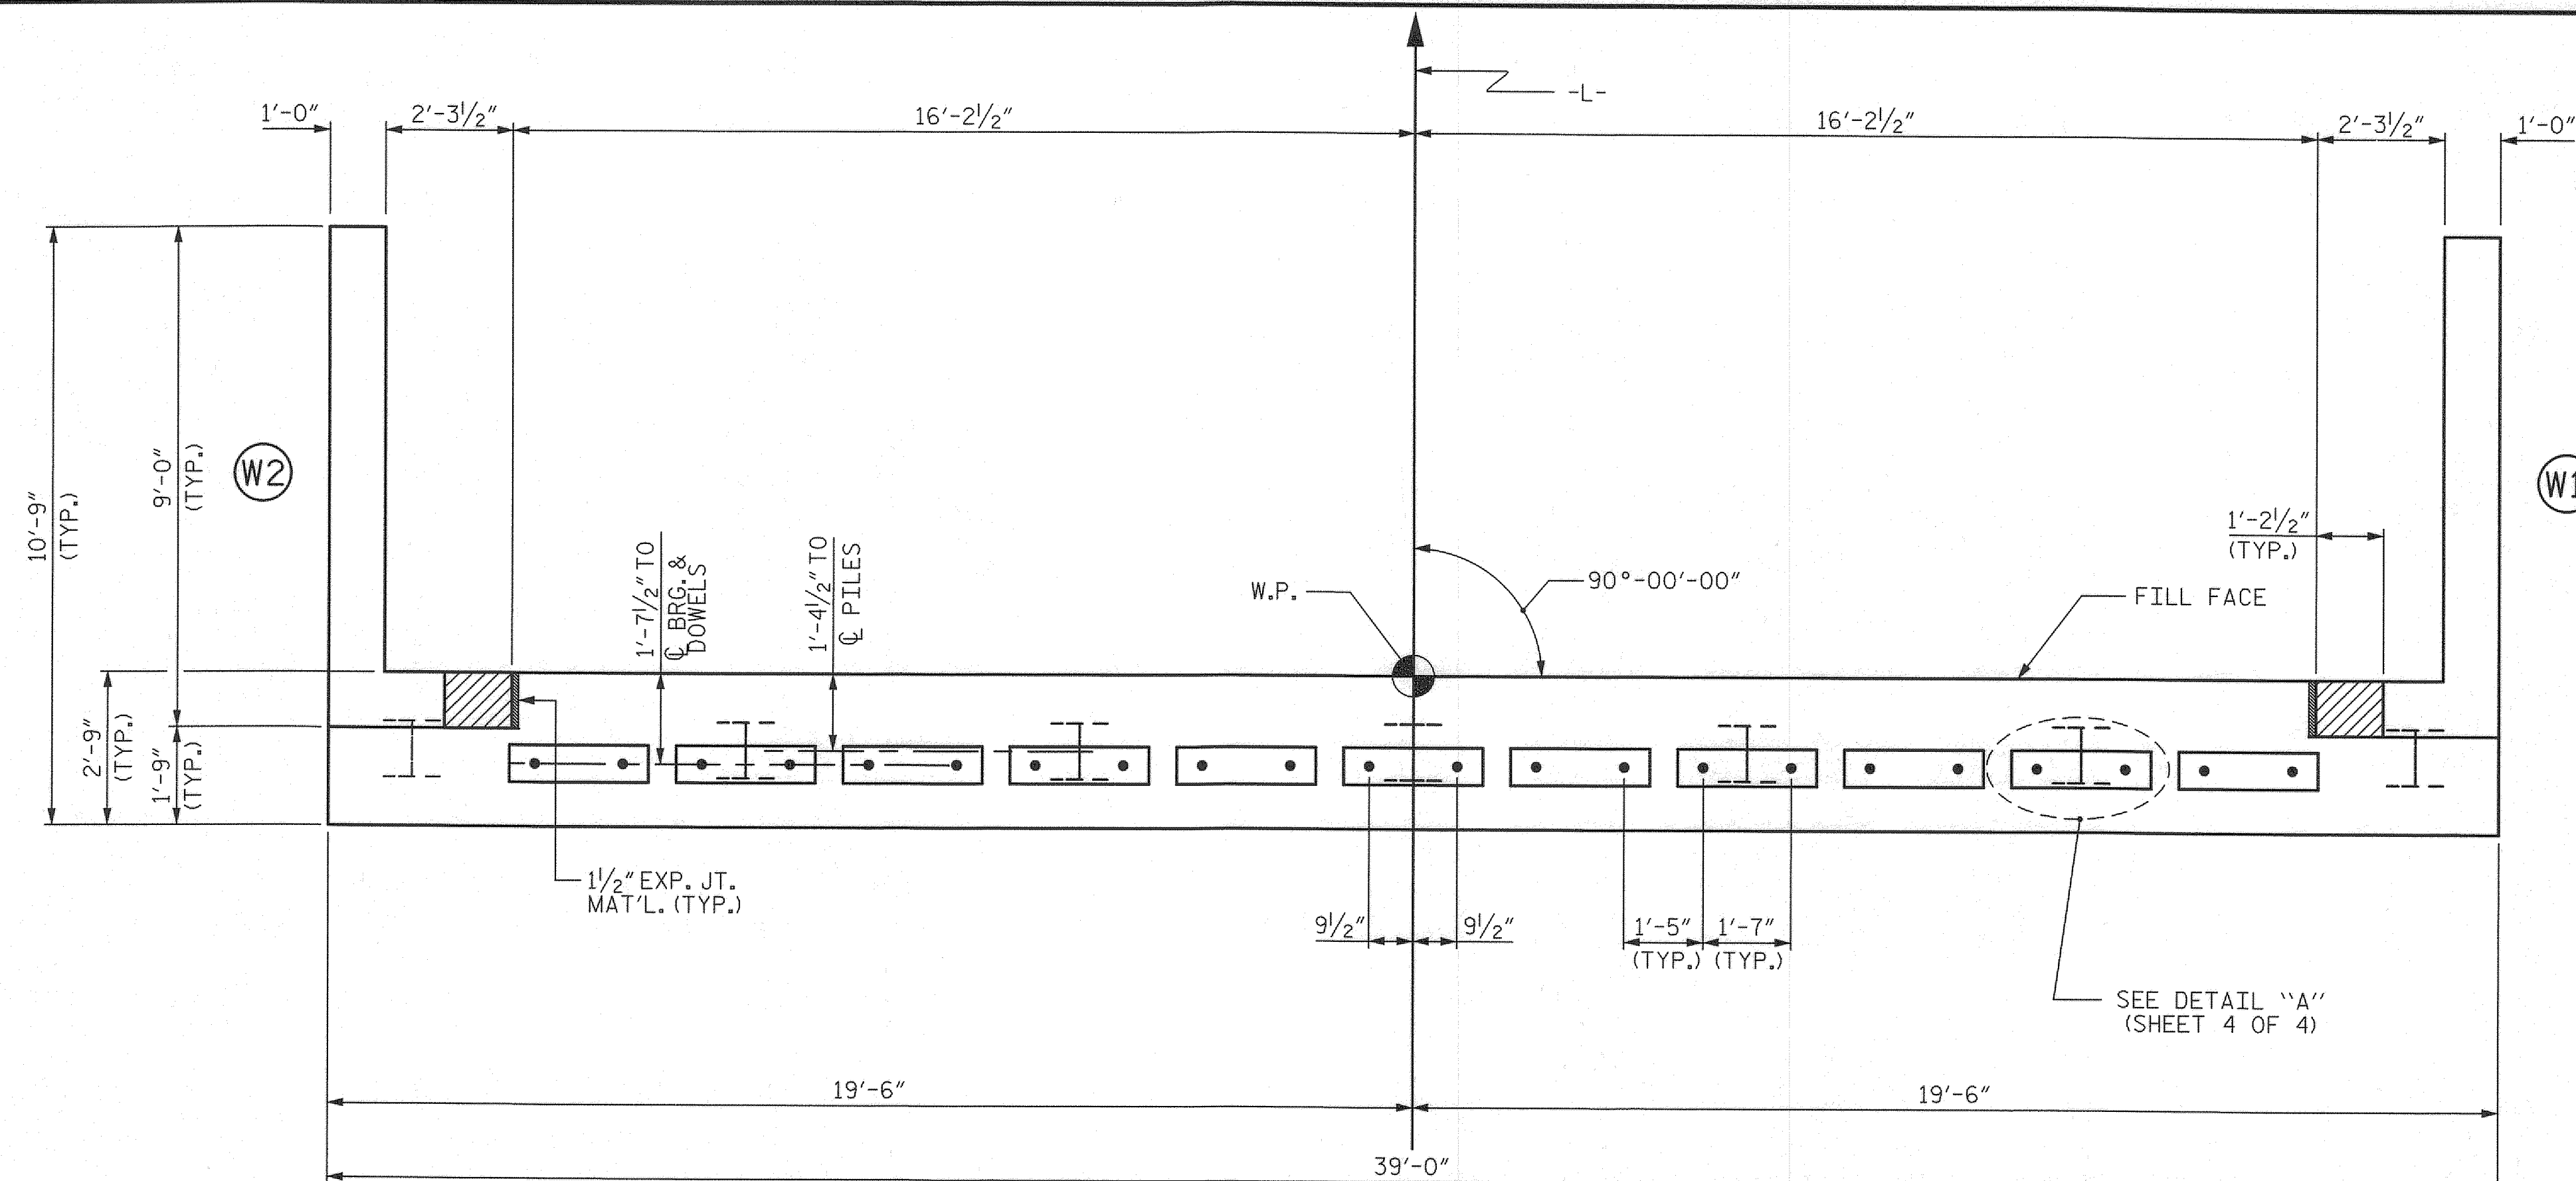

PLAN

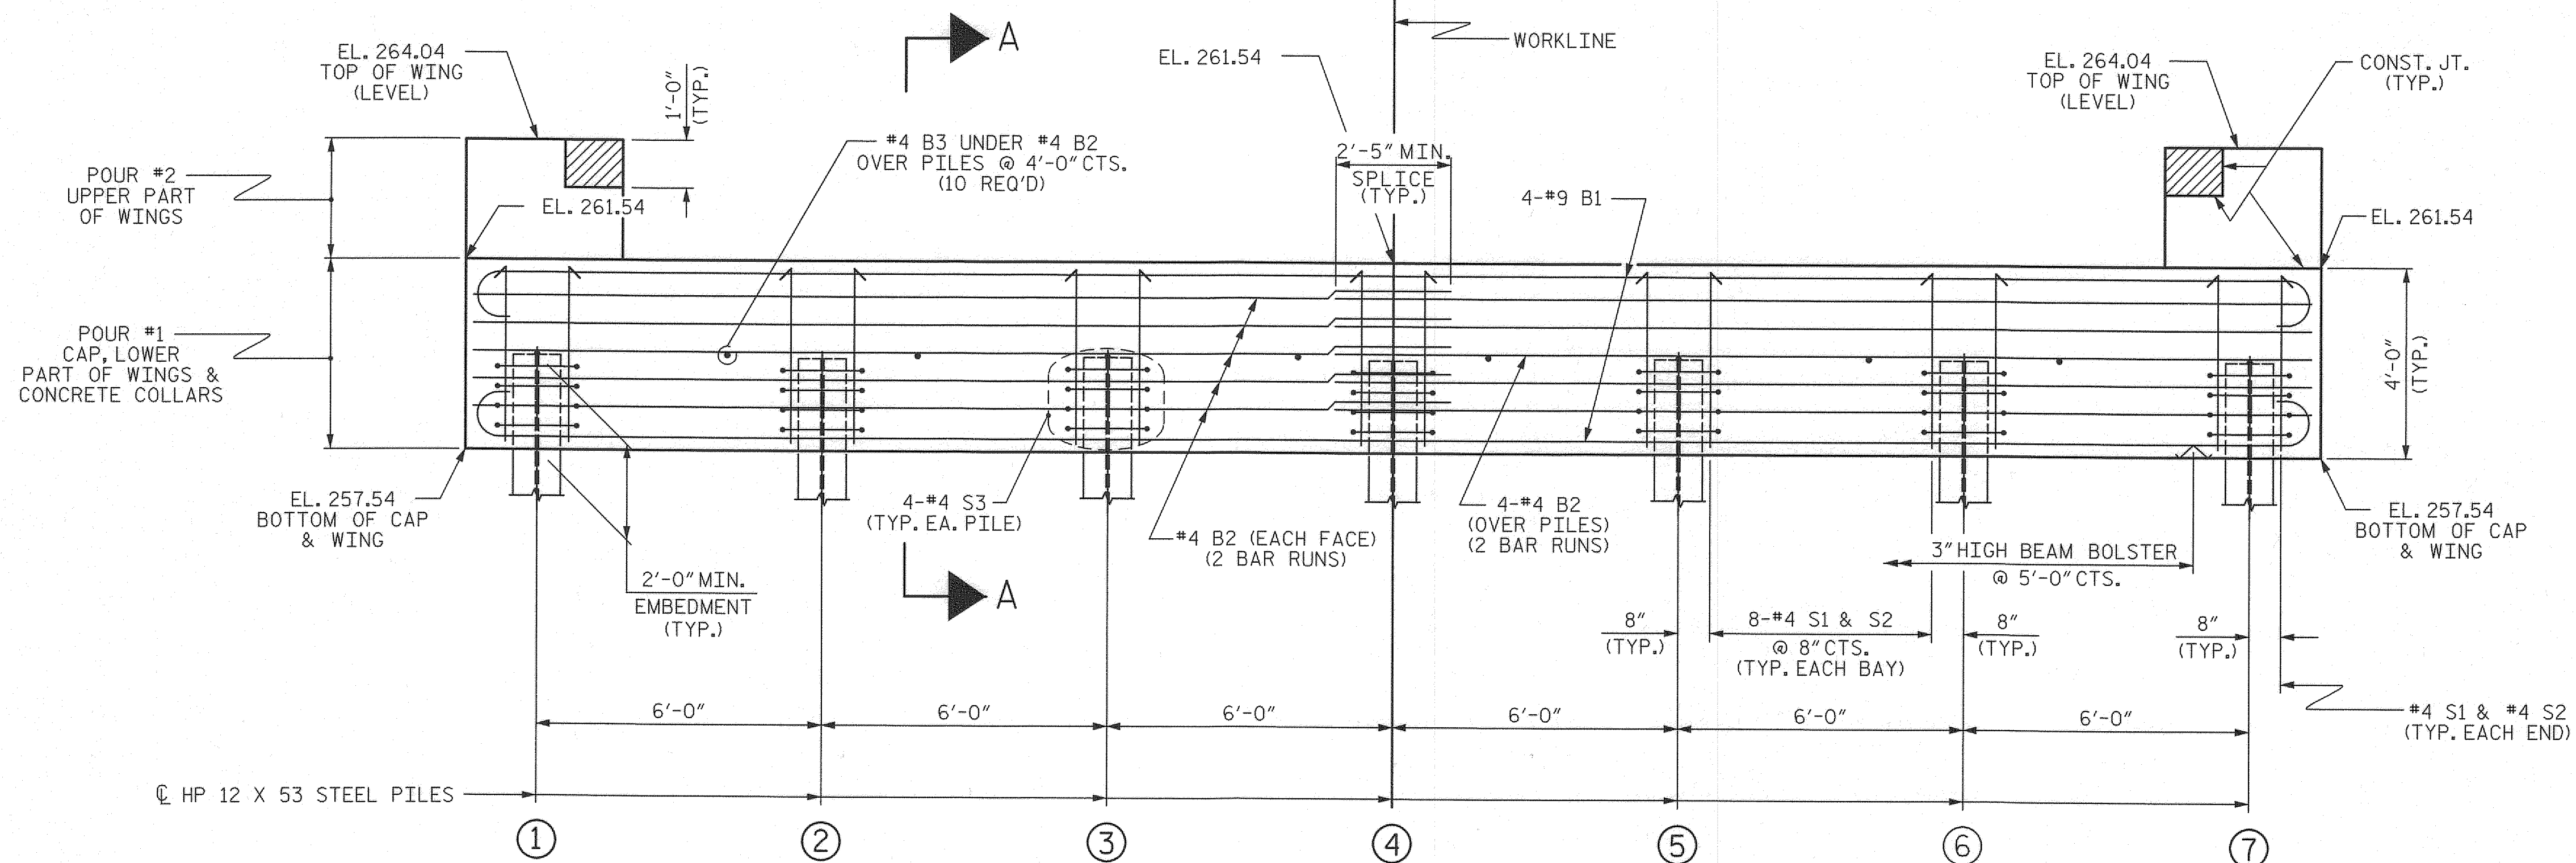

ELEVATION

WINGS NOT SHOWN FOR CLARITY.
FOR SECTION A-A, SEE SHEET 4 OF 4.
CONCRETE COLLARS FOR STEEL PILES NOT SHOWN IN PLAN AND ELEVATION VIEWS FOR CLARITY.
SEE "CORROSION PROTECTION FOR STEEL PILES DETAIL", SHEET 4 OF 4.


PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-

SHEET 2 OF 4

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH


SUBSTRUCTURE
END BENT No. 2

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-9
1			3			TOTAL SHEETS
2			4			17

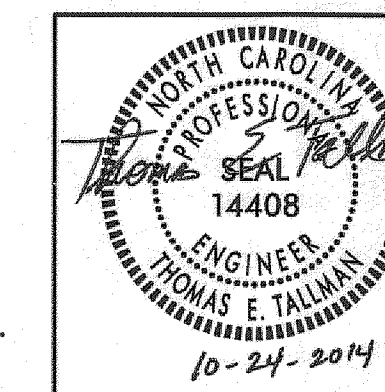


10/24/2014 P:\Lib\Projects\Div05\30_Franklin\Structures\Plans\17BP.5.R.30.ed.sht19.dgn ICA Engineering


ASSEMBLED BY : M. T. MOBLEY DATE : 10/12
CHECKED BY : J. E. MONDOLFI DATE : 10/12
DRAWN BY : WJH 12/11
CHECKED BY : AAC 12/11

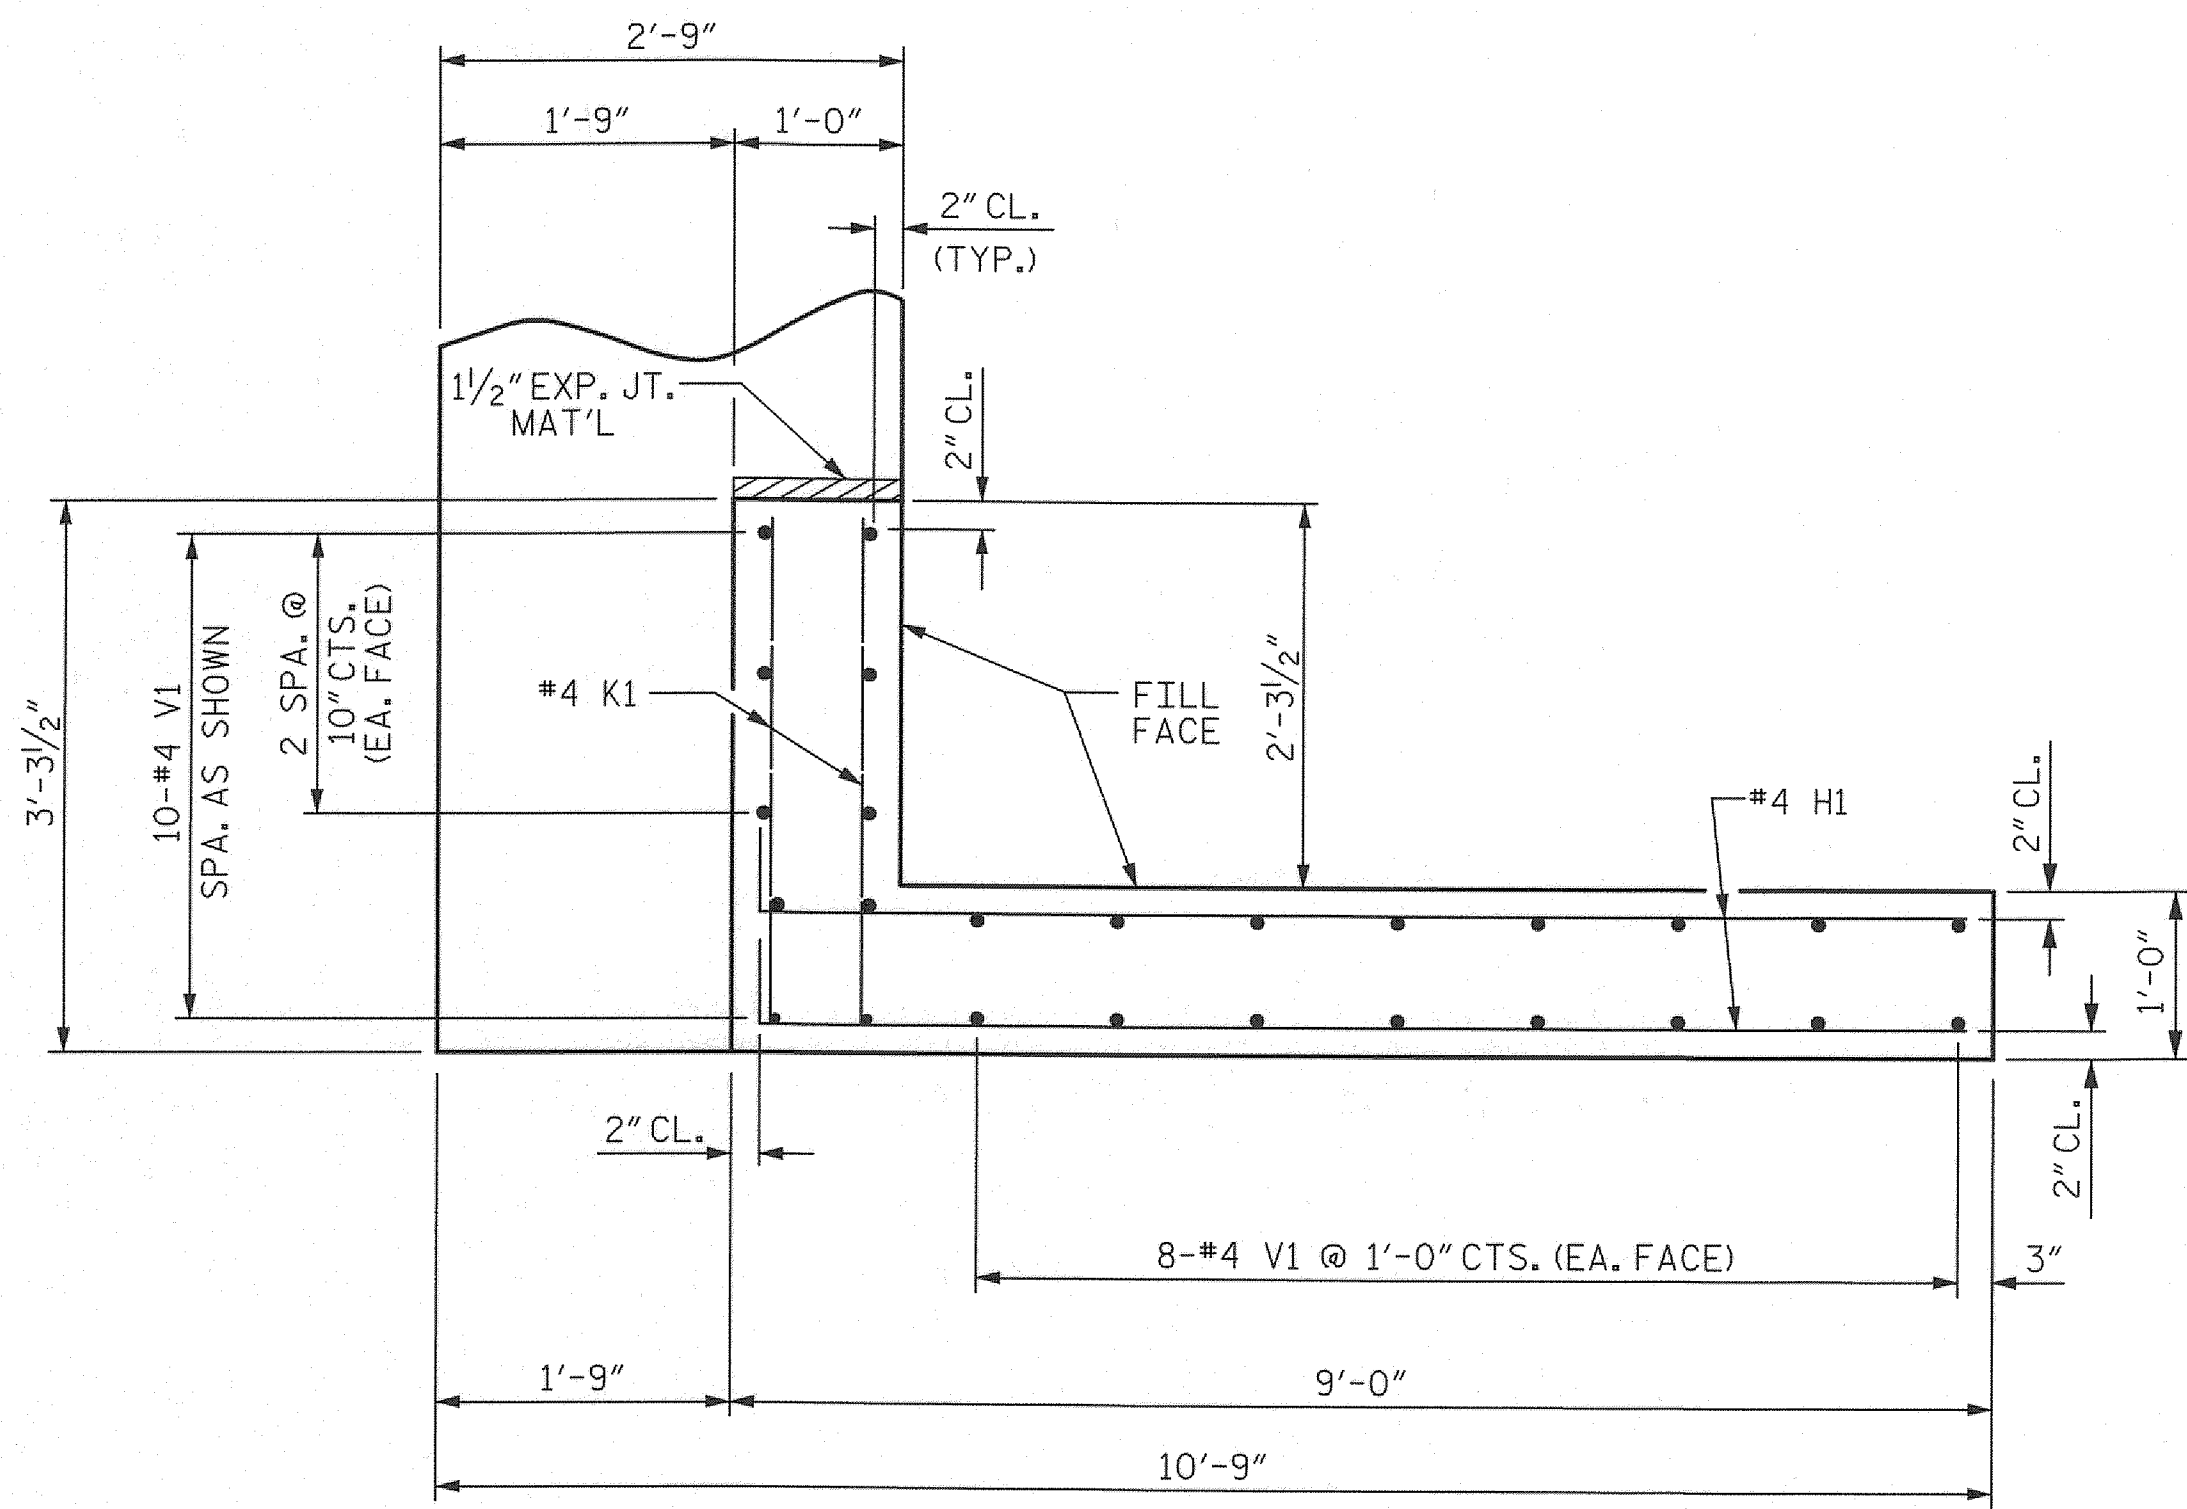


PLAN OF WING (W1)

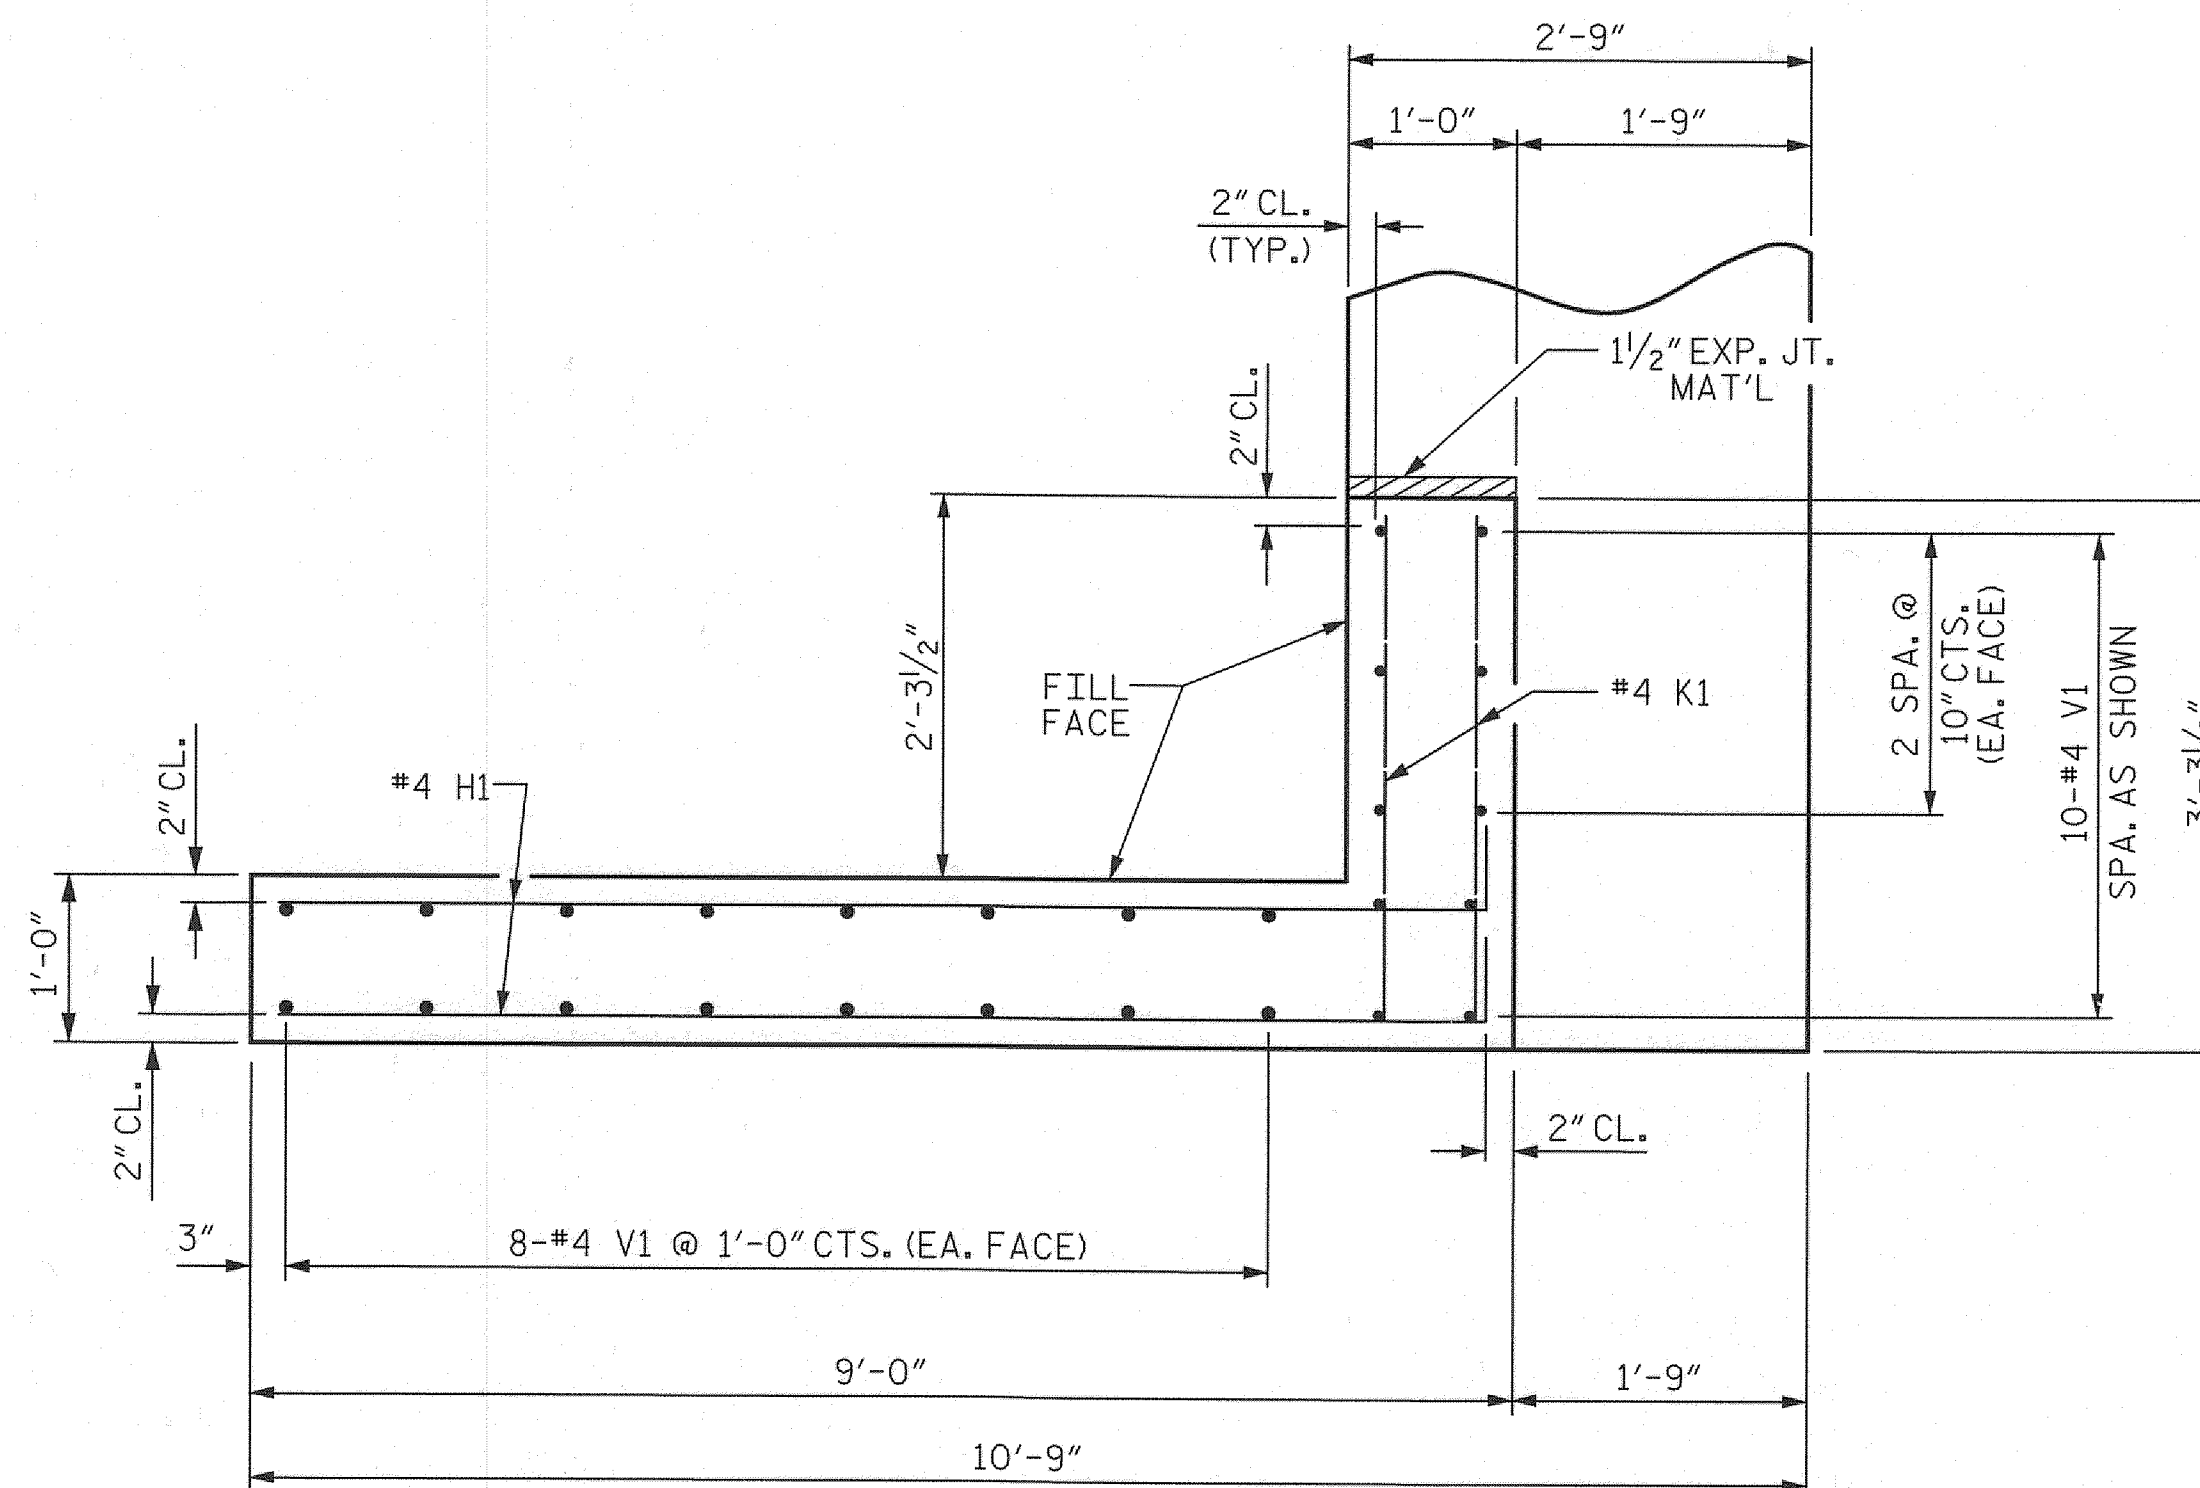


PLAN OF WING (W2)

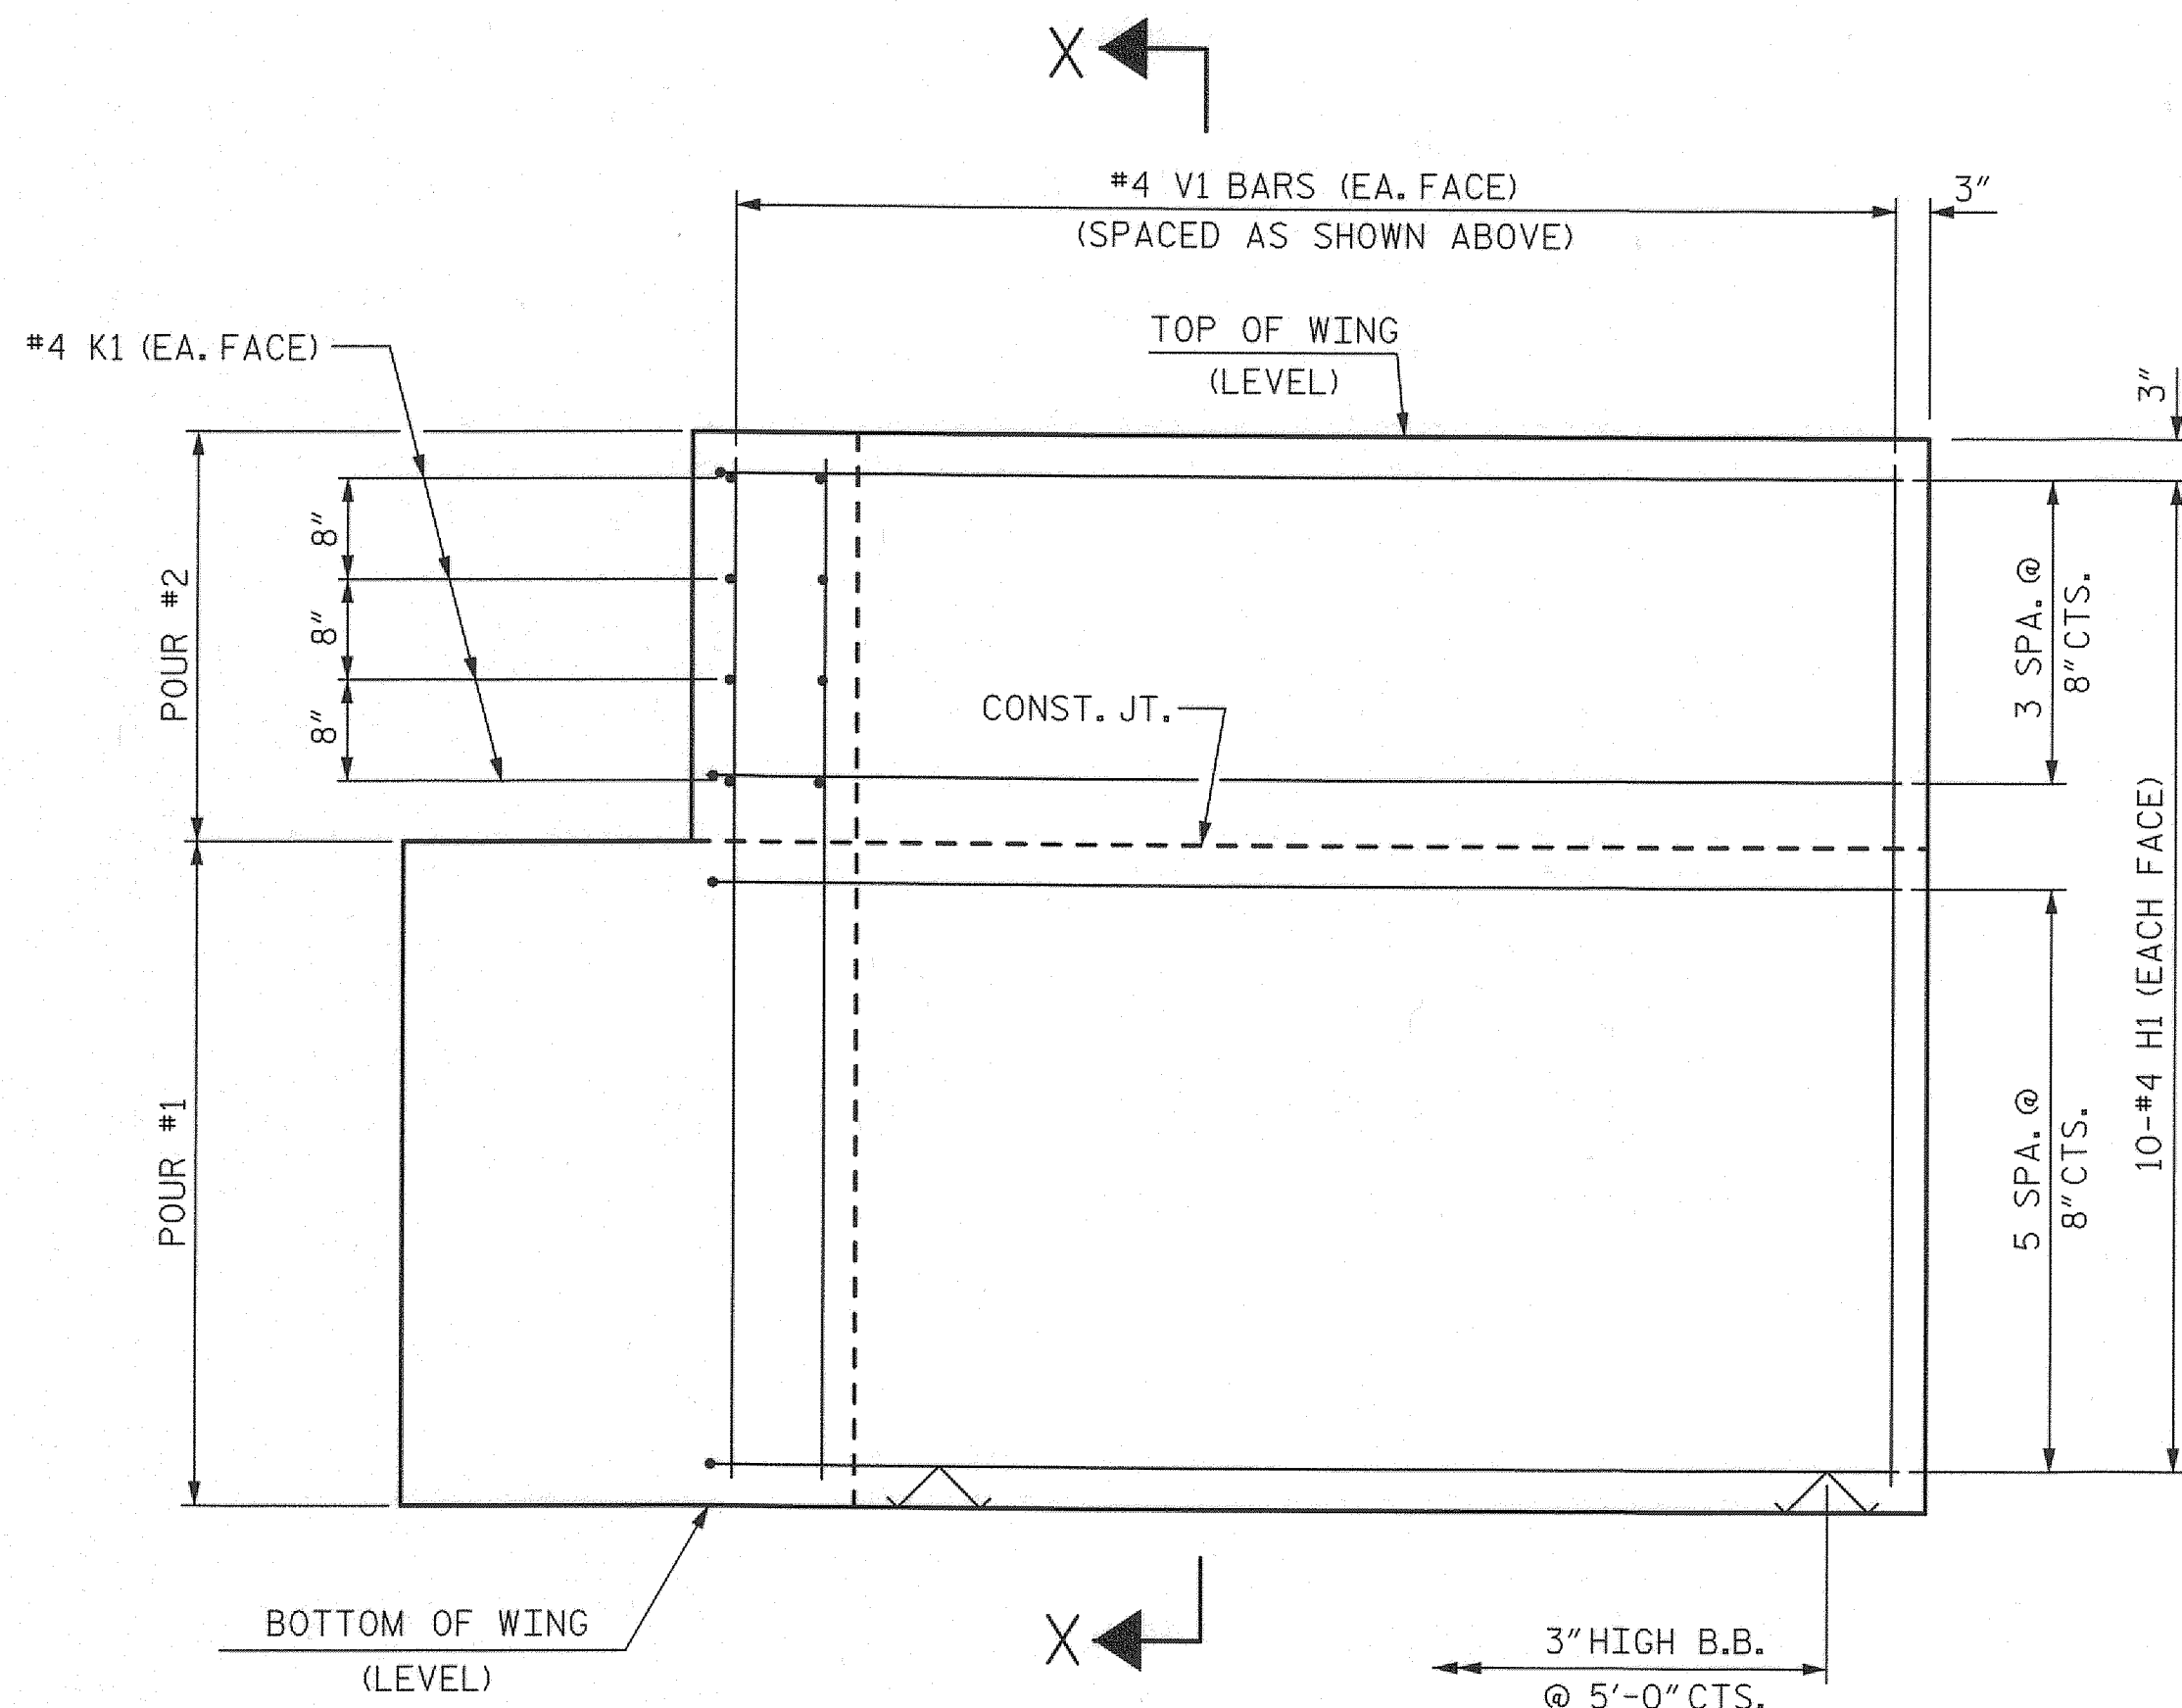


ELEVATION OF WING (W1)

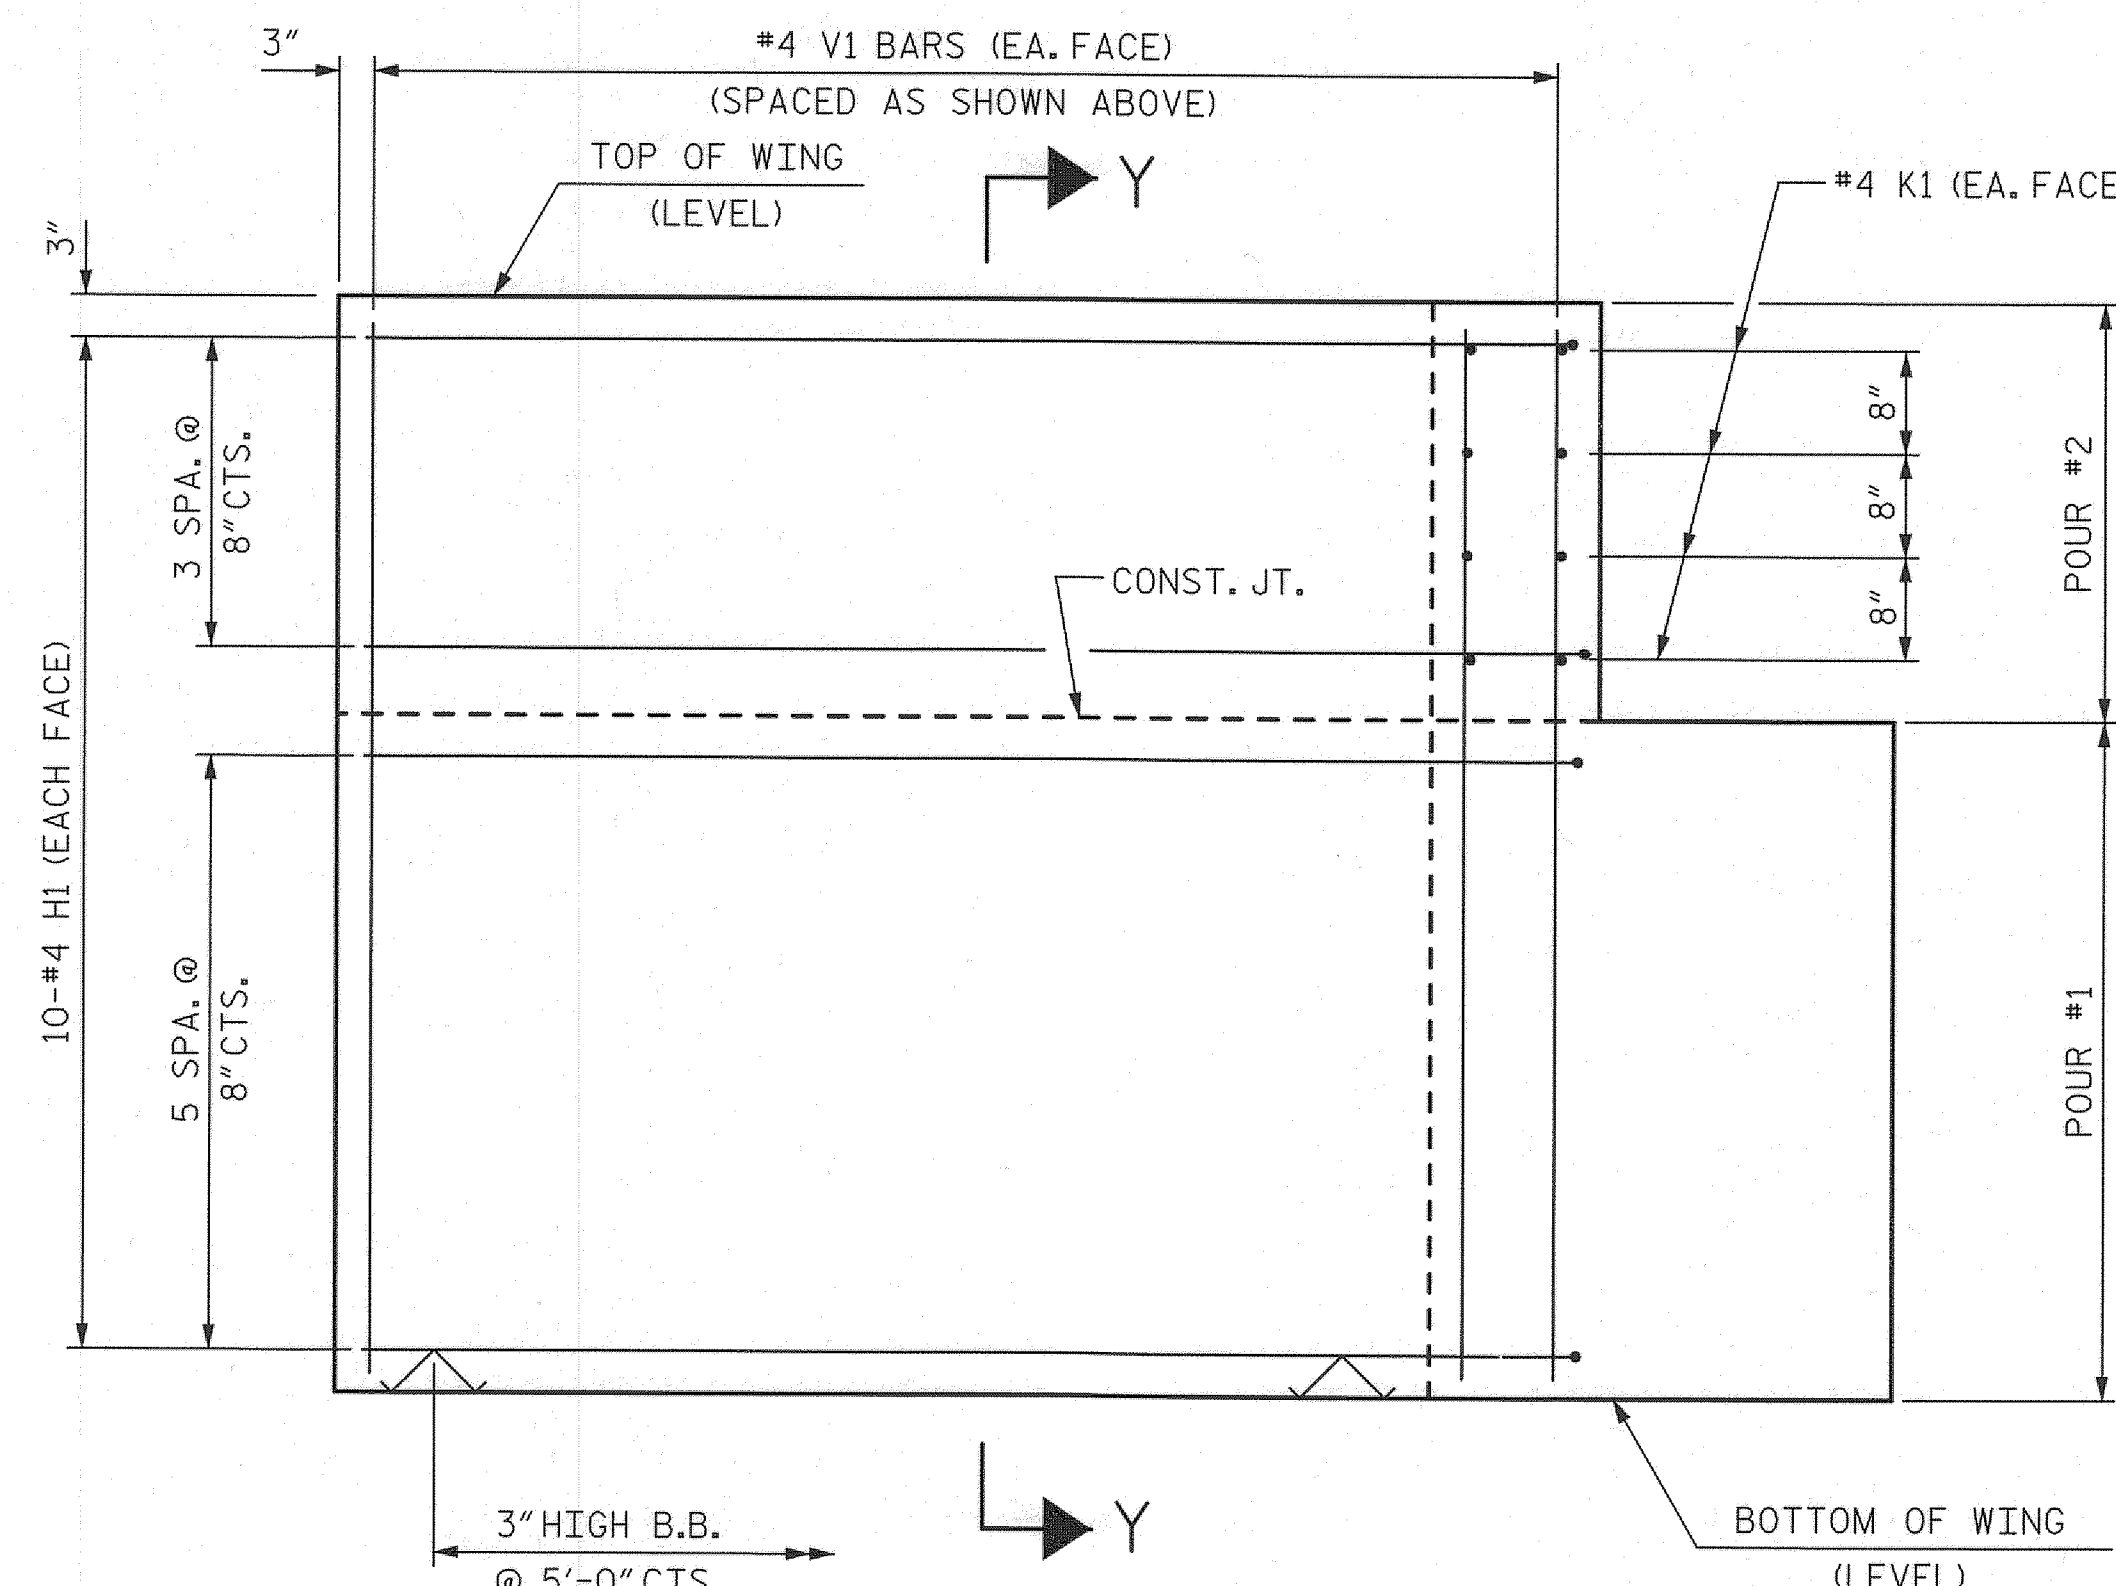

ELEVATION OF WING (W2)

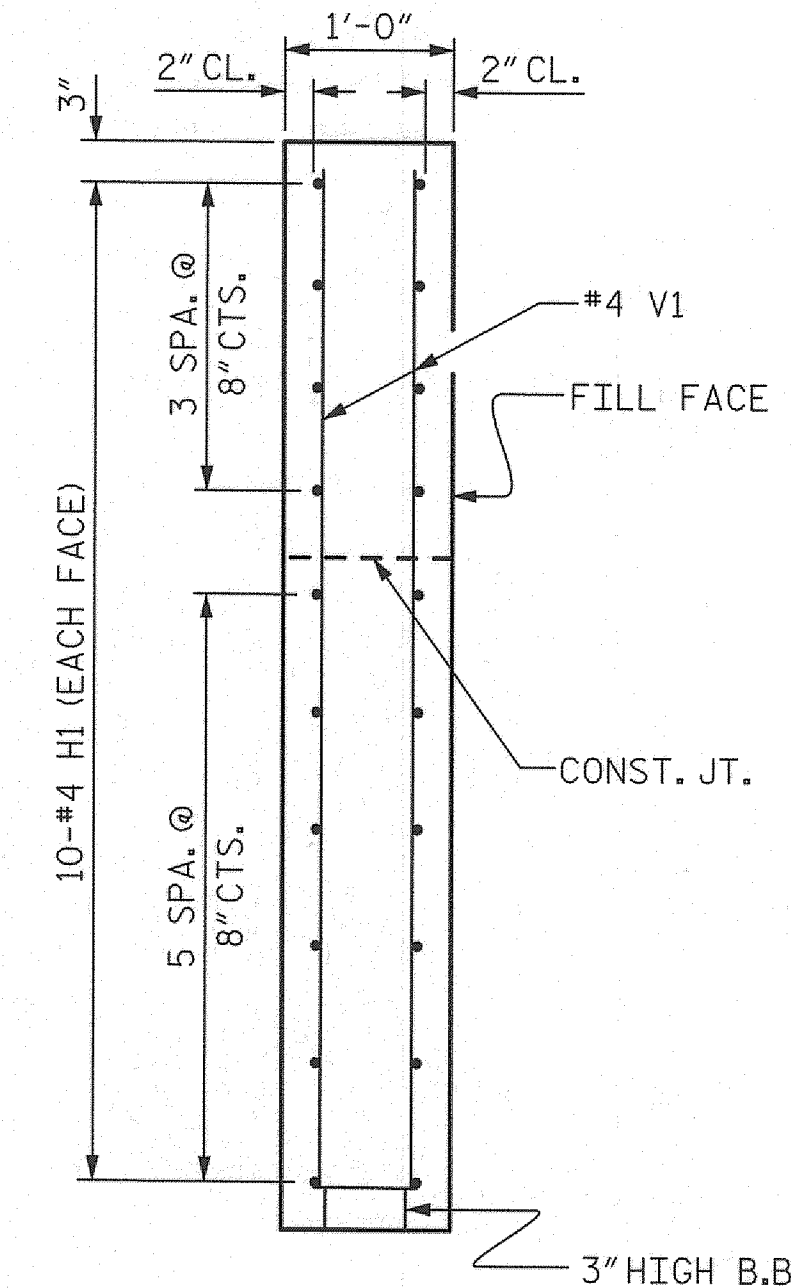

SECTION X-X

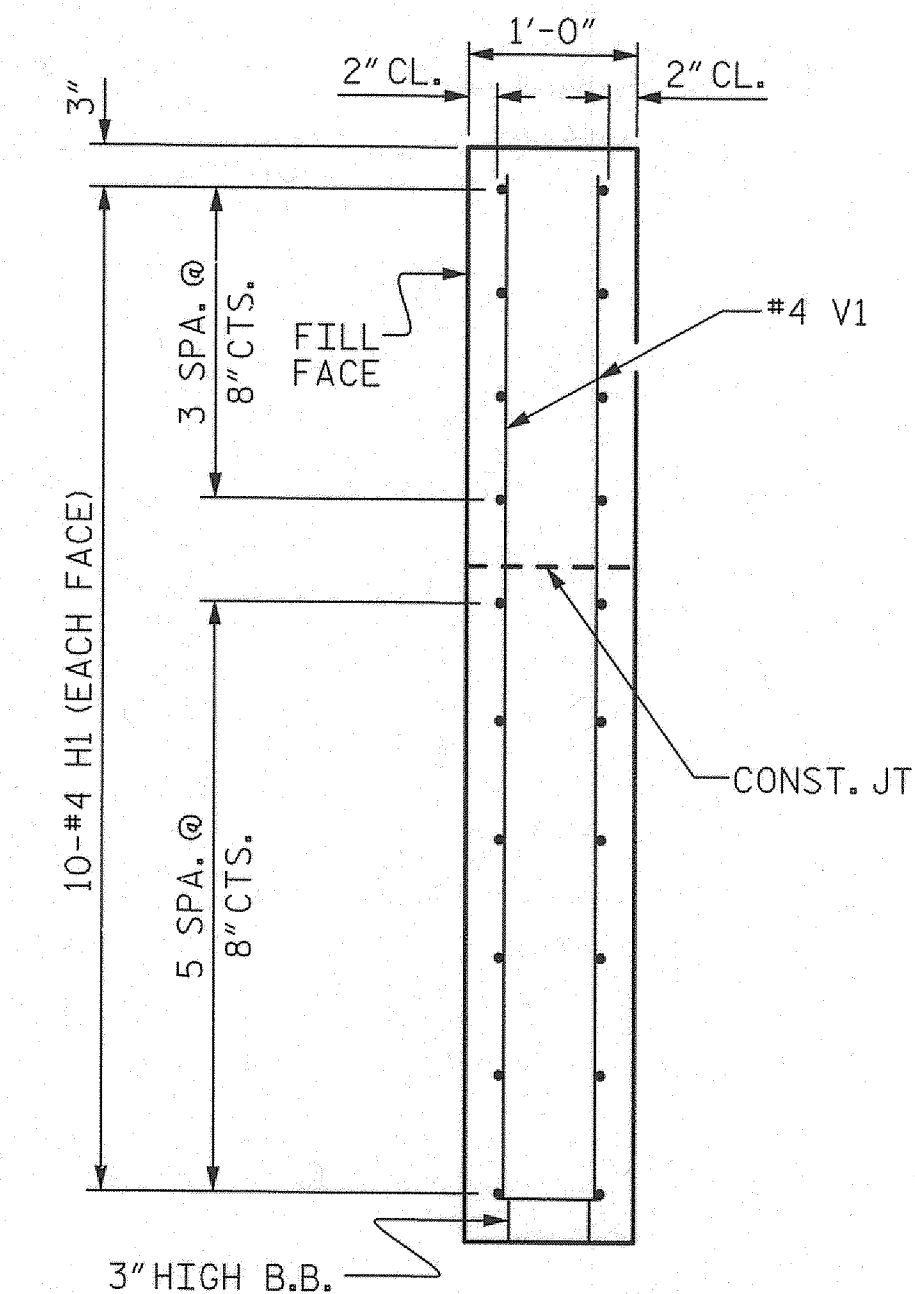

SECTION Y-Y


PROJECT NO. 17BP.5.R.30
 FRANKLIN COUNTY
 STATION: 14+00.00 -L-

SHEET 3 OF 4

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

SUBSTRUCTURE
 END BENT
 WING DETAILS


REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-10
1			3			TOTAL SHEETS
2			4			17

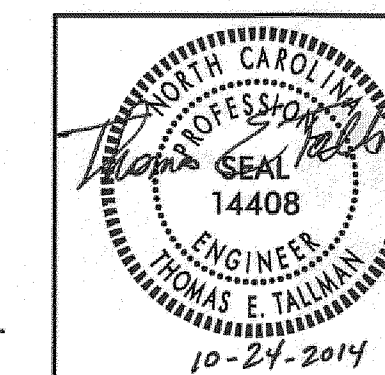

WING DETAILS

ASSEMBLED BY : M. T. MOBLEY DATE : 10/12
 CHECKED BY : J. E. MONDOLFI DATE : 10/12
 DRAWN BY : WJH 12/11
 CHECKED BY : AAC 12/11

10/24/2014
 P:\Lib\Projects\170530-Franklin\Structures\Plans\17BP.5.R.30.sht10.dgn
 ICA Engineering

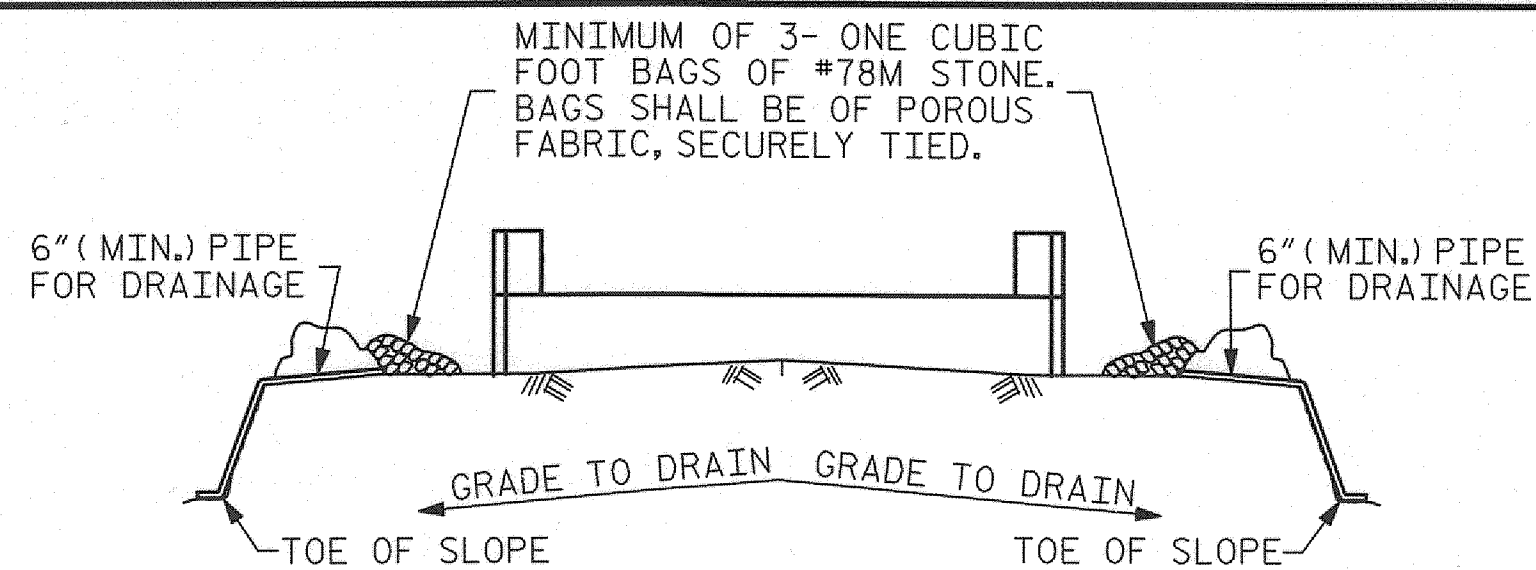


BAGGED STONE AND PIPE SHALL BE PLACED IMMEDIATELY AFTER COMPLETION OF END BENT EXCAVATION. PIPE MAY BE EITHER CONCRETE, CORRUGATED STEEL, CORRUGATED ALUMINUM ALLOY, OR CORRUGATED PLASTIC. PERFORATED PIPE WILL NOT BE ALLOWED.


BAGGED STONE SHALL REMAIN IN PLACE UNTIL THE ENGINEER DIRECTS THAT IT BE REMOVED. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF SILT ACCUMULATIONS AT BAGGED STONE WHEN SO DIRECTED BY THE ENGINEER. BAGS SHALL BE REMOVED AND REPLACED WHENEVER THE ENGINEER DETERMINES THAT THEY HAVE DETERIORATED AND LOST THEIR EFFECTIVENESS.

NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE BID FOR THE SEVERAL PAY ITEMS.

TEMPORARY DRAINAGE AT END BENT

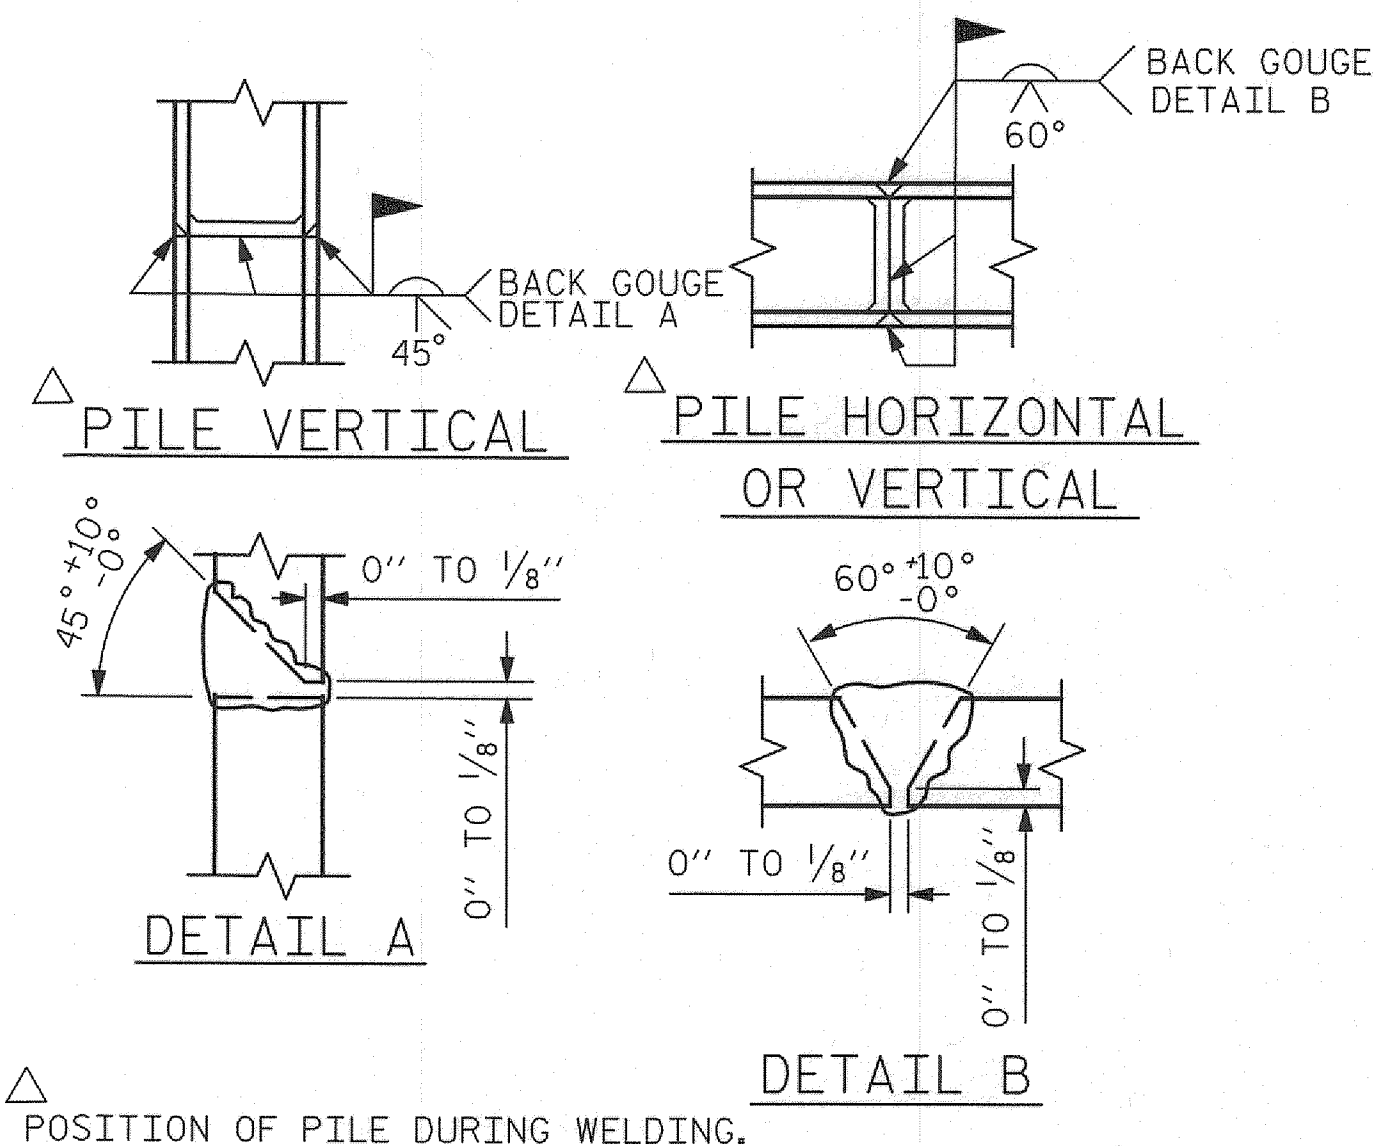


PILE SPLICE DETAILS

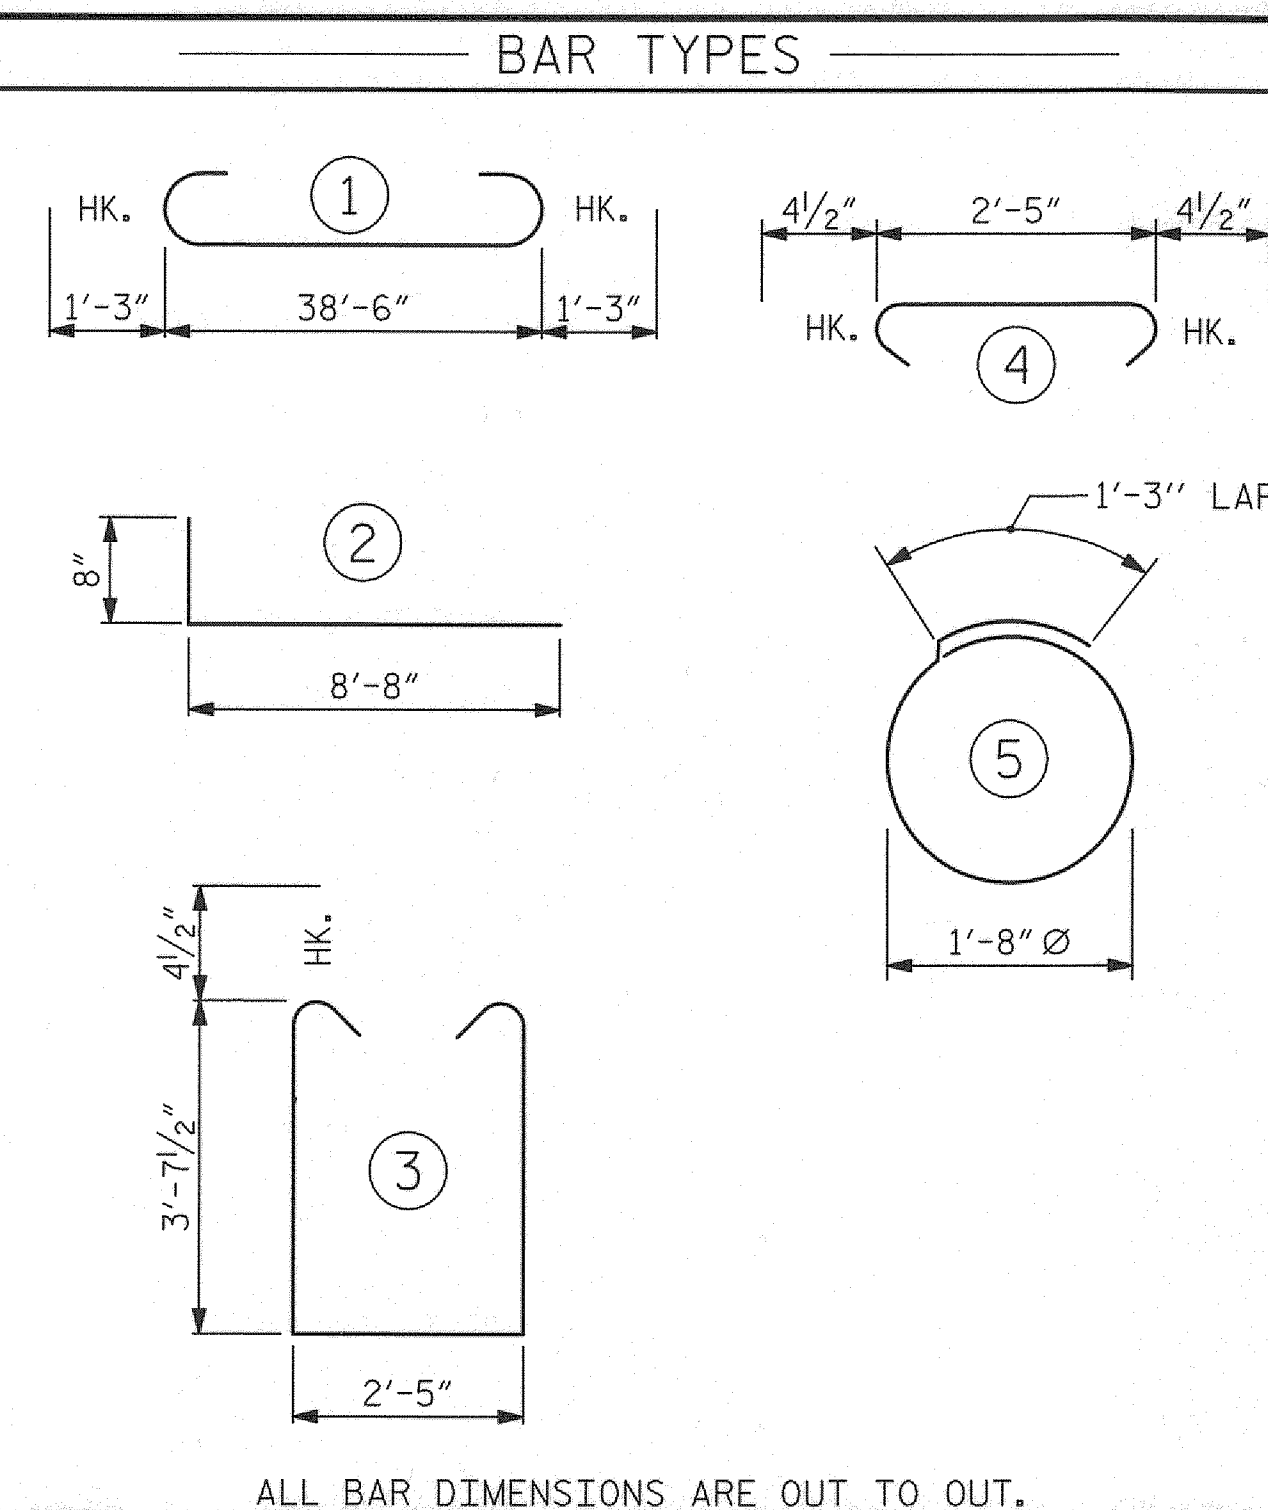


END BENT No. 1 HP 12 X 53 STEEL PILES NO: 7 LIN. FT.= 70	END BENT No. 2 HP 12 X 53 STEEL PILES NO: 7 LIN. FT.= 175
PILE EXCAVATION IN SOIL LIN. FT.= 46	
PILE EXCAVATION NOT IN SOIL LIN. FT.= 24	

BILL OF MATERIAL FOR ONE END BENT					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
B1	8	#9	1	41'-0"	1115
B2	28	#4	STR	20'-7"	385
B3	10	#4	STR	2'-5"	16
D1	22	#6	STR	1'-6"	50
H1	40	#4	2	9'-4"	249
K1	16	#4	STR	2'-11"	31
S1	50	#4	3	10'-5"	348
S2	50	#4	4	3'-2"	106
S3	28	#4	5	6'-6"	122
V1	52	#4	STR	6'-2"	214
REINFORCING STEEL (FOR ONE END BENT)					2636 LBS.
CLASS A CONCRETE BREAKDOWN (FOR ONE END BENT)					
POUR #1 CAP, LOWER PART OF WINGS & COLLARS					19.5 C.Y.
POUR #2 UPPER PART OF WINGS					2.1 C.Y.
TOTAL CLASS A CONCRETE					21.6 C.Y.

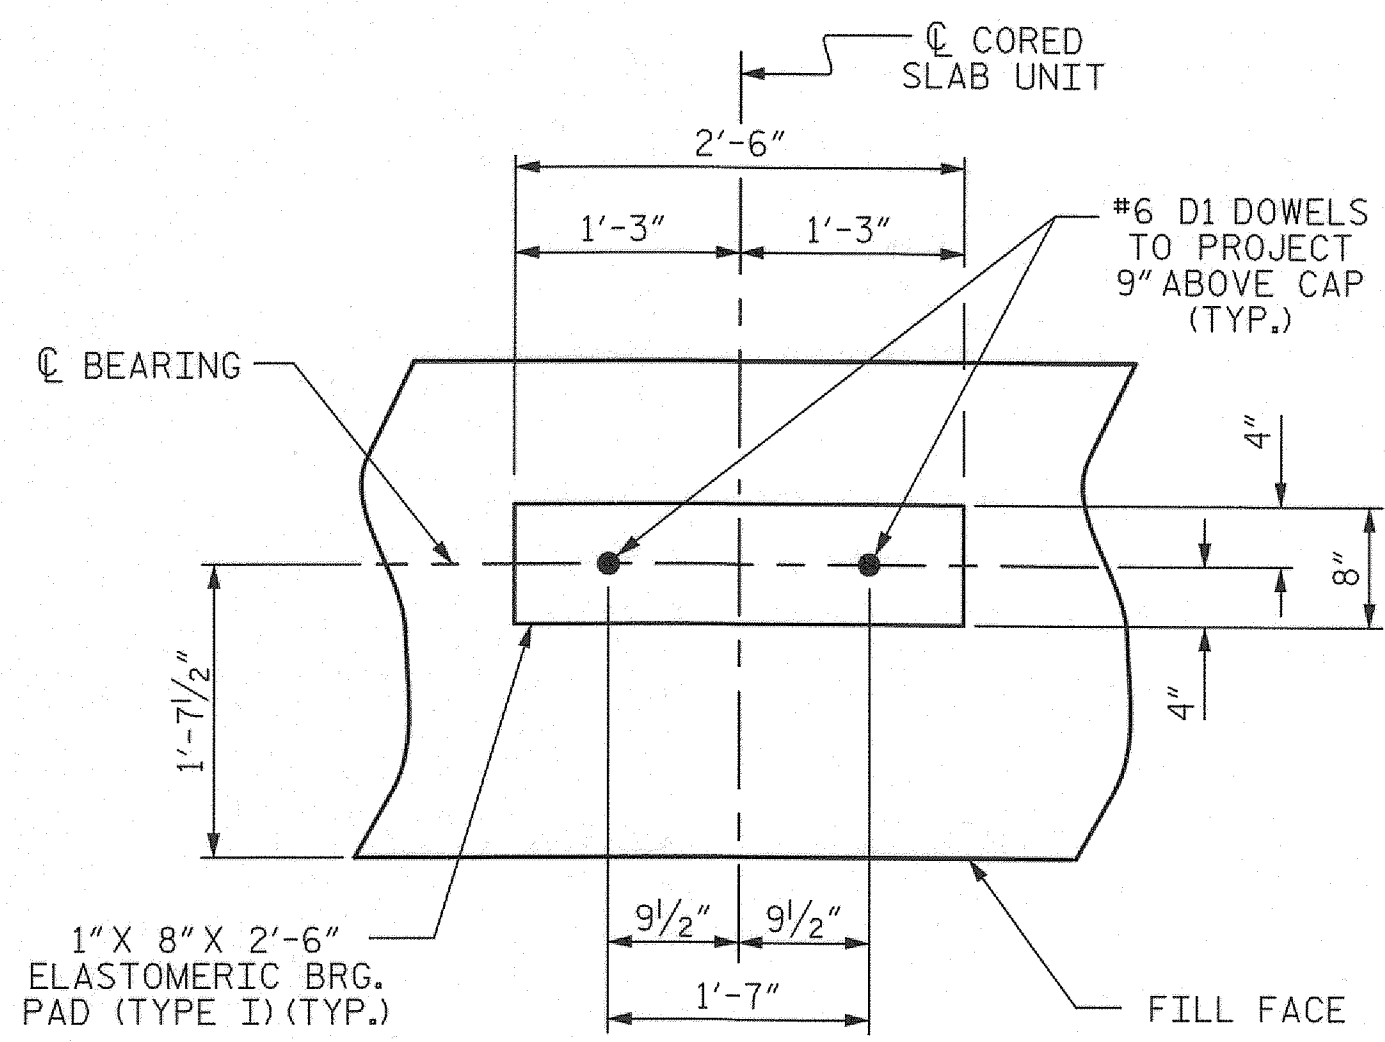

DETAIL "A"


(END BENT No. 1 SHOWN, END BENT No. 2 SIMILAR BY ROTATION)

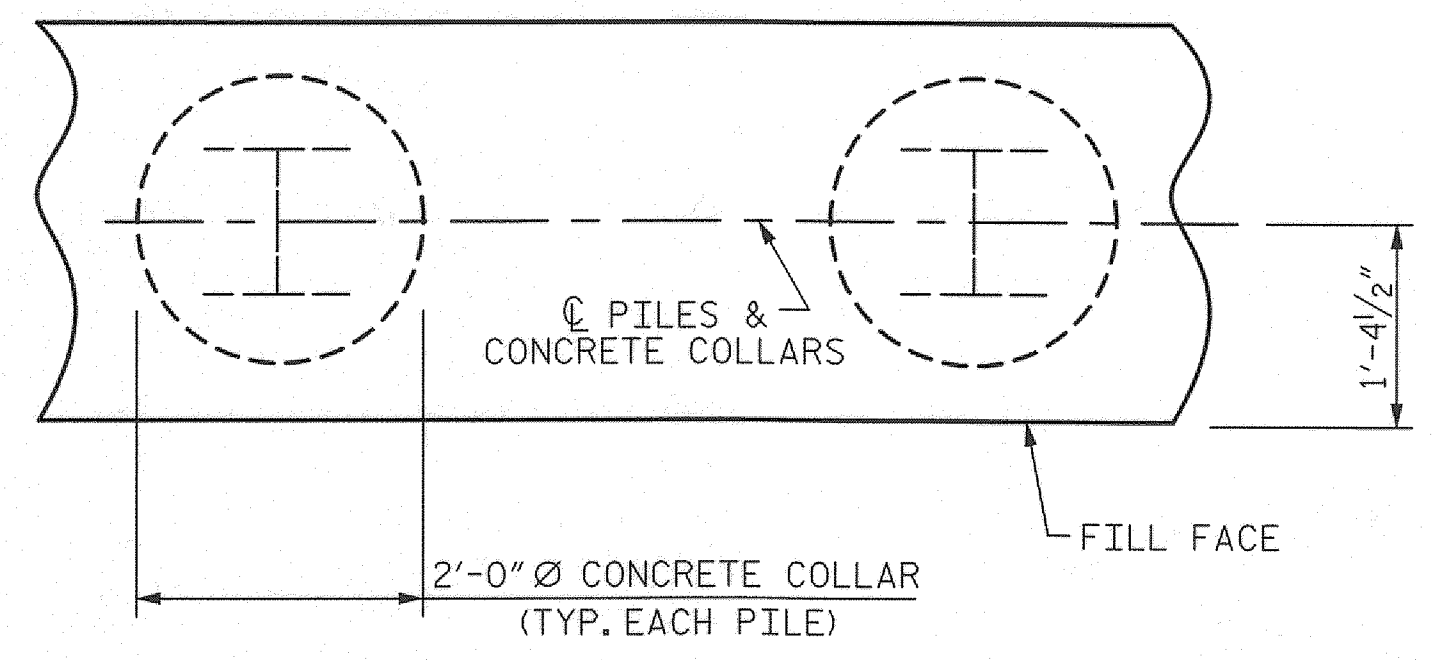


PLAN

CORROSION PROTECTION FOR STEEL PILES DETAIL

(END BENT No. 1 SHOWN, END BENT No. 2 SIMILAR BY ROTATION)

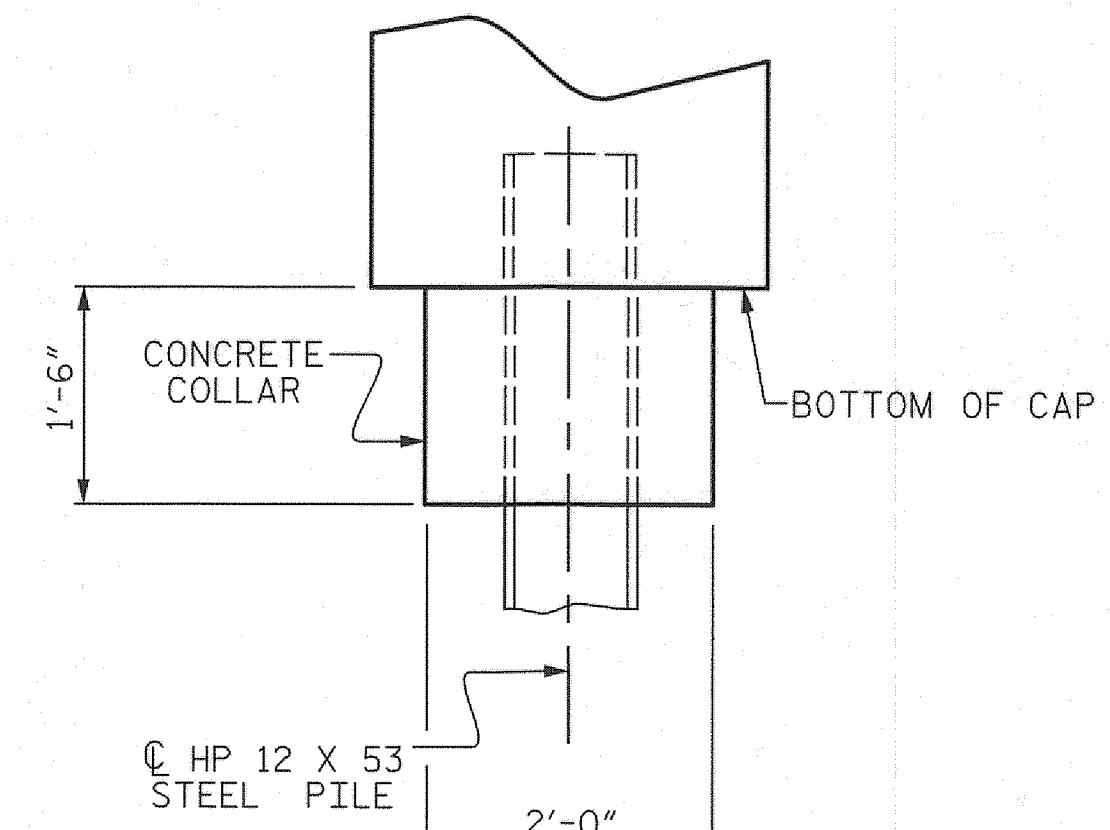

ELEVATION

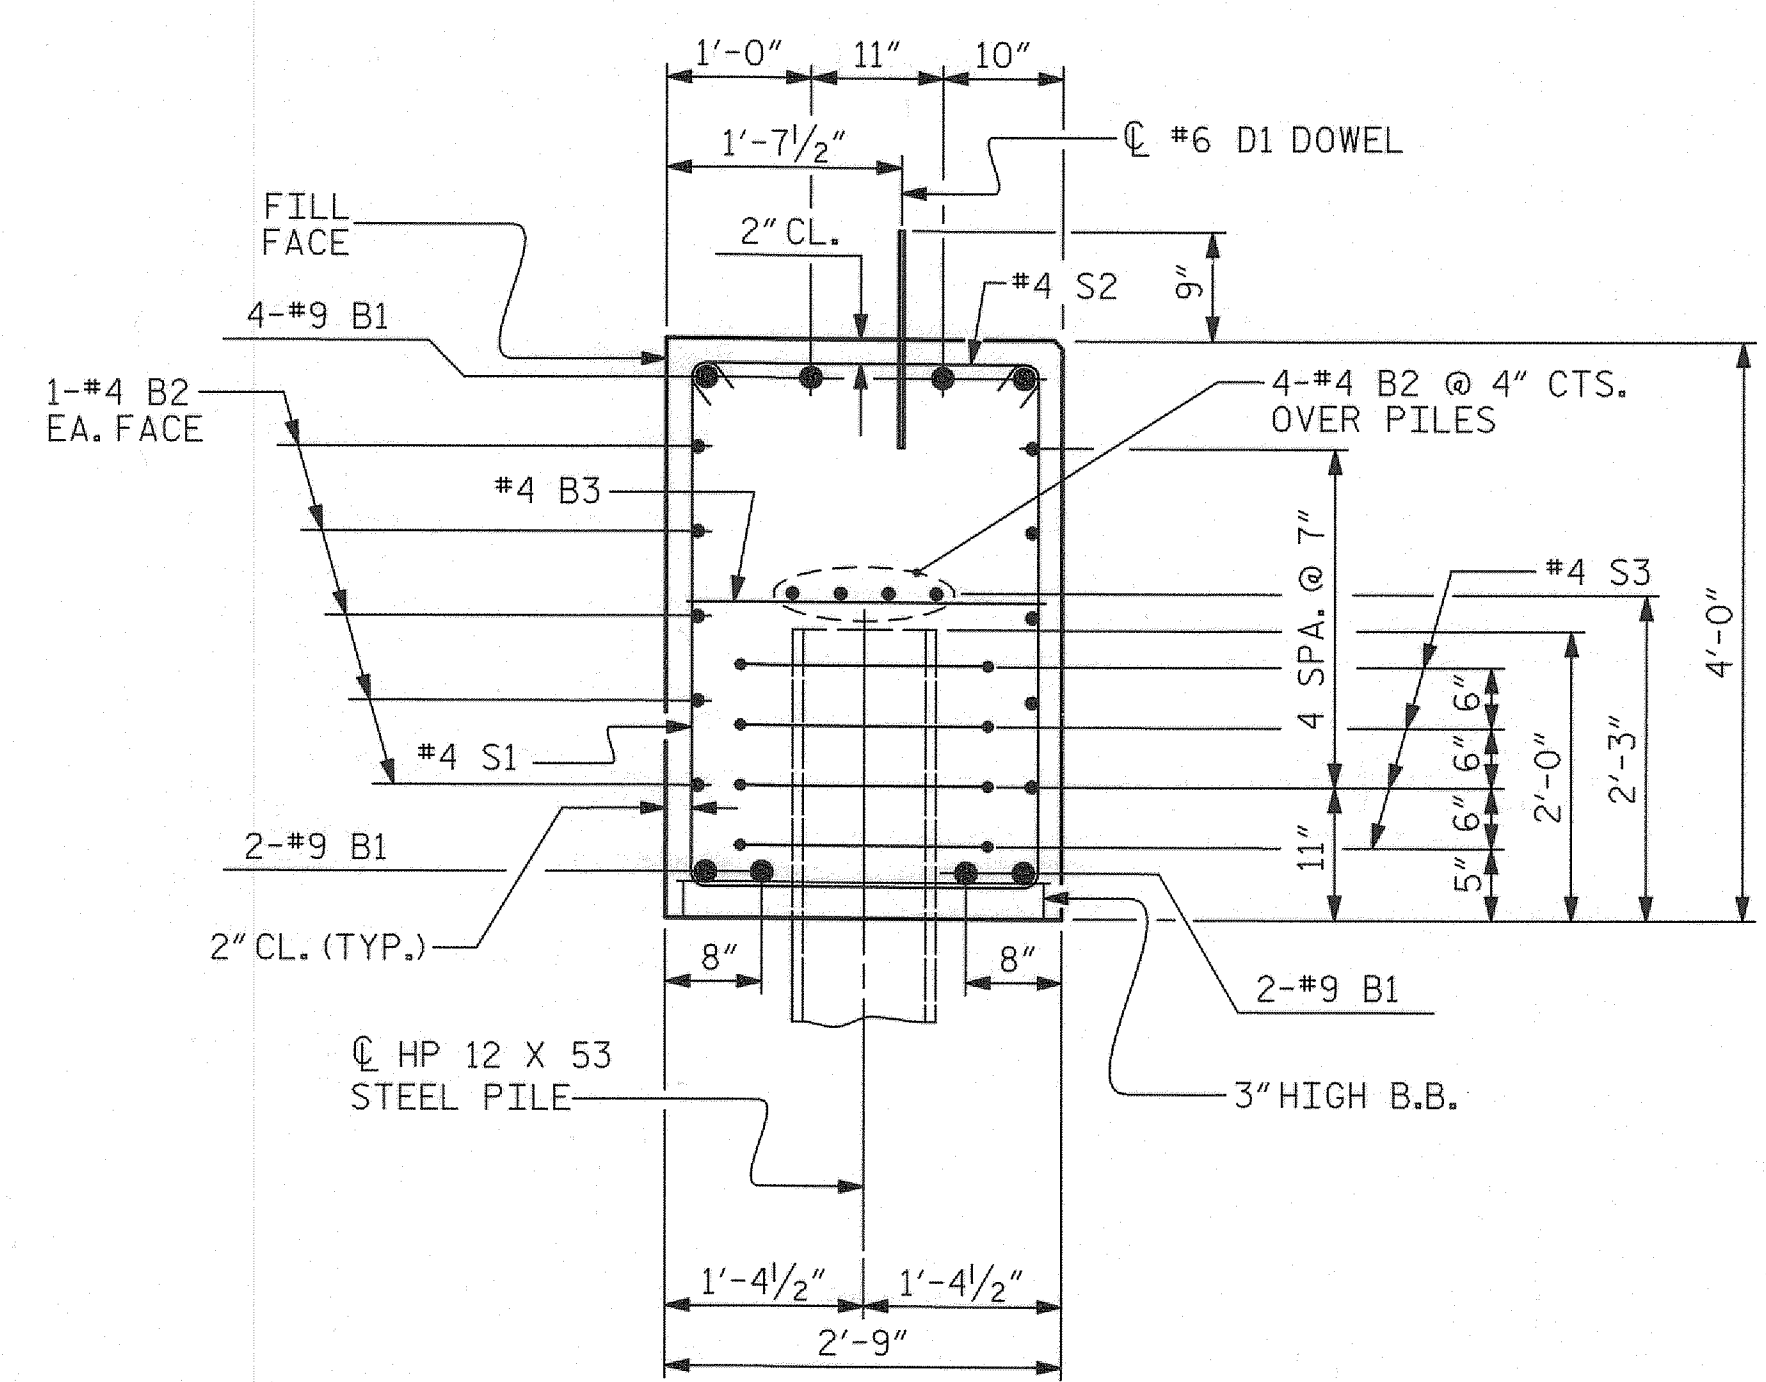


SECTION A-A

(CONCRETE COLLAR NOT SHOWN FOR CLARITY. SEE "CORROSION PROTECTION FOR STEEL PILES DETAIL.")

PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-

SHEET 4 OF 4
STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
SUBSTRUCTURE
END BENT No. 1 & 2
DETAILS

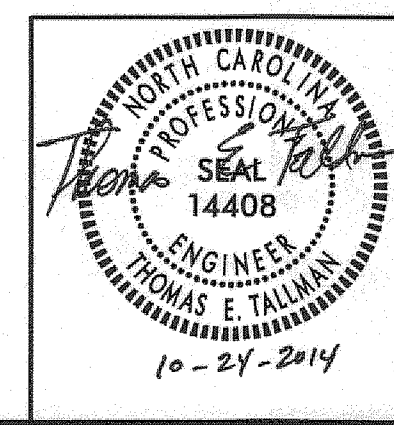


ICA
Engineering
f/k/a Florence & Hutcheson, Inc.
1521 Kingdom Way, Suite 100 Raleigh, NC 27607
NC License No: F-0258


REVISIONS						SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	S-11	
1			3			TOTAL SHEETS	
2			4			17	

10/24/2014 P:\LIB\projects\105\30-Franklin\Structures\Plans\17BP.5.R.30.ed.sht11.dgn ICA Engineering


ASSEMBLED BY: M. T. MOBLEY DATE: 10/12
CHECKED BY: J. E. MONDOLFI DATE: 10/12
DRAWN BY: WJH 12/11
CHECKED BY: AAC 12/11

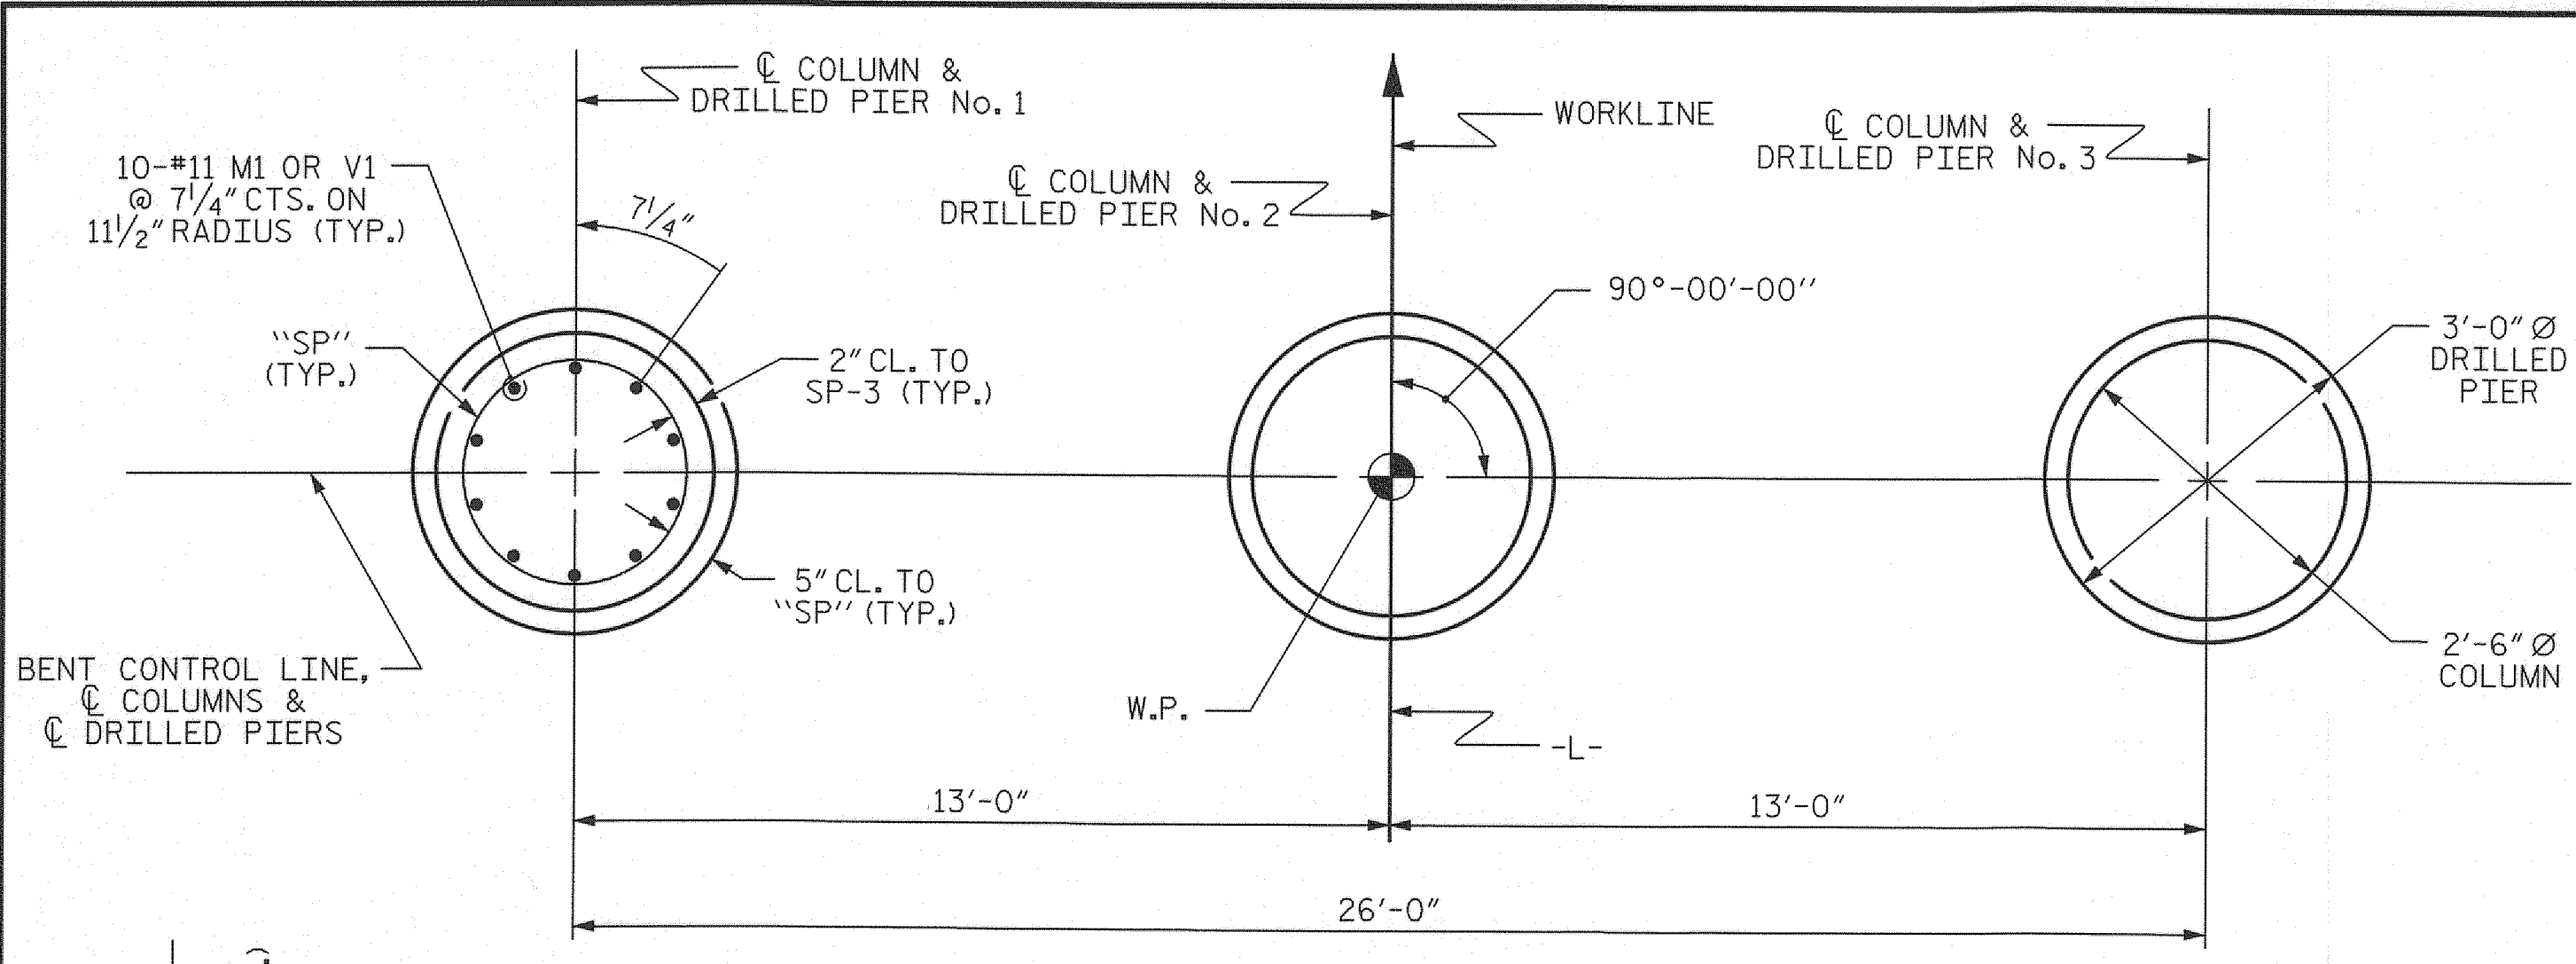


PLAN OF DRILLED PIERS & COLUMNS

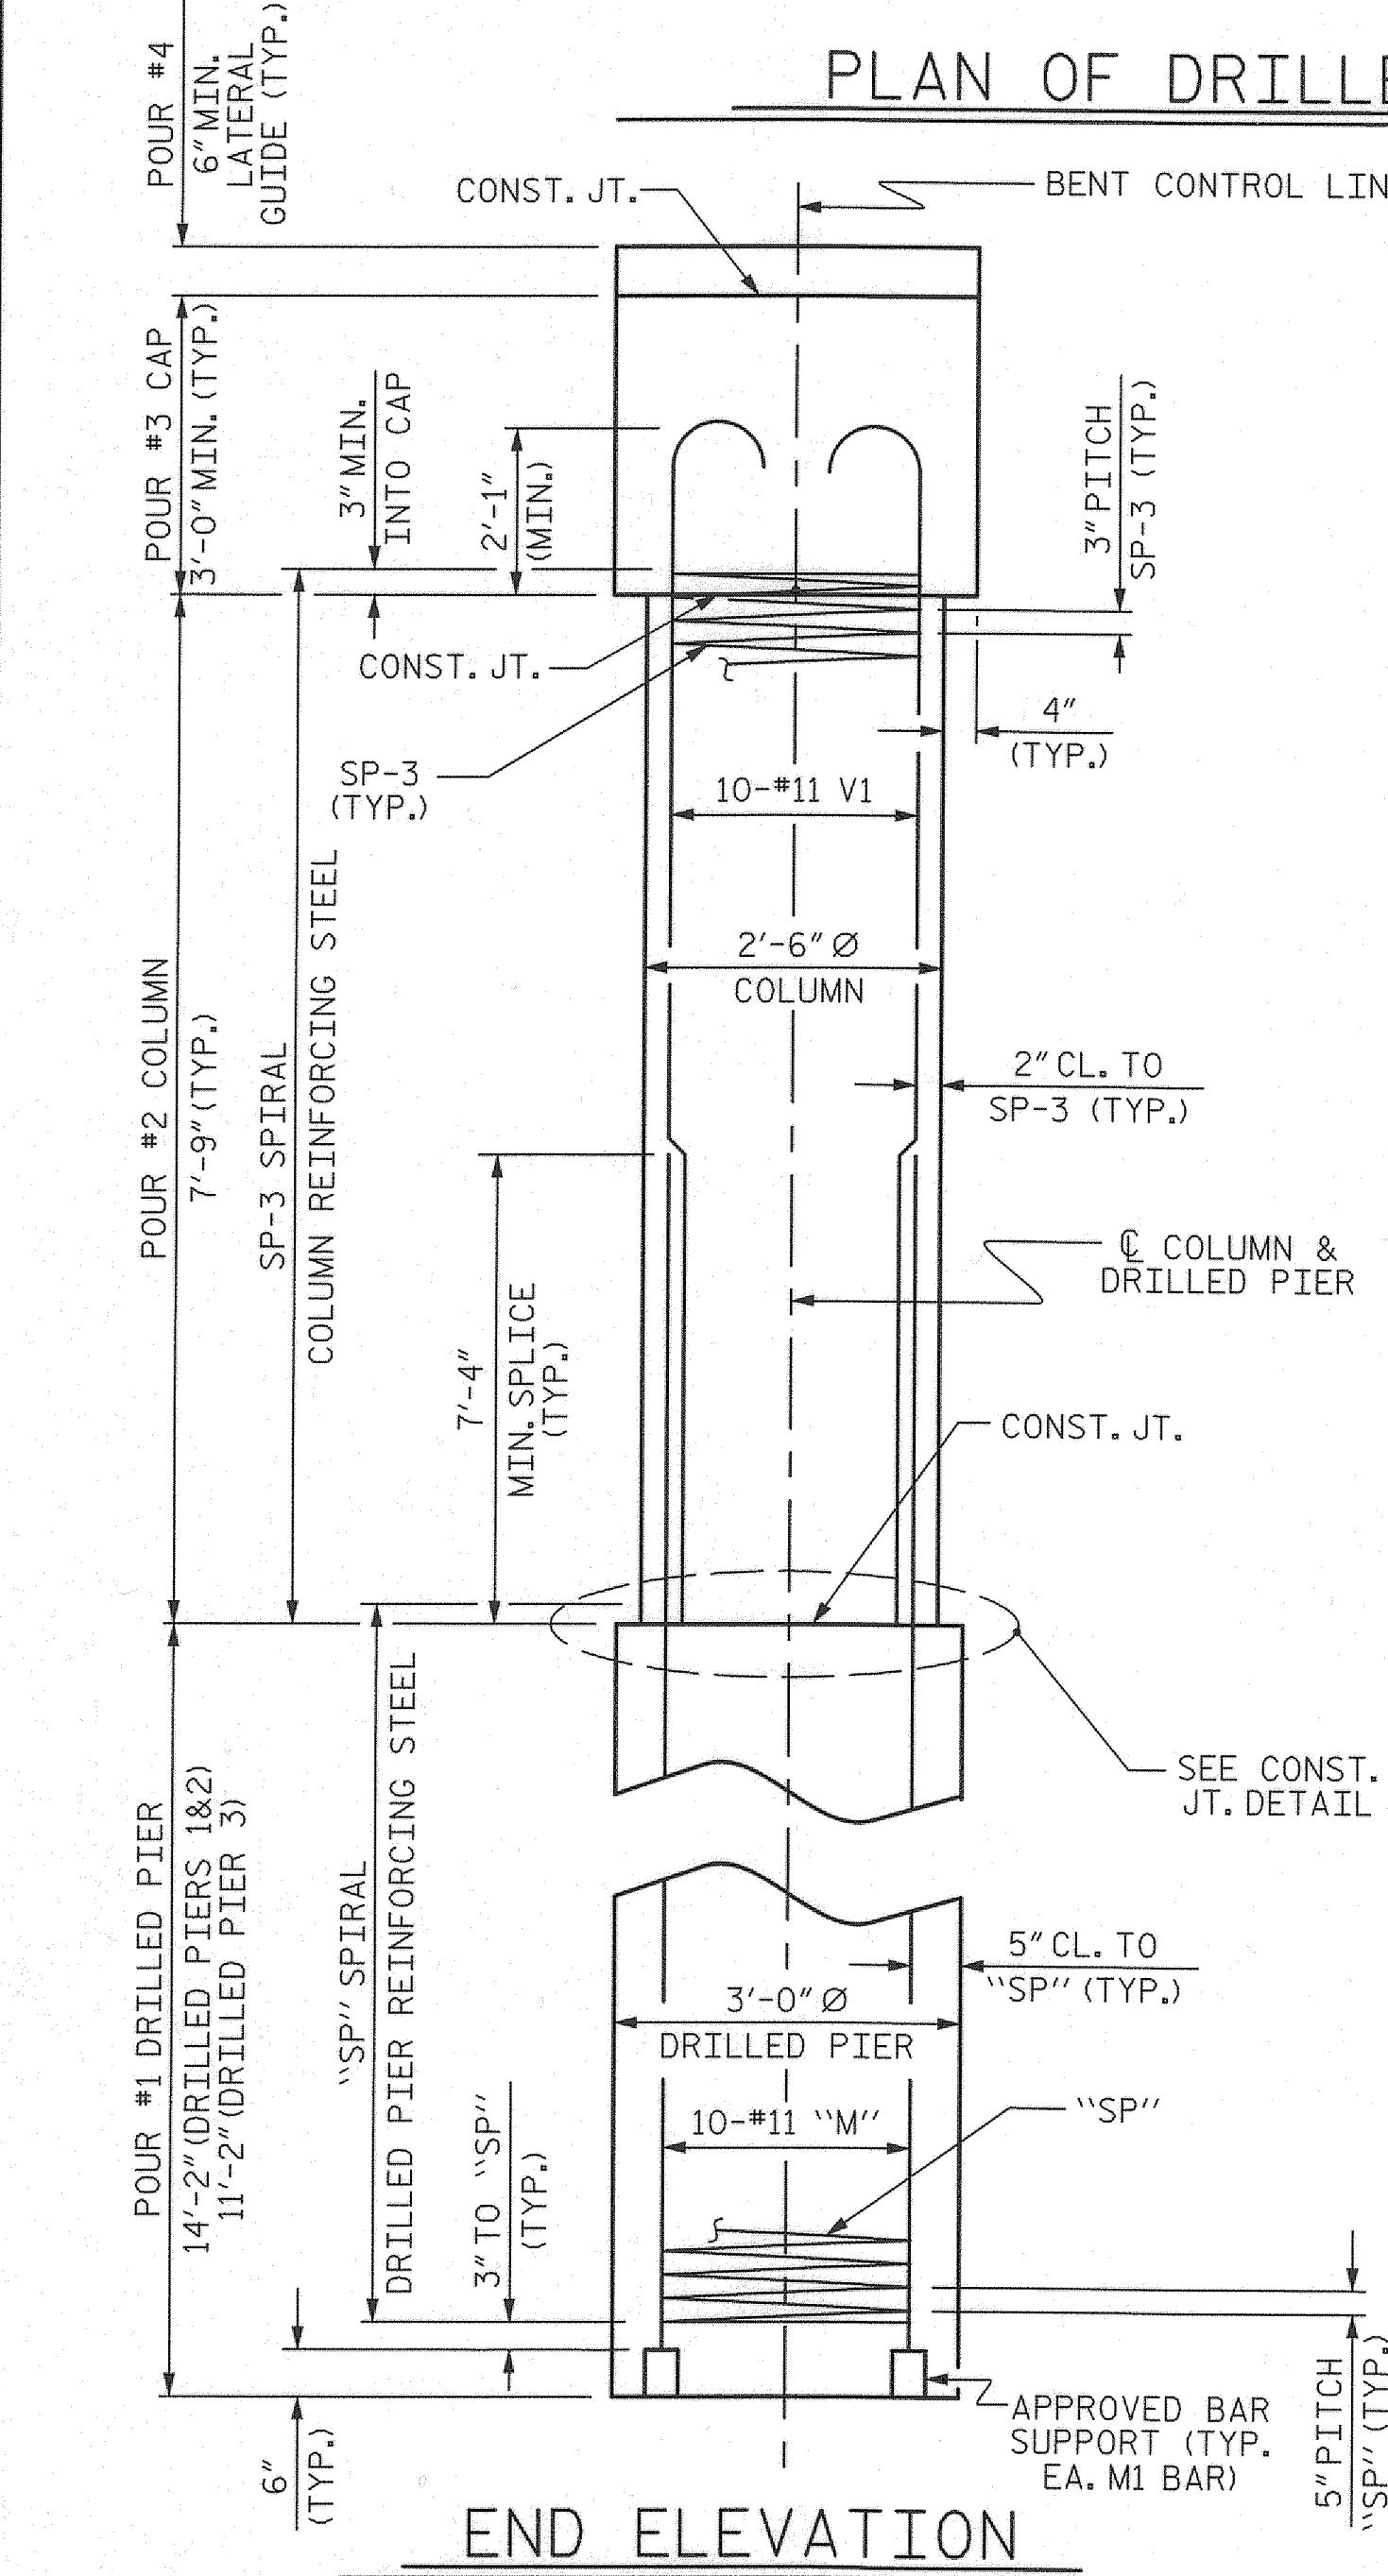


END ELEVATION

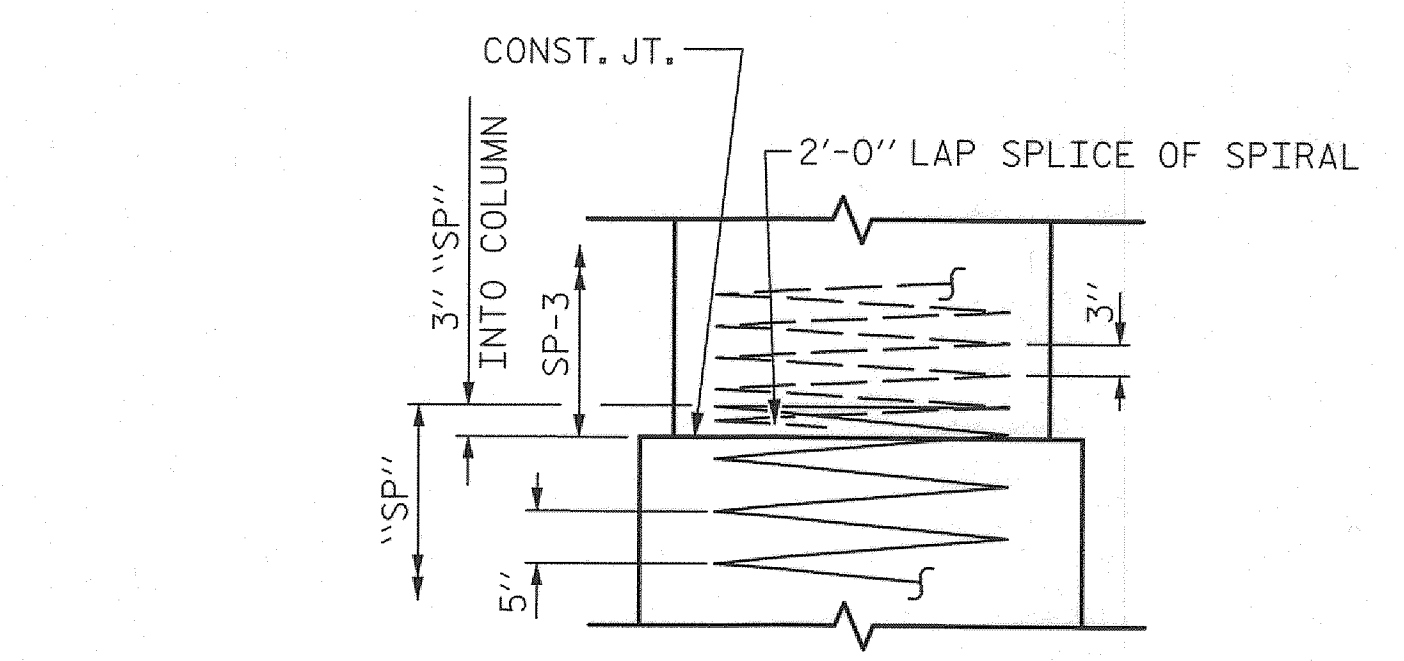

CONSTRUCTION JOINT DETAIL

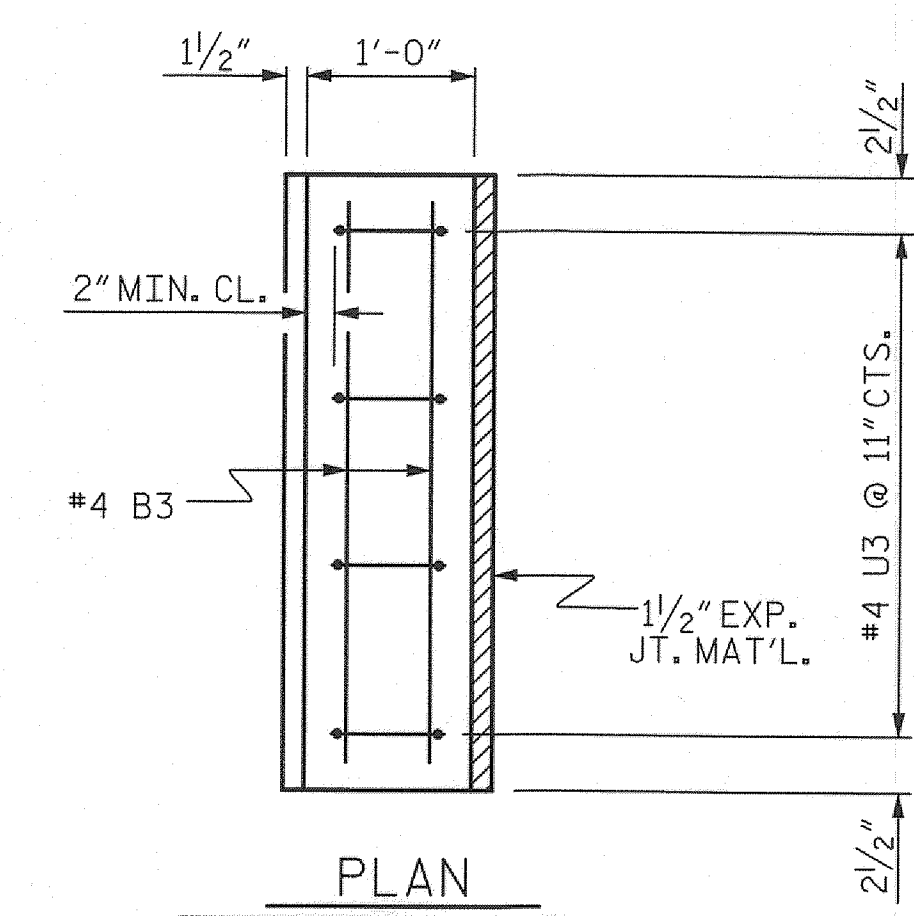


PLAN

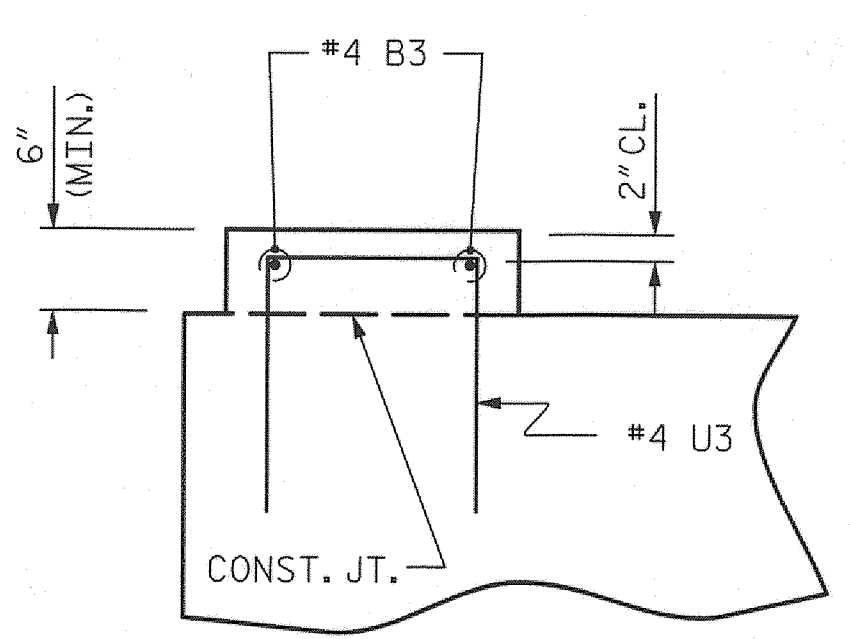


ELEVATION

LATERAL GUIDE DETAILS
(LEFT LATERAL GUIDE SHOWN, RIGHT SIDE SIMILAR)

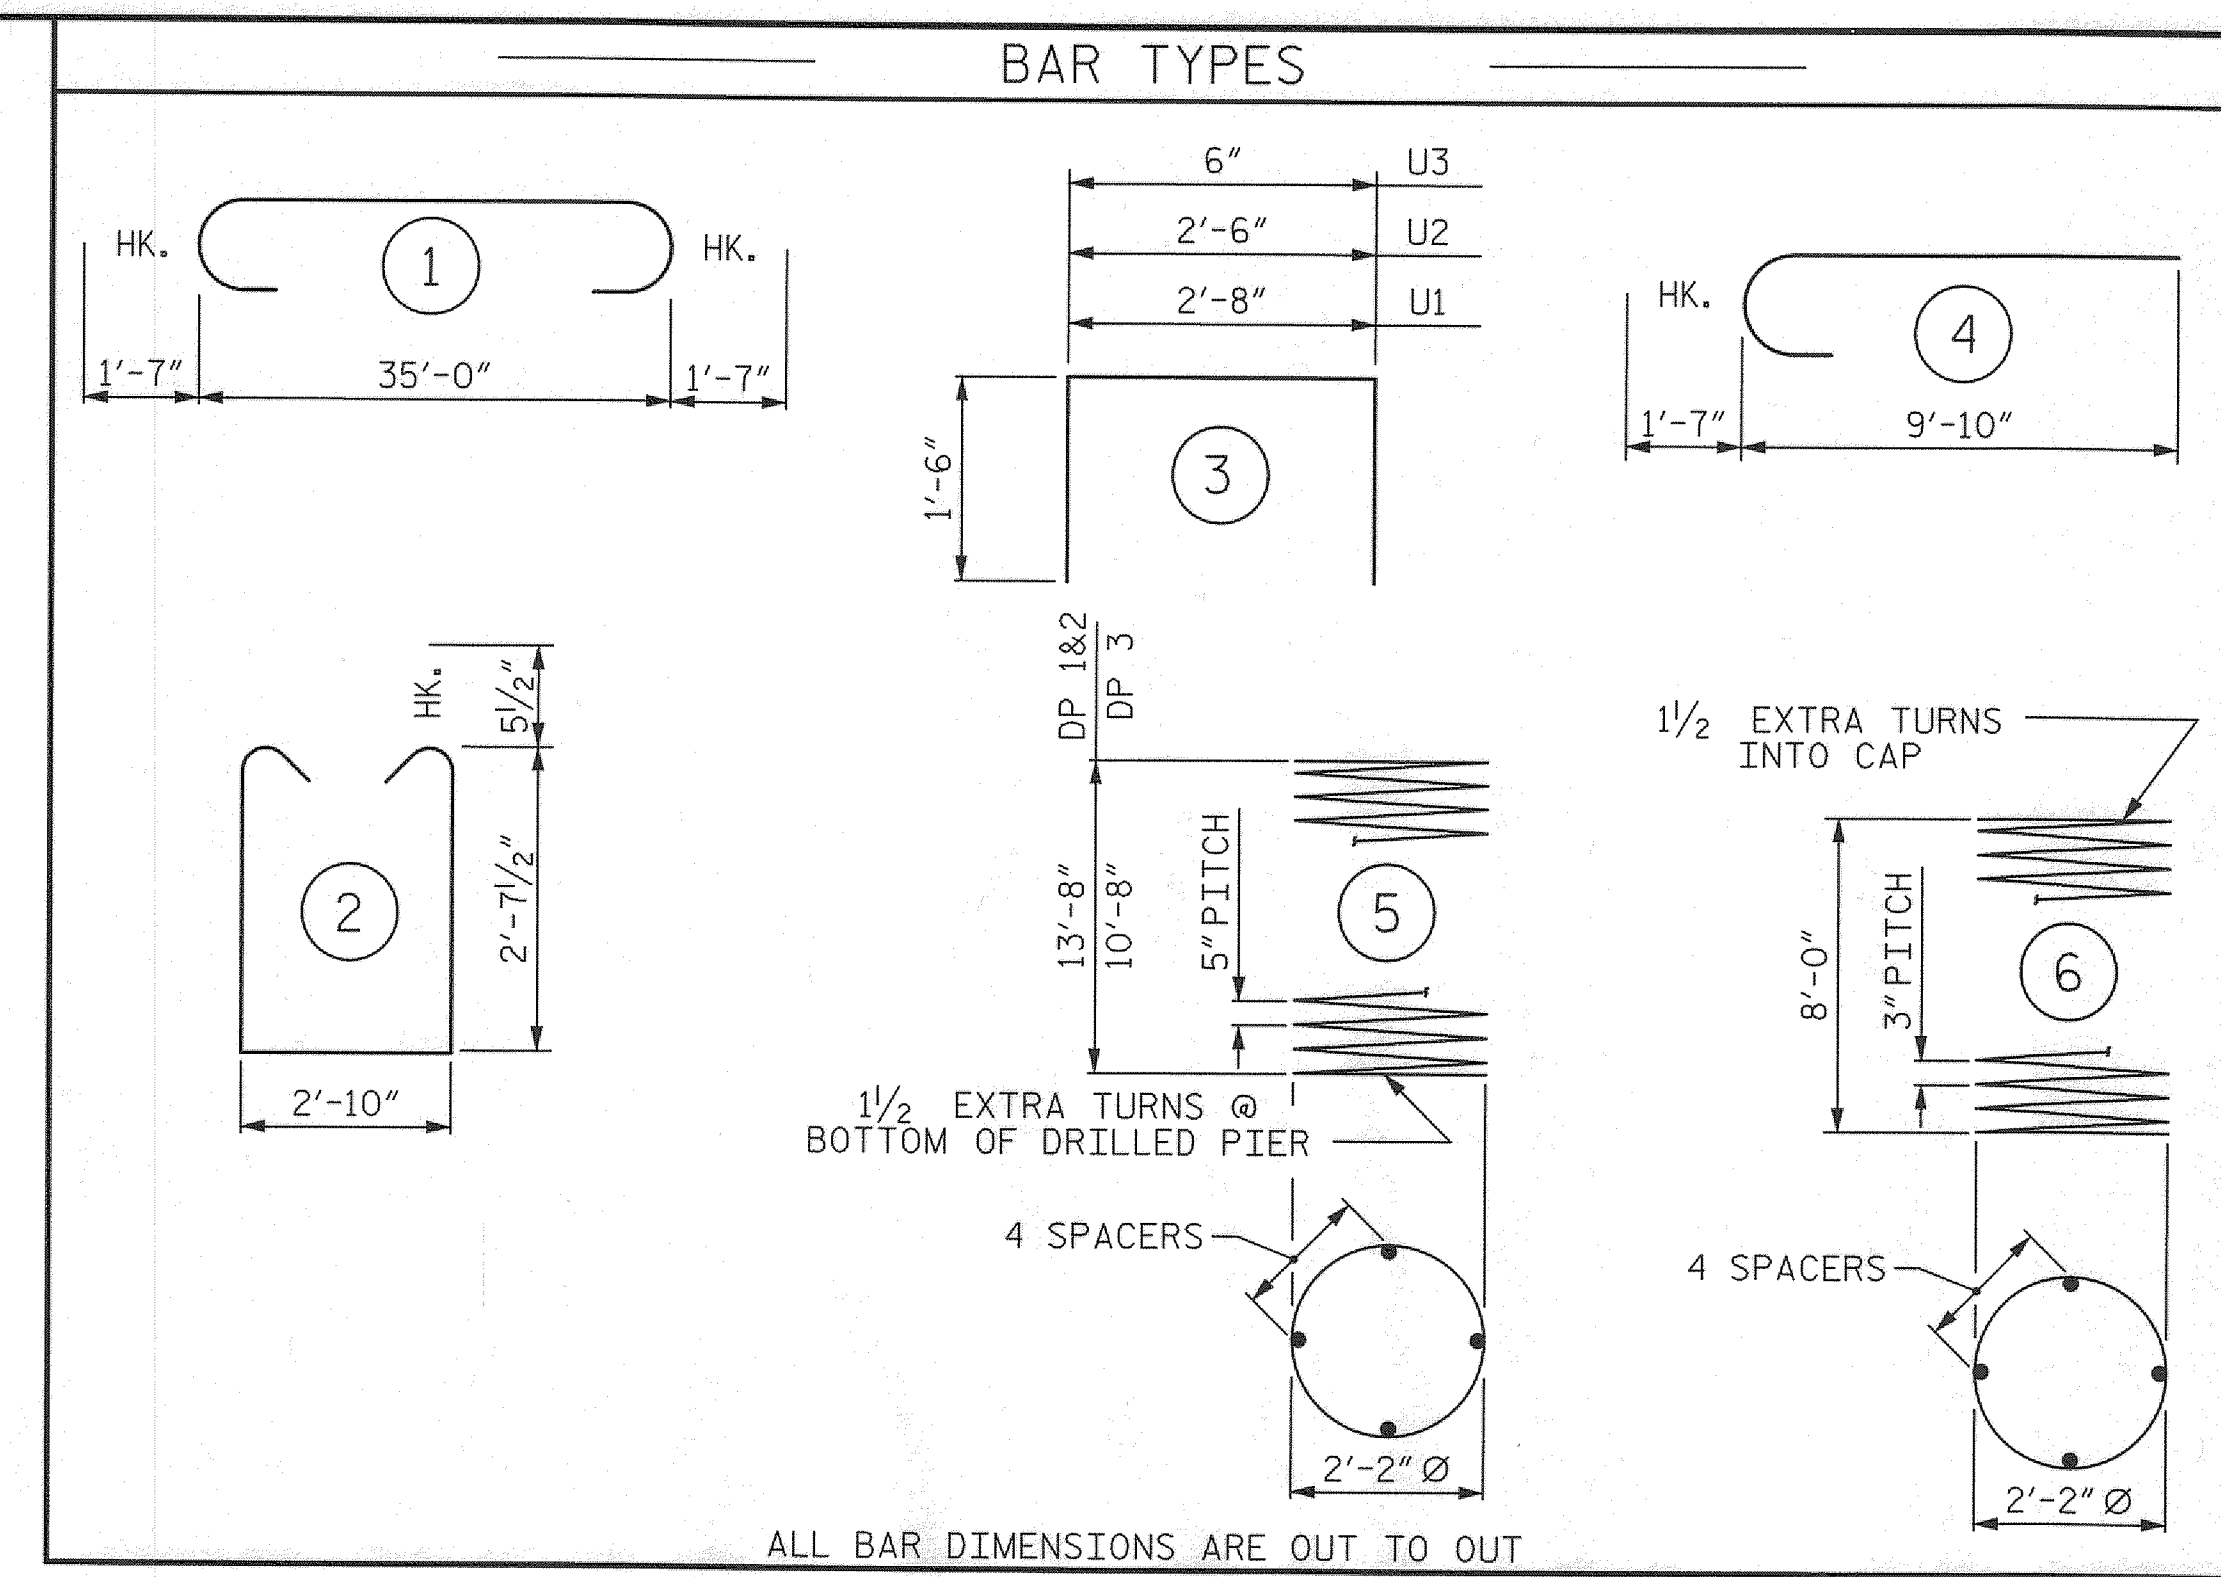


BAR TYPES

ALL BAR DIMENSIONS ARE OUT TO OUT

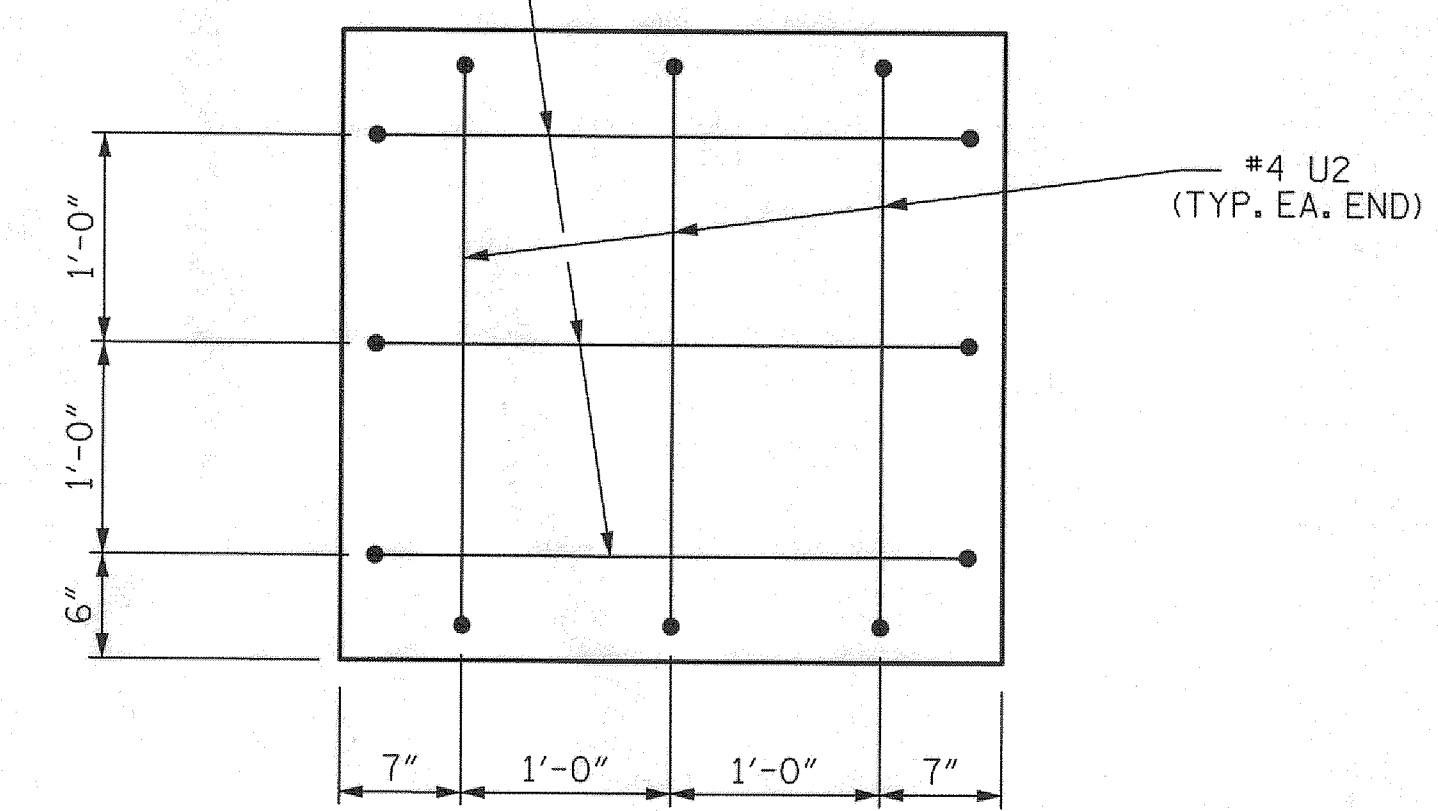

END OF CAP VIEW

(TYPICAL BOTH ENDS)

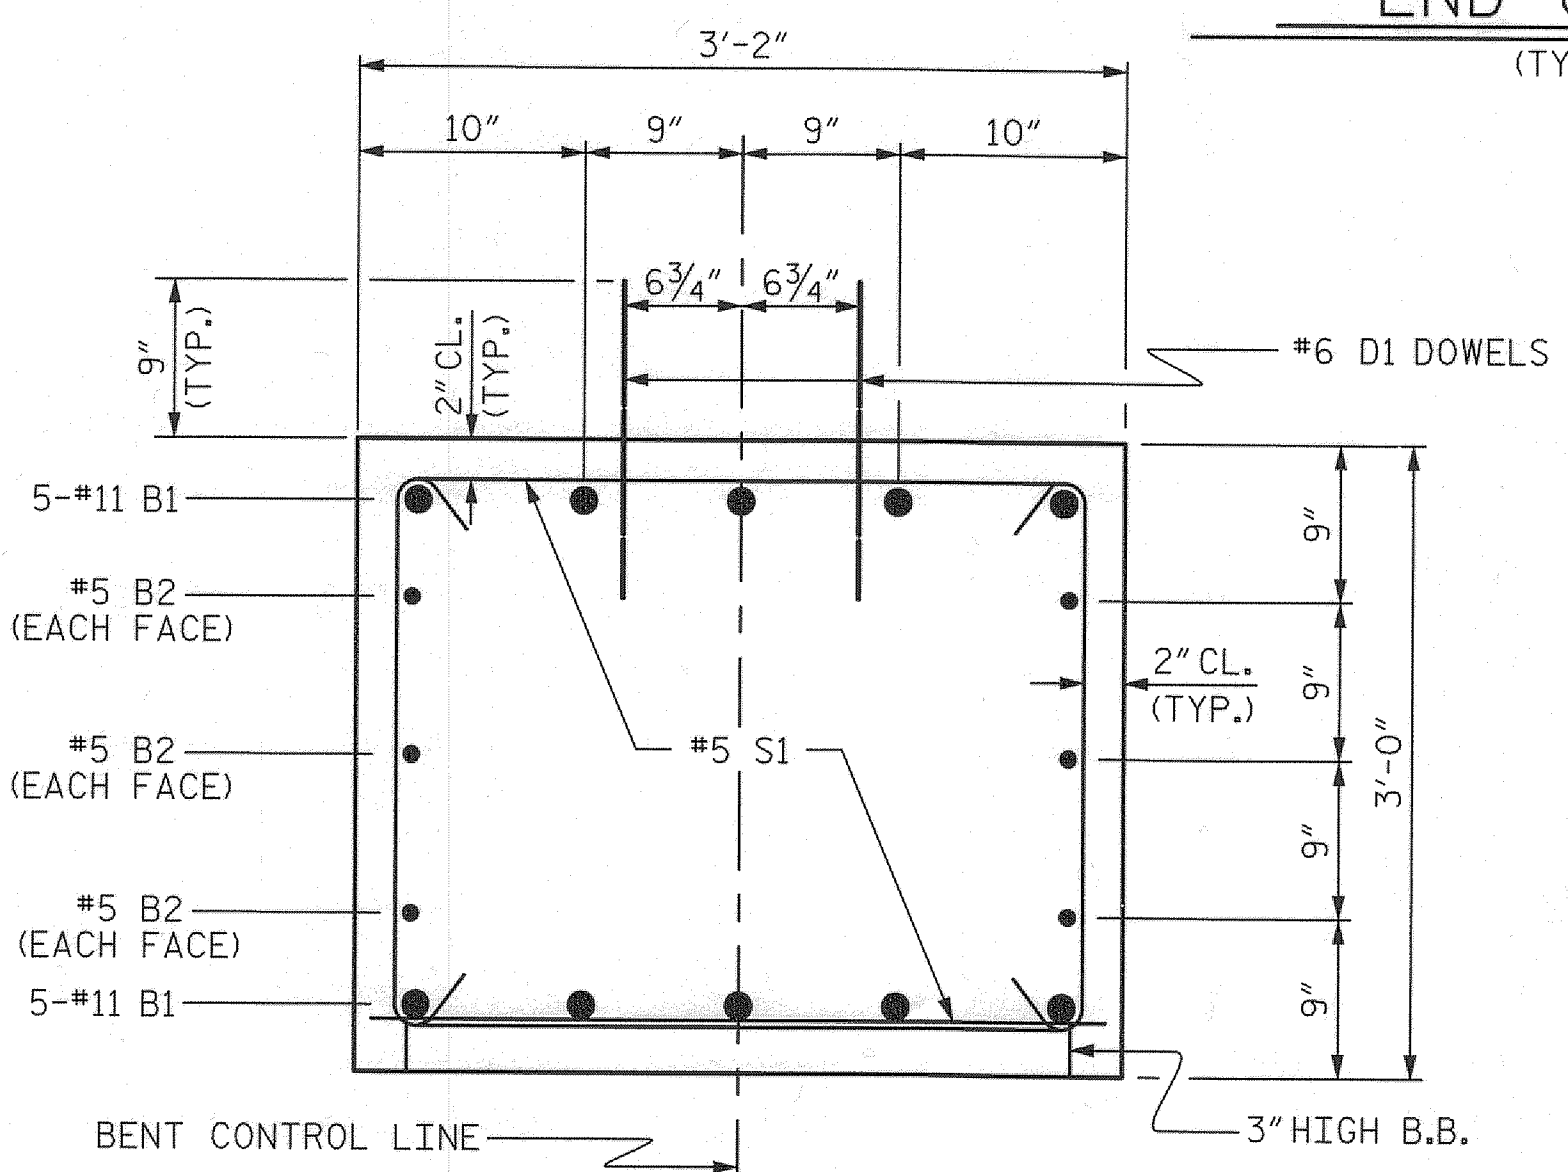

SECTION THRU CAP


BILL OF MATERIAL					
FOR ONE BENT					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
B1	10	#11	1	38'-2"	2028
B2	6	#5	STR	35'-2"	220
B3	4	#4	STR	2'-10"	8
D1	44	#6	STR	1'-6"	99
M1	20	#11	STR	24'-0"	2550
M2	10	#11	STR	21'-0"	1116
S1	60	#5	2	9'-0"	563
U1	6	#4	3	5'-8"	23
U2	6	#4	3	5'-6"	22
U3	8	#4	3	3'-6"	19
V1	30	#11	4	11'-5"	1820
REINFORCING STEEL (FOR ONE BENT)					8468 LBS.
SP-1	2	*	5	229'-8"	479
SP-2	1	*	5	181'-5"	189
SP-3	3	**	6	223'-10"	449
SPIRAL COLUMN REINFORCING STEEL (FOR ONE BENT)					1117 LBS.
* THE SP-1 & SP-2 SPIRAL REINFORCING STEEL SHALL BE W31 OR D-31 COLD DRAWN WIRE OR #5 PLAIN OR DEFORMED BAR					
** THE SP-3 SPIRAL REINFORCING STEEL SHALL BE W20 OR D-20 COLD DRAWN WIRE OR #4 PLAIN OR DEFORMED BAR					
CLASS A CONCRETE BREAKDOWN (FOR ONE BENT)					
POUR #2 (COLUMNS)					4.3 C.Y.
POUR #3 (CAP)					12.5 C.Y.
POUR #4 (LATERAL GUIDE)					0.1 C.Y.
TOTAL CLASS A CONCRETE					16.9 C.Y.
DRILLED PIERS: (FOR ONE BENT)					
DRILLED PIER CONCRETE					10.4 C.Y.
3'-0" Ø DRILLED PIERS					39.5 LIN. FT.
PERMANENT STEEL CASING FOR 3'-0" Ø DRILLED PIER					18.0 LIN. FT.
CSL TUBES					176 LIN. FT.

PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-

SHEET 2 OF 2

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

SUBSTRUCTURE
BENT No. 1

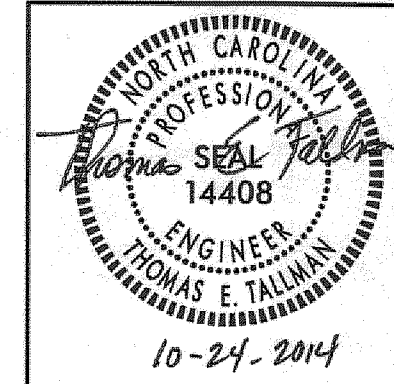

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-13
1			3			TOTAL SHEETS
2			4			17

10/24/2014 P:\118\Projects\DIV05\30_Franklin\Structures\Plans\17BP.5.R.30_ssd_sht13.dgn ICA Engineering

ASSEMBLED BY: M. T. MOBLEY DATE: 10/12
CHECKED BY: J. E. MONDOLFI DATE: 10/12
DRAWN BY: DGE 03/10
CHECKED BY: MKT 03/10

NOTES

STIRRUPS IN CAP MAY BE SHIFTED AS NECESSARY TO CLEAR DOWELS.

HOOKS ON "V" BARS MAY BE TURNED AS NECESSARY FOR PLACING REINFORCING STEEL.

FOR DRILLED PIERS, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.

ALL STEEL IN THE DRILLED PIERS IS INCLUDED IN THE PAY ITEMS FOR "REINFORCING STEEL" AND "SPIRAL COLUMN REINFORCING STEEL."

THE LATERAL GUIDES ARE NOT TO BE POURED UNTIL AFTER THE CORED SLAB UNITS ARE IN PLACE.

★ INVERT ALTERNATE STIRRUPS.


THE LOCATION OF THE CONSTRUCTION JOINT IN THE DRILLED PIERS IS BASED ON AN APPROXIMATE GROUND LINE ELEVATION. IF THE CONSTRUCTION JOINT IS ABOVE THE ACTUAL GROUND LINE ELEVATION, THE CONTRACTOR SHALL PLACE THE CONSTRUCTION JOINT ONE FOOT BELOW THE GROUND LINE.

DRILLED PIERS SHALL BE TERMINATED ONE FOOT ± ABOVE NORMAL WATER SURFACE ELEVATION FOR SHAFTS LOCATED IN WATER.

FOR PERMANENT STEEL CASING, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.

THE CONTRACTOR HAS THE OPTION TO OMIT THE LATERAL GUIDE IF APPROVED BY THE ENGINEER.

THE CONTRACTOR'S ATTENTION IS CALLED TO THE FACT THAT THE LONGITUDINAL REINFORCEMENT FOR DRILLED PIERS IS DETAILED WITH 3 FEET OF EXTRA LENGTH.

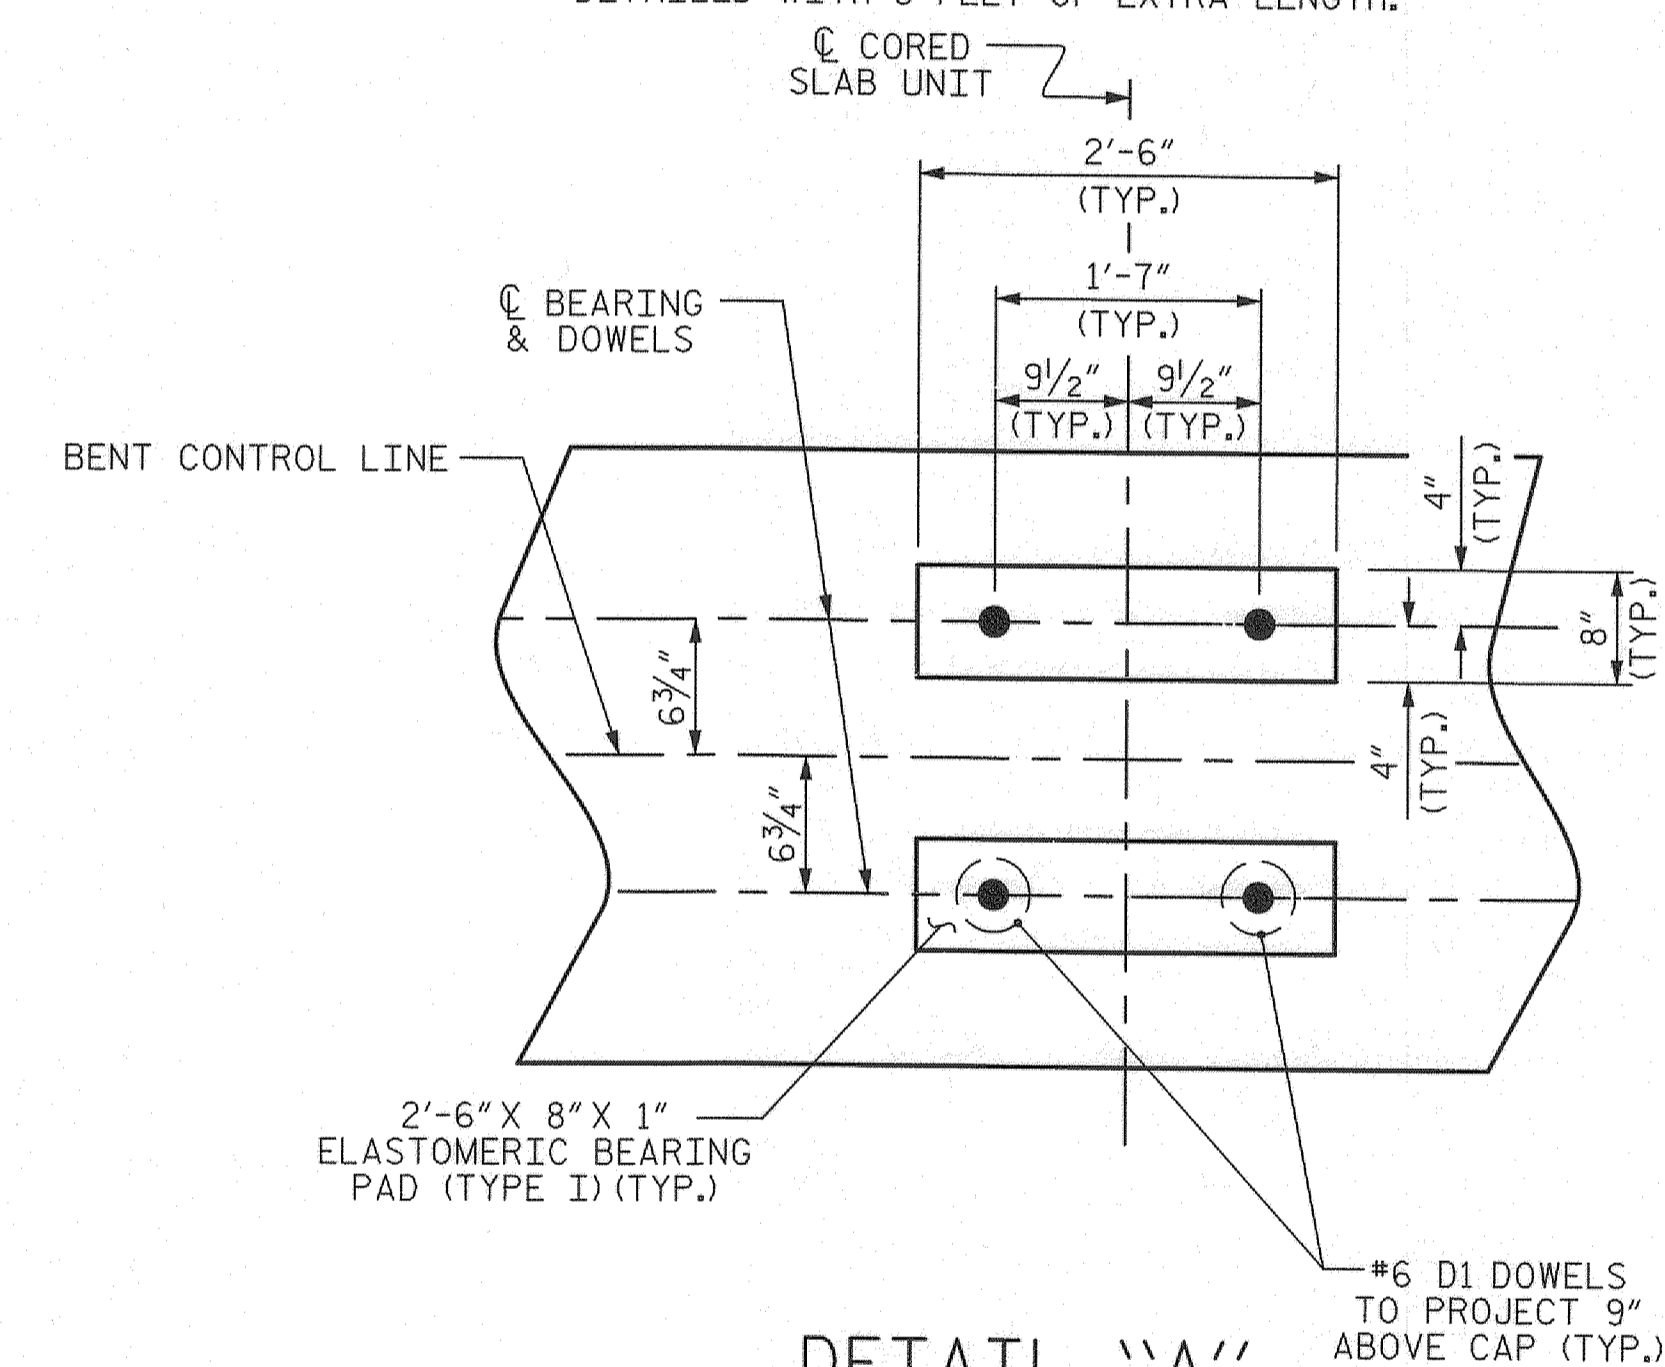

DETAIL "A"
(DIMENSIONS ARE TYPICAL EACH BEARING)



PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-

SHEET 1 OF 2


STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

**SUBSTRUCTURE
BENT No. 2**

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-14
1			3			TOTAL SHEETS
2			4			17

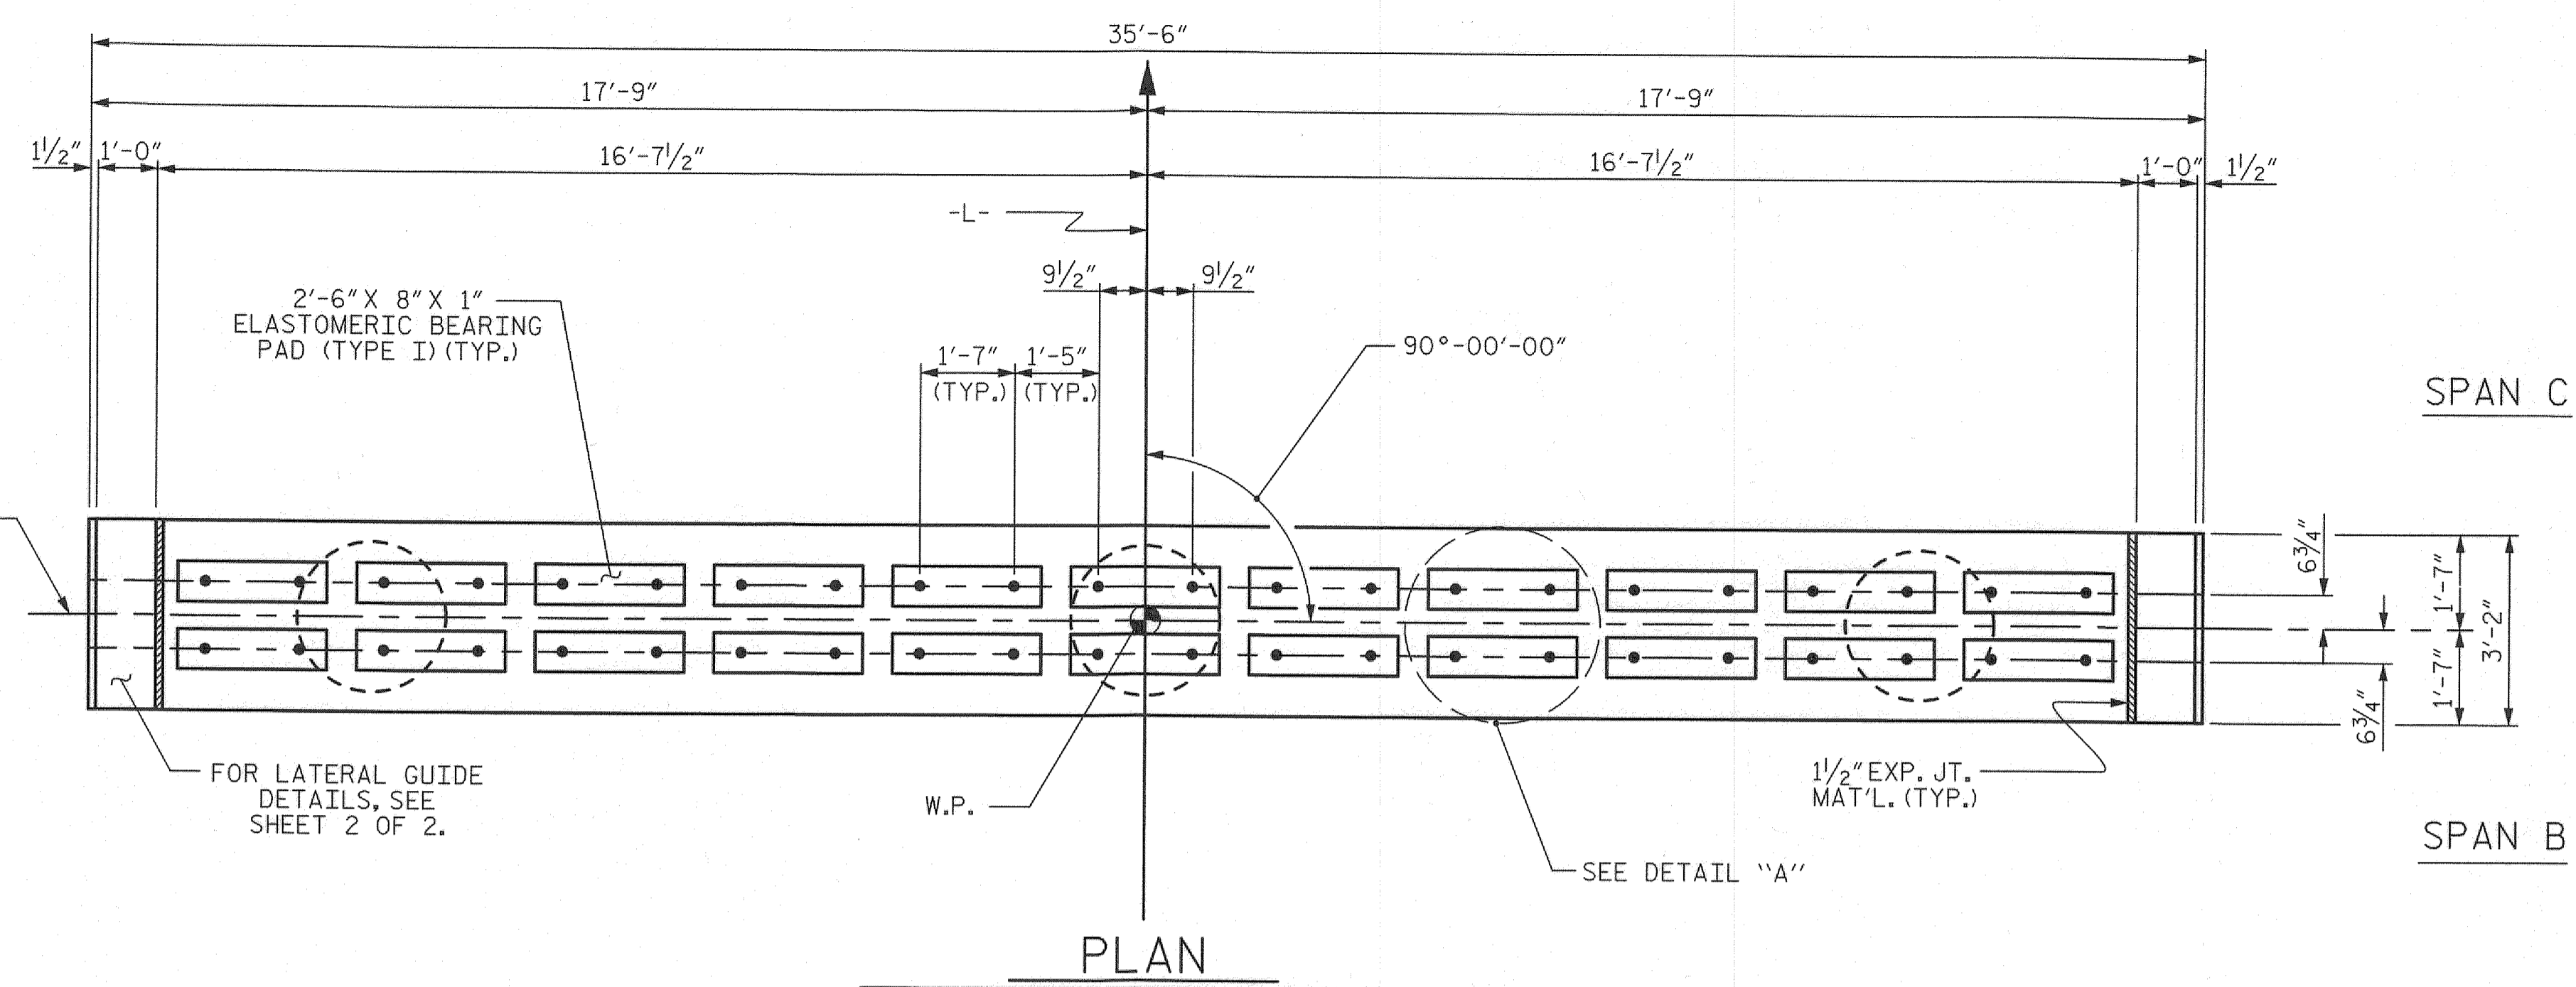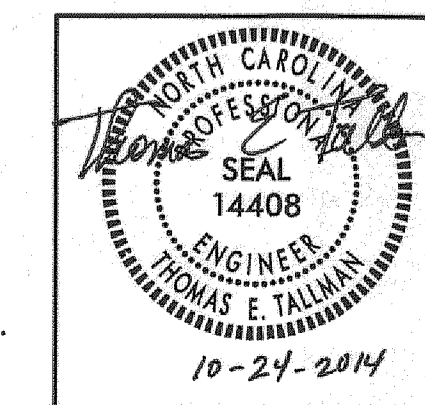

PLAN

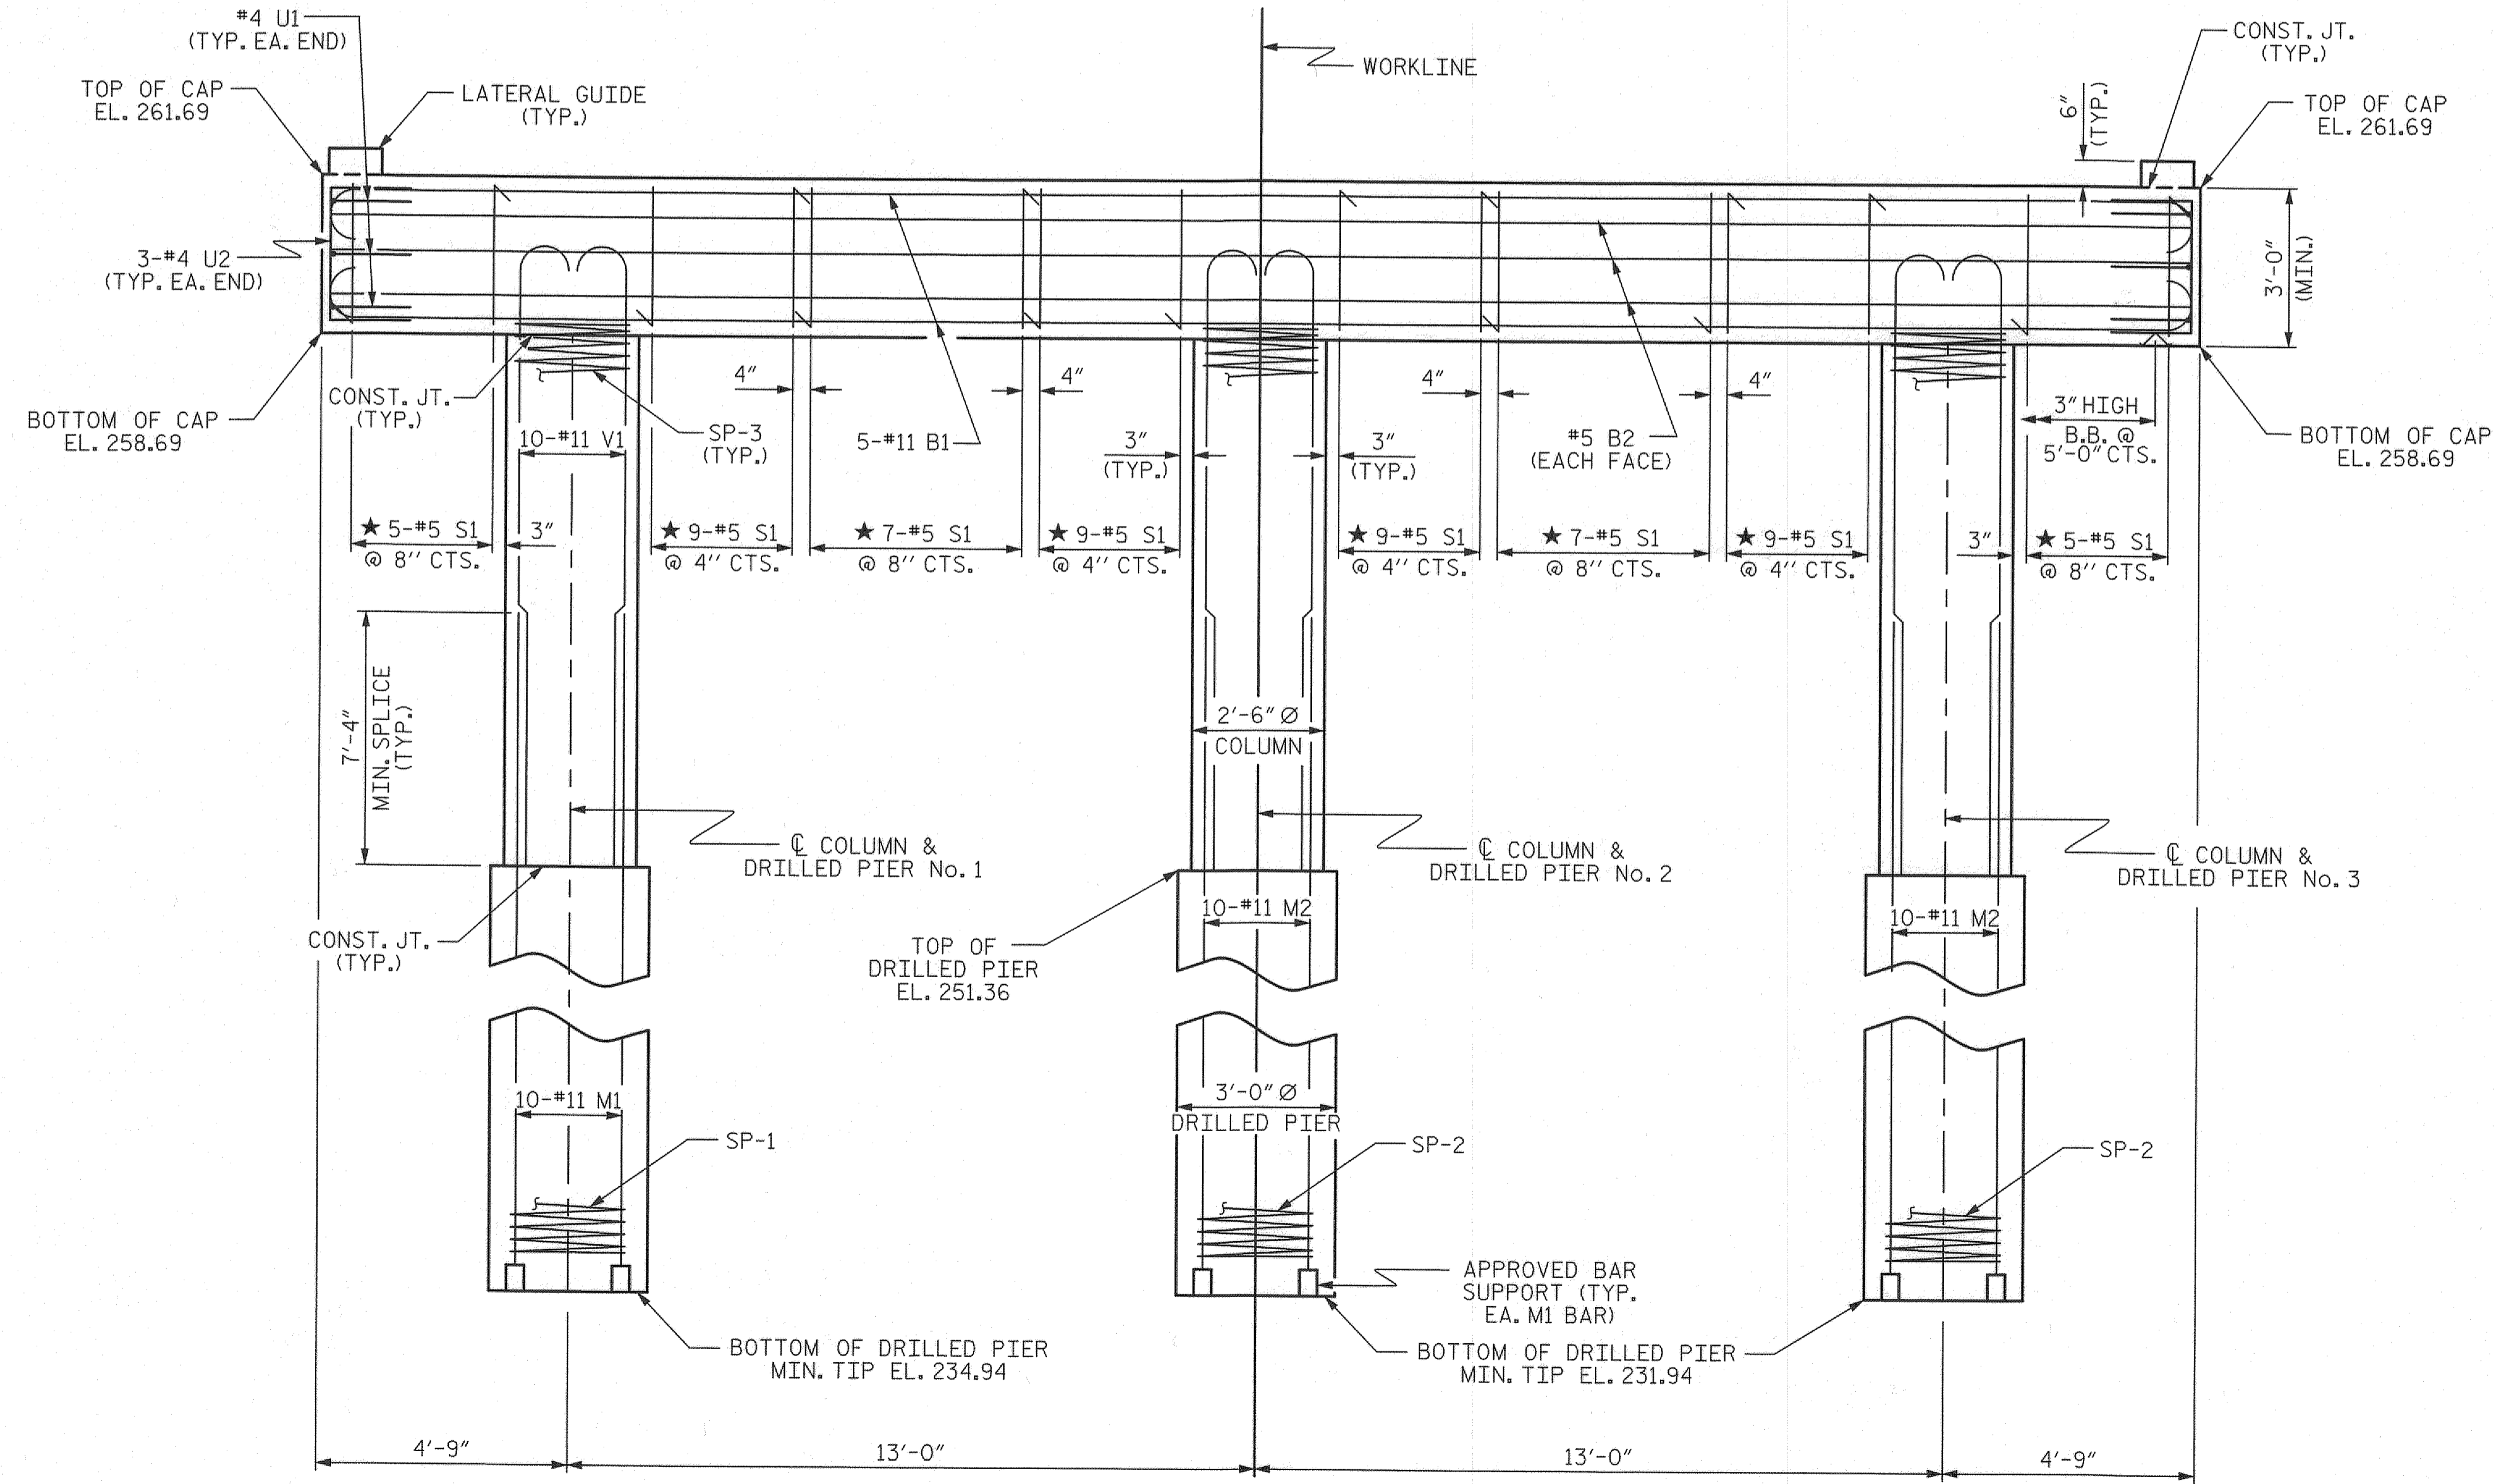


ELEVATION


DIMENSIONS & REINFORCING STEEL ARE TYPICAL FOR EACH COLUMN & DRILLED PIER UNLESS OTHERWISE NOTED.

10/24/2014 P:\L\B\Projects\0105\30_Franklin\Structures\17BP.5.R.30_s.dwg J.E. Mondolfi


ASSEMBLED BY: M. T. MOBLEY DATE: 10/12
CHECKED BY: J. E. MONDOLFI DATE: 10/12
DRAWN BY: DGE 03/10
CHECKED BY: MKT 03/10

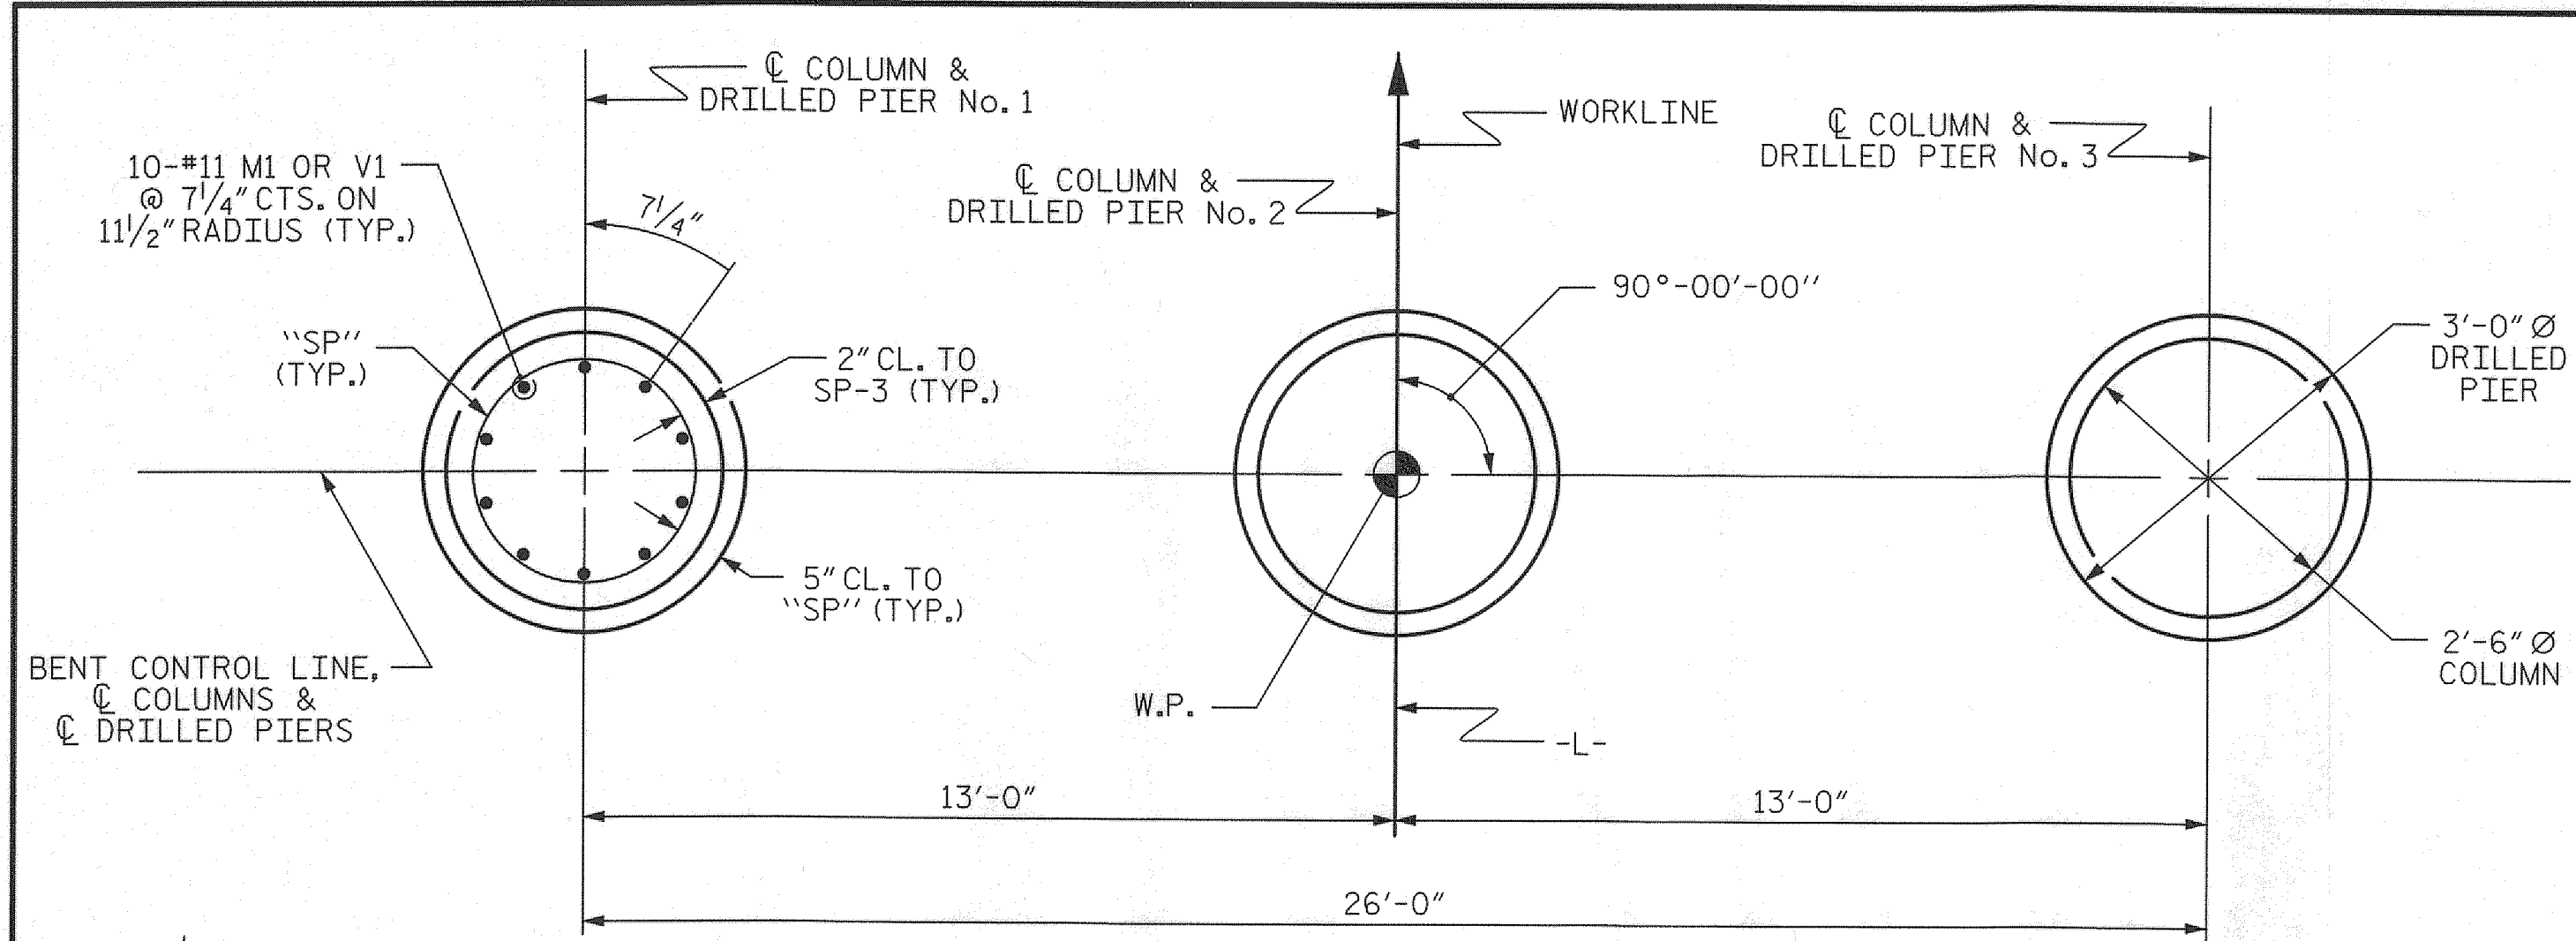


PLAN OF DRILLED PIERS & COLUMNS

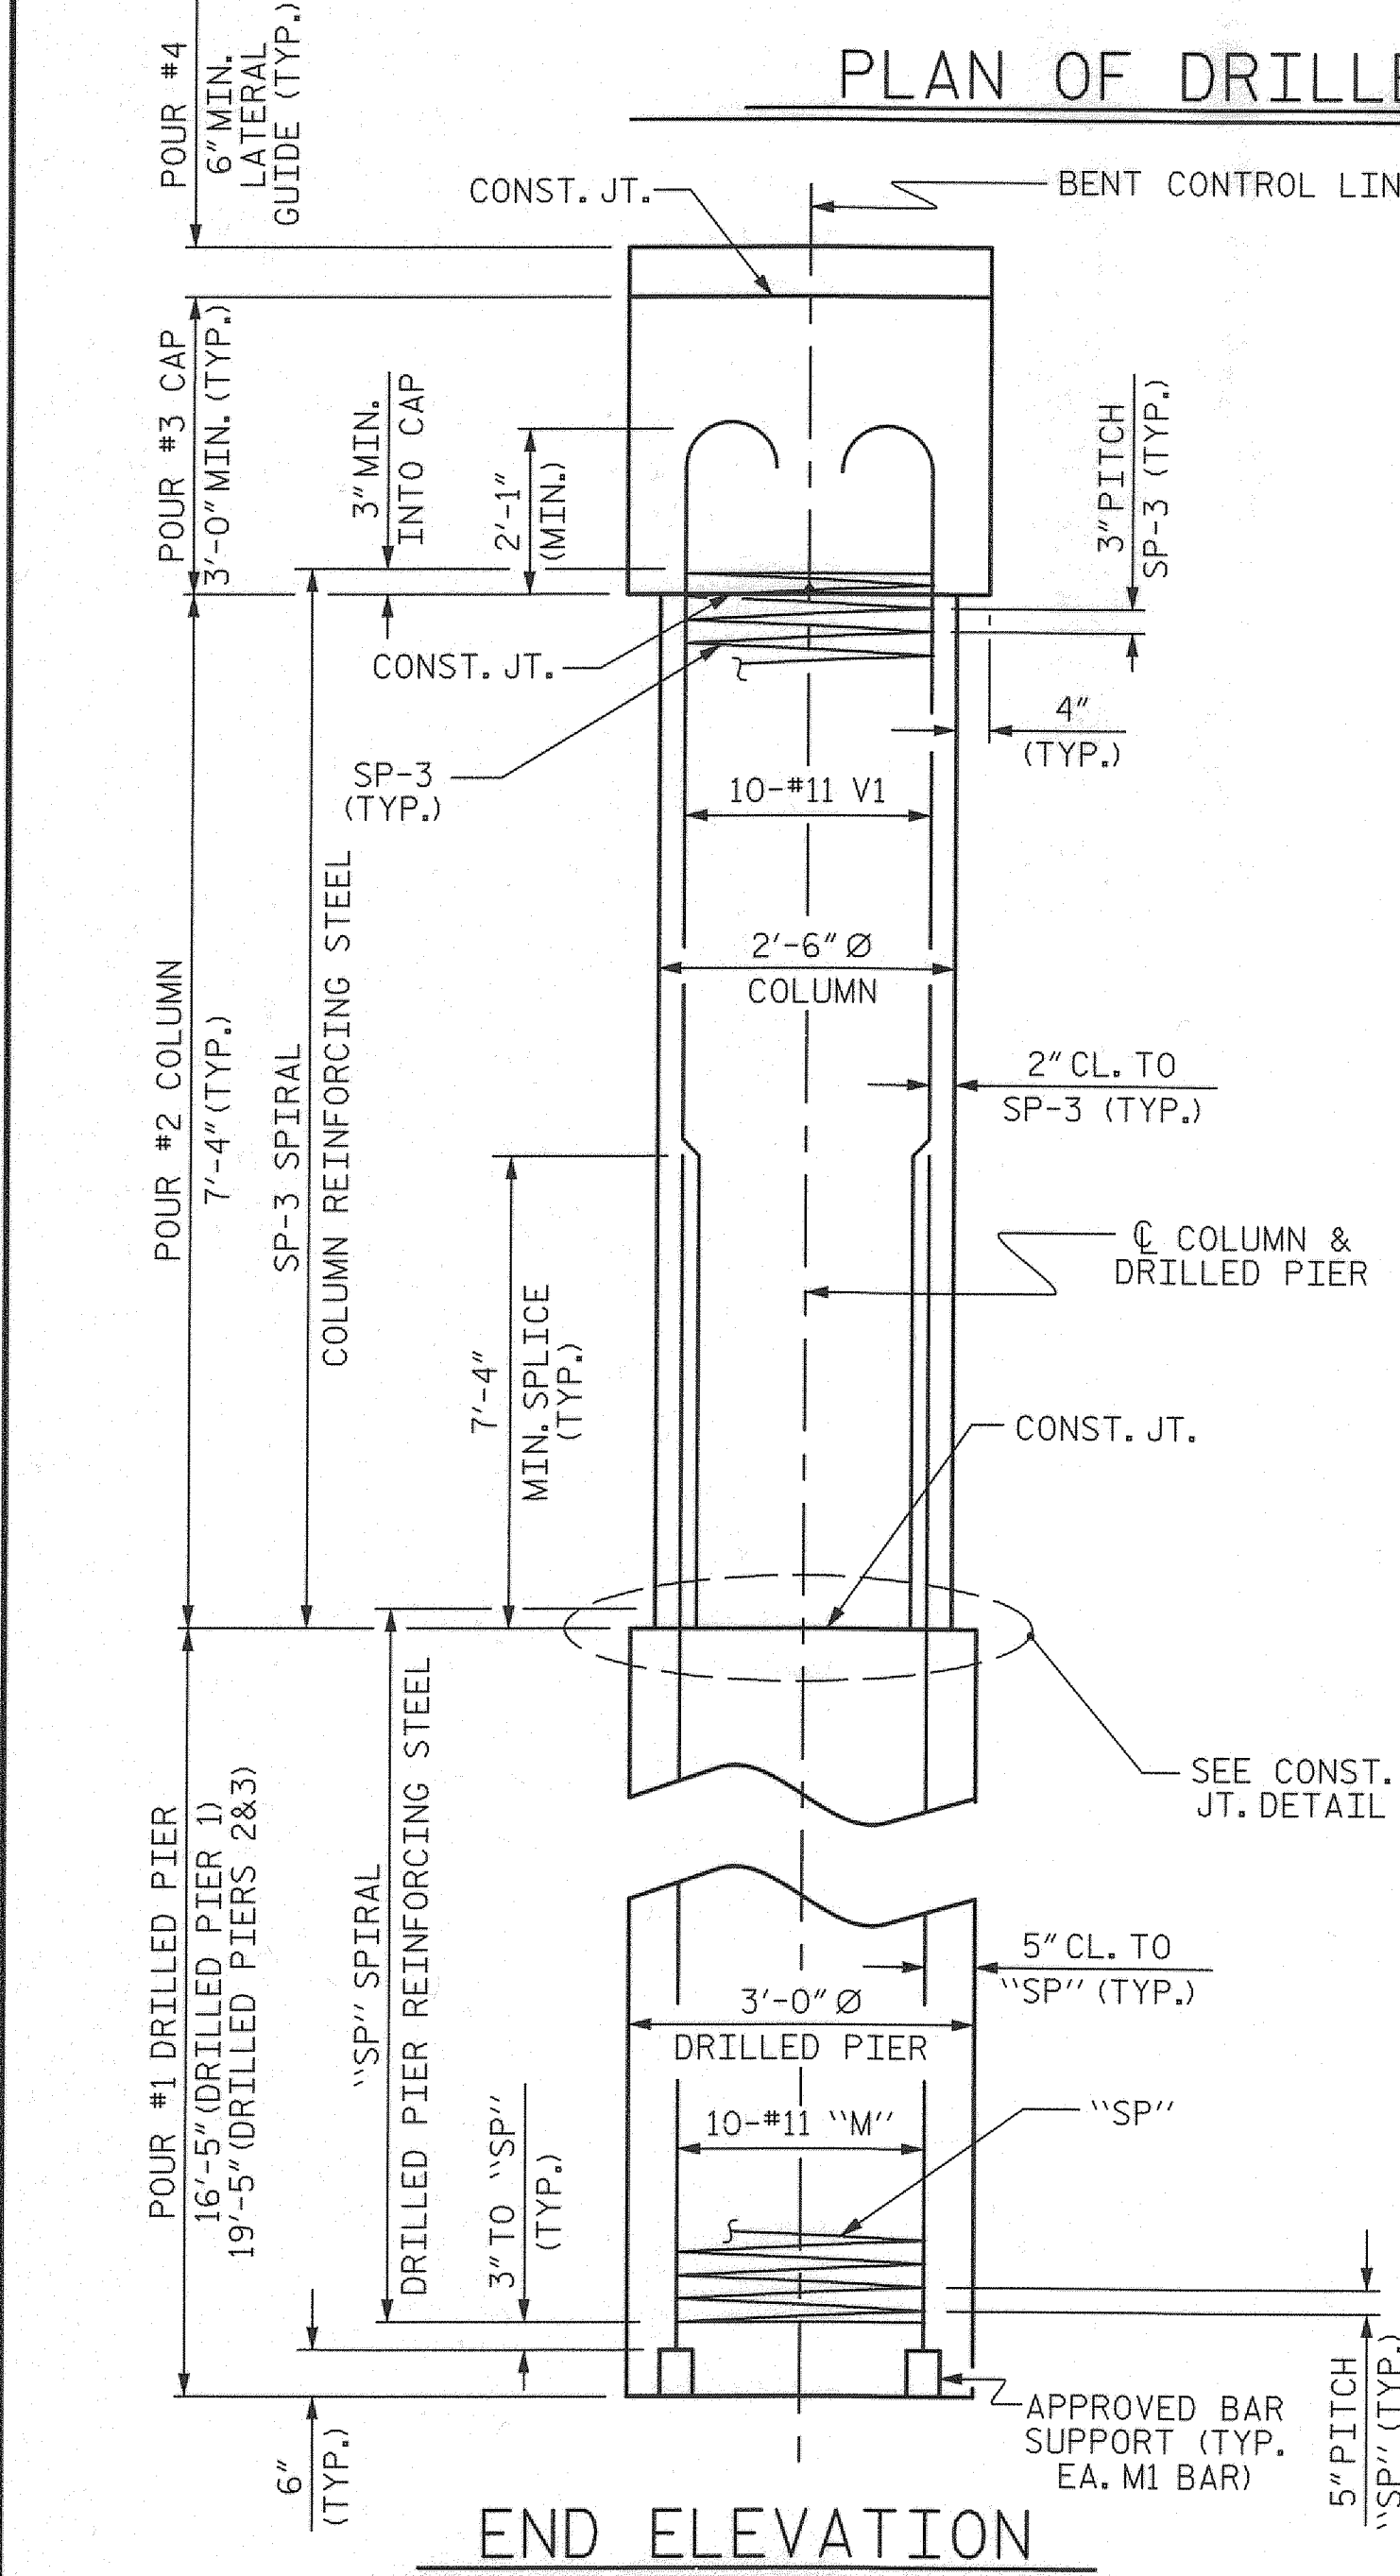


END ELEVATION

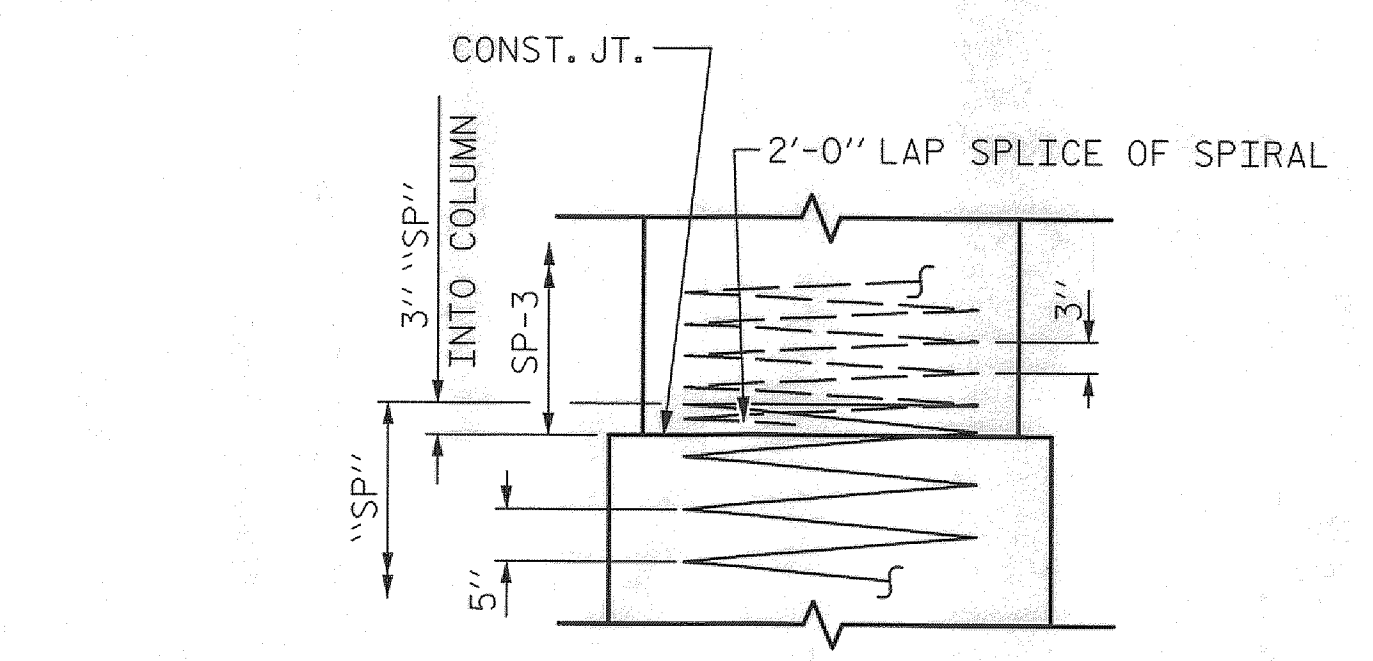

CONSTRUCTION JOINT DETAIL

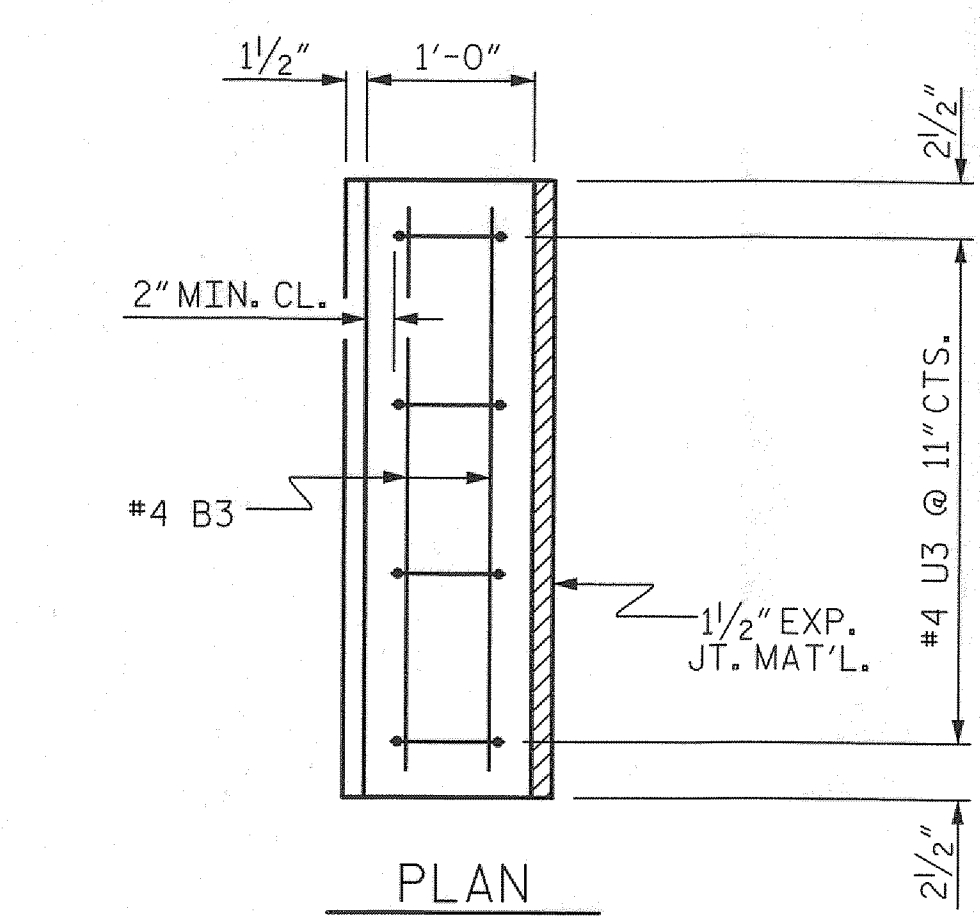


PLAN

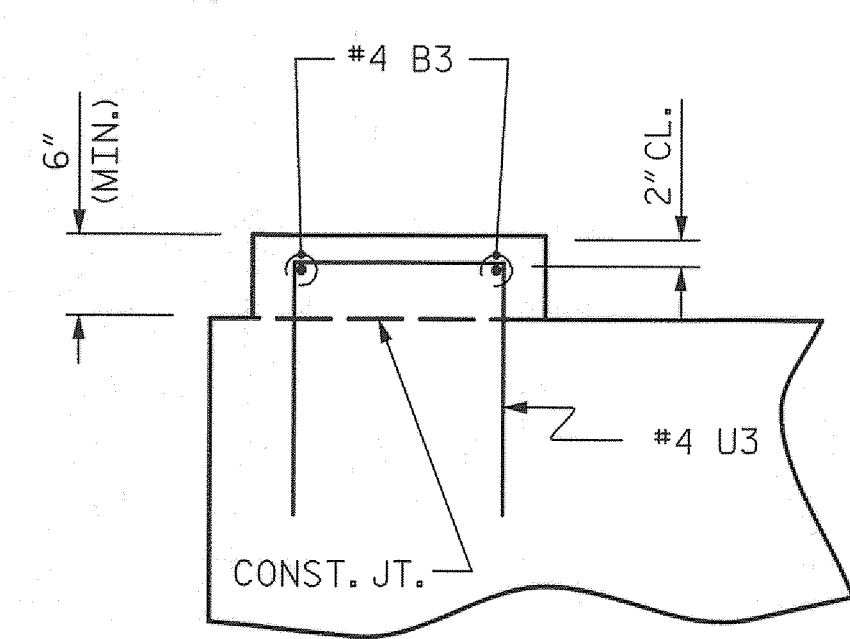


ELEVATION

LATERAL GUIDE DETAILS
(LEFT LATERAL GUIDE SHOWN, RIGHT SIDE SIMILAR)

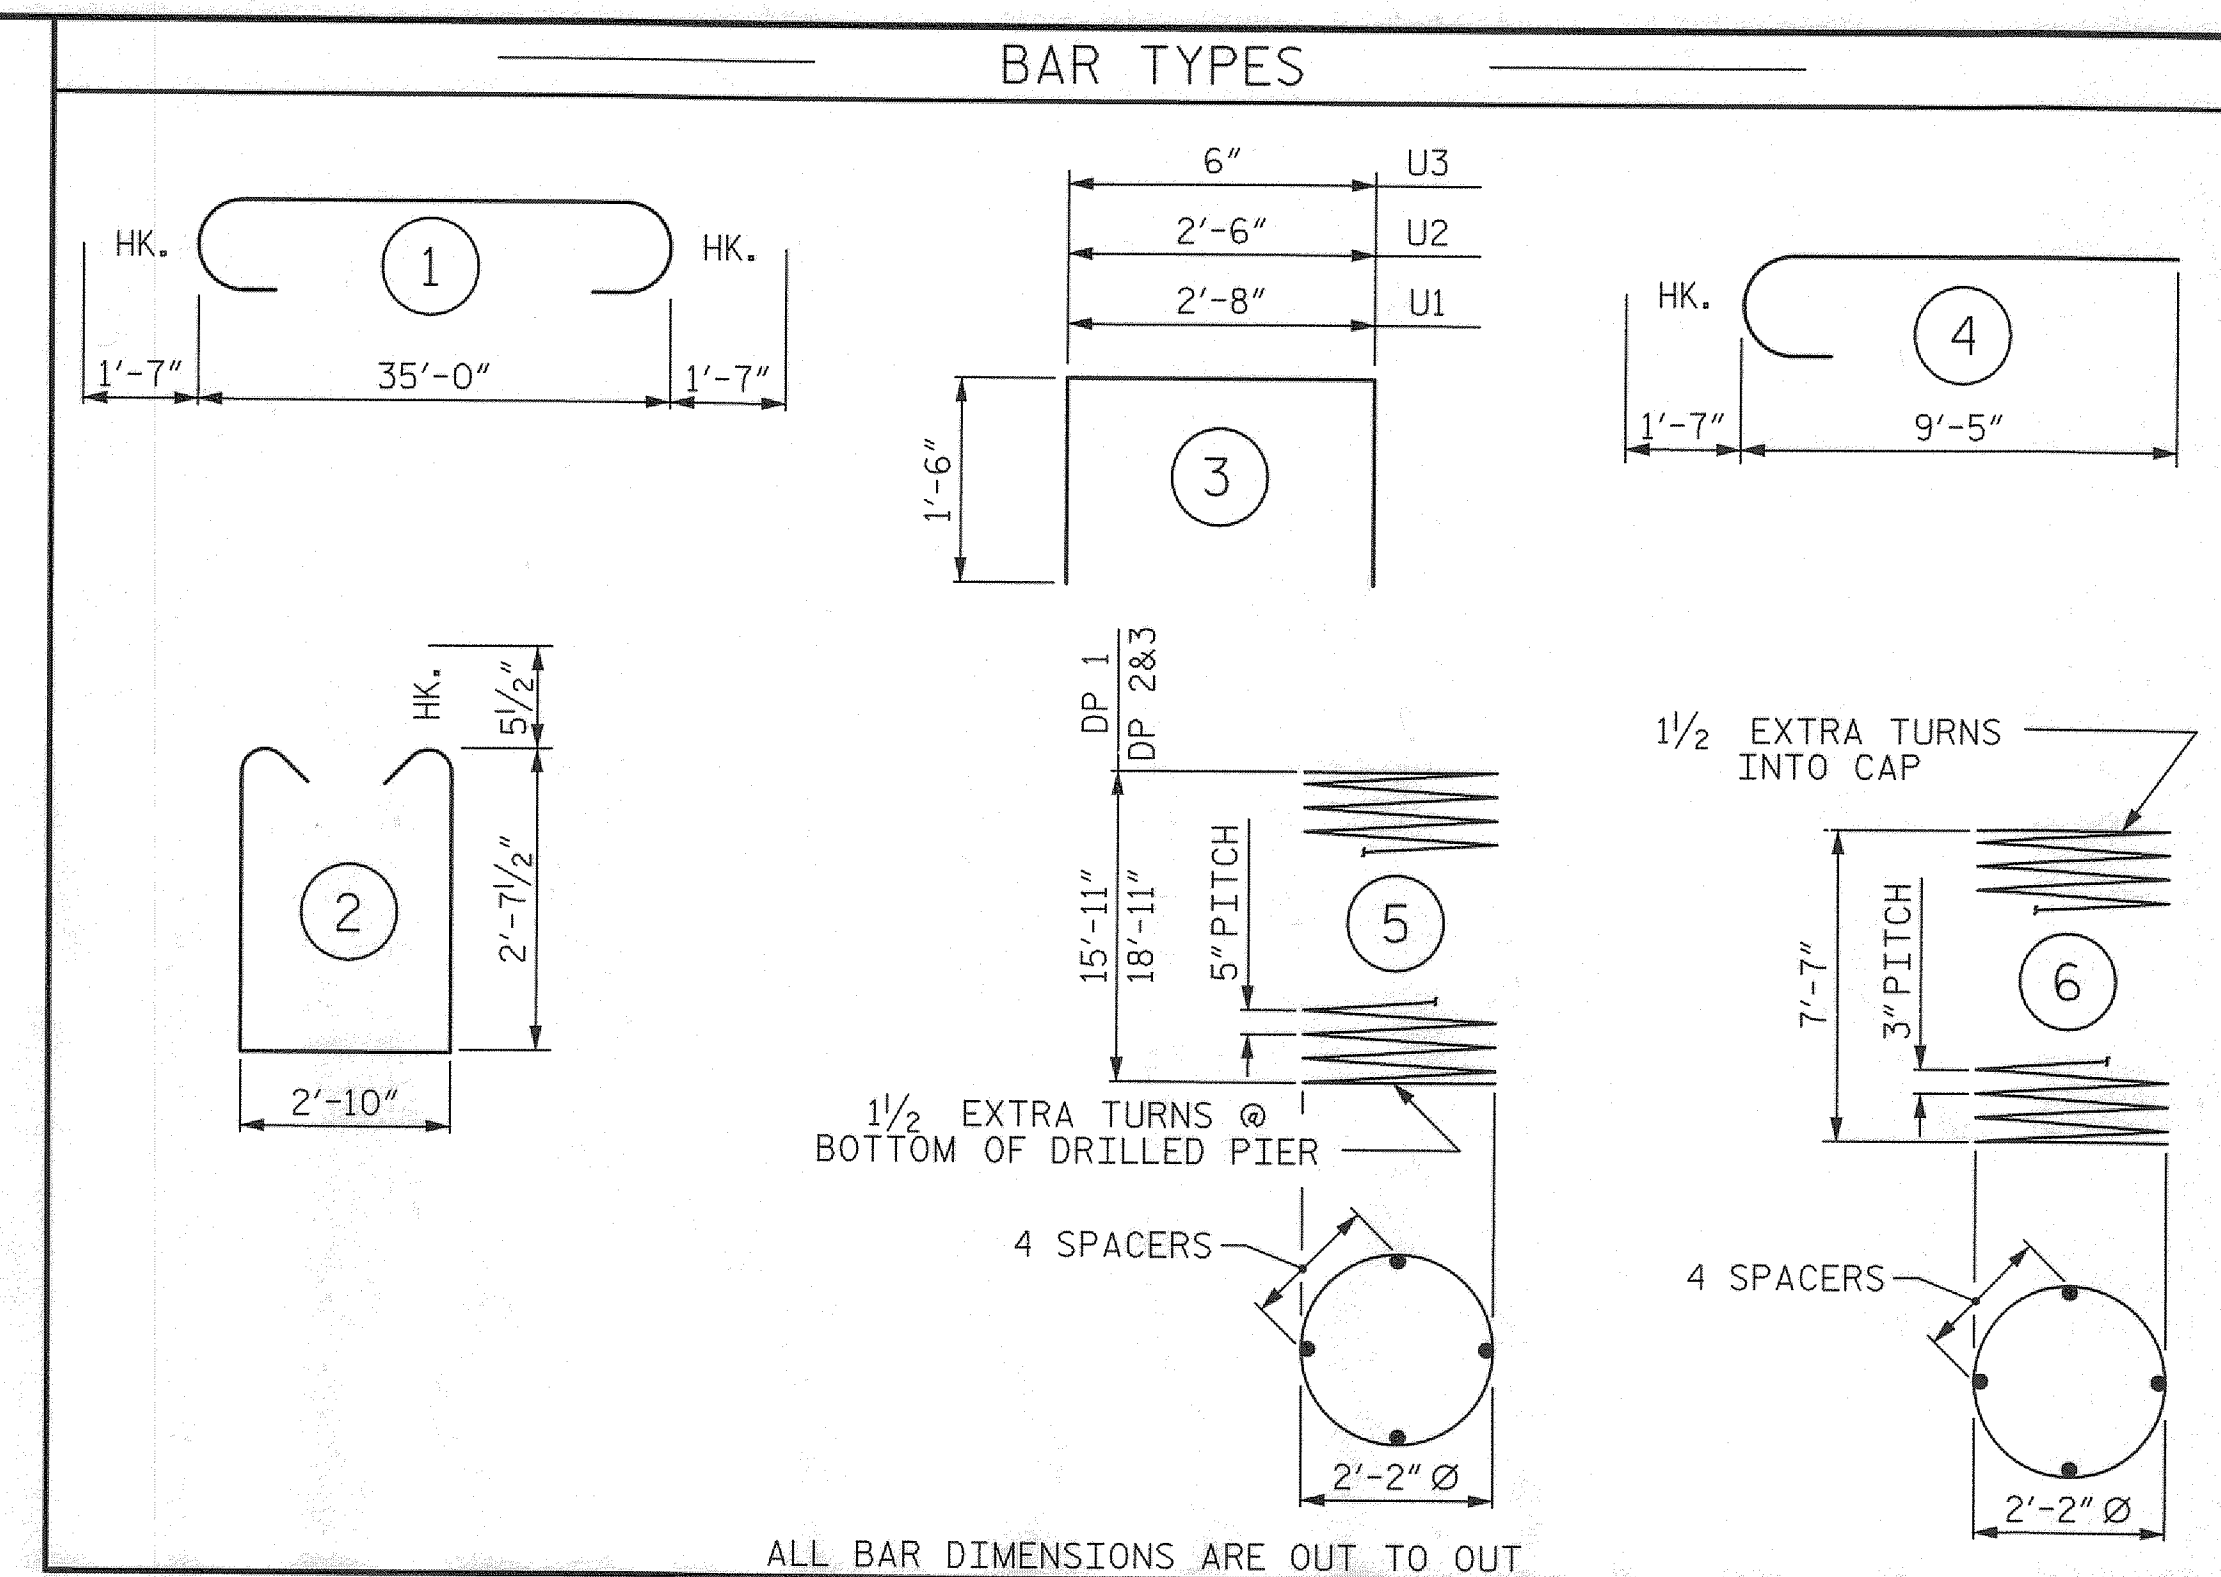


BAR TYPES

ALL BAR DIMENSIONS ARE OUT TO OUT

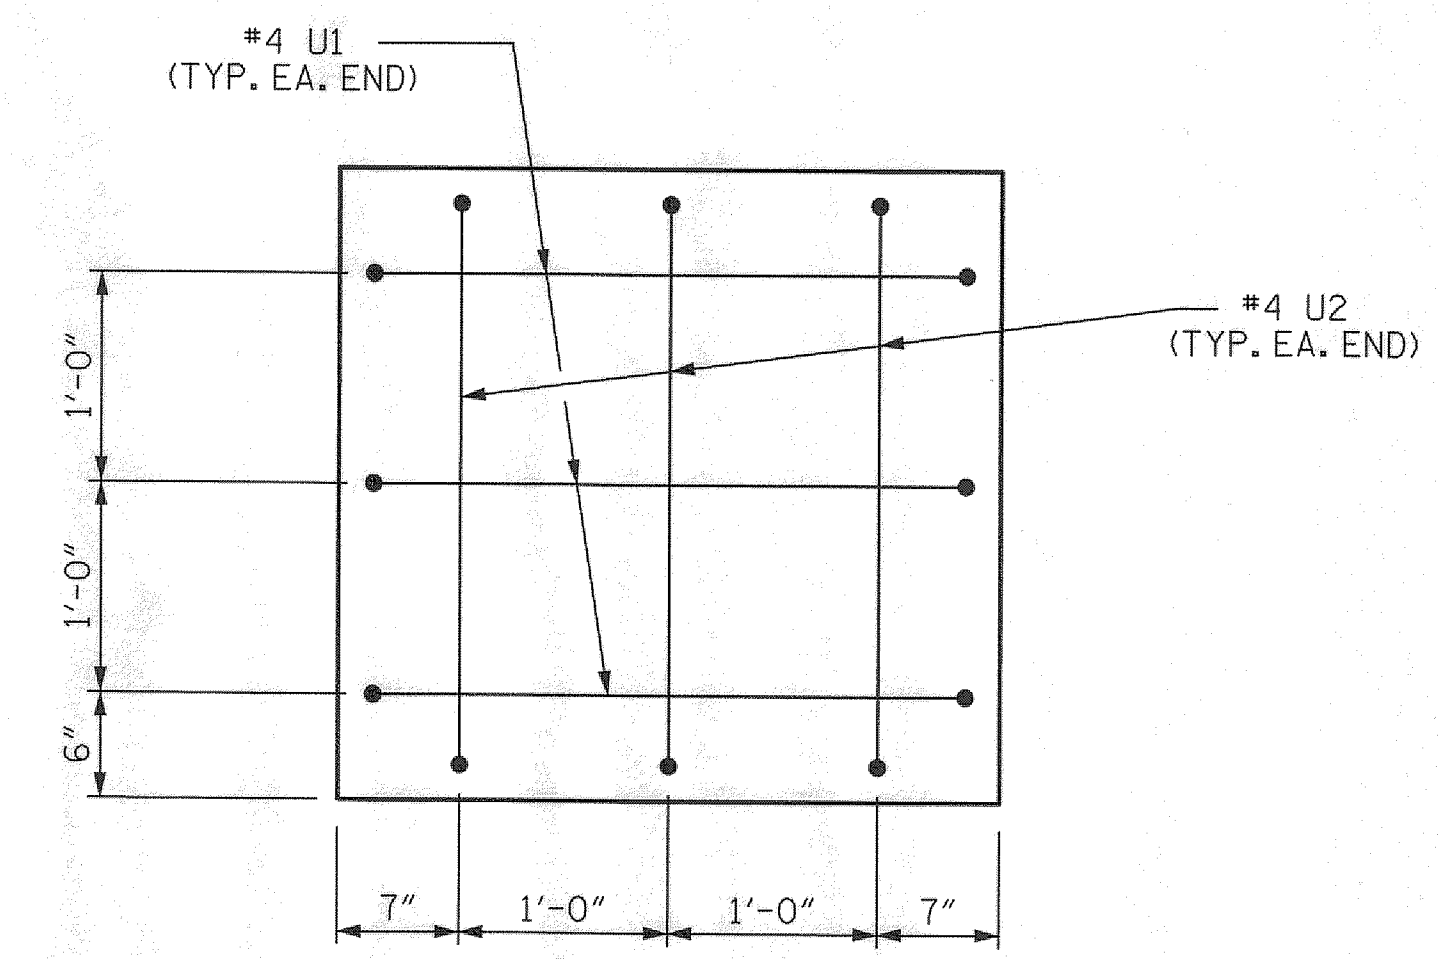

END OF CAP VIEW

(TYPICAL BOTH ENDS)

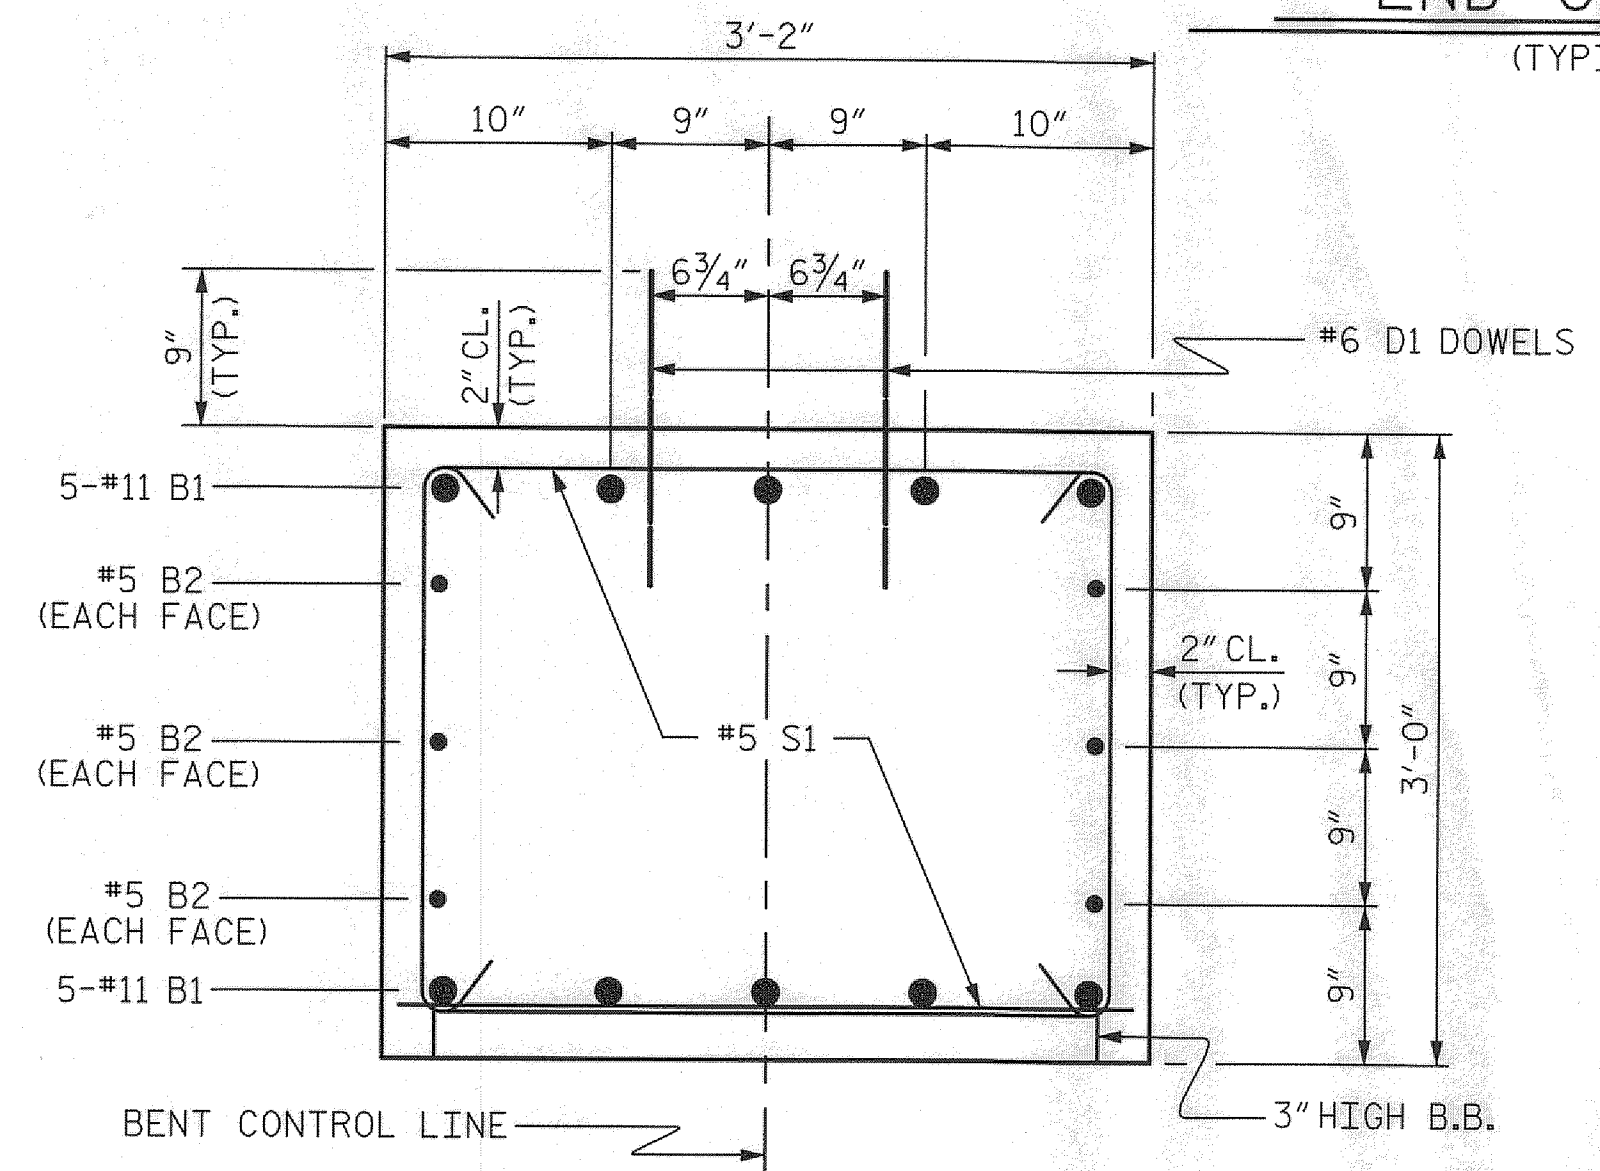


SECTION THRU CAP

BILL OF MATERIAL					
FOR ONE BENT					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
B1	10	#11	1	38'-2"	2028
B2	6	#5	STR	35'-2"	220
B3	4	#4	STR	2'-10"	8
D1	44	#6	STR	1'-6"	99
M1	10	#11	STR	26'-4"	1399
M2	20	#11	STR	29'-4"	3117
S1	60	#5	2	9'-0"	563
U1	6	#4	3	5'-8"	23
U2	6	#4	3	5'-6"	22
U3	8	#4	3	3'-6"	19
V1	30	#11	4	11'-0"	1753
REINFORCING STEEL (FOR ONE BENT)					9251 LBS.
SP-1	1	*	5	265'-11"	277
SP-2	2	*	5	314'-3"	656
SP-3	3	**	6	213'-10"	429
SPIRAL COLUMN REINFORCING STEEL (FOR ONE BENT)					1362 LBS.
* THE SP-1 & SP-2 SPIRAL REINFORCING STEEL SHALL BE W31 OR D-31 COLD DRAWN WIRE OR #5 PLAIN OR DEFORMED BAR					
** THE SP-3 SPIRAL REINFORCING STEEL SHALL BE W20 OR D-20 COLD DRAWN WIRE OR #4 PLAIN OR DEFORMED BAR					
CLASS A CONCRETE BREAKDOWN (FOR ONE BENT)					
POUR #2 (COLUMNS)					4.1 C.Y.
POUR #3 (CAP)					12.5 C.Y.
POUR #4 (LATERAL GUIDE)					0.1 C.Y.
TOTAL CLASS A CONCRETE					16.7 C.Y.
DRILLED PIERS: (FOR ONE BENT)					
DRILLED PIER CONCRETE					14.5 C.Y.
POUR #1 (DRILLED PIERS)					14.5 C.Y.
3'-0" Ø DRILLED PIERS					55.3 LIN. FT.
PERMANENT STEEL CASING FOR 3'-0" Ø DRILLED PIER					42 LIN. FT.
CSL TUBES					239 LIN. FT.

PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
STATION: 14+00.00 -L-
SHEET 2 OF 2


STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH					
SUBSTRUCTURE BENT No. 2					
REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		

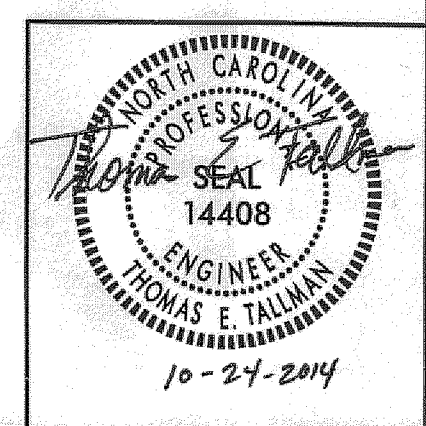


10/24/2014 P:\Libraries\Projects\17BP.5.R.30\17BP.5.R.30.sd.shh15.dgn ICA Engineering

ASSEMBLED BY: M. T. MOBLEY DATE: 10/12
CHECKED BY: J. E. MONDOLFI DATE: 10/12
DRAWN BY: DGE 03/10
CHECKED BY: MKT 03/10

SHEET NO. S-15
TOTAL SHEETS 17

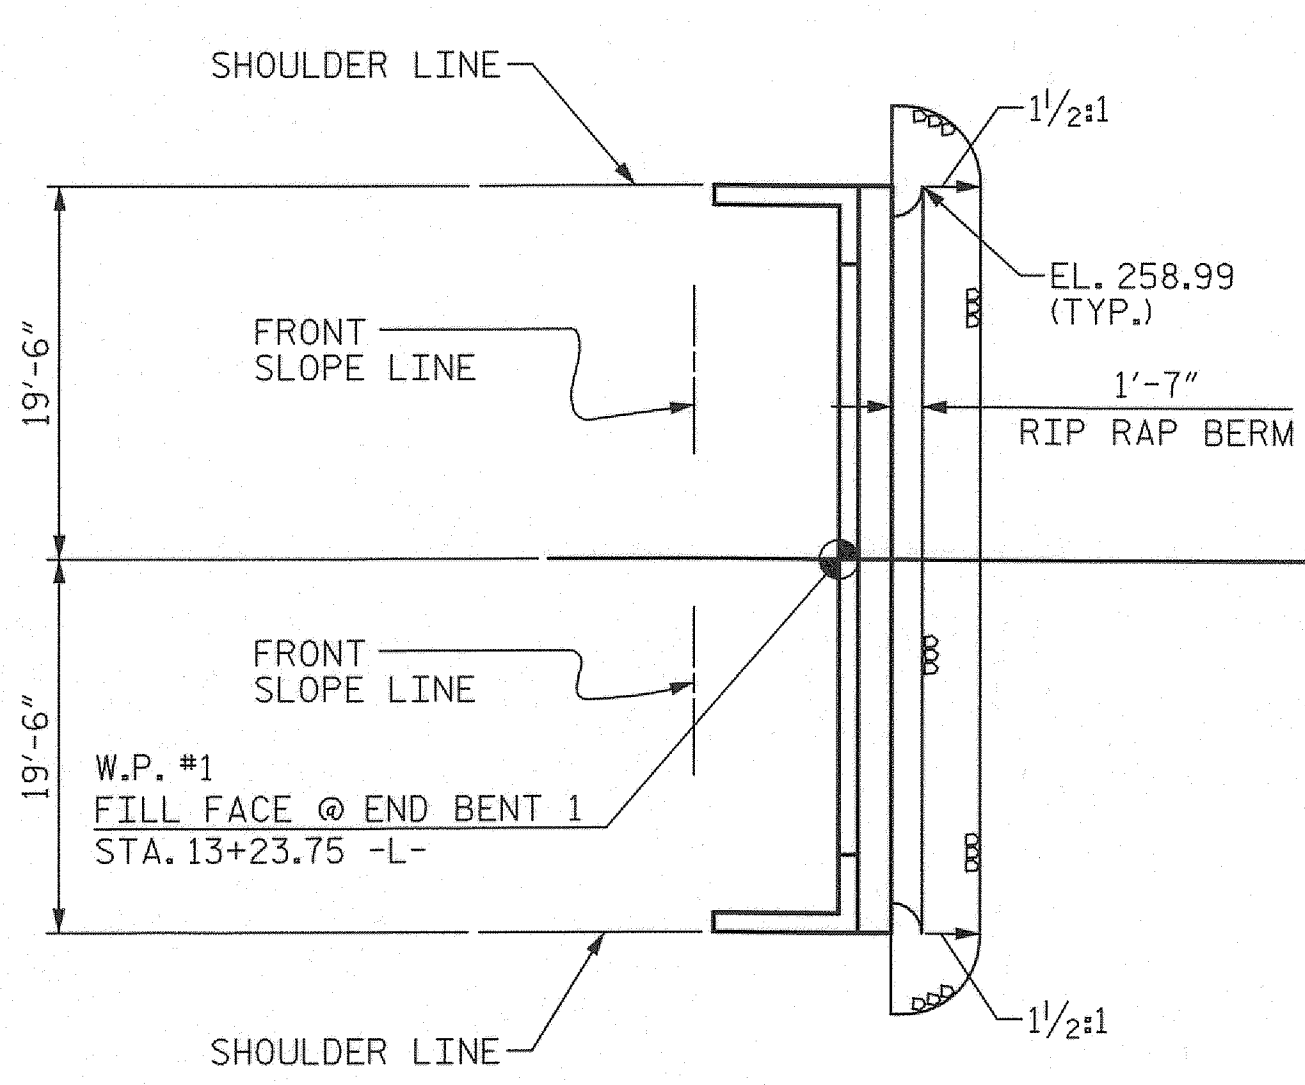


END BENT 1

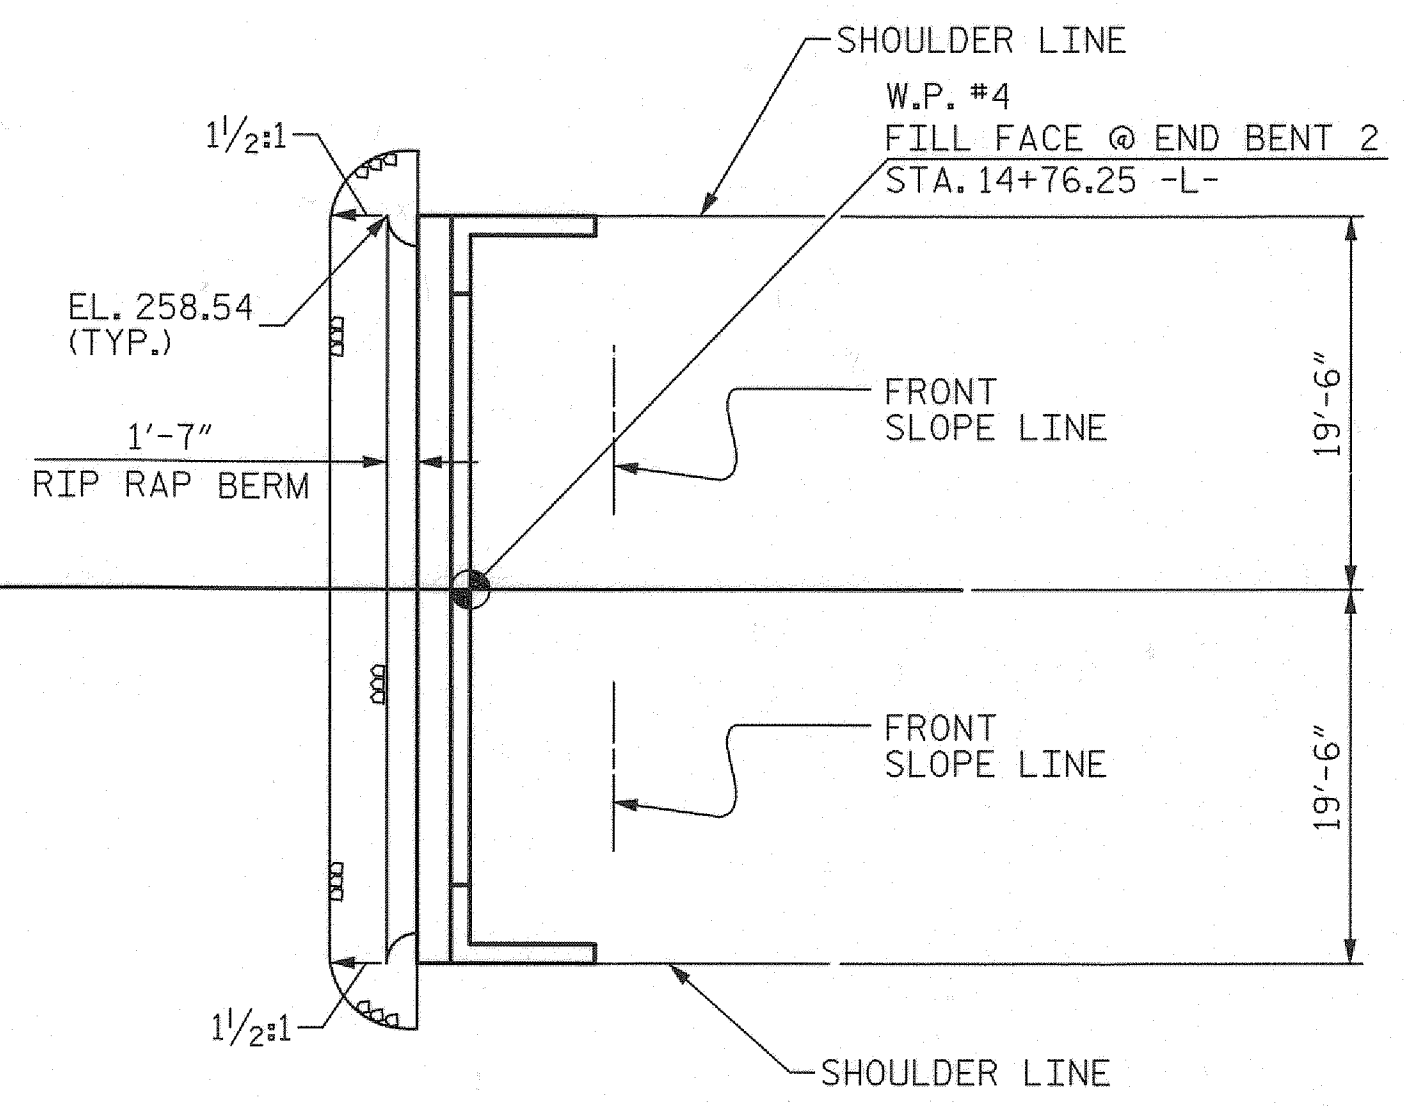

END BENT 2

ESTIMATED QUANTITIES		
BRIDGE @ STA. 14+00.00 -L-	RIP RAP CLASS II (2'-0" THICK)	GEOTEXTILE FOR DRAINAGE
	TONS	SQUARE YARDS
END BENT 1	24	27
END BENT 2	23	26

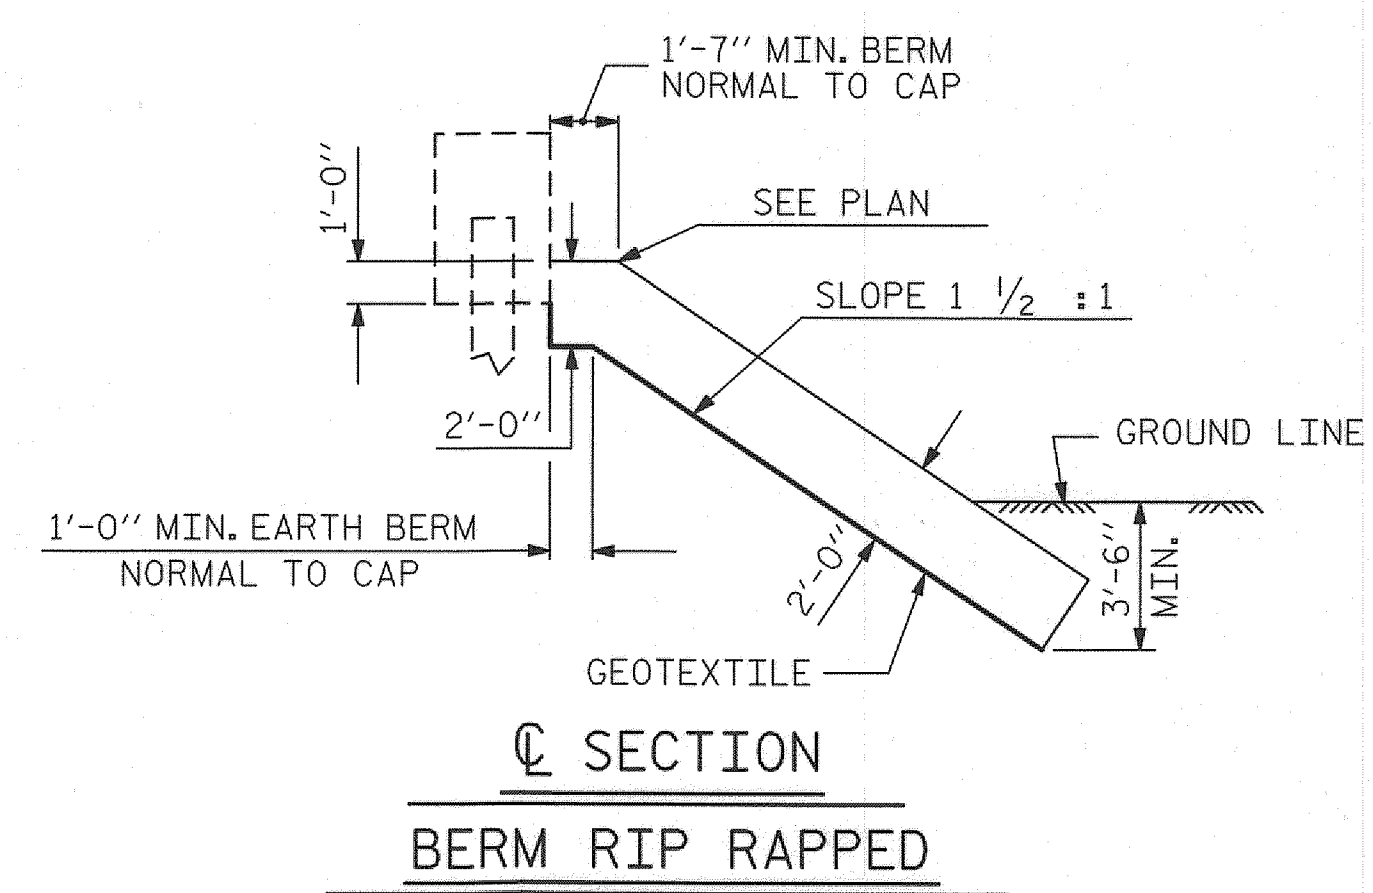


PROJECT NO. 17BP.5.R.30
FRANKLIN COUNTY
 STATION: 14+00.00 -L-

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

RIP RAP DETAILS

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-16
1			3			TOTAL SHEETS 17
2			4			

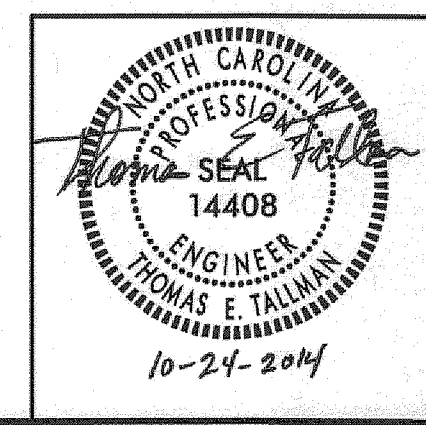

10/24/2014
 P:\Library\Projects\10\05\30-Franklin\Structures\Plans\17BP.5.R.30_scd.sht16.dgn
 ICA Engineering

DRAWN BY : D. H. CARTER DATE : OCT 2012
 CHECKED BY : M. T. MOBLEYLF DATE : OCT 2012
 DESIGN ENGINEER OF RECORD: T. E. TALLMAN DATE : FEB 2014

NOTES

FOR BRIDGE APPROACH FILL INCLUDING GEOTEXTILE, 4" Ø DRAINAGE PIPE, AND #78M STONE BACKFILL, SEE ROADWAY PLANS.

GEOTEXTILE SHALL BE TYPE 11N ACCORDANCE WITH THE STANDARD SPECIFICATIONS SECTION 1016.

#78M STONE BACKFILL (CLASS V SELECT MATERIAL) SHALL BE IN ACCORDANCE WITH STANDARD SPECIFICATIONS SECTION 1016.

#78M STONE BACKFILL IS TO BE CONTINUOUS ALONG FILL FACE OF BACKWALL FROM OUTSIDE EDGE TO OUTSIDE EDGE OF APPROACH SLAB.



FOR THE 4" Ø DRAINAGE PIPE OUTLET(S), SEE ROADWAY STANDARD DRAWINGS.

AREA BETWEEN THE WINGWALL AND APPROACH SLAB SHALL BE GRADED TO DRAIN THE WATER AWAY FROM THE FILL FACE OF THE BRIDGE AND SHALL BE PAVED. SEE ROADWAY PLANS.


APPROACH SLAB GROOVING IS NOT REQUIRED.

BILL OF MATERIAL

APPROACH SLAB AT EB #1						
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT	
*A1	26	#4	STR	16'-11"	294	
A2	26	#4	STR	16'-9"	291	
*B1	64	#5	STR	11'-2"	745	
B2	64	#6	STR	11'-8"	1121	
REINFORCING STEEL					LBS.	1412
* EPOXY COATED REINFORCING STEEL					LBS.	1039
CLASS AA CONCRETE					C. Y.	18.6
APPROACH SLAB AT EB #2						
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT	
*A1	26	#4	STR	16'-11"	294	
A2	26	#4	STR	16'-9"	291	
*B1	64	#5	STR	11'-2"	745	
B2	64	#6	STR	11'-8"	1121	
REINFORCING STEEL					LBS.	1412
* EPOXY COATED REINFORCING STEEL					LBS.	1039
CLASS AA CONCRETE					C. Y.	18.6

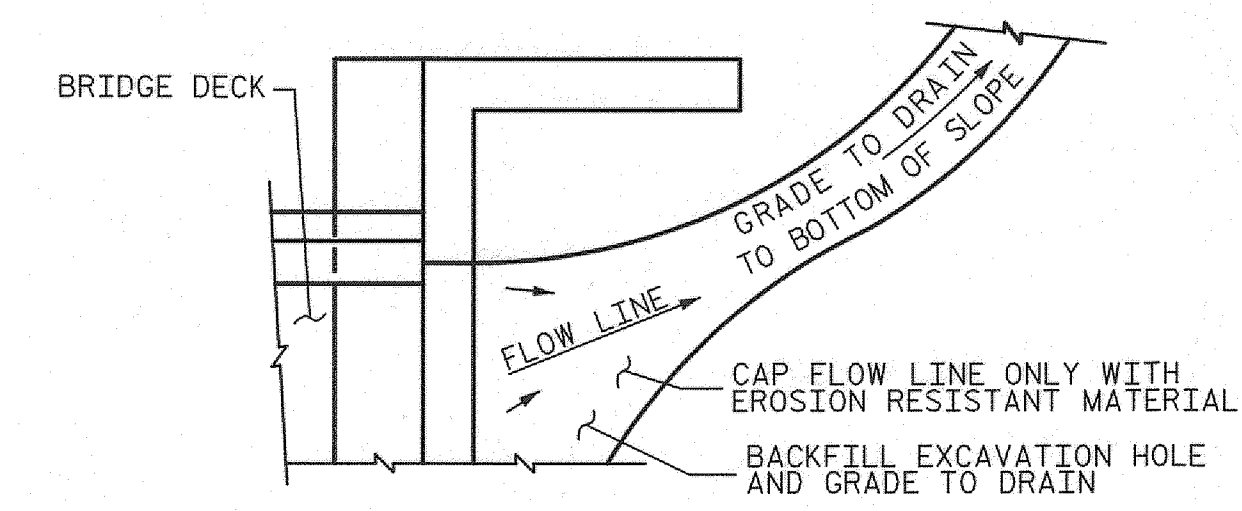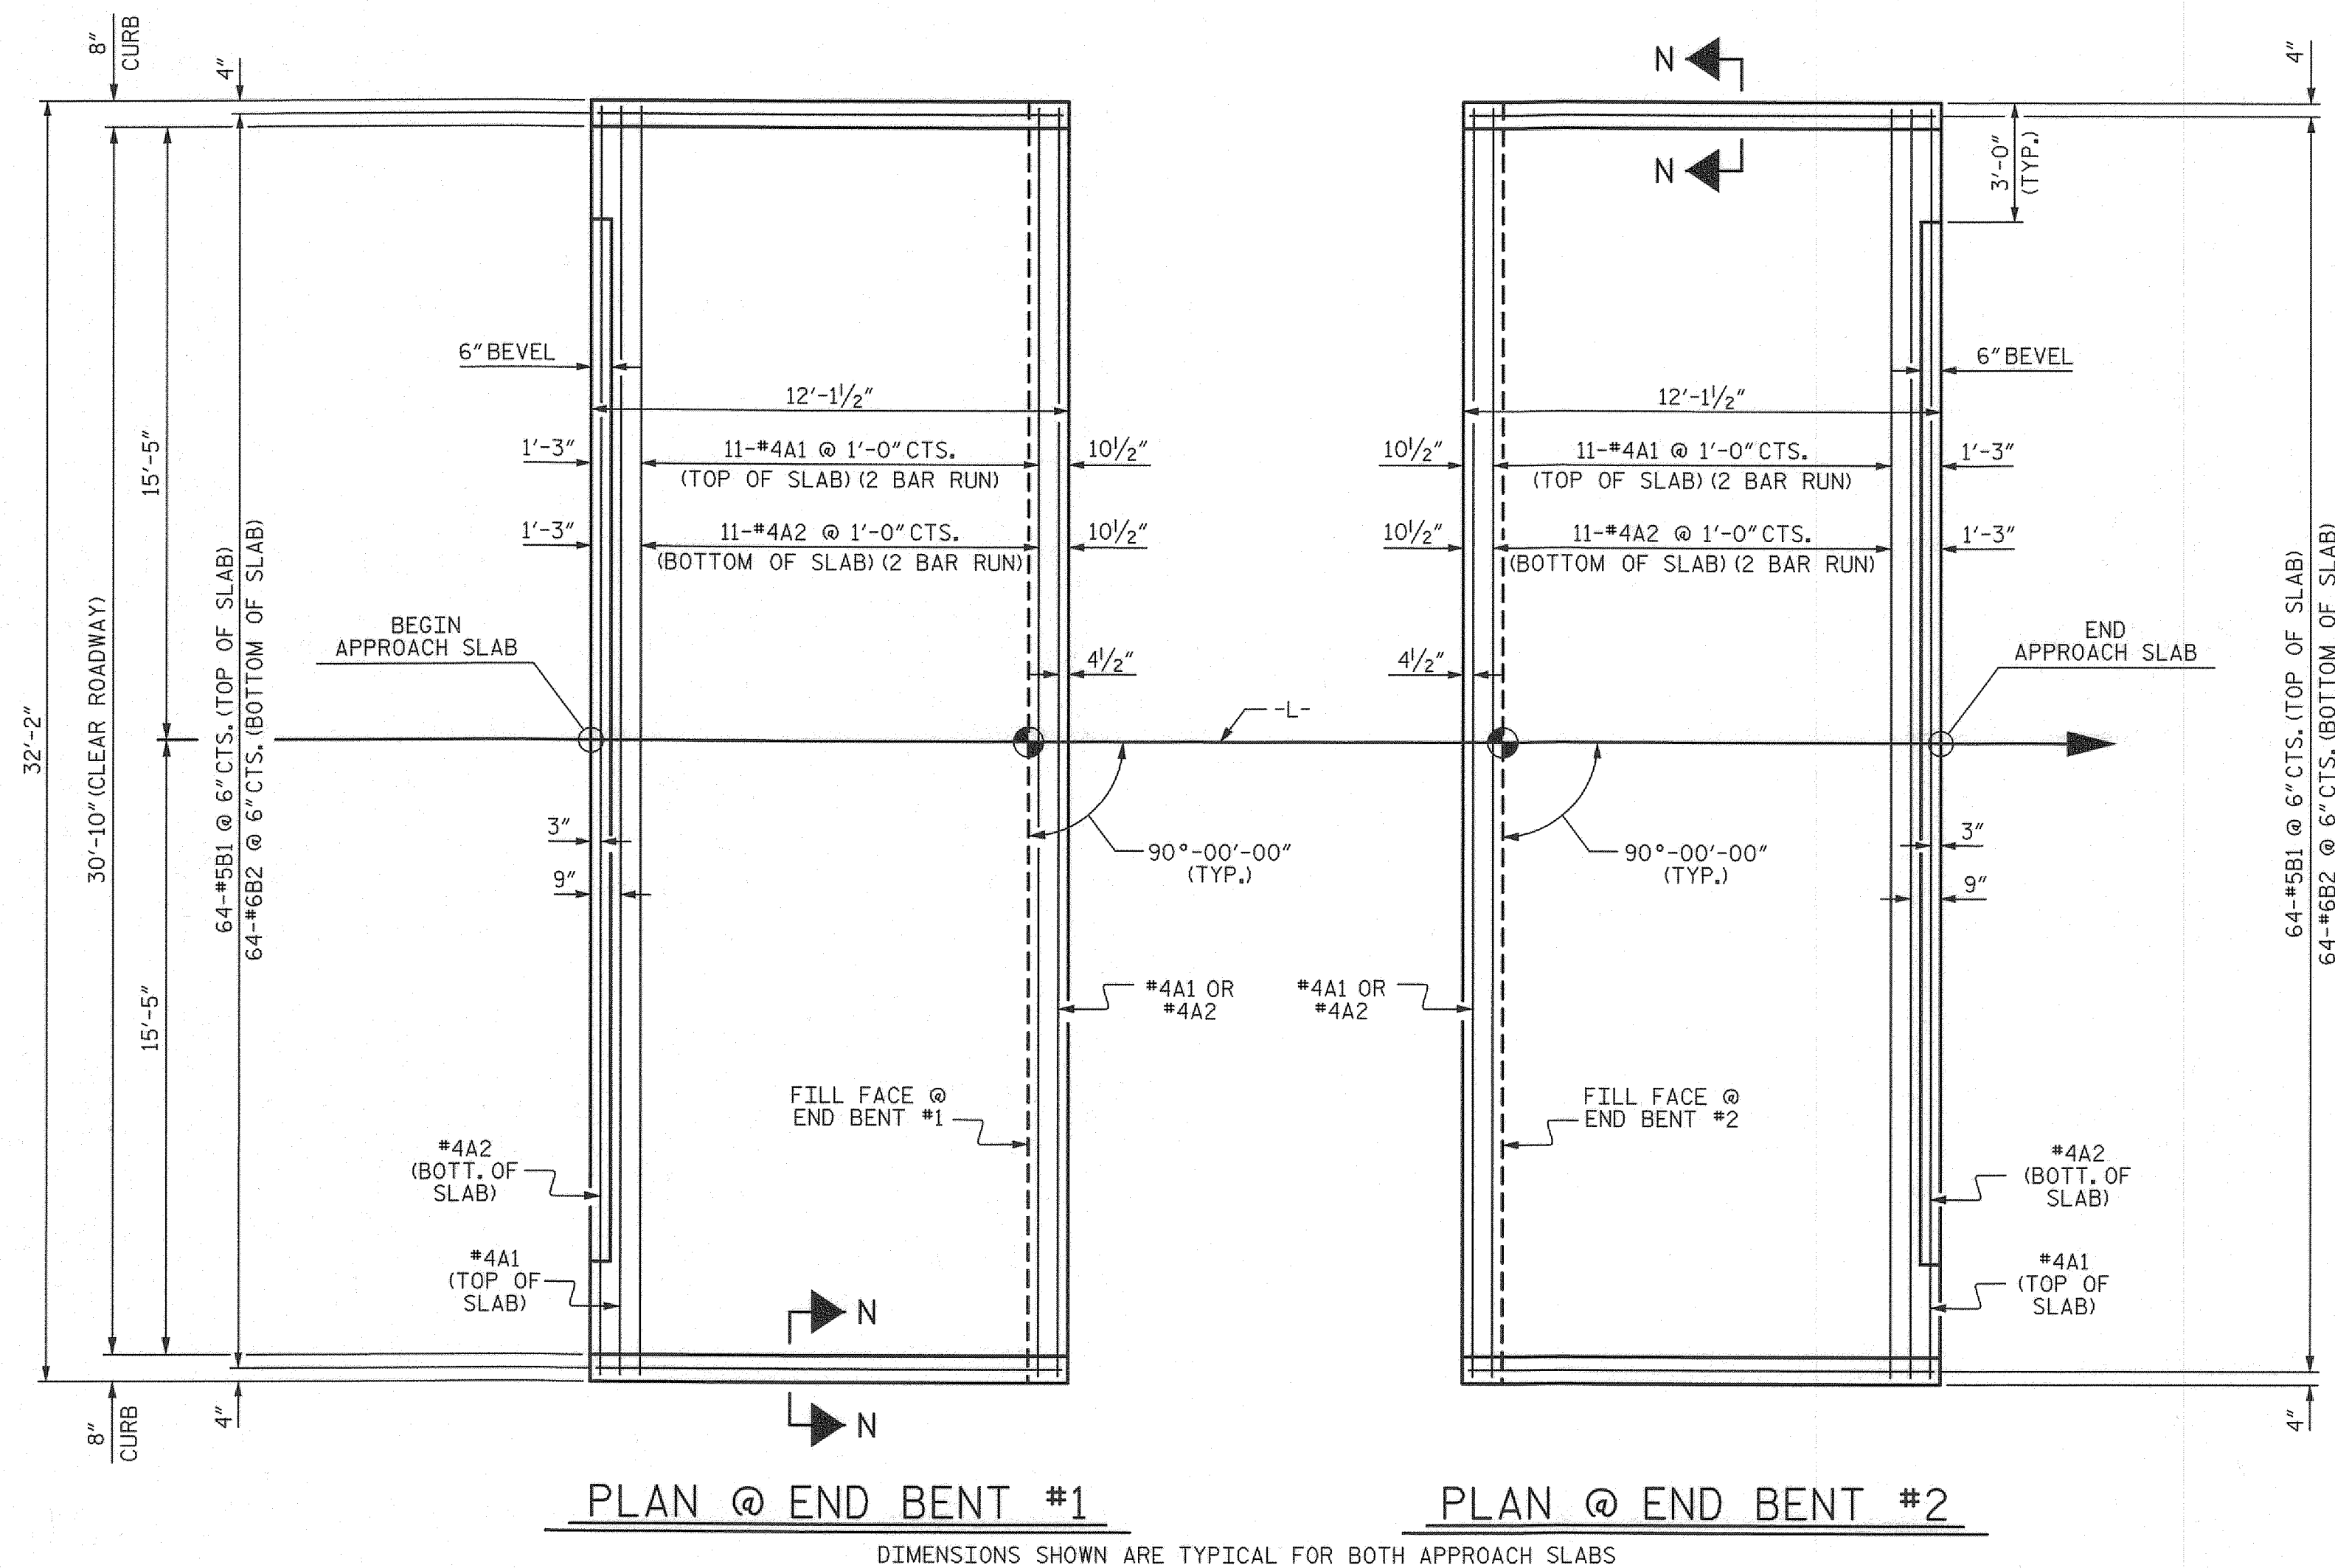


NOTE: IF THE APPROACH SLAB IS NOT CONSTRUCTED IMMEDIATELY AFTER THE BACKFILLING OF THE END BENT EXCAVATION, GRADE TO DRAIN TO THE BOTTOM OF THE SLOPE AND PROVIDE EROSION RESISTANT MATERIAL, SUCH AS FIBERGLASS ROVING OR AS DIRECTED BY THE ENGINEER TO PREVENT SOIL EROSION AND TO PROTECT THE AREA ADJACENT TO THE STRUCTURE. THE CONTRACTOR WILL BE REQUIRED TO REMOVE THESE MATERIALS PRIOR TO CONSTRUCTION OF THE APPROACH SLAB.

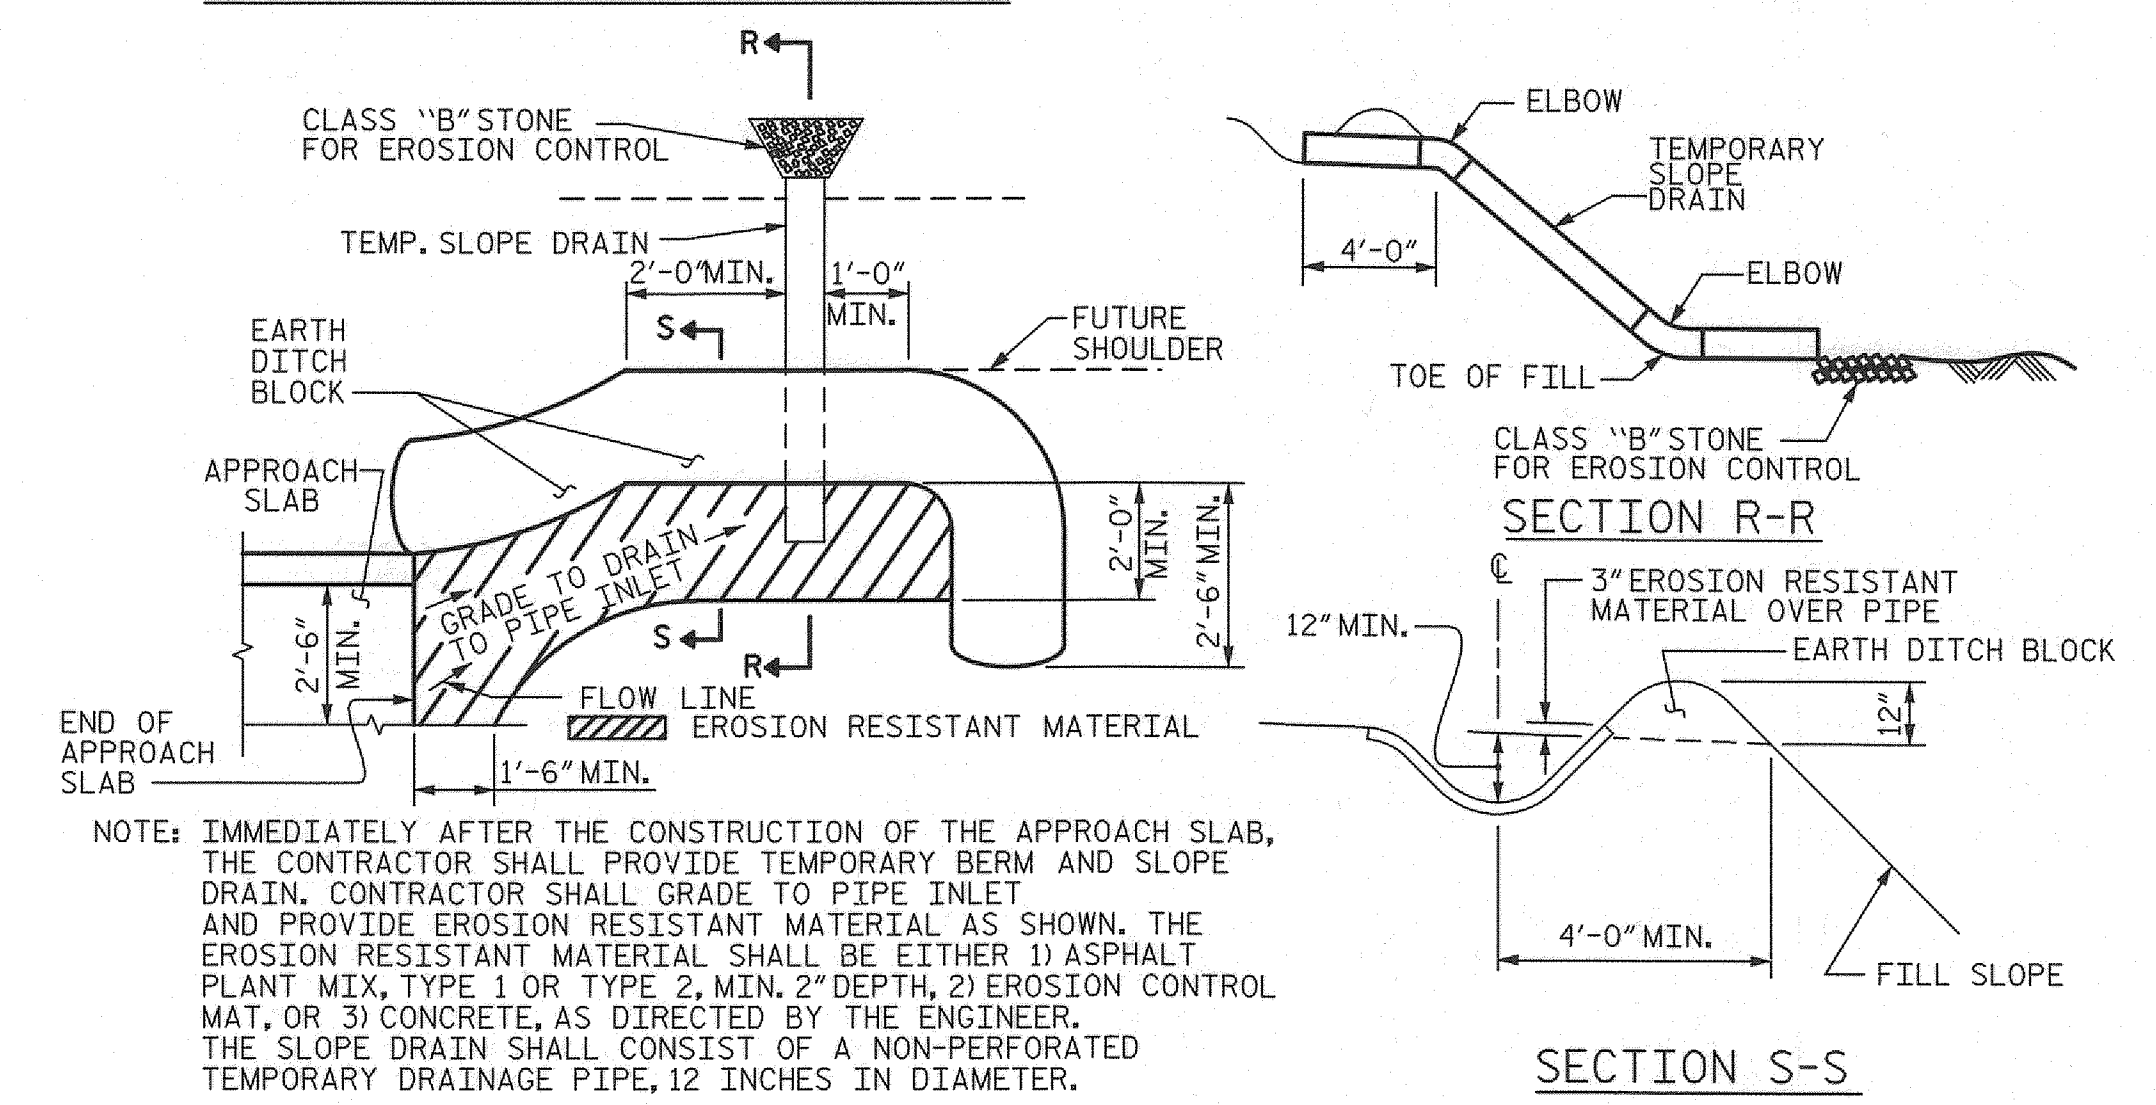


NOTE: IMMEDIATELY AFTER THE CONSTRUCTION OF THE APPROACH SLAB, THE CONTRACTOR SHALL PROVIDE TEMPORARY BERM AND SLOPE DRAIN. CONTRACTOR SHALL GRADE TO PIPE INLET AND PROVIDE EROSION RESISTANT MATERIAL AS SHOWN. THE EROSION RESISTANT MATERIAL SHALL BE EITHER 1) ASPHALT PLANT MIX, TYPE 1 OR TYPE 2, MIN. 2" DEPTH, 2) EROSION CONTROL MAT, OR 3) CONCRETE, AS DIRECTED BY THE ENGINEER. THE SLOPE DRAIN SHALL CONSIST OF A NON-PERFORATED TEMPORARY DRAINAGE PIPE, 12 INCHES IN DIAMETER.

TEMPORARY BERM AND SLOPE DRAIN DETAILS
 (TO BE USED WHEN SHOULDER BERM GUTTER IS REQUIRED)

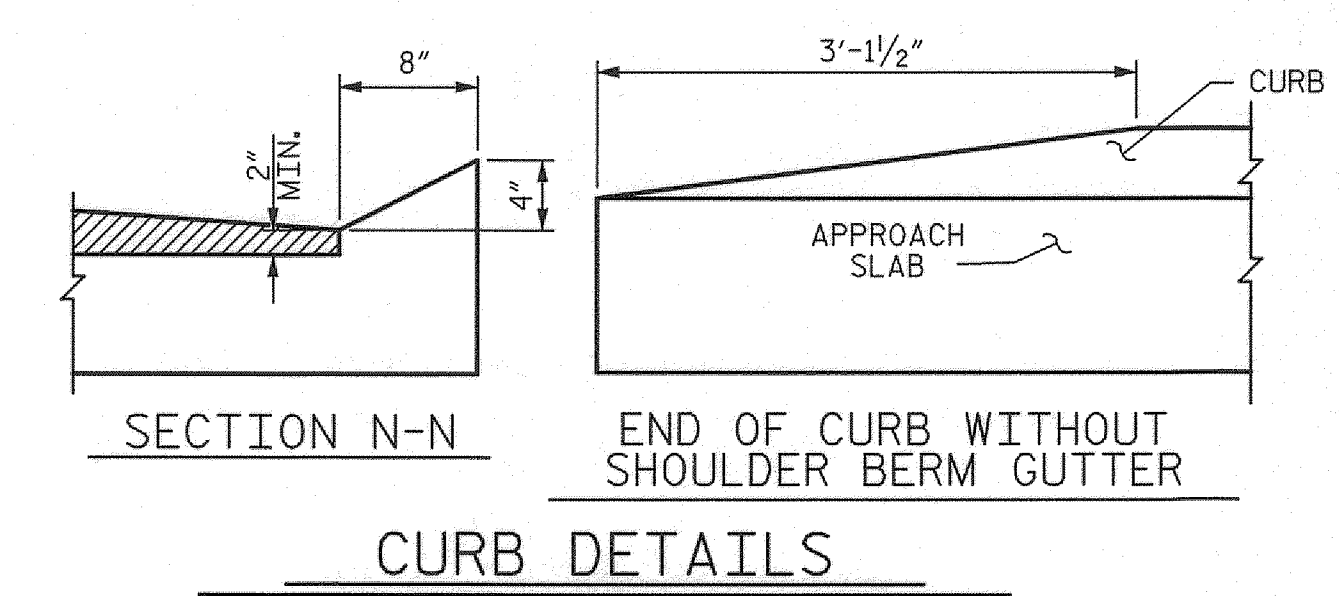

SPLICE LENGTHS

BAR SIZE	EPOXY COATED	UNCOATED
#4	2'-0"	1'-9"
#5	2'-6"	2'-2"
#6	3'-10"	2'-7"

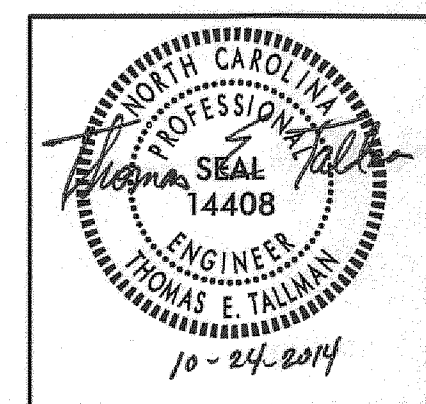

PROJECT NO. 17BP.5.R.30
 FRANKLIN COUNTY
 STATION: 14+00.00 -L-

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

STANDARD BRIDGE APPROACH SLAB FOR PRESTRESSED CONCRETE CORED SLAB UNIT (SUB-REGIONAL TIER) 90° SKEW

REVISIONS						SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	S-17	
1			3			TOTAL SHEETS 17	
2			4				

10/24/2014 P:\17BP\17BP5.R\30-Franklin\Structures\17BP.5.R.30.scd.sht17.dgn ICA Engineering

ASSEMBLED BY: M. T. MOBLEY DATE: 10/12
 CHECKED BY: J. E. MONDOLFI DATE: 10/12
 DRAWN BY: SHS/MAA 5-09 REV. 12-11 MAA/AAC
 CHECKED BY: BCH 5-09

STANDARD NOTES

DESIGN DATA:

SPECIFICATIONS	-----	A.A.S.H.T.O. (CURRENT)
LIVE LOAD	-----	SEE PLANS
IMPACT ALLOWANCE	-----	SEE A.A.S.H.T.O.
STRESS IN EXTREME FIBER OF		
STRUCTURAL STEEL - AASHTO M270 GRADE 36	-	20,000 LBS. PER SQ. IN.
- AASHTO M270 GRADE 50W	-	27,000 LBS. PER SQ. IN.
- AASHTO M270 GRADE 50	-	27,000 LBS. PER SQ. IN.
REINFORCING STEEL IN TENSION		
GRADE 60	--	24,000 LBS. PER SQ. IN.
CONCRETE IN COMPRESSION	-----	1,200 LBS. PER SQ. IN.
CONCRETE IN SHEAR	-----	SEE A.A.S.H.T.O.
STRUCTURAL TIMBER - TREATED OR		
UNTREATED - EXTREME FIBER STRESS	-----	1,800 LBS. PER SQ. IN.
COMPRESSION PERPENDICULAR TO GRAIN OF TIMBER	-----	375 LBS. PER SQ. IN.
EQUIVALENT FLUID PRESSURE OF EARTH	-----	30 LBS. PER CU. FT. (MINIMUM)

MATERIAL AND WORKMANSHIP:

EXCEPT AS MAY OTHERWISE BE SPECIFIED ON PLANS OR IN THE SPECIAL PROVISIONS, ALL MATERIAL AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE 2012 "STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES" OF THE N. C. DEPARTMENT OF TRANSPORTATION.

STEEL SHEET PILING FOR PERMANENT OR TEMPORARY APPLICATIONS SHALL BE HOT ROLLED.

CONCRETE:

UNLESS OTHERWISE REQUIRED ON PLANS, CLASS A CONCRETE SHALL BE USED FOR ALL PORTIONS OF ALL STRUCTURES WITH THE EXCEPTION THAT: CLASS AA CONCRETE SHALL BE USED IN BRIDGE SUPERSTRUCTURES, ABUTMENT BACKWALLS, AND APPROACH SLABS; AND CLASS B CONCRETE SHALL BE USED FOR SLOPE PROTECTION AND RIP RAP.

CONCRETE CHAMFERS:

UNLESS OTHERWISE NOTED ON THE PLANS, ALL EXPOSED CORNERS ON STRUCTURES SHALL BE CHAMFERED 3/4" WITH THE FOLLOWING EXCEPTIONS: TOP CORNERS OF CURBS MAY BE ROUNDED TO 1-1/2" RADIUS WHICH IS BUILT INTO CURB FORMS; CORNERS OF TRANSVERSE FLOOR EXPANSION JOINTS SHALL BE ROUNDED WITH A 1/4" FINISHING TOOL UNLESS OTHERWISE REQUIRED ON PLANS; AND CORNERS OF EXPANSION JOINTS IN THE ROADWAY FACES AND TOPS OF CURBS AND SIDEWALKS SHALL BE ROUNDED TO A 1/4" RADIUS WITH A FINISHING STONE OR TOOL UNLESS OTHERWISE REQUIRED ON PLANS.

DOWELS:

DOWELS WHEN INDICATED ON PLANS AS FOR CULVERT EXTENSIONS, SHALL BE EMBEDDED AT LEAST 12" INTO THE OLD CONCRETE AND GROUTED INTO PLACE WITH 1:2 CEMENT MORTAR.

ALLOWANCE FOR DEAD LOAD DEFLECTION, SETTLEMENT, ETC. IN CASTING SUPERSTRUCTURES:

BRIDGES SHALL BE BUILT ON THE GRADE OR VERTICAL CURVE SHOWN ON PLANS. SLABS, CURBS AND PARAPETS SHALL CONFORM TO THE GRADE OR CURVE.
ALL DIMENSIONS WHICH ARE GIVEN IN SECTION AND ARE AFFECTED BY DEAD LOAD DEFLECTIONS ARE DIMENSIONS AT CENTER LINE OF BEARING UNLESS OTHERWISE NOTED ON PLANS. IN SETTING FORMS FOR STEEL BEAM BRIDGES AND PRESTRESSED CONCRETE GIRDER BRIDGES, ADJUSTMENTS SHALL BE MADE DUE TO THE DEAD LOAD DEFLECTIONS FOR THE ELEVATIONS SHOWN. WHERE BLOCKS ARE SHOWN OVER BEAMS FOR BUILDING UP TO THE SLAB, THE VERTICAL DIMENSIONS OF THE BLOCKS SHALL BE ADJUSTED BETWEEN BEARINGS TO COMPENSATE FOR DEAD LOAD DEFLECTIONS, VERTICAL CURVE ORDINATE, AND ACTUAL BEAM CAMBER. WHERE BOTTOM OF SLAB IS IN LINE WITH BOTTOM OF TOP FLANGES, DEPTH OF SLAB BETWEEN BEARINGS SHALL BE ADJUSTED TO COMPENSATE FOR DEAD LOAD DEFLECTION, VERTICAL CURVE ORDINATE, AND ACTUAL BEAM CAMBER.
IN SETTING FALSEWORK AND FORMS FOR REINFORCED CONCRETE SPANS, AN ALLOWANCE SHALL BE MADE FOR DEAD LOAD DEFLECTIONS, SETTLEMENT OF FALSEWORK, AND PERMANENT CAMBER WHICH SHALL BE PROVIDED FOR IN ADDITION TO THE ELEVATIONS SHOWN. AFTER REMOVAL OF THE FALSEWORK, THE FINISHED STRUCTURES SHALL CONFORM TO THE PROFILE AND ELEVATIONS SHOWN ON THE PLANS AND CONSTRUCTION ELEVATIONS FURNISHED BY THE ENGINEER.
DETAILED DRAWINGS FOR FALSEWORK OR FORMS FOR BRIDGE SUPERSTRUCTURE AND ANY STRUCTURE OR PARTS OF A STRUCTURE AS NOTED ON THE PLANS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL BEFORE CONSTRUCTION OF THE FALSEWORK OR FORMS IS STARTED.

REINFORCING STEEL:

ALL REINFORCING STEEL SHALL BE DEFORMED. DIMENSIONS RELATIVE TO PLACEMENT OF REINFORCING ARE TO CENTERS OF BARS UNLESS OTHERWISE INDICATED IN THE PLANS. DIMENSIONS ON BAR DETAILS ARE TO CENTERS OF BARS OR ARE OUT TO OUT AS INDICATED ON PLANS.
WIRE BAR SUPPORTS SHALL BE PROVIDED FOR REINFORCING STEEL WHERE INDICATED ON THE PLANS. WHEN BAR SUPPORT PIECES ARE PLACED IN CONTINUOUS LINES, THEY SHALL BE SO PLACED THAT THE ENDS OF THE SUPPORTING WIRES SHALL BE LAPPED TO LOCK LEGS ON ADJOINING PIECES.

STRUCTURAL STEEL:

AT THE CONTRACTOR'S OPTION, HE MAY SUBSTITUTE 7/8" Ø SHEAR STUDS FOR THE 3/4" Ø STUDS SPECIFIED ON THE PLANS. THIS SUBSTITUTION SHALL BE MADE AT THE RATE OF 3 - 7/8" Ø STUDS FOR 4 - 3/4" Ø STUDS, AND STUD SPACING CHANGES SHALL BE MADE AS NECESSARY TO PROVIDE THE SAME EQUIVALENT NUMBER OF 7/8" Ø STUDS ALONG THE BEAM AS SHOWN FOR 3/4" Ø STUDS BASED ON THE RATIO OF 3 - 7/8" Ø STUDS FOR 4 - 3/4" Ø STUDS. STUDS OF THE LENGTH SPECIFIED ON THE PLANS MUST BE PROVIDED. THE MAXIMUM SPACING SHALL BE 2'-0".
EXCEPT AT THE INTERIOR SUPPORTS OF CONTINUOUS BEAMS WHERE THE COVER PLATE IS IN CONTACT WITH BEARING PLATE, THE CONTRACTOR MAY, AT HIS OPTION, SUBSTITUTE FOR THE COVER PLATES DESIGNATED ON THE PLANS COVER PLATES OF THE EQUIVALENT AREA PROVIDED THESE PLATES ARE AT LEAST 5/16" IN THICKNESS AND DO NOT EXCEED A WIDTH EQUAL TO THE FLANGE WIDTH LESS 2" OR A THICKNESS EQUAL TO 2 TIMES THE FLANGE THICKNESS. THE SIZE OF FILLET WELDS SHALL CONFORM TO THE REQUIREMENTS OF THE CURRENT ANSI/AASHTO/AWS "BRIDGE WELDING CODE". ELECTROSLAG WELDING WILL NOT BE PERMITTED.
WITH THE SOLE EXCEPTION OF EDGES AT SURFACES WHICH BEAR ON OTHER SURFACES, ALL SHARP EDGES AND ENDS OF SHAPES AND PLATES SHALL BE SLIGHTLY ROUNDED BY SUITABLE MEANS TO A RADIUS OF APPROXIMATELY 1/16" INCH OR EQUIVALENT FLAT SURFACE AT A SUITABLE ANGLE PRIOR TO PAINTING, GALVANIZING, OR METALLIZING.

HANDRAILS AND POSTS:

METAL STANDARDS AND FACES OF THE CONCRETE END POSTS FOR THE METAL RAIL SHALL BE SET NORMAL TO THE GRADE OF THE CURB, UNLESS OTHERWISE SHOWN ON PLANS. THE METAL RAIL AND TOPS OF CONCRETE POSTS USED WITH THE ALUMINUM RAIL SHALL BE BUILT PARALLEL TO THE GRADE OF THE CURB.
METAL HANDRAILS SHALL BE IN ACCORDANCE WITH THE PLANS. RAILS SHALL BE AS MANUFACTURED FOR BRIDGE RAILING. CASTINGS SHALL BE OF A UNIFORM APPEARANCE. FINIS AND OTHER DEFORMATIONS RESULTING FROM CASTING OR OTHERWISE SHALL BE REMOVED IN A MANNER SO THAT A UNIFORM COLORING OF THE COMPLETED CASTING SHALL BE OBTAINED. CASTINGS WITH DISCOLORATIONS OR OF NON-UNIFORM COLORING WILL NOT BE ACCEPTED. CERTIFIED MILL REPORTS ARE REQUIRED FOR METAL RAILS AND POSTS.

SPECIAL NOTES:

GENERALLY, IN CASE OF DISCREPANCY, THIS STANDARD SHEET OF NOTES SHALL GOVERN OVER THE SPECIFICATIONS, BUT THE REMAINDER OF THE PLANS SHALL GOVERN OVER NOTES HEREON, AND SPECIAL PROVISIONS SHALL GOVERN OVER ALL. SEE SPECIFICATIONS ARTICLE 105-4.

ENGLISH

JANUARY, 1990

STD. NO. SN