

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	BP6.R003	1	8

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY HARNETT
PROJECT DESCRIPTION REPLACE STRUCTURE NO. 420028
OVER BEAVERDAM SWAMP CANAL ON NC 217

CONTENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2 - 2A	LEGEND (SOIL & ROCK)
3	SITE PLAN
4	PROFILE
5 - 8	BORE LOGS

PERSONNEL

PLUMMER, K.
MARPLES, Z.
POWELL, B. (CONTRACT DRILLER)
STONESTREET, M. (CONTRACT DRILLER)

DS
ML
INVESTIGATED BY PLUMMER, K.
DRAWN BY FIELDS, W. D.
CHECKED BY ALEXANDER, M. J.
SUBMITTED BY PLUMMER, K.
DATE JUNE 2022

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS, AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.


GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

Prepared in the Office of:
Terracon
Explore with us

3401 BRENTWOOD ROAD, SUITE 101
RALEIGH, NORTH CAROLINA 27604
NC REGISTERED ENGINEERING FIRM # 4889
NC REGISTERED GEOLOGIC FIRM C-361



DocuSigned by:
Kelly P. Plummer
ABAD25CB98FE418
SIGNATURE DATE

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

REFERENCE: N/A

PROJECT: BP6.R003

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT





SUBSURFACE INVESTIGATION


SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS
(PAGE 1 OF 2)

SOIL DESCRIPTION SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6										GRADATION <u>WELL GRADED</u> - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. <u>UNIFORMLY GRADED</u> - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. <u>GAP-GRADED</u> - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES. ANGULARITY OF GRAINS THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED. MINERALOGICAL COMPOSITION MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE. COMPRESSIBILITY SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50 PERCENTAGE OF MATERIAL <table><tr><td>ORGANIC MATERIAL</td><td>GRANULAR SOILS</td><td>SILT - CLAY SOILS</td><td>OTHER MATERIAL</td></tr><tr><td>TRACE OF ORGANIC MATTER</td><td>2 - 3%</td><td>3 - 5%</td><td>TRACE 1 - 10%</td></tr><tr><td>LITTLE ORGANIC MATTER</td><td>3 - 5%</td><td>5 - 12%</td><td>LITTLE 10 - 20%</td></tr><tr><td>MODERATELY ORGANIC</td><td>5 - 10%</td><td>12 - 20%</td><td>SOME 20 - 35%</td></tr><tr><td>HIGHLY ORGANIC</td><td>> 10%</td><td>> 20%</td><td>HIGHLY 35% AND ABOVE</td></tr></table> GROUND WATER WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP										ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%	HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE																																																																																																																																			
ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																																																																																							
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%																																																																																																																																																																							
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%																																																																																																																																																																							
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%																																																																																																																																																																							
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE																																																																																																																																																																							
SOIL LEGEND AND AASHTO CLASSIFICATION <table><tr><td>GENERAL CLASS.</td><td colspan="5">GRANULAR MATERIALS (< 35% PASSING #200)</td><td colspan="5">SILT-CLAY MATERIALS (> 35% PASSING #200)</td><td colspan="5">ORGANIC MATERIALS</td></tr><tr><td>GROUP CLASS.</td><td colspan="2">A-1</td><td colspan="2">A-3</td><td colspan="2">A-2</td><td colspan="2">A-4</td><td colspan="2">A-5</td><td colspan="2">A-6</td><td colspan="2">A-7</td><td colspan="2">A-1, A-2</td><td colspan="2">A-4, A-5</td></tr><tr><td>SYMBOL</td><td colspan="2">A-1-a</td><td colspan="2">A-1-b</td><td colspan="2">A-2-4</td><td colspan="2">A-2-5</td><td colspan="2">A-2-6</td><td colspan="2">A-2-7</td><td colspan="2">A-7-5, A-7-6</td><td colspan="2">A-3</td><td colspan="2">A-6, A-7</td></tr><tr><td>% PASSING #10 #40 #200</td><td colspan="2">50 MX 30 MX 15 MX</td><td colspan="2">50 MX 25 MX</td><td colspan="2">51 MN 10 MX</td><td colspan="2">35 MX</td><td colspan="2">35 MX</td><td colspan="2">35 MX</td><td colspan="2">35 MX</td><td colspan="2">36 MN</td><td colspan="2">36 MN</td></tr><tr><td>MATERIAL PASSING #40 LL PI</td><td colspan="2">-</td><td colspan="2">6 MX</td><td colspan="2">-</td><td colspan="2">40 MX 10 MX</td><td colspan="2">41 MN 10 MX</td><td colspan="2">40 MX 11 MN</td><td colspan="2">41 MN 11 MN</td><td colspan="2">40 MX 10 MX</td><td colspan="2">41 MN 11 MN</td></tr><tr><td>GROUP INDEX</td><td colspan="2">0</td><td colspan="2">0</td><td colspan="2">0</td><td colspan="2">4 MX</td><td colspan="2">8 MX</td><td colspan="2">12 MX</td><td colspan="2">16 MX</td><td colspan="2">NO MX</td><td colspan="2">NO MX</td></tr><tr><td>USUAL TYPES OF MAJOR MATERIALS</td><td colspan="2">STONE FRAGS, GRAVEL, AND SAND</td><td colspan="2">FINE SAND</td><td colspan="2">SILTY OR CLAYEY GRAVEL AND SAND</td><td colspan="2">SILTY SOILS</td><td colspan="2">CLAYEY SOILS</td><td colspan="2">SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER</td><td colspan="2">HIGHLY ORGANIC SOILS</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td>GEN. RATING AS SUBGRADE</td><td colspan="5">EXCELLENT TO GOOD</td><td colspan="5">FAIR TO POOR</td><td colspan="5">FAIR TO POOR</td><td colspan="5">POOR</td></tr></table> PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30										GENERAL CLASS.	GRANULAR MATERIALS (< 35% PASSING #200)					SILT-CLAY MATERIALS (> 35% PASSING #200)					ORGANIC MATERIALS					GROUP CLASS.	A-1		A-3		A-2		A-4		A-5		A-6		A-7		A-1, A-2		A-4, A-5		SYMBOL	A-1-a		A-1-b		A-2-4		A-2-5		A-2-6		A-2-7		A-7-5, A-7-6		A-3		A-6, A-7		% PASSING #10 #40 #200	50 MX 30 MX 15 MX		50 MX 25 MX		51 MN 10 MX		35 MX		35 MX		35 MX		35 MX		36 MN		36 MN		MATERIAL PASSING #40 LL PI	-		6 MX		-		40 MX 10 MX		41 MN 10 MX		40 MX 11 MN		41 MN 11 MN		40 MX 10 MX		41 MN 11 MN		GROUP INDEX	0		0		0		4 MX		8 MX		12 MX		16 MX		NO MX		NO MX		USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS, GRAVEL, AND SAND		FINE SAND		SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS		CLAYEY SOILS		SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS						GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD					FAIR TO POOR					FAIR TO POOR					POOR														
GENERAL CLASS.	GRANULAR MATERIALS (< 35% PASSING #200)					SILT-CLAY MATERIALS (> 35% PASSING #200)					ORGANIC MATERIALS																																																																																																																																																															
GROUP CLASS.	A-1		A-3		A-2		A-4		A-5		A-6		A-7		A-1, A-2		A-4, A-5																																																																																																																																																									
SYMBOL	A-1-a		A-1-b		A-2-4		A-2-5		A-2-6		A-2-7		A-7-5, A-7-6		A-3		A-6, A-7																																																																																																																																																									
% PASSING #10 #40 #200	50 MX 30 MX 15 MX		50 MX 25 MX		51 MN 10 MX		35 MX		35 MX		35 MX		35 MX		36 MN		36 MN																																																																																																																																																									
MATERIAL PASSING #40 LL PI	-		6 MX		-		40 MX 10 MX		41 MN 10 MX		40 MX 11 MN		41 MN 11 MN		40 MX 10 MX		41 MN 11 MN																																																																																																																																																									
GROUP INDEX	0		0		0		4 MX		8 MX		12 MX		16 MX		NO MX		NO MX																																																																																																																																																									
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS, GRAVEL, AND SAND		FINE SAND		SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS		CLAYEY SOILS		SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS																																																																																																																																																													
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD					FAIR TO POOR					FAIR TO POOR					POOR																																																																																																																																																										
CONSISTENCY OR DENSENESS <table><tr><td>PRIMARY SOIL TYPE</td><td>COMPACTNESS OR CONSISTENCY</td><td>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</td><td>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT²)</td></tr><tr><td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td><td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td><td>< 4 4 TO 10 10 TO 30 30 TO 50 > 50</td><td>N/A</td></tr><tr><td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td><td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td><td>< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30</td><td>< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4</td></tr></table>										PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)	GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																																																																																																					
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)																																																																																																																																																																							
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A																																																																																																																																																																							
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																																																																																																																							
TEXTURE OR GRAIN SIZE <table><tr><td>U.S. STD. SIEVE SIZE OPENING (MM)</td><td>4</td><td>10</td><td>40</td><td>60</td><td>200</td><td>270</td></tr><tr><td></td><td>4.76</td><td>2.00</td><td>0.42</td><td>0.25</td><td>0.075</td><td>0.053</td></tr><tr><td>BOULDER (BLDR.)</td><td>COBBLE (COB.)</td><td>GRAVEL (GR.)</td><td>COARSE SAND (CSE, SD.)</td><td>FINE SAND (F SD.)</td><td>SILT (SL.)</td><td>CLAY (CL.)</td></tr></table> <table><tr><td>GRAIN SIZE</td><td>MM</td><td>305</td><td>75</td><td>2.0</td><td>0.25</td><td>0.05</td><td>0.005</td></tr><tr><td></td><td>IN.</td><td>12</td><td>3</td><td></td><td></td><td></td><td></td></tr></table>										U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.76	2.00	0.42	0.25	0.075	0.053	BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE, SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)	GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005		IN.	12	3																																																																																																																																
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																																																																																				
	4.76	2.00	0.42	0.25	0.075	0.053																																																																																																																																																																				
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE, SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																																																																				
GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005																																																																																																																																																																			
	IN.	12	3																																																																																																																																																																							
SOIL MOISTURE - CORRELATION OF TERMS <table><tr><td>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</td><td>FIELD MOISTURE DESCRIPTION</td><td>GUIDE FOR FIELD MOISTURE DESCRIPTION</td></tr><tr><td rowspan="2">LL PLASTIC RANGE (PI) PL</td><td>- SATURATED - (SAT.)</td><td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td></tr><tr><td>- WET - (W)</td><td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td></tr><tr><td rowspan="2">OM SL</td><td>- MOIST - (M)</td><td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td></tr><tr><td>- DRY - (D)</td><td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td></tr></table>										SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL PLASTIC RANGE (PI) PL	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	OM SL	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																				
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																																																																																								
LL PLASTIC RANGE (PI) PL	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																																																																																								
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																								
OM SL	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																																																																																								
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																								
PLASTICITY <table><tr><td></td><td>PLASTICITY INDEX (PI)</td><td>DRY STRENGTH</td></tr><tr><td>NON PLASTIC</td><td>0-5</td><td>VERY LOW</td></tr><tr><td>SLIGHTLY PLASTIC</td><td>6-15</td><td>SLIGHT</td></tr><tr><td>MODERATELY PLASTIC</td><td>16-25</td><td>MEDIUM</td></tr><tr><td>HIGHLY PLASTIC</td><td>26 OR MORE</td><td>HIGH</td></tr></table>											PLASTICITY INDEX (PI)	DRY STRENGTH	NON PLASTIC	0-5	VERY LOW	SLIGHTLY PLASTIC	6-15	SLIGHT	MODERATELY PLASTIC	16-25	MEDIUM	HIGHLY PLASTIC	26 OR MORE	HIGH																																																																																																																																																		
	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																																																																																																																								
NON PLASTIC	0-5	VERY LOW																																																																																																																																																																								
SLIGHTLY PLASTIC	6-15	SLIGHT																																																																																																																																																																								
MODERATELY PLASTIC	16-25	MEDIUM																																																																																																																																																																								
HIGHLY PLASTIC	26 OR MORE	HIGH																																																																																																																																																																								
COLOR DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.																																																																																																																																																																										
EQUIPMENT USED ON SUBJECT PROJECT <table><tr><td>DRILL UNITS: <input type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input type="checkbox"/> CME-550 <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST <input checked="" type="checkbox"/> CME-45C (MID3964) <input type="checkbox"/></td><td>ADVANCING TOOLS: <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input checked="" type="checkbox"/> TRICONE 2 1/8" STEEL TEETH <input type="checkbox"/> TRICONE " TUNG.-CARB. <input type="checkbox"/> CORE BIT <input type="checkbox"/></td><td>HAMMER TYPE: <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL CORE SIZE: <input type="checkbox"/> -B <input type="checkbox"/> -H <input type="checkbox"/> -N HAND TOOLS: <input type="checkbox"/> POST HOLE DIGGER <input checked="" type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/></td></tr></table>										DRILL UNITS: <input type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input type="checkbox"/> CME-550 <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST <input checked="" type="checkbox"/> CME-45C (MID3964) <input type="checkbox"/>	ADVANCING TOOLS: <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input checked="" type="checkbox"/> TRICONE 2 1/8" STEEL TEETH <input type="checkbox"/> TRICONE " TUNG.-CARB. <input type="checkbox"/> CORE BIT <input type="checkbox"/>	HAMMER TYPE: <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL CORE SIZE: <input type="checkbox"/> -B <input type="checkbox"/> -H <input type="checkbox"/> -N HAND TOOLS: <input type="checkbox"/> POST HOLE DIGGER <input checked="" type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/>																																																																																																																																																														
DRILL UNITS: <input type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input type="checkbox"/> CME-550 <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST <input checked="" type="checkbox"/> CME-45C (MID3964) <input type="checkbox"/>	ADVANCING TOOLS: <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input checked="" type="checkbox"/> TRICONE 2 1/8" STEEL TEETH <input type="checkbox"/> TRICONE " TUNG.-CARB. <input type="checkbox"/> CORE BIT <input type="checkbox"/>	HAMMER TYPE: <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL CORE SIZE: <input type="checkbox"/> -B <input type="checkbox"/> -H <input type="checkbox"/> -N HAND TOOLS: <input type="checkbox"/> POST HOLE DIGGER <input checked="" type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/>																																																																																																																																																																								

PROJECT REFERENCE NO.	SHEET NO.
BP6.R003	2A

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SUBSURFACE INVESTIGATION
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS
(PAGE 2 OF 2)

ROCK DESCRIPTION			TERMS AND DEFINITIONS		
HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:			<u>ALLUVIUM (ALLUV.)</u> - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. <u>AQUIFER</u> - A WATER BEARING FORMATION OR STRATA. <u>ARENACEOUS</u> - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. <u>ARGILLACEOUS</u> - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. <u>ARTESIAN</u> - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. <u>CALCAREOUS (CALC.)</u> - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. <u>COLLUVIUM</u> - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. <u>CORE RECOVERY (REC.)</u> - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <u>DIKE</u> - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. <u>DIP</u> - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. <u>DIP DIRECTION (DIP AZIMUTH)</u> - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. <u>FAULT</u> - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. <u>FISSILE</u> - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. <u>FLOAT</u> - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. <u>FLOOD PLAIN (FP)</u> - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. <u>FORMATION (FM.)</u> - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. <u>JOINT</u> - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. <u>LEDGE</u> - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. <u>LENS</u> - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. <u>MOTTLED (MOT.)</u> - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. <u>PERCHED WATER</u> - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. <u>RESIDUAL (RES.) SOIL</u> - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. <u>ROCK QUALITY DESIGNATION (RQD)</u> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <u>SAPROLITE (SAP.)</u> - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. <u>SILL</u> - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. <u>SLICKENSIDE</u> - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. <u>STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT)</u> - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. <u>STRATA CORE RECOVERY (SREC.)</u> - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. <u>STRATA ROCK QUALITY DESIGNATION (SRQD)</u> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. <u>TOPSOIL (TS.)</u> - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.		
	NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.				
	FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.				
	FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.				
	COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.				
WEATHERING					
FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.				
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.				
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.				
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.				
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <u>IF TESTED, WOULD YIELD SPT REFUSAL</u>				
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <u>IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF</u>				
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. <u>IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF</u>				
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.				
ROCK HARDNESS					
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.				
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.				
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.				
MEDIUM HARD	CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.				
SOFT	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.				
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.				
FRACTURE SPACING		BEDDING			
TERM	SPACING	TERM	THICKNESS		
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET		
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET		
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET		
CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET		
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET		
		THINLY LAMINATED	< 0.008 FEET		
INDURATION					
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.					
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.			BENCH MARK: BL-2, STA. 14+18.00 -L-, 18,9976' RIGHT	
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.			N: 563441.763; E: 2086805.658	
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.			ELEVATION: 110.92 FEET	
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.			NOTES:	
				FIAD - FILLED IMMEDIATELY AFTER DRILLING	

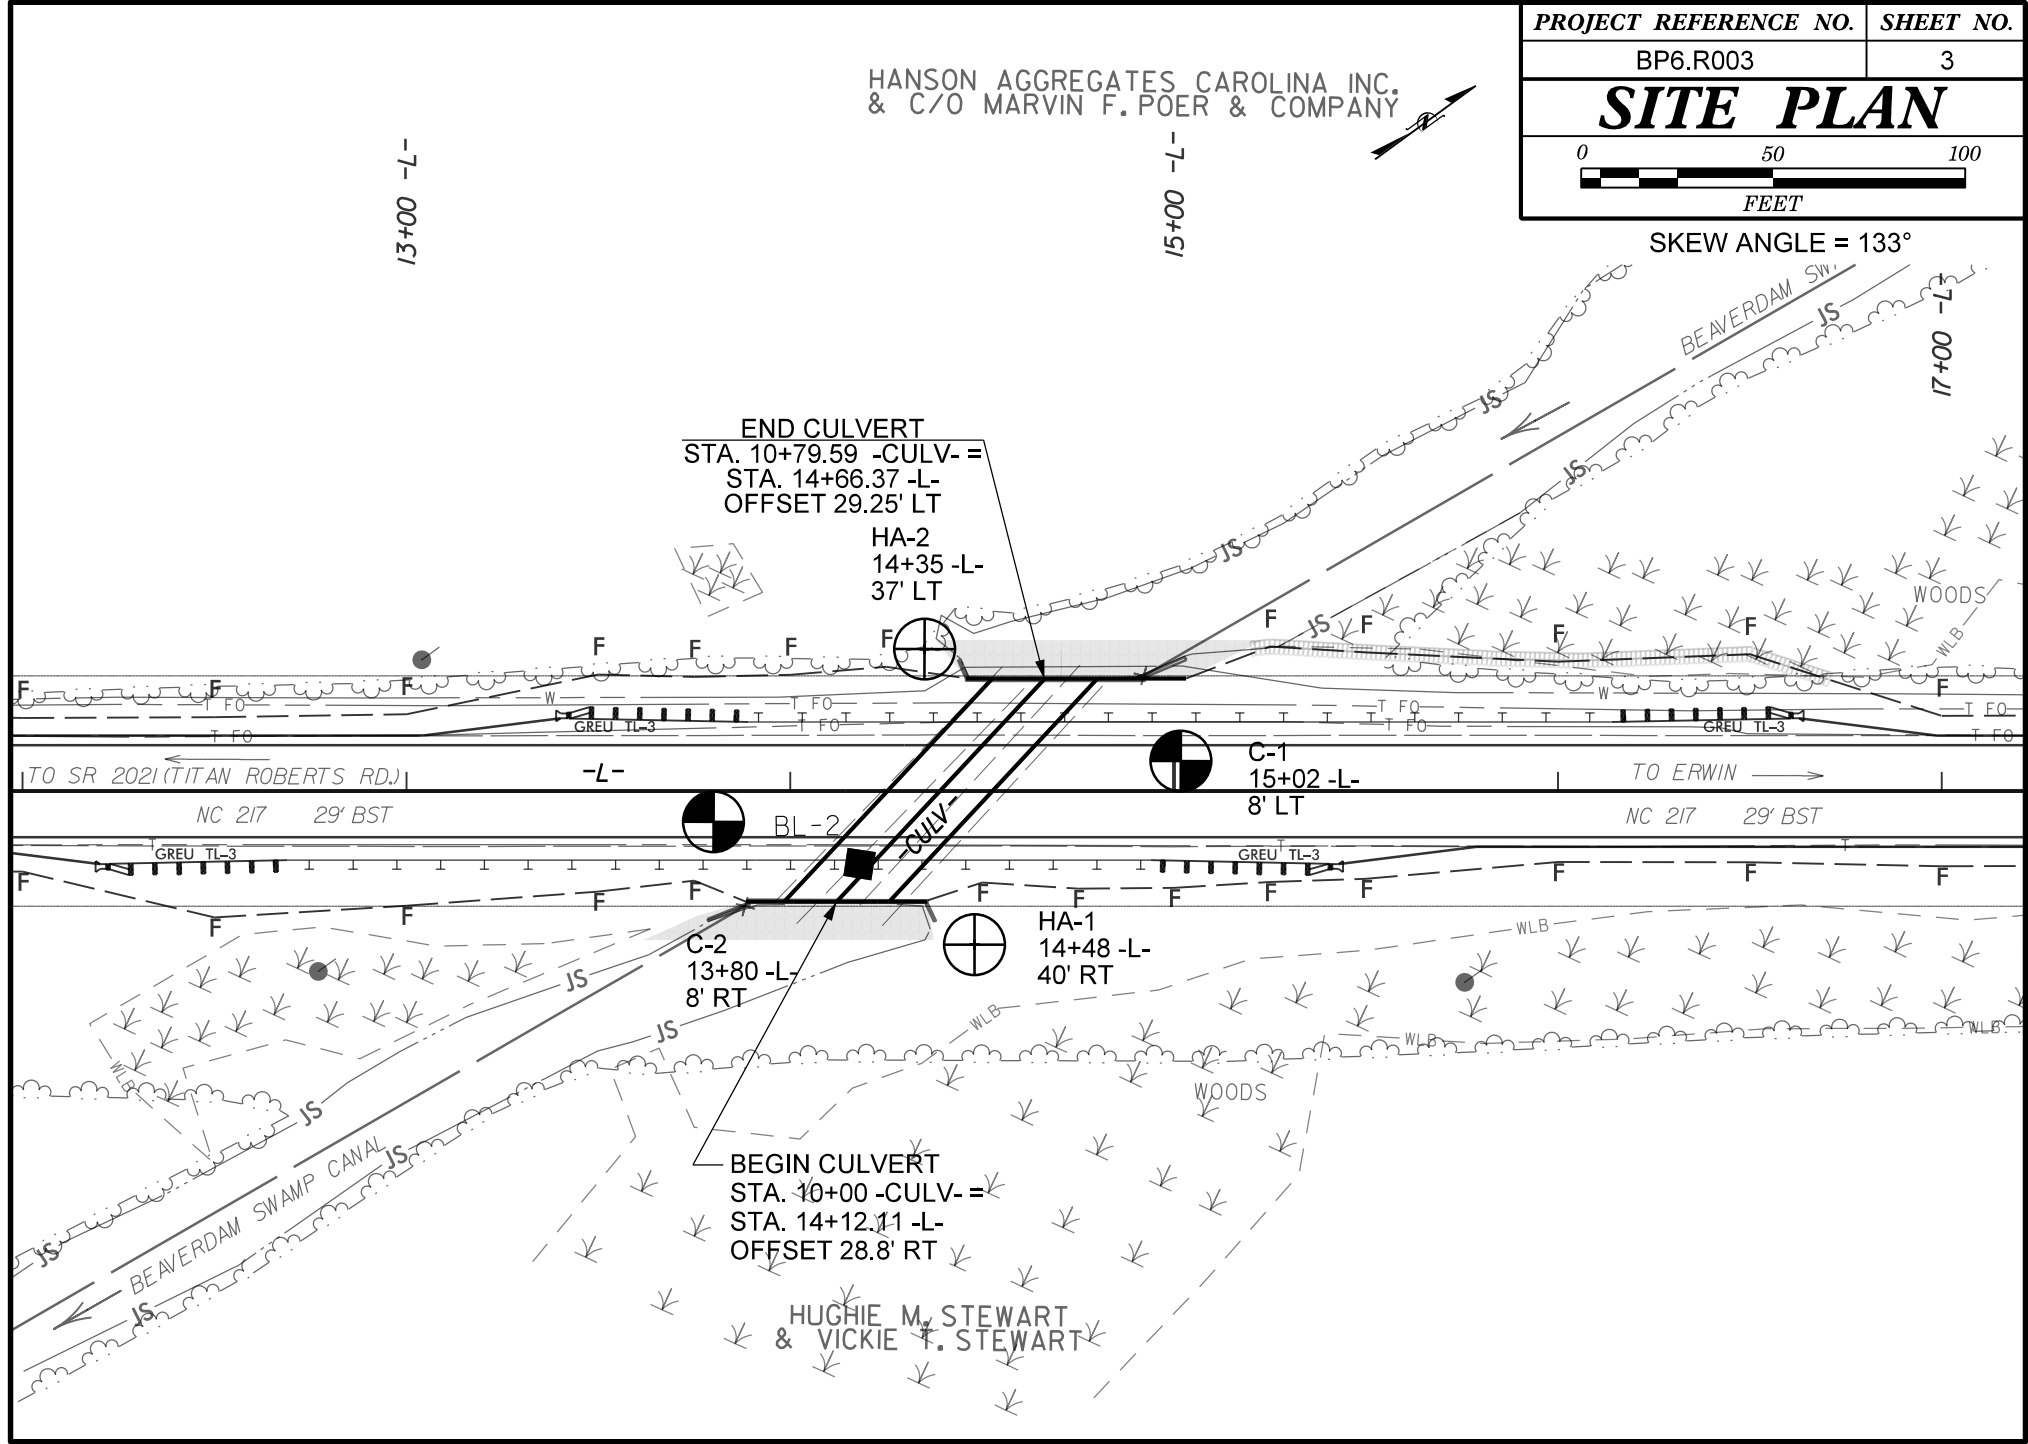

WBS			BP6.R003.1			TIP			N/A			COUNTY			HARNETT			GEOLOGIST			MARPLES, Z.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
SITE DESCRIPTION															REPLACE STRUCTURE NO. 420028 OVER BEAVERDAM SWAMP CANAL ON NC 217															GROUND WTR (ft)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
BORING NO.					C-2					STATION					13+80					OFFSET					8 ft RT					ALIGNMENT					-L-					0 HR.		N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
COLLAR ELEV.					111.5 ft					TOTAL DEPTH					24.8 ft					NORTHING					563,418					EASTING					2,086,774					24 HR.		N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
DRILL RIG/HAMMER EFF./DATE															MID3964 CME-45C 87% 09/24/2021															DRILL METHOD					Mud Rotary					HAMMER TYPE					Automatic																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
DRILLER					B. Powell					START DATE					06/02/22					COMP. DATE					06/02/22					SURFACE WATER DEPTH										N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
115																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														

NCDOT BORE SINGLE BEAVER DAM CREEK CULVERT 70215241.GPJ NC_DOT.GDT 6/16/22

WBS BP6.R003.1				TIP N/A		COUNTY HARNETT				GEOLOGIST PLUMMER, K.				
SITE DESCRIPTION REPLACE STRUCTURE NO. 420028 OVER BEAVERDAM SWAMP CANAL ON NC 217										GROUND WTR (ft)				
BORING NO. HA-1				STATION 14+48		OFFSET 40 ft RT		ALIGNMENT -L-		0 HR. 1.5				
COLLAR ELEV. 105.2 ft				TOTAL DEPTH 7.0 ft		NORTHING 563,454		EASTING 2,086,840		24 HR. N/A				
DRILL RIG/HAMMER EFF./DATE N/A						DRILL METHOD Hand Auger			HAMMER TYPE N/A					
DRILLER N/A				START DATE 06/02/22		COMP. DATE 06/02/22		SURFACE WATER DEPTH N/A						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)
110														
105													105.2	GROUND SURFACE 0.0
100													103.7	ROADWAY EMBANKMENT 1.5
														LOOSE, RED-BROWN, CLAYEY FINE TO COARSE SAND, MOIST (A-2-6)
														ALLUVIAL
													98.2	VERY SOFT, DARK GRAY, SILTY CLAY, WET, WITH TRACE ORGANICS AND SIGNIFICANT WOOD FRAGMENTS AT 6 FEET (A-7-6) 7.0
														Boring Terminated by Hand Augur Refusal at Elevation 98.2 ft IN ALLUVIAL: SILTY CLAY

NCDOT BORE SINGLE BEAVER DAM CREEK CULVERT 70215241.GPJ NC_DOT.GDT 6/16/22

GEOTECHNICAL BORING REPORT

BORE LOG

WBS BP6.R003.1			TIP N/A		COUNTY HARNETT			GEOLOGIST PLUMMER, K.					
SITE DESCRIPTION REPLACE STRUCTURE NO. 420028 OVER BEAVERDAM SWAMP CANAL ON NC 217								GROUND WTR (ft)					
BORING NO. HA-2		STATION 14+35		OFFSET 37 ft LT		ALIGNMENT -L-		0 HR. 1.0					
COLLAR ELEV. 104.2 ft		TOTAL DEPTH 6.0 ft		NORTHING 563,488		EASTING 2,086,770		24 HR. N/A					
DRILL RIG/HAMMER EFF./DATE N/A					DRILL METHOD Hand Auger			HAMMER TYPE N/A					
DRILLER N/A		START DATE 06/02/22		COMP. DATE 06/02/22		SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT				SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100		MOI	ELEV. (ft) DEPTH (ft)
105													104.2 GROUND SURFACE 0.0
100													ALLUVIAL VERY SOFT, GRAY, SILTY CLAY, WET, WITH TRACE ORGANICS AND SIGNIFICANT WOOD FRAGMENTS AT 5 FEET (A-7-6)
													98.2 Boring Terminated by Hand Auger Refusal at Elevation 98.2 ft IN ALLUVIAL: SILTY CLAY 6.0

NCDOT BORE SINGLE BEAVER DAM CREEK CULVERT 70215241.GPJ NC_DOT.GDT 6/16/22