| PROJECT REFERENCE NO. | SHEET NO. |
|---|---|
| W-5145 | 2 |
| R/W SHEET NO. | |

DocuSigned by: Greg S. Davis 33D47B5FD78F4A8...

NORTH CAROLINA PROFESSIONAL SEAL 26930 ENGINEER GREG S. DAVIS

11/18/2015

DIVISION DESIGN / CONSTRUCT ENGINEER

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

## TYPICAL SECTION NO. 1

–L– STA. 11+00 TO –L– STA. 17+11.80
–L– STA. 17+82.94 TO –L– 24+41.10

NOTE:
–L– STA. 17+82.94 TO –L– STA. 18+04.93
IS THE INTERSECTION OF US 15-501 AT SR 1614

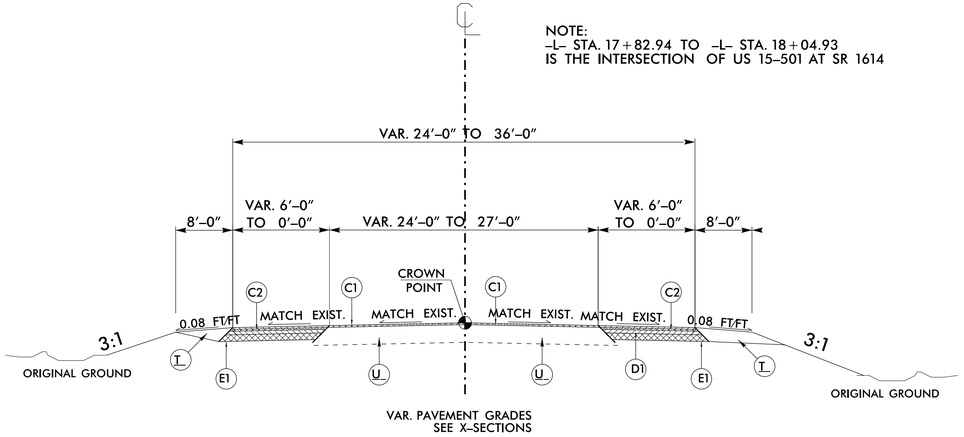


## TYPICAL SECTION NO. 2

–L– STA. 17+11.80 TO –L– STA. 17+82.94

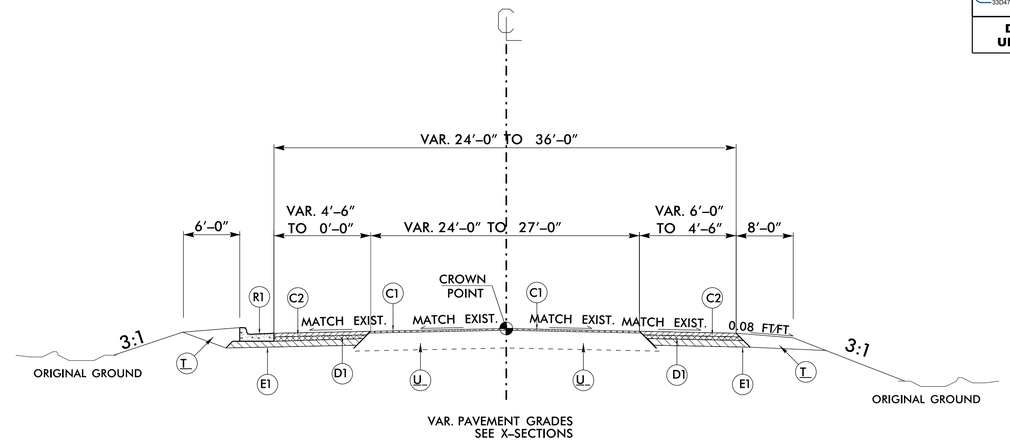


## TYPICAL SECTION NO. 3

–Y1– STA. 13+96.52 TO –Y1– STA. 14+56.61

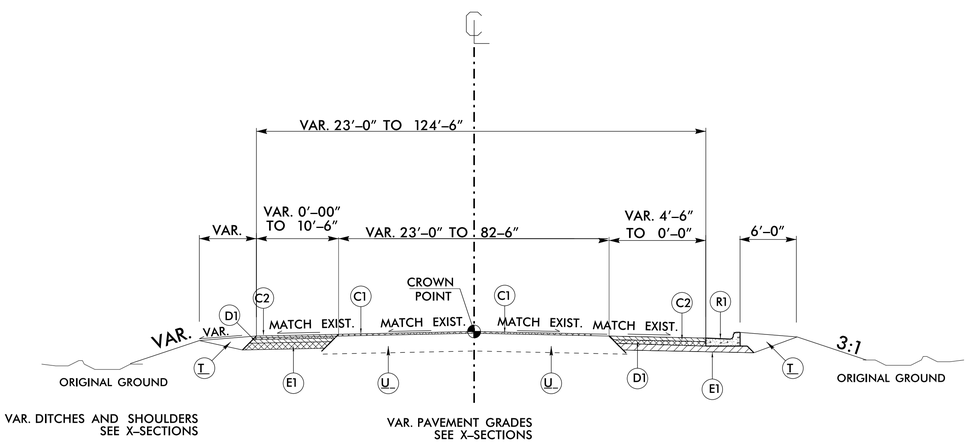


## TYPICAL SECTION NO. 4

–Y1– STA. 14+92.91 TO –Y1– STA. 15+22.22

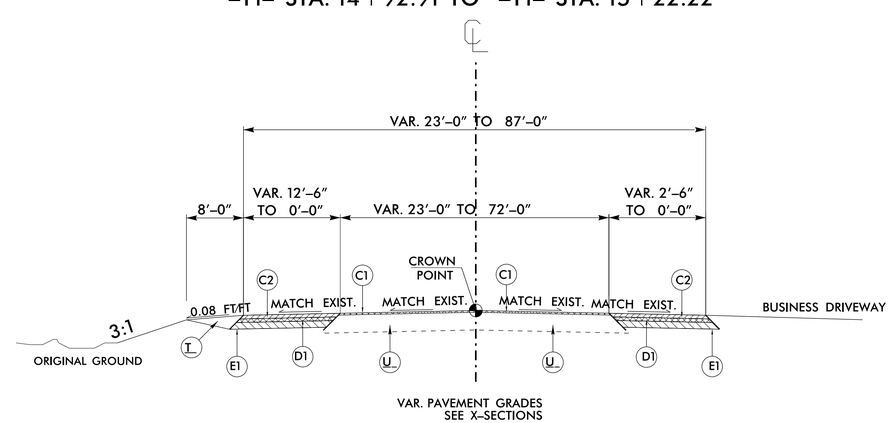


| PAVEMENT SCHEDULE | |
|---|---|
| C1 | PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| C2 | PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. PER 1½" DEPTH. TO BE PLACED IN TWO LAYERS. |
| D1 | PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. |
| E1 | PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. |
| R1 | 2.5' CONCRETE CURB AND GUTTER |
| T_ | EARTH MATERIAL. |
| U_ | EXISTING PAVEMENT. |

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

REVISIONS

8/17/99

17-NOV-2015 16:46
r:\hydro\sco1\proj\u5010\sr_1614\barnes_bridge_rd\ash\typ\W-5145_typ.dgn
gsdavis
A1 D8(AD) 27.0410