
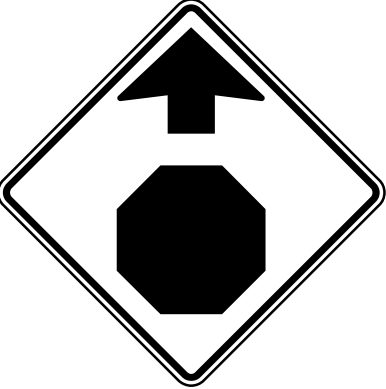






11/14/23

<div>401</div> <div>QUANTITY REQ'D . 2 _</div> <div><div></div><div>30 X 30 W3-1</div></div> <div>ONE "U" POST PER SIGN</div>						
<div>402</div> <div>QUANTITY REQ'D . 2 _</div> <div><div></div><div>30 X 30 R1-1</div></div> <div>ONE "U" POST PER SIGN</div>						
<div>403</div> <div>QUANTITY REQ'D . 1 _</div> <div><div></div><div>30 X 30 R1-1</div></div> <div>ONE OMNI-DIRECTIONAL BREAKAWAY SIGN SUPPORT AND ONE STEEL SQUARE TUBE PER SIGN</div>						
<div>404</div> <div>QUANTITY REQ'D . 3 _</div> <div><div></div><div>18 X 6 R1-3P</div></div> <div>MOUNT BELOW SIGN 402 IN 2 INSTALLATIONS MOUNT BELOW SIGN 403 IN 1 INSTALLATION</div>						
<div>405</div> <div>QUANTITY REQ'D . 1 _</div> <div><div></div><div>36 X 9 W14-1a</div></div> <div>MOUNT ABOVE SIGN 402 IN 1 INSTALLATION AND FACING IN THE OPPOSITE DIRECTION</div>						


BP14-R038

SIGN002

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
POLK COUNTY




SIGNING AND DELINEATION UNIT



9/25/2025

PREPARED BY



VHB Engineering NC, P.C. (C-3705)
540 Main Campus Drive, Suite 500
Raleigh, NC 27605

TYPE "E" SIGNS

PROJECT: BP14-R038