RESURFACING TYPICALS

WBS ELEMENT	SHEET NO.
2016CPT.08.04.20761.1	2–A

NORTH CAROLINA PROFESSIONAL SEAL 26930 ENGINEER GREG S. DAVIS

DocuSigned by: Greg S. Davis 33D47B5FD78F4A8... 6/19/2015

DIVISION DESIGN / CONSTRUCT ENGINEER

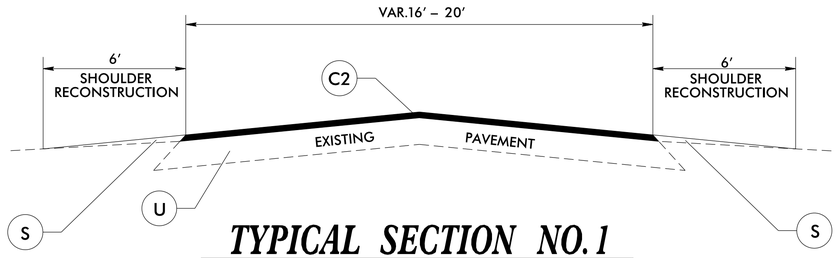

TYPICAL SECTION NO. 1

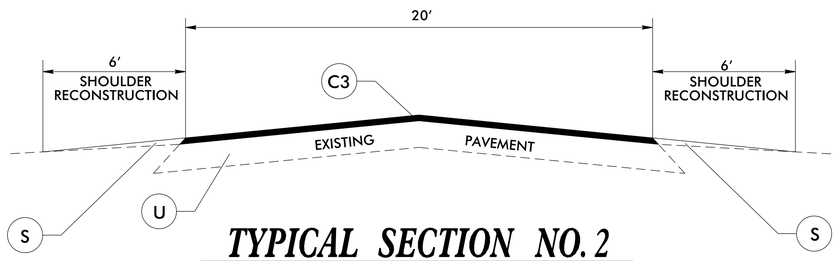

TYPICAL SECTION NO. 2

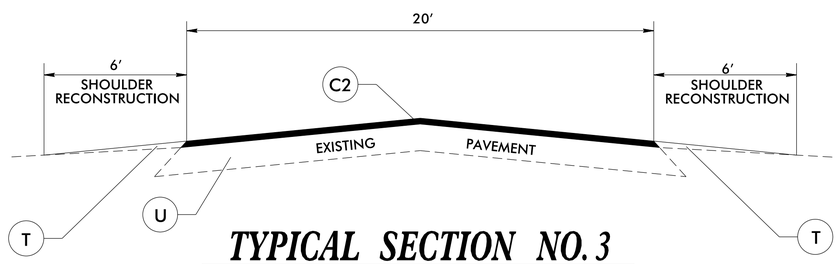

TYPICAL SECTION NO. 3

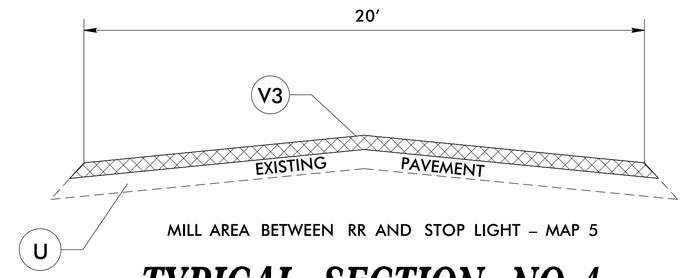

MILL AREA BETWEEN RR AND STOP LIGHT – MAP 5

TYPICAL SECTION NO. 4

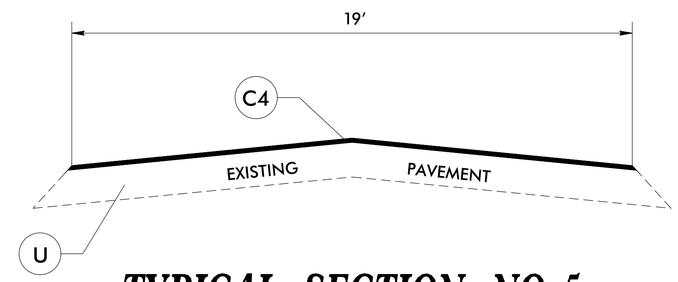

TYPICAL SECTION NO. 5

DETAILS OF PATCHING EXISTING PAVEMENT PRIOR TO RESURFACING

DETAIL

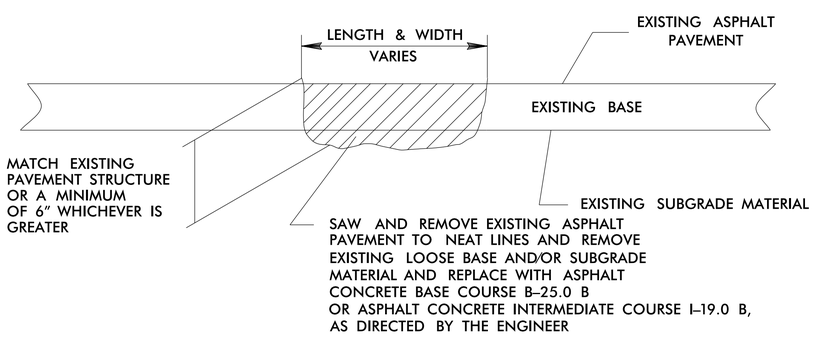

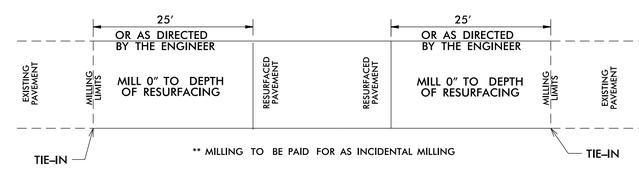

PAVEMENT TIE–IN DETAIL

PAVEMENT SCHEDULE

C2	PROP. APPROX. 1.25″ ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROP. APPROX. 0.75″ ASPHALT CONCRETE SURFACE COURSE, TYPE S4.75A, AT AN AVERAGE RATE OF 100 LBS. PER SQ. YD.
S	AGGREGATE SHOULDER BORROW
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V3	MILLING 1.25″ IN DEPTH

040397
20-JUN-2015 10:52
S:\311_Pedestrian_Engineering\psh\2015_Randolph_Resurfacing_TYPICALS.dgn
$$$$USER$$$$ PLOT DATE: 6/19/2015