


K:\RAL_Roadway\015574013 - BL-0008 Clear Creek Greenway\Roadway\Proj\Title and Typical\BL-0008_rdy_typ.dgn

3/3/2026

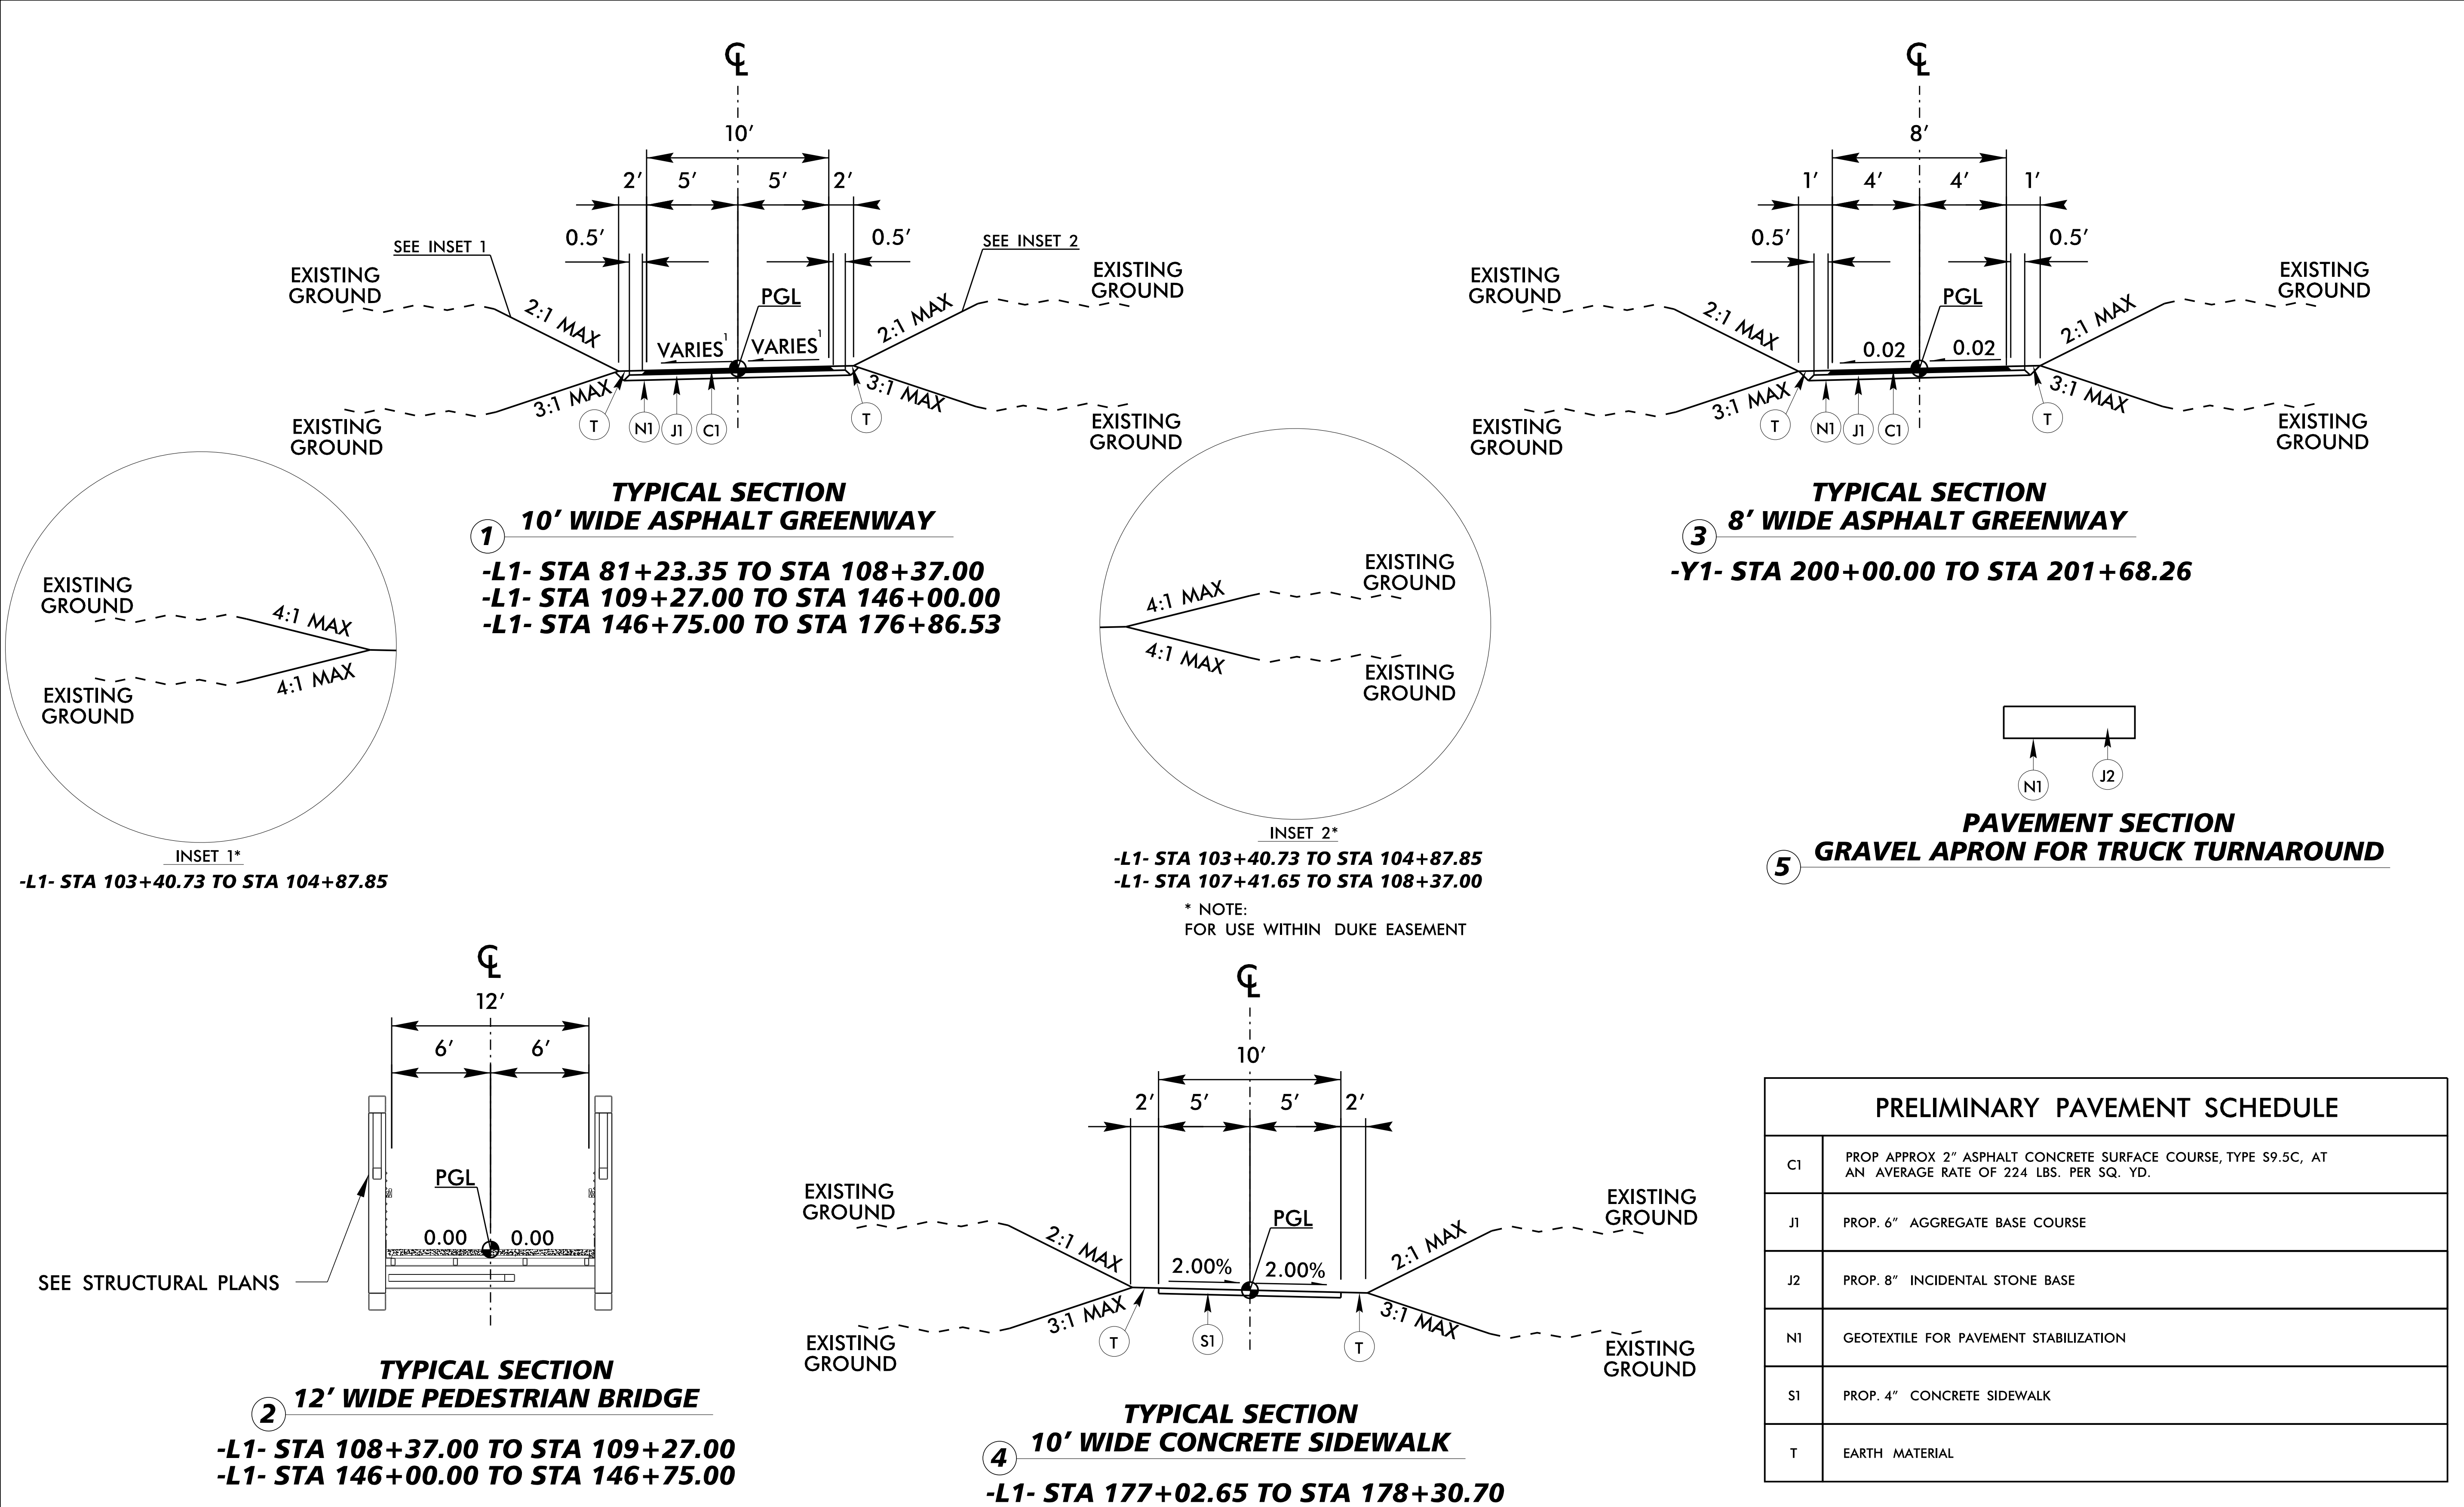

PRELIMINARY PAVEMENT SCHEDULE	
C1	PROP APPROX 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
J1	PROP. 6" AGGREGATE BASE COURSE
J2	PROP. 8" INCIDENTAL STONE BASE
N1	GEOTEXTILE FOR PAVEMENT STABILIZATION
S1	PROP. 4" CONCRETE SIDEWALK
T	EARTH MATERIAL

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

REV. No.	REVISION	DATE	DRAWN BY	CHECKED BY
This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adoption by Kimley-Horn and Associates, Inc. shall be without liability to Kimley-Horn and Associates, Inc. Copyright Kimley-Horn and Associates, Inc., 2025				

PREPARED IN THE OFFICE OF:

Kimley»Horn
NC LICENSE #F-0102
200 S TRYON ST, SUITE 200
CHARLOTTE, NORTH CAROLINA 28202
PHONE: (704) 333-5131
© 2025

TYPICAL SECTIONS



PROJECT:

CLEAR CREEK GREENWAY

JOB NUMBER: 015574013

SHEET NUMBER: 2A-1