

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
HAYWOOD COUNTY

LOCATION: BRIDGE #430163 ON US 276 (PIGEON ROAD) OVER
WEST FORK PIGEON RIVER OVERFLOW

INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN INDEX, GENERAL NOTES, ROADWAY STANDARD DRAWINGS, AND PAVEMENT MARKING SCHEDULE
PMP-2	PAVEMENT MARKING DETAILS

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTILANE ROADWAYS

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS ON THE FINAL SURFACE AS FOLLOWS:
- | ROAD NAME | MARKING | MARKER |
|----------------------|---------------|--------------|
| US 276 (PIGEON ROAD) | THERMOPLASTIC | SNOWPLOWABLE |
- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
- C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.


PAVEMENT MARKING AND
MARKER SCHEDULE

SYMBOL	DESCRIPTION
T20	THERMOPLASTIC WHITE EDGELINE (6", 90 MIL)
T33	THERMOPLASTIC YELLOW DOUBLE CENTER (6", 90 MIL)
ME	SNOWPLOWABLE MARKER (YELLOW & YELLOW)

PLAN PREPARED BY:



BENJAMIN A. WHITE, PE PROJECT ENGINEER
ANGELA B. PRIDGEN, PE PROJECT DESIGN ENGINEER



18314.1044067.PR


PMP 001

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
HAYWOOD COUNTY



ROADWAY DESIGN UNIT

SEAL:

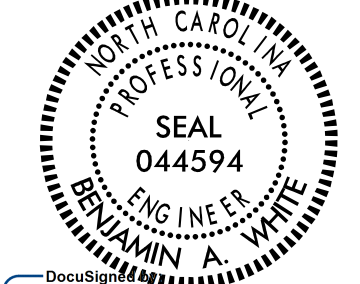

Document: 7/9/2026

NO REPRESENTATION IS MADE BY THIS SEAL
UNLESS ALL SIGNATURES COMPLETED