

8/26/21



LOCATION SKETCH

INFORMATION INDICATED ON THE LOCATION SKETCH SHALL BE CONSIDERED GENERAL INFORMATION ONLY. THE CONTRACTOR SHALL CONFIRM, THROUGH OTHER SOURCES, SPECIFIC INFORMATION REGARDING BRIDGES, ROADWAYS, UTILITIES, THE SURROUNDING AREA, AND ANY OTHER ASPECTS THAT MAY BE NECESSARY TO PERFORM AND COMPLETE THE PROJECT.

BRIDGE COORDINATES	
LATITUDE	LONGITUDE
35° - 28 ' - 16.5"	82° - 53 ' - 13.8"

TOTAL BILL OF MATERIAL									
AGGREGATE BASE COURSE	INCIDENTAL MILLING	ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B	ASPHALT BINDER FOR PLANT MIX	FLOWABLE FILL	STEEL BEAM GUARDRAIL	GUARDRAIL ANCHOR UNITS TYPE B-77	REMOVE AND RESET EXISTING GUARDRAIL	REMOVE EXISTING GUARDRAIL	CONSTRUCTION, MAINTENANCE AND REMOVAL OF TEMPORARY ACCESS AT STA. 15+50 -L-
TONS	SQ. YDS.	TONS	TONS	CU. YDS.	LIN. FT.	EA.	LIN. FT.	LIN. FT.	LUMP SUM
160	290	40	3	5.0	50.0	2	100.0	50.0	LUMP SUM
RIP RAP CLASS A	CLASS II RIP RAP (2'-0" THICK)	GEOTEXTILE FOR DRAINAGE	PARTIAL REMOVAL OF EXISTING STRUCTURE	PRECAST APPROACH SLABS	VOLUMETRIC MIXER	ASPHALT PLUG JOINT FOR PRESERVATION	LONGITUDINAL CLOSURE POUR	STEEL PILE REPAIRS	
TONS	TONS	SQ. YDS.	LUMP SUM	LUMP SUM	LUMP SUM	LIN. FT.	CU. YDS.	LBS.	
420	265	305	LUMP SUM	LUMP SUM	LUMP SUM	33.0	3.0	4,760	

GENERAL NOTES

SEE CONTRACT DOCUMENTS FOR LANE WIDTHS, SEQUENCING AND OTHER TRAFFIC CONTROL MEASURES FOR STAGING OF FOR INSTALLATION OF THE PRECAST SLEEPER SLABS AND APPROACH SLABS.

FOR NEW ASPHALT PLACEMENT, SEE STANDARD SPECIFICATIONS.

THE CONTRACTOR'S ATTENTION IS CALLED TO THE FACT THAT DUE TO THE NATURE OF PRESERVATION PROJECTS, THE EXTENT OF WORK CANNOT ALWAYS BE ACCURATELY DETERMINED PRIOR TO COMMENCEMENT OF WORK. REPAIR LOCATIONS AND ESTIMATES OF QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS.

EXISTING DIMENSIONS AND BRIDGE CONDITION ARE FROM THE BEST INFORMATION AVAILABLE. THE CONTRACTOR SHALL FIELD VERIFY THE INFORMATION SHOWN ON THE PLANS AND NOTIFY THE ENGINEER IF ACTUAL DIMENSIONS AND CONDITIONS DIFFER.

THE CONTRACTOR SHALL HAVE NO CLAIM WHATSOEVER AGAINST THE DEPARTMENT FOR ANY DELAYS OR ADDITIONAL COST INCURRED BASED ON DIFFERENCES BETWEEN WHAT IS SHOWN ON THE PLANS AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO FOLLOW ALL STATE AND FEDERAL SAFETY REQUIREMENTS.

WORK ON THE BRIDGE SHALL BE PERFORMED SO AS NOT TO ALLOW DEBRIS TO FALL BELOW, EXCEPT WHERE THE CONTRACTOR'S PLAN USES PLATFORMS, NETS, SCREENS OR OTHER PROTECTIVE DEVICES TO CATCH THE MATERIAL. THE CONTRACTOR SHALL SUBMIT PLANS FOR CONSTRUCTION IN ACCORDANCE WITH ARTICLE 402-2 OF THE STANDARD SPECIFICATIONS AND THE PROJECT SPECIAL PROVISIONS.

THE CONTRACTOR SHALL PERFORM ALL WORK WITH CARE SO THAT THE EXISTING STRUCTURE WHICH IS TO REMAIN IN PLACE WILL NOT BE DAMAGED. IF THE CONTRACTOR DAMAGES ANY PART OF THE EXISTING STRUCTURE WHICH IS TO REMAIN IN PLACE, THE DAMAGED AREA SHALL BE REPAIRED OR REPLACED IN A MANNER SATISFACTORY TO THE ENGINEER AT NO ADDITIONAL COST TO THE DEPARTMENT.

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" HIGHWAY DESIGN BRANCH - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY, 2024, ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED PART OF THESE PLANS:

STD. NO. TITLE

DIVISION 8 - INCIDENTALS

862.01 GUARDRAIL PLACEMENT
862.02 GUARDRAIL INSTALLATION
862.03 STRUCTURE ANCHOR UNITS

THE CONTRACTOR SHALL SUBMIT TO THE ENGINEER FOR REVIEW AND APPROVAL A PLAN SHOWING THE MEANS FOR POSITIVE PROTECTION OF THE ENDS OF THE BRIDGE BARRIER RAIL DURING THE TIME PERIOD BETWEEN CONSTRUCTION PHASE I AND PHASE II.

ANY DAMAGE TO EXISTING REINFORCING STEEL, DURING CONTRACTOR'S OPERATIONS, SHALL BE REPAIRED AS DIRECTED BY THE ENGINEER AND PERFORMED AT NO ADDITIONAL COST TO THE DEPARTMENT.

FOR CONTROL OF TRAFFIC AND LIMITS ON PHASING OF CONSTRUCTION, SEE CONTRACT DOCUMENTS.

PRIOR TO BEGINNING WORK, THE CONTRACTOR SHALL SUBMIT FOR REVIEW AND APPROVAL A COMPLETE SEQUENCE OF TASKS FOR EACH OPERATION AFFECTING THE BRIDGE SURFACE AND/OR TRAFFIC.

FOR OTHER DESIGN DATA AND GENERAL NOTES, SEE SHEET SN.

FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.

FOR FALSEWORK AND FORMWORK, SEE SPECIAL PROVISIONS.

FOR GROUT FOR STRUCTURES, SEE SPECIAL PROVISIONS.

FOR CRANE SAFETY, SEE SPECIAL PROVISIONS.

ALL PAVEMENT MARKING WILL BE IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.

THE CONTRACTOR SHALL TAKE CARE DURING JOINT REHAB OPERATIONS NOT TO DROP ANY MATERIAL BELOW THE BRIDGE WITHOUT PROTECTIVE DEVICES BELOW TO CATCH THE MATERIAL. ANY MATERIAL THAT FALLS BELOW THE BRIDGE SHALL BE CONTAINED, REMOVED AND DISPOSED OF BY THE CONTRACTOR AT NO EXTRA COST TO THE DEPARTMENT. IF THE ENGINEER DETERMINES THAT PROTECTIVE DEVICES ARE NOT ADEQUATE OR NOT BEING EMPLOYED, THE WORK SHALL BE SUSPENDED UNTIL ADEQUATE PROTECTION IS PROVIDED.

FOR FLOWABLE FILL, SEE SPECIAL PROVISIONS.

FOR CONSTRUCTION, MAINTENANCE AND REMOVAL OF TEMPORARY ACCESS, SEE SPECIAL PROVISIONS.

FOR PARTIAL REMOVAL OF EXISTING STRUCTURE, SEE SPECIAL PROVISIONS.

FOR PRECAST APPROACH SLABS AND LONGITUDINAL CLOSURE POUR, SEE PRECAST APPROACH SLABS SPECIAL PROVISIONS.

FOR ASPHALT PLUG JOINT FOR PRESERVATION, SEE SPECIAL PROVISIONS.

FOR STEEL PILE REPAIRS, SEE SPECIAL PROVISIONS.


FOR VOLUMETRIC MIXER, SEE SPECIAL PROVISIONS.

FOR EROSION CONTROL MEASURES, SEE EROSION CONTROL PLANS.

PROJECT NO. **18314.1044067.PR**
HAYWOOD COUNTY

BRIDGE: **430163**

SHEET 3 OF 4

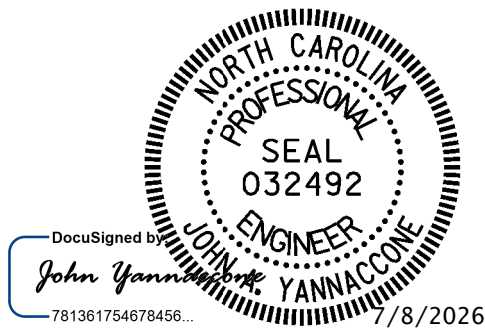

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
GENERAL DRAWING
FOR BRIDGE ON US 276
(PIGEON RD) OVER WEST FORK
PIGEON RIVER OVERFLOW

DRAWN BY : J. MYA DATE : 4/2025
CHECKED BY : J. YANNACCON DATE : 4/2025



DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S-3
2			4			TOTAL SHEETS 14