





6/2/99

NOTE: FINAL SURFACE WILL BE PLACED BY ANOTHER CONTRACT ON LINE -EL-


PROJECT REFERENCE NO.	SHEET NO.
43837	1
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER

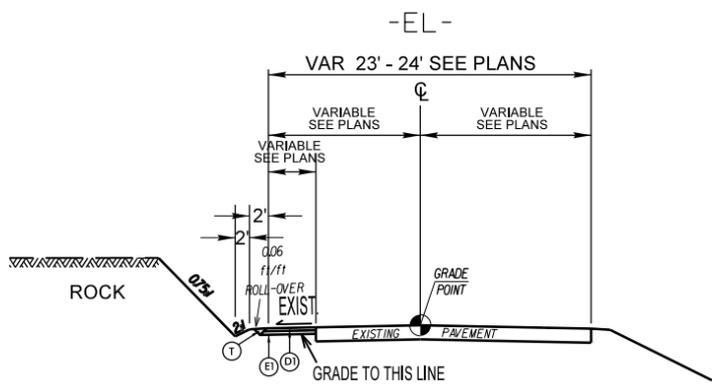


**TYPICAL SECTION NO. 1**  
FROM -EL- STA. 16+04.61 TO 17+00.00

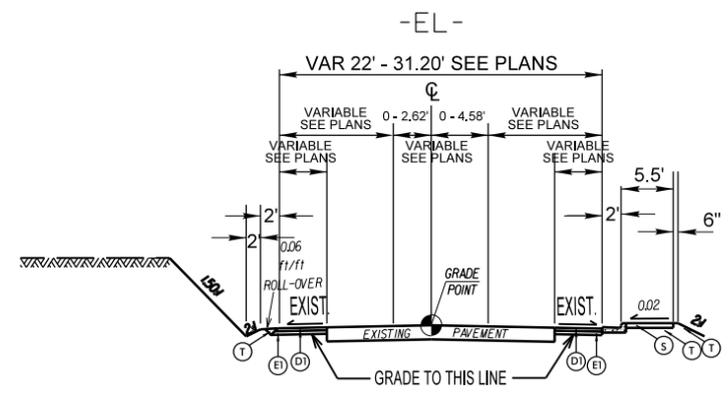


**TYPICAL SECTION NO. 4**  
FROM -EL- STA. 19+30.76 TO END OF PROJECT

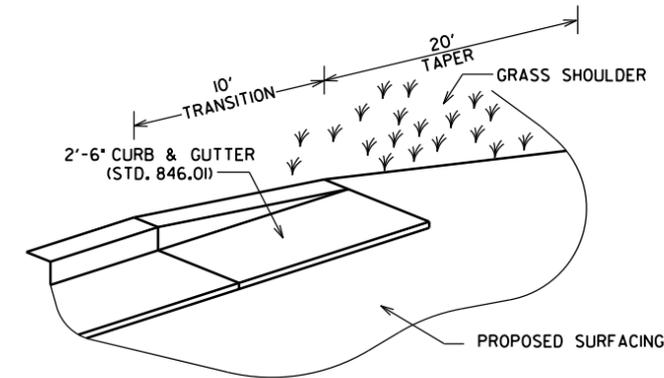


**DETAIL FOR TRANSITION AT END OF 2'-6" CONCRETE CURB & GUTTER**

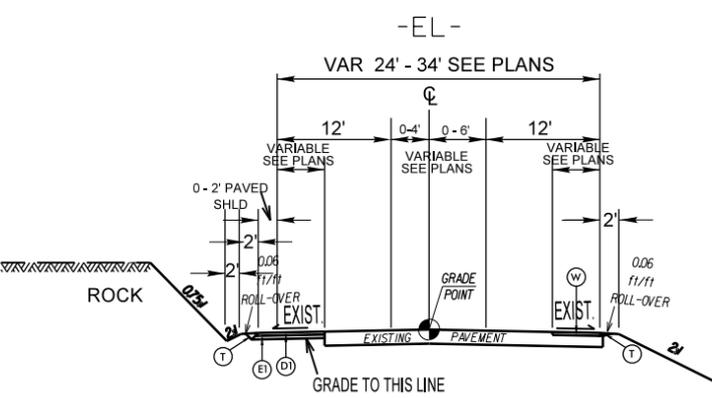


**TYPICAL SECTION NO. 2**  
FROM -EL- STA. 17+00.00 TO 18+79.61




TO BE USED WITH TYPICAL SECTION NO. 2  
FROM -EL- STA. 18+67.65 TO 18+79.61

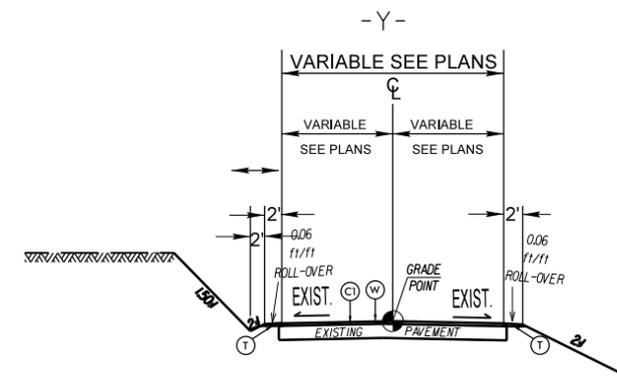

**TYPICAL SECTION NO. 5**  
FROM -Y- STA. 10+00.00 TO 11+39.88

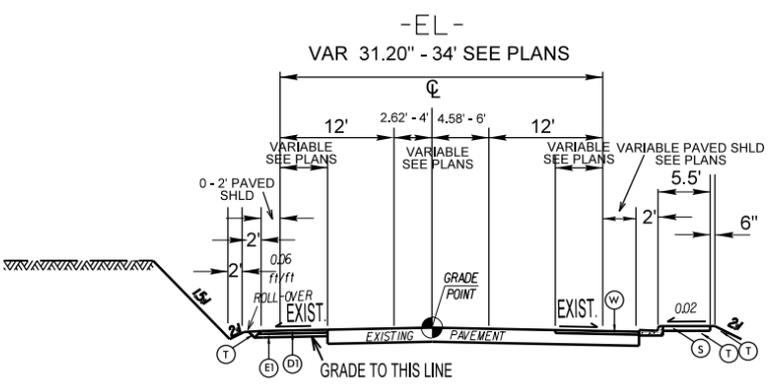

**TYPICAL SECTION NO. 3**  
FROM -EL- STA. 18+79.61 TO 19+30.76

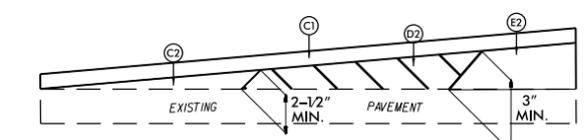

**Wedging Detail For Resurfacing**

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B. AT AN AVERAGE RATE OF 168 LBS. PER SQ.YD.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B. AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE TYPE I19.0B. AT AN AVERAGE RATE OF 342 LBS. PER SQ.YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B. AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE TYPE B25.0B. AT AN AVERAGE RATE OF 570 LBS. PER SQ.YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B. AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
S	4" CONCRETE SIDEWALK.
T	EARTH MATERIAL.

05-MAR-2014 15:55 C:\Users\Bjorn\Documents\NC81\_Extented\nc81.DDC\_tup.dgn