

SUMMARY OF EARTHWORK
(IN CUBIC YARDS)

Station	Station	Uncl. Excav.	Embank. +%	Borrow	Waste
-L7- STA. 10+40.00	-L7- STA. 13+15.00	80	267	267	80
-L7- STA. 13+64.00	-L7- STA. 14+35.00	33	14	14	33
-DRWY- STA. 10+11.55	-DRWY- STA. 10+92.00	30	39	39	30
PROJECT TOTALS:		143	320	320	143
Waste in Lieu of Borrow					
Replace Topsoil on Borrow Pit (5%)					
GRAND TOTALS:		143	320	320	143
SAY:		145		325	

NOTES:

APPROXIMATE QUANTITIES ONLY. UNCLASSIFIED EXCAVATION, BORROW EXCAVATION, FINE GRADING, CLEARING AND GRUBBING, AND REMOVAL OF EXISTING PAVEMENT WILL BE PAID FOR BY THE CONTRACT LUMP SUM PRICE FOR "GRADING".

ALL EARTHWORK QUANTITIES WERE DERIVED FROM ORD QUANTITIES BY NAMED BOUNDARY REPORT(S) AS DESCRIBED IN THE ORD QUICKSTART TRAINING.


PAVEMENT REMOVAL SUMMARY
IN SQUARE YARDS

SURVEY LINE	Station	Station	LOCATION LT/RT/CL	ASPHALT REMOVAL	ASPHALT BREAKUP	CONCRETE REMOVAL	CONCRETE BREAKUP
-L7-	10+40.00	13+15.00	CL	611.11			
-L7-	13+64.00	14+35.00	CL	157.78			
		TOTAL:		768.89			
		SAY:		770			

DF18314.
2045066

FINAL38-7

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
HENDERSON COUNTY

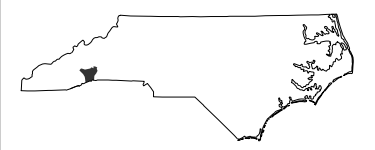

HIGHWAY DIVISION 14

PREPARED BY
KCA
KISINGER CAMPO
& ASSOCIATES
NC FIRM LICENSE No: C-1506
301 Fayetteville St.,
Suite 1500
Raleigh, NC 27601
(919) 882-7839

REVISIONS