

SUMMARY OF EARTHWORK

IN CUBIC YARDS

Station	Station	Uncl. Excav.	Embank. +%	Borrow	Waste
-L10- STA. 11+10.00	-L10- STA. 12+40.00	335	3	3	335
PROJECT TOTALS:					
PROJECT TOTALS:		335	3	3	335
Waste in Lieu of Borrow					
Replace Topsoil on Borrow Pit (5%)					
GRAND TOTALS:		335	3	3	335
SAY:		340		5	

NOTES:

APPROXIMATE QUANTITIES ONLY. UNCLASSIFIED EXCAVATION, BORROW EXCAVATION, FINE GRADING, CLEARING AND GRUBBING, AND REMOVAL OF EXISTING PAVEMENT WILL BE PAID FOR BY THE CONTRACT LUMP SUM PRICE FOR "GRADING".

ALL EARTHWORK QUANTITIES WERE DERIVED FROM ORD QUANTITIES BY NAMED BOUNDARY REPORT(S) AS DESCRIBED IN THE ORD QUICKSTART TRAINING.

PAVEMENT REMOVAL SUMMARY


IN SQUARE YARDS

SURVEY LINE	Station	Station	LOCATION LT/RT/CL	ASPHALT REMOVAL	ASPHALT BREAKUP	CONCRETE REMOVAL	CONCRETE BREAKUP
-L10-	11+10.00	12+40.00	CL	288.89			
		TOTAL:		288.89			
		SAY:		290			

DF18314.
2045067

FINAL38-10

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
HENDERSON COUNTY

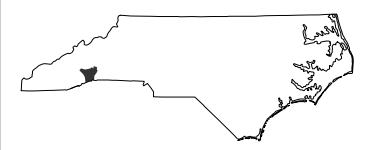

HIGHWAY DIVISION 14

PREPARED BY

KCA

KISINGER CAMPO
& ASSOCIATES

NC FIRM LICENSE No: C-1506
301 Fayetteville St.,
Suite 1500
Raleigh, NC 27601
(919) 882-7839

REVISIONS