Project Reference No.	Sheet No.
49016	1

TYPICAL SECTION NO. 2

MAP 2: FULL DEPTH RECLAMATION ON SR 1002, FROM STA. 0+00
TO BEAUFORT COUNTY LINE

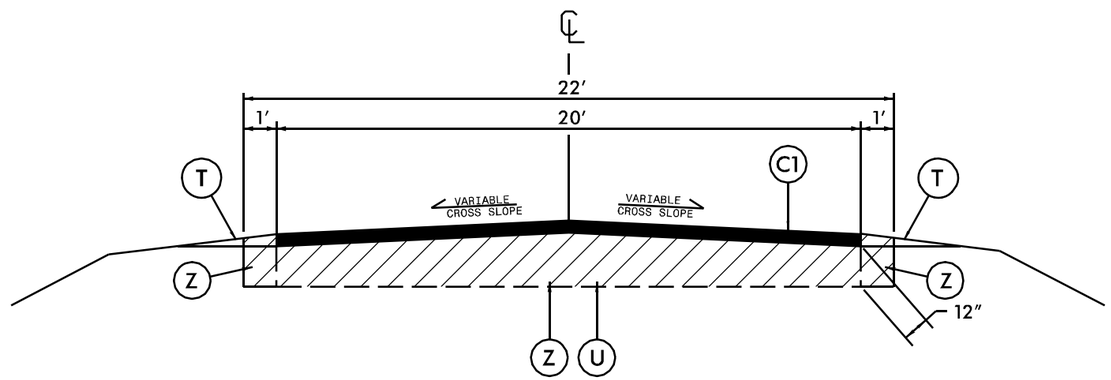

NOTE:

1. A TACK COAT BETWEEN THE FDR LAYER AND THE SURFACE LAYER IS REQUIRED.
2. SPECIAL ATTENTION IS NEEDED IN ANY AREAS WHICH ARE TO BE WIDENED, TO ENSURE THAT THE BASE CLOSELY MATCHES THE COMPOSITION OF THE MAINLINE PAVEMENT.

PAVEMENT SCHEDULE

C1	PROP APPROX 3″, ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE OF 168 LBS PER SQ. YD. IN EACH OF TWO LAYERS.
T	EARTH MATERIAL
U	EXISTING PAVEMENT
Z	FULL DEPTH RECLAMATION, MIXING DEPTH 12″ WITH CEMENT TO BE ADDED AT A RATE OF 63 LBS PER SQ. YD.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

$$$$$$$$SYSTIME$$$$$$
$$$$$$$$$$$$$$$$$$DGN$$$$$$$$$$$$$$$$$$$$
$$$$$$USERNAME$$$$$