Project Reference No.	Sheet No.
2016CPT.02.19.20742.1	1 OF 4

PAVEMENT SCHEDULE

C1	PROP. ASPHALT SURFACE TREATMENT. DOUBLE SEAL, AT AN APPLICATION RATE TO BE DETERMINED BY FIELD CONDITIONS IN ACCORDANCE WITH PROJECT SPECIAL PROVISIONS.
U	EXISTING PAVEMENT.

NOTES:

*ALL PAVED SR ROADS TO BE TREATED TO THE ENDS OF THE RADII., OR AS DIRECTED BY THE ENGINEER

*PAVEMENT MARKINGS TO BE PERFORMED BY OTHERS

*ASPHALT SURFACE TREATMENT, DOUBLE SEAL CONSISTS OF TWO LAYERS OF TREATMENT:

BOTTOM LAYER CONSISTS OF EMULSIFIED ASPHALT, GRADE CRS–2L AT A RATE OF APPROX. 0.25± GAL/SY AND A LAYER OF 5/16" LIGHT WEIGHT AGGREGATE AT A RATE OF APPROX. 9± LBS/SY.

TOP LAYER CONSISTS OF EMULSIFIED ASPHALT, GRADE CRS–2L AT A RATE OF APPROX. 0.25± GAL/SY AND A LAYER OF 5/16" LIGHT WEIGHT AGGREGATE AT A RATE OF APPROX. 9± LBS/SY.

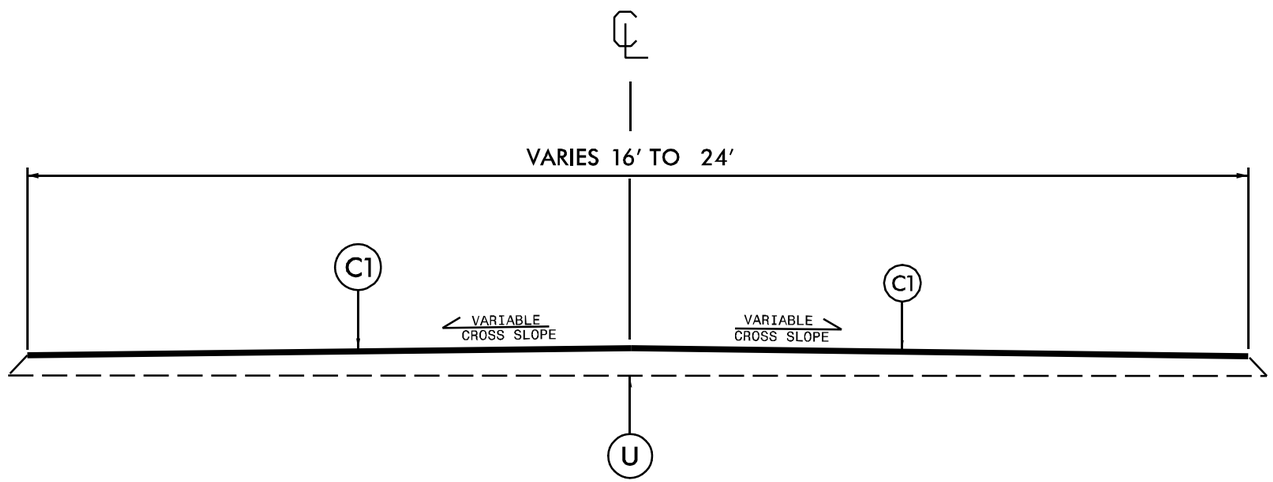

TYPICAL SECTION NO. 1

MAP 1: SR 1104, FROM SR 1105 TO SR 1110
MAP 2: SR 1109, FROM SR 1111 TO SR 1110
MAP 3: SR 1114, FROM NC 102 TO SR 1117
MAP 4: SR 1117, FROM SR 1114 TO SR 1120
MAP 5: SR 1118, FROM NC 903 TO SR 1117
MAP 6: SR 1119, FROM NC 11 TO SR 1117
MAP 7: SR 1120, FROM NC 102 TO NC 11
MAP 8: SR 1123, FROM SR 1114 TO NC 903
MAP 9: SR 1125, FROM SR 1138 TO SR 2111
MAP 10: SR 1126, FROM DEAD–END TO SR 1124
MAP 11: SR 1154, FROM NC 11 TO DEAD–END

$$$$$$$SYSTIME$$$$$
$$$$$$$$$$$$$$$$$$DGN$$$$$$$$$$$$$$$$$$
$$$$$USERNAME$$$$