

# BEAUFORT COUNTY

**DB00625**

**WBS# 84013.GOCR.002**

**Goose Creek State Park**


**TYPE OF WORK : MILLING, RESURFACING , AND SHOULDER RECONSTRUCTION**

| PROJECT REFERENCE NO. | SHEET NO. |
|-----------------------|-----------|
| DB00625               | 1         |



**NCDOT**  
DIVISION 2



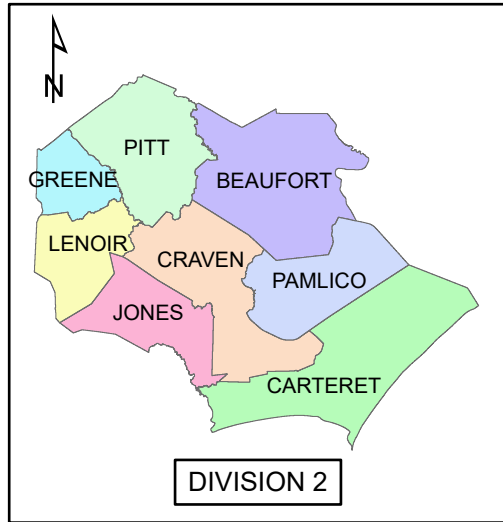

# BEAUFORT COUNTY

**DB00625**

**WBS# 84013.GOCR.002**

**Goose Creek State Park**

**TYPE OF WORK : MILLING, RESURFACING , AND SHOULDER RECONSTRUCTION**

| PROJECT REFERENCE NO. | SHEET NO. |
|-----------------------|-----------|
| DB00625               | 2         |



**NCDOT**  
DIVISION 2




|                |           |
|----------------|-----------|
| PROJECT NO.    | SHEET NO. |
| 84013.GOCR.002 | 3         |
|                |           |

### SUMMARY OF QUANTITIES

| PROJECT NO                               | COUNTY   | MAP NO | ROUTE                     | DESCRIPTION               | TYP NO | LENGTH       | WIDTH | HAULING<br>NCDOT<br>SUPPLIED<br>SHOULDER<br>MATERIAL | SHOULDER<br>RECONSTRUCTION | INCIDENTAL<br>MILLING | SURFACE<br>COURSE,<br>S9.5B | ASPHALT<br>BINDER FOR<br>PLANT MIX |
|------------------------------------------|----------|--------|---------------------------|---------------------------|--------|--------------|-------|------------------------------------------------------|----------------------------|-----------------------|-----------------------------|------------------------------------|
|                                          |          |        |                           |                           |        | MI           | FT    | EA                                                   | SMI                        | SY                    | TONS                        | TONS                               |
| 84013.GOCR.002                           | Beaufort | 1      | GOOSE CREEK WALKING PATHS | GOOSE CREEK WALKING PATHS | 1      | 0.279        | 8     | 1                                                    | 0.20                       | 1,381                 | 160                         | 10                                 |
| <b>TOTAL FOR PROJ NO. 84013.GOCR.002</b> |          |        |                           |                           |        | <b>0.279</b> |       | <b>1</b>                                             | <b>0.20</b>                | <b>1,381</b>          | <b>160</b>                  | <b>10</b>                          |
| <b>GRAND TOTAL</b>                       |          |        |                           |                           |        | <b>0.279</b> |       | <b>1</b>                                             | <b>0.20</b>                | <b>1,381</b>          | <b>160</b>                  | <b>10</b>                          |

## TYPICAL SECTION NO. 1

MAP 1

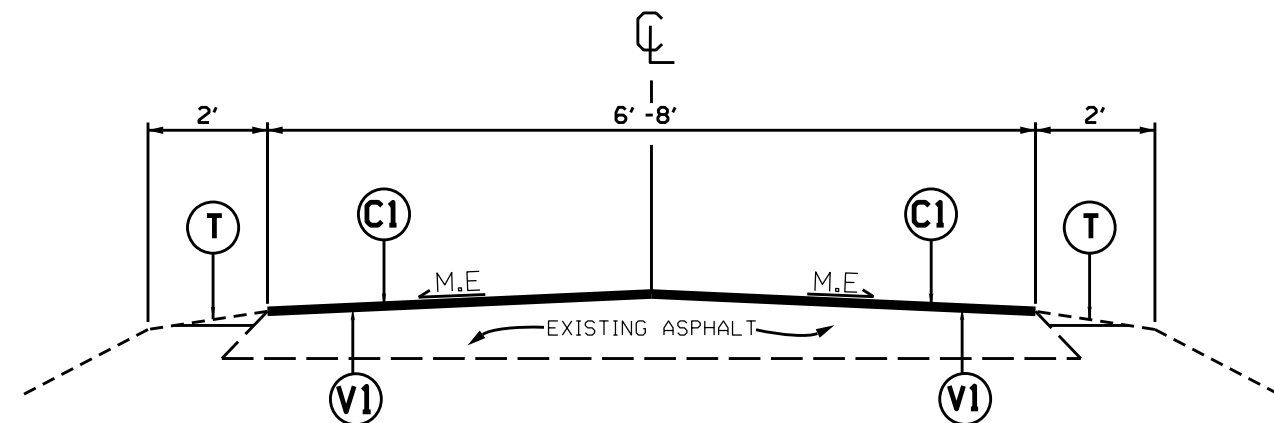

**NOTE:**

1. MILL FULL WIDTH OF THE ENTIRE WALKING PATH TO A DEPTH OF 2 INCHES. MILLING TO INCLUDE REMOVING ALL ROOTS COMPLETELY FROM THE WALKING PATH TO ANY DEPTH.
2. PLACE ASPHALT SURFACE COURSE AT FULL WIDTH OF EXISTING ASPHALT PAVEMENT, AS DIRECTED BY THE ENGINEER.
3. PERFORM SHOULDER RECONSTRUCTION AFTER PAVING IS COMPLETED. ONLY SELECT AREAS WILL NEED SHOULDER RECONSTRUCTION, AS DIRECTED BY THE ENGINEER.

| PAVEMENT SCHEDULE     |                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------|
| C1                    | PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 220 LBS. PER SQ. YD. |
| T                     | SHOULDER RECONSTRUCTION                                                                                 |
| V1                    | INCIDENTAL MILLING. MILLING DEPTH 2" FOR THE ENTIRE WIDTH OF WALKING PATH.                              |
| DRAWINGS NOT TO SCALE |                                                                                                         |

*NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.*