


TYPICAL SECTION

WBS ELEMENT: 3CR.20711.123 & 43251

MAPS NO. 1 & 4

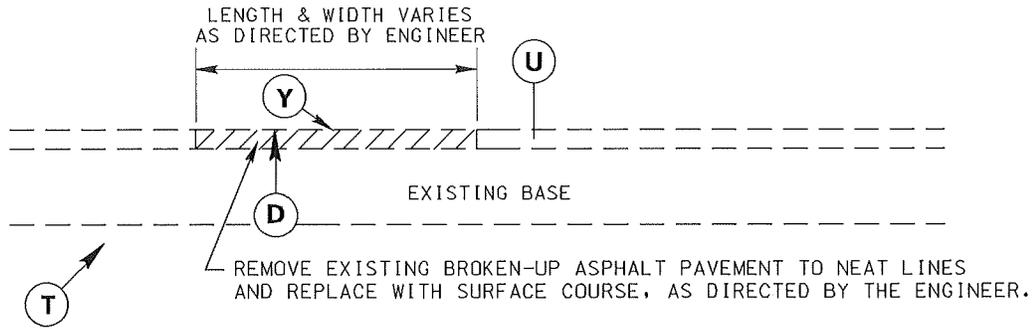


TYPICAL SECTION NO. 1

USE ON SR 1331 & SR 1436

WBS ELEMENT: 3C.067067

MAPS NO. 2 & 3

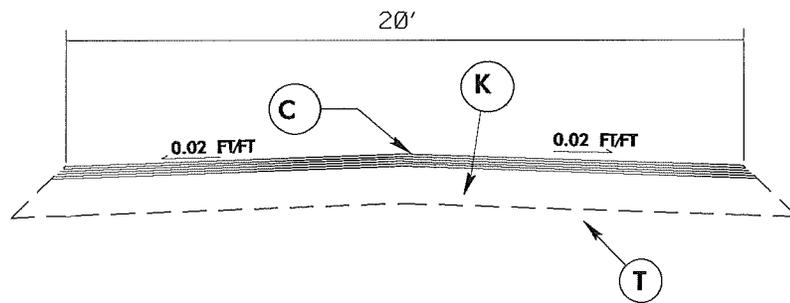

TYPICAL SECTION NO. 2

USE ON SR 2221 & SR 2222

PAVEMENT SCHEDULE

WBS ELEMENTS: 3CR.20711.123
3C.071071 & 3C.071072

C	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
D	PROP. APPROX. 2-1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I 19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. FOR MILL PATCHING
K	CONDITION EXISTING BASE
T	EXISTING SUBGRADE MATERIAL.
U	EXISTING PAVEMENT
Y	MILL EXISTING PAVEMENT 2-1/2".