

PROJECT: 17BP.4.R.100 REFERENCE: 500049

**CONTENTS**

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4	PROFILE(S)
5	BORE LOG(S)
6	SOIL TEST RESULTS
7	SITE PHOTOGRAPH(S)

**STATE OF NORTH CAROLINA**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**  
**GEOTECHNICAL ENGINEERING UNIT**

**STRUCTURE**  
**SUBSURFACE INVESTIGATION**

COUNTY JOHNSTON  
PROJECT DESCRIPTION BRIDGE NO. 49 ON -L-  
(SR 1116) OVER JOHN K. SWAMP

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	500049	1	7

**CAUTION NOTICE**

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT 1919 TOT-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTES:

1. THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
2. BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
N. O. MOORE  
D. G. PINTER  
R. E. CLARKE

INVESTIGATED BY J. L. LOVE  
DRAWN BY A. N. KINTNER  
CHECKED BY C. A. KREIDER  
SUBMITTED BY J. L. LOVE  
DATE SEPTEMBER 2018



DocuSigned by:  
Jaime L. Love 10/3/2018  
B93571039B... SIGNATURE DATE

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
GEOTECHNICAL ENGINEERING UNIT  
SUBSURFACE INVESTIGATION  
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS**

SOIL DESCRIPTION				GRADATION				ROCK DESCRIPTION				TERMS AND DEFINITIONS							
SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>				WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.				HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS: WEATHERED ROCK (WR) CRYSTALLINE ROCK (CR) NON-CRYSTALLINE ROCK (NCR) COASTAL PLAIN SEDIMENTARY ROCK (CP)				ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOGGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.							
SOIL LEGEND AND AASHTO CLASSIFICATION				ANGULARITY OF GRAINS				WEATHERING				ROCK HARDNESS							
GENERAL CLASS. GRANULAR MATERIALS (<= 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS				THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.				FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE. VERY SLIGHT (V SL.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE. SLIGHT (SL.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS. MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK. MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. IF TESTED, WOULD YIELD SPT REFUSAL SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF COMPLETE ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.				MINERALOGICAL COMPOSITION MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.				ROCK HARDNESS VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROOVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.			
COMPRESSIBILITY				GROUND WATER				ROCK HARDNESS				ROCK HARDNESS							
PERCENTAGE OF MATERIAL				MISCELLANEOUS SYMBOLS				ROCK HARDNESS				ROCK HARDNESS							
ORGANIC MATERIAL GRANULAR SOILS SILT - CLAY SOILS OTHER MATERIAL				ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY				ROCK HARDNESS				ROCK HARDNESS							
COMPACTION OR DENSENESS				RECOMMENDATION SYMBOLS				ROCK HARDNESS				ROCK HARDNESS							
TEXTURE OR GRAIN SIZE				ABBREVIATIONS				ROCK HARDNESS				ROCK HARDNESS							
SOIL MOISTURE - CORRELATION OF TERMS				EQUIPMENT USED ON SUBJECT PROJECT				ROCK HARDNESS				ROCK HARDNESS							
PLASTICITY				EQUIPMENT USED ON SUBJECT PROJECT				ROCK HARDNESS				ROCK HARDNESS							
COLOR				EQUIPMENT USED ON SUBJECT PROJECT				ROCK HARDNESS				ROCK HARDNESS							



13+00

14+00

15+00

16+00

17+00

18+00


19+00

BEGIN PROJECT  
-L- POT STA. 13+75.00

BEGIN BRIDGE  
-L- STA. 16+03.00

END BRIDGE  
-L- STA. 16+58.00

BM#1  
N: 566,599  
E: 2,163,570  
-BL- STA 15+05.41  
O/S 48' LT  
ELEV.= 151.42'  
BENCH TIE NAIL  
IN 12" OAK TREE

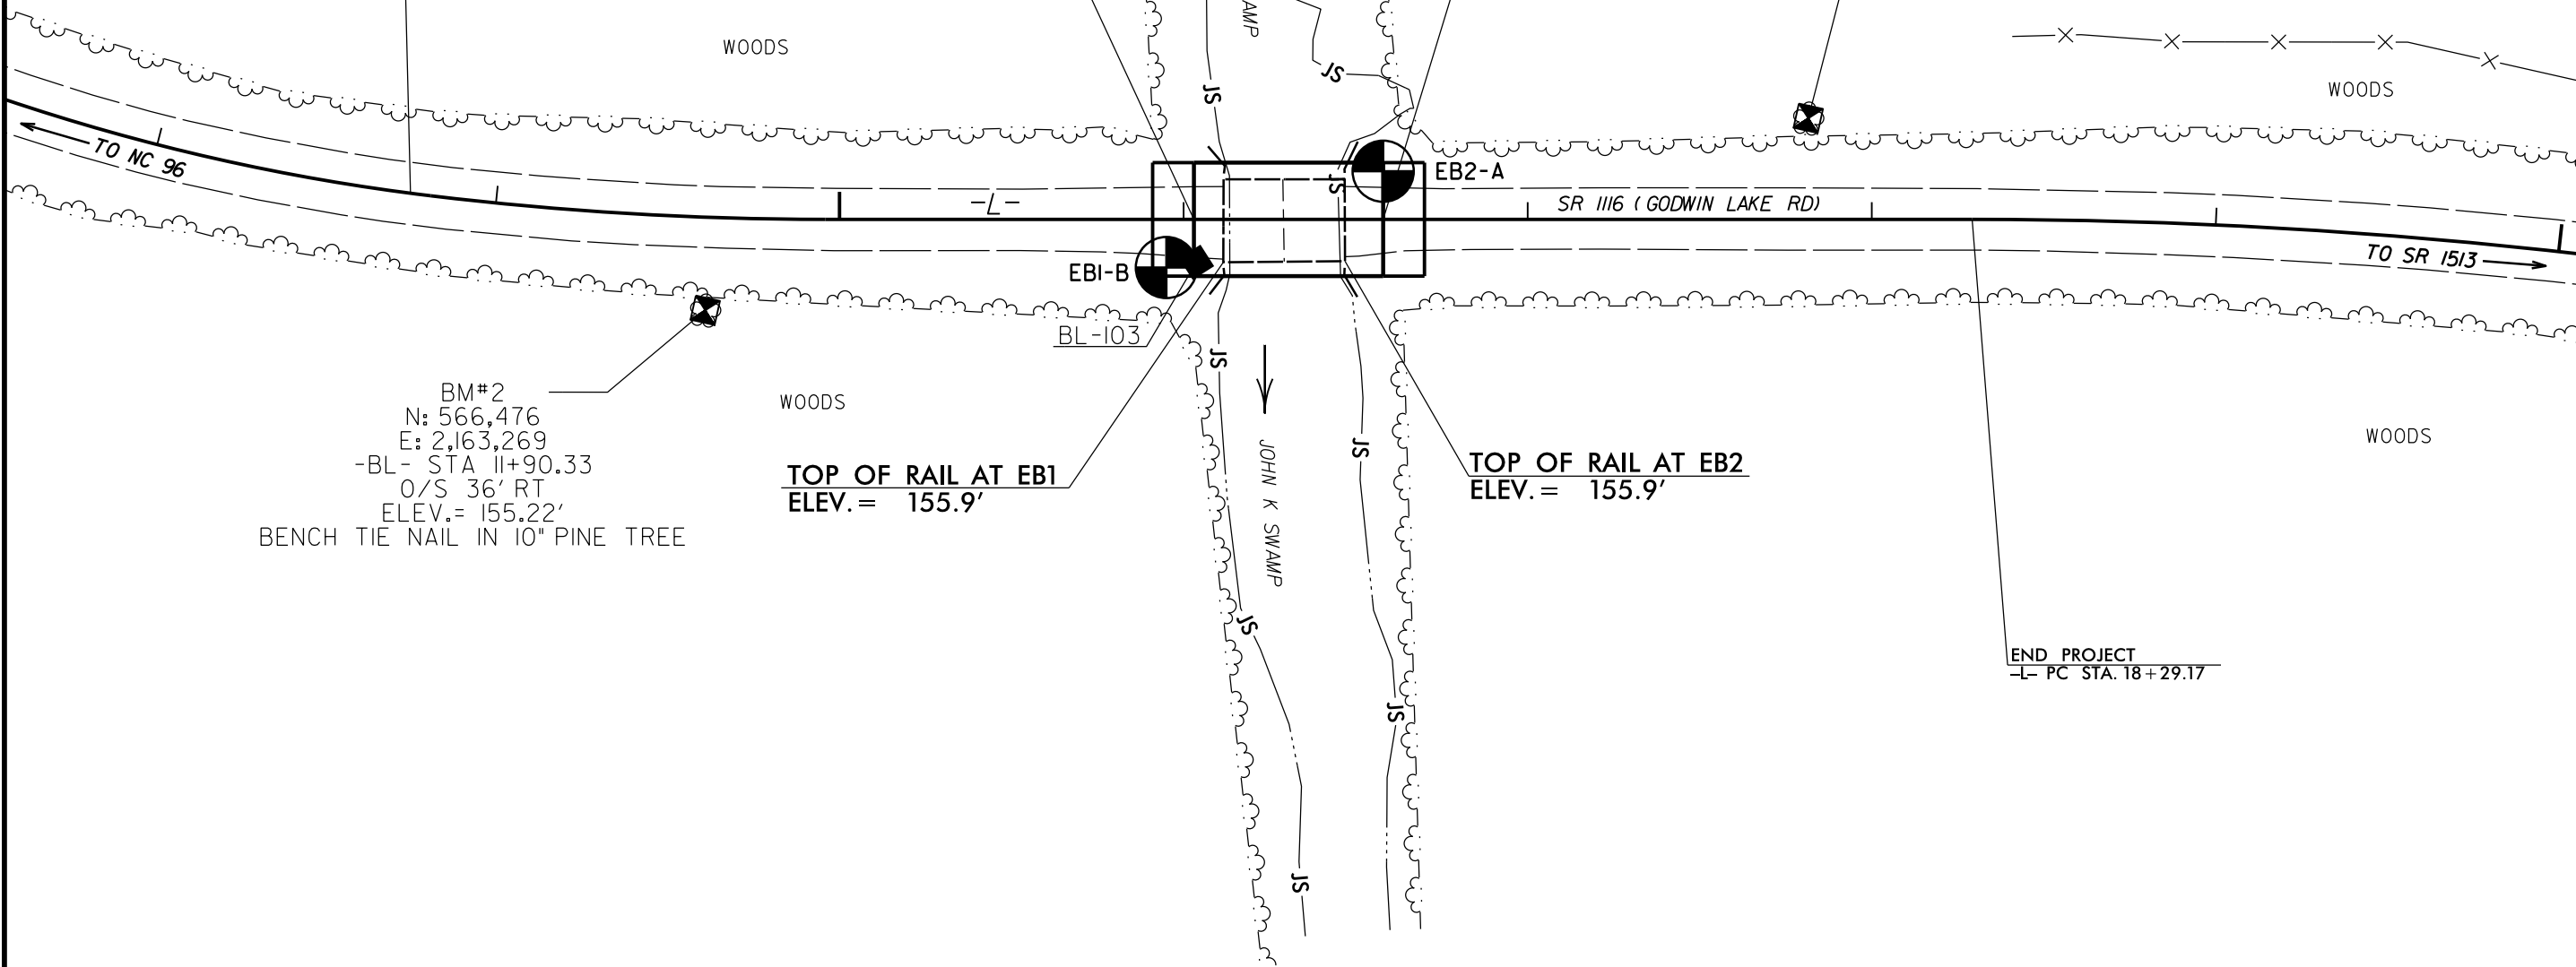


BM#2  
N: 566,476  
E: 2,163,269  
-BL- STA 11+90.33  
O/S 36' RT  
ELEV.= 155.22'  
BENCH TIE NAIL IN 10" PINE TREE

TOP OF RAIL AT EB1  
ELEV.= 155.9'


TOP OF RAIL AT EB2  
ELEV.= 155.9'

END PROJECT  
-L- PC STA. 18+29.17

**SKEW = 90°**

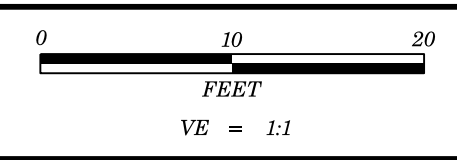

PROJECT REFERENCE NO.	SHEET NO.
500049	4
FENCE DIAGRAM OF BORINGS PROJECTED ALONG -L- PROFILE AT CENTERLINE	

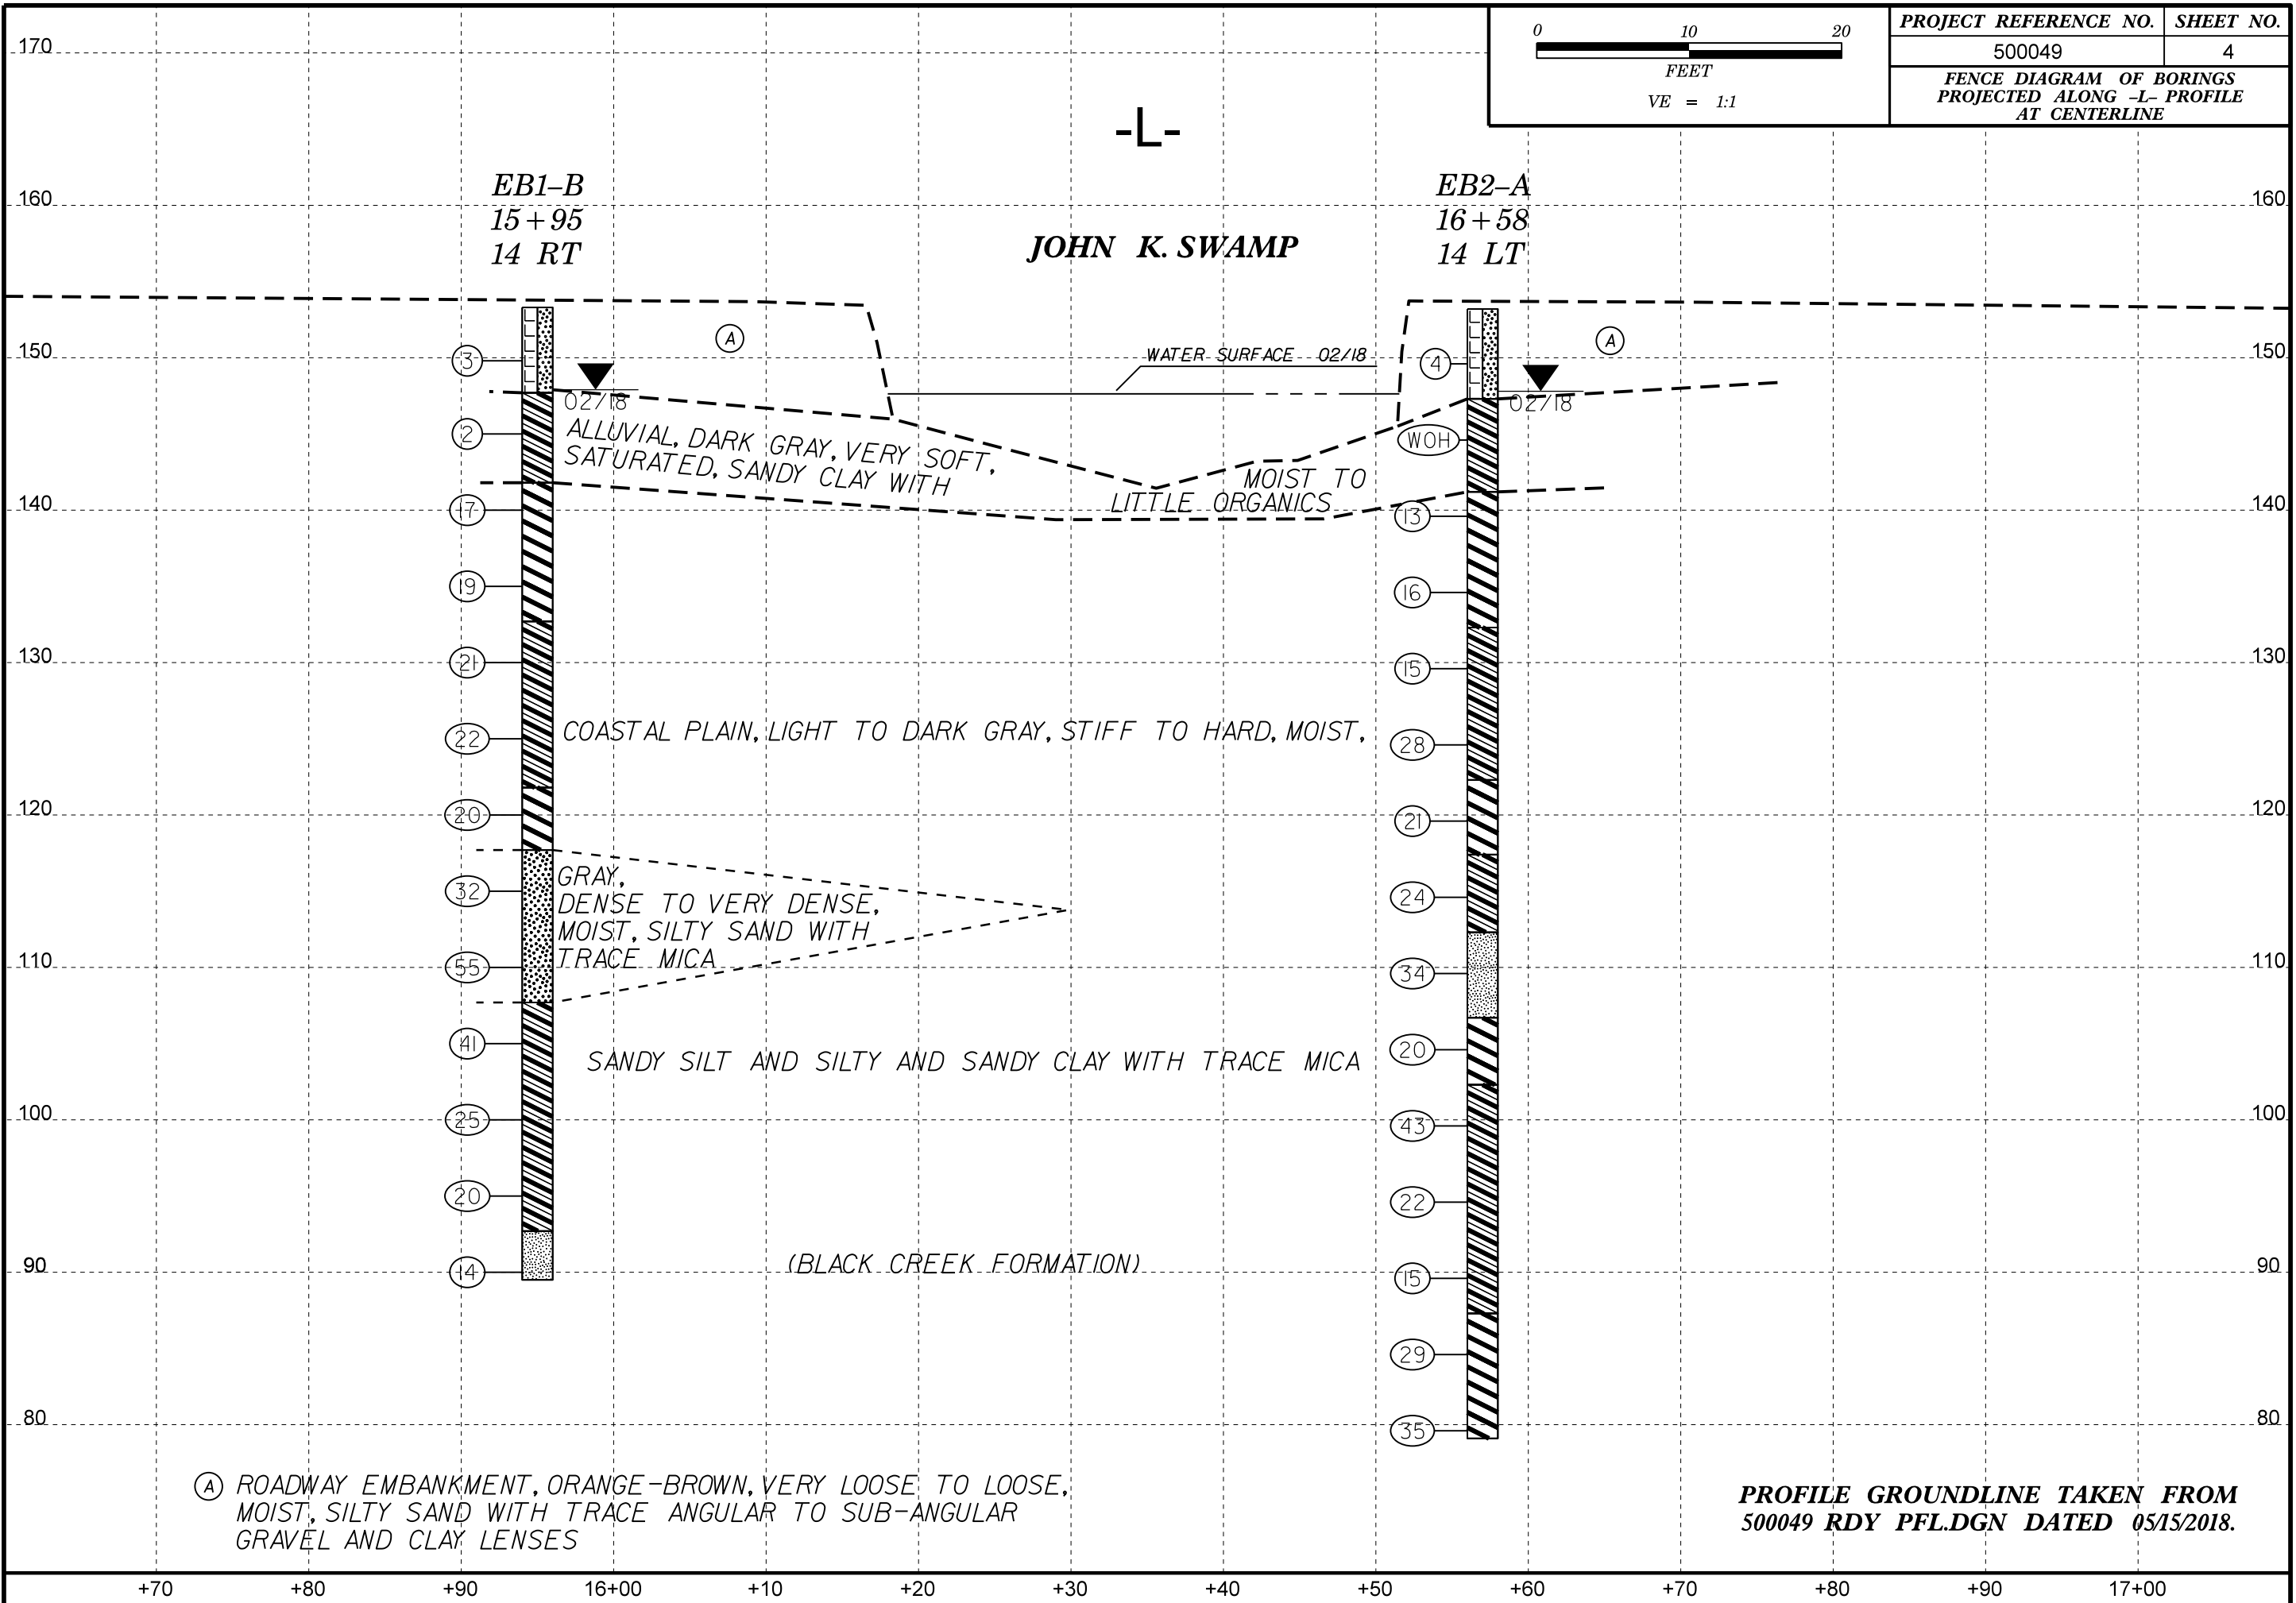

# GEOTECHNICAL BORING REPORT

## BORE LOG

WBS 17BP.4.R.100		TIP 500049		COUNTY JOHNSTON		GEOLOGIST Moore, N. O.										
SITE DESCRIPTION BRIDGE NO. 49 ON -L- (SR 1116) OVER JOHN K. SWAMP							GROUND WTR (ft)									
BORING NO. EB1-B		STATION 15+95		OFFSET 14 ft RT		ALIGNMENT -L-										
COLLAR ELEV. 153.3 ft		TOTAL DEPTH 63.8 ft		NORTHING 566,517		EASTING 2,163,397										
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 86% 11/17/2017			DRILL METHOD Mud Rotary			HAMMER TYPE Automatic										
DRILLER Pinter, D. G.		START DATE 02/21/18		COMP. DATE 02/21/18		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
155														153.3	GROUND SURFACE	0.0
150	150.8	2.5	1	2	1								M	ROADWAY EMBANKMENT ORANGE-BROWN, SILTY SAND WITH TRACE SUB-ANGULAR GRAVEL	5.6	
145	146.0	7.3	WOH	1	1								M	ALLUVIAL DARK GRAY, SANDY CLAY WITH TRACE ORGANICS	11.5	
140	141.0	12.3		4	7	10							M	COASTAL PLAIN DARK GRAY, SILTY CLAY WITH TRACE MICA (BLACK CREEK FORMATION)	20.6	
135	136.0	17.3		6	8	11							M	LIGHT GRAY, SANDY CLAY WITH TRACE MICA	31.5	
130	131.0	22.3		4	8	13							M	DARK GRAY, SILTY CLAY WITH TRACE MICA	35.6	
125	126.0	27.3		5	10	12							M	GRAY, SILTY SAND WITH TRACE MICA	45.6	
120	121.0	32.3		4	9	11							M	LIGHT GRAY AND GRAY, SANDY CLAY WITH TRACE MICA	60.6	
115	116.0	37.3		8	11	21							M	GRAY, SANDY SILT WITH TRACE MICA	63.8	
110	111.0	42.3		12	24	31							SS-6	Boring Terminated at Elevation 89.5 ft IN COASTAL PLAIN (SANDY SILT) [BLACK CREEK FORMATION]		
105	106.0	47.3		10	17	24							M			
100	101.0	52.3		7	10	15							M			
95	96.0	57.3		9	9	11							M			
90	91.0	62.3		5	5	9							M			

WBS 17BP.4.R.100		TIP 500049		COUNTY JOHNSTON		GEOLOGIST Moore, N. O.										
SITE DESCRIPTION BRIDGE NO. 49 ON -L- (SR 1116) OVER JOHN K. SWAMP							GROUND WTR (ft)									
BORING NO. EB2-A		STATION 16+58		OFFSET 14 ft LT		ALIGNMENT -L-										
COLLAR ELEV. 153.2 ft		TOTAL DEPTH 74.1 ft		NORTHING 566,558		EASTING 2,163,453										
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 86% 11/17/2017			DRILL METHOD Mud Rotary			HAMMER TYPE Automatic										
DRILLER Pinter, D. G.		START DATE 02/21/18		COMP. DATE 02/21/18		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
155														153.2	GROUND SURFACE	0.0
150	150.6	2.6	2	2	2								M	ROADWAY EMBANKMENT ORANGE-BROWN, SILTY SAND WITH TRACE ANGULAR GRAVEL AND CLAY LENSES	5.9	
145	145.6	7.6	WOR	WOH	WOH								SS-1	ALLUVIAL DARK GRAY, SANDY CLAY WITH LITTLE ORGANICS	12.0	
140	140.6	12.6		2	5	8							SS-2	COASTAL PLAIN GRAY, SILTY CLAY (BLACK CREEK FORMATION)	20.9	
135	135.6	17.6		4	6	10							M	LIGHT GRAY, SANDY CLAY	30.9	
130	130.6	22.6		3	6	9							SS-3	GRAY, SILTY CLAY	35.8	
125	125.6	27.6		7	12	16							M	LIGHT GRAY, SANDY CLAY WITH TRACE MICA	40.9	
120	120.6	32.6		7	9	12							M	DARK GRAY-BROWN, SANDY SILT WITH TRACE MICA	46.5	
115	115.6	37.6		7	10	14							SS-4	DARK GRAY, SILTY CLAY	50.9	
110	110.6	42.6		7	8	26							SS-5	LIGHT GRAY, SANDY CLAY WITH TRACE MICA	65.9	
105	105.6	47.6		4	8	12							M	DARK GRAY TO GRAY, SILTY CLAY	74.1	
100	100.6	52.6		9	19	24							M			
95	95.6	57.6		8	11	11							M			
90	90.6	62.6		5	7	8							M			
85	85.6	67.6		8	12	17							M			
80	80.6	72.6		7	14	21							M			
														79.1	Boring Terminated at Elevation 79.1 ft IN COASTAL PLAIN (SILTY CLAY) [BLACK CREEK FORMATION]	

NCDOT BORE DOUBLE 500049\_GEO\_BH.GPJ NC\_DOT.GDT 10/2/18

**PROJ. NO. - 17BP.4.R.100**  
**ID NO. - 500049**  
**COUNTY - JOHNSTON**

**EB1-B**

<b>SOIL TEST RESULTS</b>															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
SS-6	14'RT	15+95	42.3-43.8	A-2-4(0)	-	-	50.9	33.5	5.5	10.1	100	74	19	-	-

**EB2-A**

<b>SOIL TEST RESULTS</b>															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
SS-1	14'LT	16+58	7.6-9.1	A-6(4)	29	11	13.3	30.1	22.3	34.3	100	94	61	-	6.2
SS-2	14'LT	16+58	12.6-14.1	A-7-6(12)	46	19	11.1	23.4	53.4	12.1	94	89	68	-	-
SS-3	14'LT	16+58	22.6-24.1	A-6(2)	35	17	41.6	25.0	21.3	12.1	100	76	38	-	-
SS-4	14'LT	16+58	37.6-39.1	A-6(6)	31	16	7.5	43.8	38.6	10.1	100	98	59	-	-
SS-5	14'LT	16+58	42.6-44.1	A-4(0)	24	7	19.2	46.0	16.6	18.2	100	96	44	-	-

# SITE PHOTOGRAPH

Bridge No. 49 on -L- (SR 1116) over John K. Swamp



Looking Northwest towards End Bent 1