

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. 45350.1.15 (BD-5104N) F.A. PROJ. _____
 COUNTY EDGECOMBE
 PROJECT DESCRIPTION BRIDGE NO. 97 ON SR 1429 (DRAUGHN RD.)
OVER MAPLE SWAMP AT -L- STA. 12+95.50

CONTENTS

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4	PROFILE
5-6	BORE LOGS

CAUTION NOTICE

THE SUBSURFACE INFORMATION FOR THE SUBSURFACE INVESTIGATION ON WHICH IS BASED HEREON HAVE BEEN OBTAINED FOR THE PURPOSES OF PLANNING, DESIGN AND CONSTRUCTION OF THE PROJECT. THE VARIATIONS IN FIELD BORING LOGS, TRACK RECORDS, AND SOIL TEST DATA AVAILABLE HAVE BEEN REVIEWED AND APPROVED BY ENGINEERING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT 1085 PAT GARDNER ROAD, RALEIGH, N.C. 27601. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, TRACK RECORDS, OR SOIL TEST DATA ARE PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOTTOMS ARE BASED ON A CAREFUL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN SAMPLES OR BETWEEN SAMPLES WITHIN THE BOTTOMS. THE LABORATORY SAMPLE DATA AND THE IN SITU UNPLACED TEST DATA CAN BE RELIED ON ONLY TO THE EXTENT OF PRESENTED IN THE STANDARD TEST METHODS.


THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATION ARE AS MEASURED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BODIES ON CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BORING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND MEMORANDUMS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT BEES NOT WARRANT OR GUARANTEE THE ACCURACY OR ACCURACY OF THE INVESTIGATION DATA, NOR THE INTERPRETATIONS MADE OR OPINIONS OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BODIES ON CONTRACTOR IS CAUTIONED TO MAKE SOME INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF THE PERIOD AND REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

PROJECT: 45350.1.15 ID: BD-5104N

PERSONNEL
T.C. BOTTOMS
C.M. WRIKE
R.E. SMITH
D.G. PINTER

INVESTIGATED BY T.C. BOTTOMS
 CHECKED BY D.N. ARGENBRIGHT
 SUBMITTED BY D.N. ARGENBRIGHT
 DATE APRIL 2013



DRAWN BY: C.P. TURNER

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IS IT CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREON AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.


NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION		GRADATION	ROCK DESCRIPTION	TERMS AND DEFINITIONS																																																																																								
<p>SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT PROBE AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (ASTM D 1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM AND DESCRIBED BY AASHTO M 1980. CONSISTENCY, GRAIN TEXTURE, PLASTICITY, AND OTHER PERTINENT FACTORS SUCH AS PERMEABILITY, COMPRESSIBILITY, STRUCTURE, PLASTICITY, ETC. (EXAMPLES)</p> <p>FOR SETTING UP AND USE OF STANDARD TESTS SEE AASHTO M 1980.</p>		<p>WELL GRADE - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. LIMITED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. POORLY GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.</p> <p style="text-align: center;">ANGULARITY OF GRAINS</p> <p>THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERM ANGULAR, SUBANGULAR, OR ROUNDED.</p>	<p>NON-CRYSTALLINE PLAIN MATERIAL - THAT YIELD POINT SPT REFUSAL AN UNIFORM ROCK LINE INDICATES THE LEVEL AT WHICH NON-CRYSTALLINE PLAIN MATERIAL YIELD POINT SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPMON SAMPLER FROM 10 IN. TO LESS THAN 8 1/2 FEET PER 60 BLOWS. IN NON-CRYSTALLINE PLAIN MATERIALS, THE TRANSITION BETWEEN SOIL AND ROCK IS NOT REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:</p> <p>WEATHERED ROCK (WR) - NON-CRYSTALLINE PLAIN MATERIAL THAT YIELD POINT SPT VALUES > 100 BLOWS PER FOOT IF TESTED.</p> <p>CRYSTALLINE ROCK (CR) - FINE TO COARSE GRAIN (IGNEOUS AND METAMORPHIC) ROCK THAT YIELD POINT SPT REFUSAL. IF TESTED, ROCK TYPE INCLUDES GRANITE, GNEISS, GARNET, SCHIST, ETC.</p> <p>NON-CRYSTALLINE ROCK (NR) - FINE TO COARSE GRAIN (METAMORPHIC AND NON-CRYSTALLINE PLAIN) SEDIMENTARY ROCK THAT YIELD POINT SPT REFUSAL. IF TESTED, ROCK TYPE INCLUDES PHYLLOSLATE, SANDSTONE, ETC.</p> <p>CRYSTALLINE PLAIN ROCK (CP) - CRYSTALLINE PLAIN MATERIALS (SEDIMENTARY) THAT YIELD POINT SPT REFUSAL. ROCK TYPE INCLUDES Limestones, Sandstones, Gneisses, etc.</p>	<p>ALUMINUM ILLUINOIS - SOILS THAT HAVE BEEN TRANSPORTED BY WATER.</p> <p>ARTESIAN - A WATER BEARING FORMATION OR STRATA.</p> <p>BERNSTEIN - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SANDS OR SILTS THAT CONTAIN SAND.</p> <p>BRISTLE - APPLIED TO ROCKS THAT ARE SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A PARTICLE PERCENTAGE OF CLAY IN THEIR COMPOSITION AS SHALE, SLATE, ETC.</p> <p>CRACKING - A CRACKING WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO BE ABOVE THE SURFACE SURFACE.</p> <p>ENCLOSURE CALCULI - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE.</p> <p>COLLUSION - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE.</p> <p>CONE PENETRATION TEST - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CONE BARREL DIVIDED BY TOTAL LENGTH OF CONE AND EXPRESSED AS A PERCENTAGE.</p> <p>CRACK - A FRACTURE OR FRACTURE CRACK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR SOILS.</p> <p>CRACK - A FRACTURE OR FRACTURE CRACK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR SOILS.</p> <p>DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLAIN FEATURE IS INCLINED FROM THE HORIZONTAL.</p> <p>DIP DIRECTION (OR AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH.</p> <p>FAULT - A FRACTURE OR FRACTURE CRACK ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO EACH OTHER PARALLEL TO THE FRACTURE.</p> <p>FOLIATE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES.</p> <p>FOLIATION - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOCATED FROM PARENT MATERIAL.</p> <p>FLOOD PLAIN - A LOW TERRACE OR A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM.</p> <p>FORMATION LEVEL - A HORIZONTAL GEOLGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD.</p> <p>GRADE - A FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED.</p> <p>GRADE - A SHELF-LIKE RIDGE OR THINNESS OF ROCK MASS THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT.</p> <p>LENS - A BODY OF SOIL OR ROCK THAT THIS BUT IN ONE OR MORE DIRECTIONS.</p> <p>NOTCHED (OR NOTCH) - IRREGULARLY HARKED WITH SPOTS OF DIFFERENT COLORS, HARKING IN SOILS USUALLY INDICATES POOR METAMORPHISM AND LACK OF GOOD DRAINAGE.</p> <p>REVERSE WATER - WATER WITHHELD ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERMEABLE STRATUM.</p> <p>RESIDUAL (OR RESIDUAL) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK.</p> <p>ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.</p> <p>SARONITE (OR SPT) - RESIDUAL SOIL THAT RETAINS THE PELVIC STRUCTURE OR FABRIC OF THE PARENT ROCK.</p> <p>SOIL - AN INTRUSIVE BODY OF JOUOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN ERODED PARALLEL TO THE BEDDING OR STRUCTURE OF THE INTRUSIVE ROCKS.</p> <p>SUBANGULAR - FOLIOSED AND STRATIFIED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE.</p> <p>STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS IN AN SPT IN A 140 LB HAMMER FALLING 30 INCHES IN ORDER TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL. WITH A 2 INCH DIAMETER DIAMETER SPLIT SPMON SAMPLER, SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 8 1/2 FEET PER 60 BLOWS.</p> <p>STRATA ROCK QUALITY DESIGNATION (SRQD) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE.</p> <p>STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATA EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE.</p> <p>TEMPERAL (OR T) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.</p> <p>BENCH MARK - IRON OR BRONZE SPIKE IN BASE OF 20" PINE AT -1- STA. 12+68.25, ELEVATION: 65.65 FT.</p>																																																																																								
<p style="text-align: center;">SOIL LEGEND AND AASHTO CLASSIFICATION</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th rowspan="2">GENERAL CLASS.</th> <th colspan="4">GRANULAR MATERIALS (+ 200 PASSING % 200)</th> <th colspan="4">SILT-CLAY MATERIALS (+ 200 PASSING % 200)</th> <th colspan="4">ORGANIC MATERIALS</th> </tr> <tr> <th>A-1</th> <th>A-2</th> <th>A-3</th> <th>A-4</th> <th>A-5</th> <th>A-6</th> <th>A-7</th> <th>A-8</th> <th>A-9</th> <th>A-10</th> <th>A-11</th> <th>A-12</th> <th>A-13</th> </tr> <tr> <td>GROUP INDEX</td> <td colspan="4">0 to 3</td> <td colspan="4">0 to 10</td> <td colspan="4">0 to 10</td> </tr> </table>		GENERAL CLASS.	GRANULAR MATERIALS (+ 200 PASSING % 200)				SILT-CLAY MATERIALS (+ 200 PASSING % 200)				ORGANIC MATERIALS				A-1	A-2	A-3	A-4	A-5	A-6	A-7	A-8	A-9	A-10	A-11	A-12	A-13	GROUP INDEX	0 to 3				0 to 10				0 to 10				<p style="text-align: center;">MINERALOGICAL COMPOSITION</p> <p>GENERAL NAMES SUCH AS QUARTZ, FELDSPAR, CALCITE, KALIN, ETC. ARE USED IN DESCRIPTIONS UNLESS THEY ARE CONSIDERED OF SIGNIFICANCE.</p> <p style="text-align: center;">COMPRESSIBILITY</p> <p>SLIGHTLY COMPRESSIBLE MODERATELY COMPRESSIBLE HIGHLY COMPRESSIBLE</p> <p style="text-align: center;">PERCENTAGE OF MATERIAL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>ORGANIC MATERIAL</th> <th>GRAVEL</th> <th>SILT</th> <th>CLAY</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>1 - 2%</td> <td>1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>3 - 5%</td> <td>10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>5 - 10%</td> <td>20 - 30%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>10%</td> <td>20%</td> <td>10%</td> <td>50% AND ABOVE</td> </tr> </table>		ORGANIC MATERIAL	GRAVEL	SILT	CLAY	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	1 - 2%	1 - 10%	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	3 - 5%	10 - 20%	MODERATELY ORGANIC	5 - 10%	12 - 20%	5 - 10%	20 - 30%	HIGHLY ORGANIC	10%	20%	10%	50% AND ABOVE	<p style="text-align: center;">GROUND WATER</p> <p>WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING</p> <p>STATIC WATER LEVEL AFTER 24 HOURS</p> <p>PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA</p> <p>SPRING OR SEEP</p>		<p style="text-align: center;">MISCELLANEOUS SYMBOLS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>																						
GENERAL CLASS.	GRANULAR MATERIALS (+ 200 PASSING % 200)				SILT-CLAY MATERIALS (+ 200 PASSING % 200)				ORGANIC MATERIALS																																																																																			
	A-1	A-2	A-3	A-4	A-5	A-6	A-7	A-8	A-9	A-10	A-11	A-12	A-13																																																																															
GROUP INDEX	0 to 3				0 to 10				0 to 10																																																																																			
ORGANIC MATERIAL	GRAVEL	SILT	CLAY	OTHER MATERIAL																																																																																								
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	1 - 2%	1 - 10%																																																																																								
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	3 - 5%	10 - 20%																																																																																								
MODERATELY ORGANIC	5 - 10%	12 - 20%	5 - 10%	20 - 30%																																																																																								
HIGHLY ORGANIC	10%	20%	10%	50% AND ABOVE																																																																																								
<p style="text-align: center;">TEXTURE OR GRAIN SIZE</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>U.S. STL. SIEVE SIZE (OPENING IN IN)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> <tr> <td></td> <td>4.75</td> <td>2.00</td> <td>0.425</td> <td>0.25</td> <td>0.075</td> <td>0.075</td> </tr> </table>		U.S. STL. SIEVE SIZE (OPENING IN IN)	4	10	40	60	200	270		4.75	2.00	0.425	0.25	0.075	0.075	<p style="text-align: center;">ABBREVIATIONS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>AR - ALGER REFUSAL</td> <td>HE - HELIUM</td> <td>VST - VANE SHEAR TEST</td> </tr> <tr> <td>BT - BRITISH TERMINATED</td> <td>HEC - HEAVY CLAY</td> <td>WCA - WEATHERED</td> </tr> <tr> <td>CL - CLAY</td> <td>HOB - HOMOGENEOUS</td> <td>WLT - UNIT WEIGHT</td> </tr> <tr> <td>CPT - CONE PENETRATION TEST</td> <td>HP - HIGH PLASTIC</td> <td>WRY - UNIT WEIGHT</td> </tr> <tr> <td>CS - CHANGE</td> <td>IR - IRREGULAR</td> <td></td> </tr> <tr> <td>DW - DRY WEIGHT</td> <td>IRG - IRREGULAR</td> <td></td> </tr> <tr> <td>DWT - DRY WEIGHT TEST</td> <td>IRL - IRREGULAR</td> <td></td> </tr> <tr> <td>EP - EPITHELIUM</td> <td>IRP - IRREGULAR</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>IRV - IRREGULAR</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>IRV - IRREGULAR</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>IRV - IRREGULAR</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>IRV - IRREGULAR</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>IRV - IRREGULAR</td> <td></td> </tr> </table>		AR - ALGER REFUSAL	HE - HELIUM	VST - VANE SHEAR TEST	BT - BRITISH TERMINATED	HEC - HEAVY CLAY	WCA - WEATHERED	CL - CLAY	HOB - HOMOGENEOUS	WLT - UNIT WEIGHT	CPT - CONE PENETRATION TEST	HP - HIGH PLASTIC	WRY - UNIT WEIGHT	CS - CHANGE	IR - IRREGULAR		DW - DRY WEIGHT	IRG - IRREGULAR		DWT - DRY WEIGHT TEST	IRL - IRREGULAR		EP - EPITHELIUM	IRP - IRREGULAR		F - FINE	IRV - IRREGULAR		F - FINE	IRV - IRREGULAR		F - FINE	IRV - IRREGULAR		F - FINE	IRV - IRREGULAR		F - FINE	IRV - IRREGULAR		<p style="text-align: center;">ROCK HARDNESS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>VERY HARD</td> <td>CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF 1/2" SPECIMENS REQUIRED SEVERAL HUNDRED BLOWS OF THE GEOLGIST'S PICK.</td> </tr> <tr> <td>HARD</td> <td>CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH FROM SPECIMEN.</td> </tr> <tr> <td>MODERATELY HARD</td> <td>CAN BE SCRATCHED BY KNIFE OR PICK. GRINDS OR GRINDS TO 625 TIMES DEEP CAN BE EXCAVATED BY HAND BLOW OF A GEOLGIST'S PICK. HARD SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.</td> </tr> <tr> <td>MODERATELY SOFT</td> <td>CAN BE SCRATCHED BY KNIFE OR PICK. GRINDS OR GRINDS TO 625 TIMES DEEP CAN BE EXCAVATED BY HAND BLOW OF A GEOLGIST'S PICK. HARD SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.</td> </tr> <tr> <td>SOFT</td> <td>CAN BE DRIPPED OR MOVED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS IN SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.</td> </tr> <tr> <td>VERY SOFT</td> <td>CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE DRIPPED BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.</td> </tr> </table>		VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF 1/2" SPECIMENS REQUIRED SEVERAL HUNDRED BLOWS OF THE GEOLGIST'S PICK.	HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH FROM SPECIMEN.	MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GRINDS OR GRINDS TO 625 TIMES DEEP CAN BE EXCAVATED BY HAND BLOW OF A GEOLGIST'S PICK. HARD SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.	MODERATELY SOFT	CAN BE SCRATCHED BY KNIFE OR PICK. GRINDS OR GRINDS TO 625 TIMES DEEP CAN BE EXCAVATED BY HAND BLOW OF A GEOLGIST'S PICK. HARD SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.	SOFT	CAN BE DRIPPED OR MOVED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS IN SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.	VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE DRIPPED BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																						
U.S. STL. SIEVE SIZE (OPENING IN IN)	4	10	40	60	200	270																																																																																						
	4.75	2.00	0.425	0.25	0.075	0.075																																																																																						
AR - ALGER REFUSAL	HE - HELIUM	VST - VANE SHEAR TEST																																																																																										
BT - BRITISH TERMINATED	HEC - HEAVY CLAY	WCA - WEATHERED																																																																																										
CL - CLAY	HOB - HOMOGENEOUS	WLT - UNIT WEIGHT																																																																																										
CPT - CONE PENETRATION TEST	HP - HIGH PLASTIC	WRY - UNIT WEIGHT																																																																																										
CS - CHANGE	IR - IRREGULAR																																																																																											
DW - DRY WEIGHT	IRG - IRREGULAR																																																																																											
DWT - DRY WEIGHT TEST	IRL - IRREGULAR																																																																																											
EP - EPITHELIUM	IRP - IRREGULAR																																																																																											
F - FINE	IRV - IRREGULAR																																																																																											
F - FINE	IRV - IRREGULAR																																																																																											
F - FINE	IRV - IRREGULAR																																																																																											
F - FINE	IRV - IRREGULAR																																																																																											
F - FINE	IRV - IRREGULAR																																																																																											
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF 1/2" SPECIMENS REQUIRED SEVERAL HUNDRED BLOWS OF THE GEOLGIST'S PICK.																																																																																											
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH FROM SPECIMEN.																																																																																											
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GRINDS OR GRINDS TO 625 TIMES DEEP CAN BE EXCAVATED BY HAND BLOW OF A GEOLGIST'S PICK. HARD SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.																																																																																											
MODERATELY SOFT	CAN BE SCRATCHED BY KNIFE OR PICK. GRINDS OR GRINDS TO 625 TIMES DEEP CAN BE EXCAVATED BY HAND BLOW OF A GEOLGIST'S PICK. HARD SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.																																																																																											
SOFT	CAN BE DRIPPED OR MOVED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS IN SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.																																																																																											
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE DRIPPED BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																																																																																											
<p style="text-align: center;">SOIL MOISTURE - CORRELATION OF TERMS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>CAUSE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td rowspan="2">LL - LIQUID LIMIT</td> <td rowspan="2">SATURATED (SAT)</td> <td>USUALLY LIQUID; VERY WET; USUALLY FORM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>SEMI-SATURATED; BEING TRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td rowspan="2">PL - PLASTIC LIMIT</td> <td rowspan="2">MOIST (M)</td> <td>SOLID AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td rowspan="2">SH - SHRINKAGE LIMIT</td> <td rowspan="2">DRY (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>		SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	CAUSE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT	SATURATED (SAT)	USUALLY LIQUID; VERY WET; USUALLY FORM BELOW THE GROUND WATER TABLE	SEMI-SATURATED; BEING TRYING TO ATTAIN OPTIMUM MOISTURE	PL - PLASTIC LIMIT	MOIST (M)	SOLID AT OR NEAR OPTIMUM MOISTURE	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	SH - SHRINKAGE LIMIT	DRY (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<p style="text-align: center;">EQUIPMENT USED ON SUBJECT PROJECT</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>DRILL UNITS</th> <th>ADVANCING TOOL</th> <th>HAMMER TYPE</th> </tr> <tr> <td><input type="checkbox"/> HABLE 2-</td> <td><input type="checkbox"/> CLAY BITS</td> <td><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</td> </tr> <tr> <td><input type="checkbox"/> H-51</td> <td><input type="checkbox"/> CONTINUOUS FLIGHT AUGER</td> <td><input type="checkbox"/> 10</td> </tr> <tr> <td><input type="checkbox"/> H-52</td> <td><input type="checkbox"/> BIRKBECK AUGERS</td> <td><input type="checkbox"/> 10</td> </tr> <tr> <td><input type="checkbox"/> H-53</td> <td><input type="checkbox"/> HAND FACED FINGER BITS</td> <td><input type="checkbox"/> 10</td> </tr> <tr> <td><input type="checkbox"/> H-54</td> <td><input type="checkbox"/> TUNG-CARBIDE INSERTS</td> <td><input type="checkbox"/> 10</td> </tr> <tr> <td><input checked="" type="checkbox"/> H-55</td> <td><input checked="" type="checkbox"/> CASING W/ ADVANCER</td> <td><input type="checkbox"/> 10</td> </tr> <tr> <td><input type="checkbox"/> PORTABLE MOIST</td> <td><input checked="" type="checkbox"/> TUNG-CARBIDE W/ STEEL TEETH</td> <td><input type="checkbox"/> 10</td> </tr> <tr> <td></td> <td><input type="checkbox"/> TUNG-CARBIDE</td> <td><input type="checkbox"/> 10</td> </tr> <tr> <td></td> <td><input type="checkbox"/> CONE BIT</td> <td><input type="checkbox"/> 10</td> </tr> </table>		DRILL UNITS	ADVANCING TOOL	HAMMER TYPE	<input type="checkbox"/> HABLE 2-	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input type="checkbox"/> H-51	<input type="checkbox"/> CONTINUOUS FLIGHT AUGER	<input type="checkbox"/> 10	<input type="checkbox"/> H-52	<input type="checkbox"/> BIRKBECK AUGERS	<input type="checkbox"/> 10	<input type="checkbox"/> H-53	<input type="checkbox"/> HAND FACED FINGER BITS	<input type="checkbox"/> 10	<input type="checkbox"/> H-54	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> 10	<input checked="" type="checkbox"/> H-55	<input checked="" type="checkbox"/> CASING W/ ADVANCER	<input type="checkbox"/> 10	<input type="checkbox"/> PORTABLE MOIST	<input checked="" type="checkbox"/> TUNG-CARBIDE W/ STEEL TEETH	<input type="checkbox"/> 10		<input type="checkbox"/> TUNG-CARBIDE	<input type="checkbox"/> 10		<input type="checkbox"/> CONE BIT	<input type="checkbox"/> 10	<p style="text-align: center;">FRACTURE SPACING</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>TERM</th> <th>SPACING</th> <th>THICKNESS</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> <td>2 - 4 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> <td>THINLY BEDDED</td> </tr> <tr> <td>CLOSE</td> <td>8/16 TO 1 FEET</td> <td>VERY THINLY BEDDED</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 8/16 FEET</td> <td>THICKLY LAMINATED</td> </tr> <tr> <td></td> <td></td> <td>< 0.000 FEET</td> </tr> </table> <p style="text-align: center;">INDURATION</p> <p>FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY COHERING, HEAT, PRESSURE, ETC. RUBBER WITH FINGER FRIES NUMEROUS DRAINS. BENTLE BLOW BY HAMMER REINTEGRATES SAMPLE.</p> <p>FRAGILE - GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBES. BRICKS EASILY WHEN HIT WITH HAMMER.</p> <p>MODERATELY INDURATED - GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBES. DIFFICULT TO BREAK WITH HAMMER.</p> <p>INDURATED - SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLES. SAMPLE BREAKS ACROSS GRAINS.</p> <p>EXTREMELY INDURATED - SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLES. SAMPLE BREAKS ACROSS GRAINS.</p>		TERM	SPACING	THICKNESS	VERY WIDE	MORE THAN 10 FEET	2 - 4 FEET	WIDE	3 TO 10 FEET	1.5 - 4 FEET	MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	CLOSE	8/16 TO 1 FEET	VERY THINLY BEDDED	VERY CLOSE	LESS THAN 8/16 FEET	THICKLY LAMINATED			< 0.000 FEET																						
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	CAUSE FOR FIELD MOISTURE DESCRIPTION																																																																																										
LL - LIQUID LIMIT	SATURATED (SAT)	USUALLY LIQUID; VERY WET; USUALLY FORM BELOW THE GROUND WATER TABLE																																																																																										
		SEMI-SATURATED; BEING TRYING TO ATTAIN OPTIMUM MOISTURE																																																																																										
PL - PLASTIC LIMIT	MOIST (M)	SOLID AT OR NEAR OPTIMUM MOISTURE																																																																																										
		REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																										
SH - SHRINKAGE LIMIT	DRY (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																										
		DRILL UNITS	ADVANCING TOOL	HAMMER TYPE																																																																																								
<input type="checkbox"/> HABLE 2-	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL																																																																																										
<input type="checkbox"/> H-51	<input type="checkbox"/> CONTINUOUS FLIGHT AUGER	<input type="checkbox"/> 10																																																																																										
<input type="checkbox"/> H-52	<input type="checkbox"/> BIRKBECK AUGERS	<input type="checkbox"/> 10																																																																																										
<input type="checkbox"/> H-53	<input type="checkbox"/> HAND FACED FINGER BITS	<input type="checkbox"/> 10																																																																																										
<input type="checkbox"/> H-54	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> 10																																																																																										
<input checked="" type="checkbox"/> H-55	<input checked="" type="checkbox"/> CASING W/ ADVANCER	<input type="checkbox"/> 10																																																																																										
<input type="checkbox"/> PORTABLE MOIST	<input checked="" type="checkbox"/> TUNG-CARBIDE W/ STEEL TEETH	<input type="checkbox"/> 10																																																																																										
	<input type="checkbox"/> TUNG-CARBIDE	<input type="checkbox"/> 10																																																																																										
	<input type="checkbox"/> CONE BIT	<input type="checkbox"/> 10																																																																																										
TERM	SPACING	THICKNESS																																																																																										
VERY WIDE	MORE THAN 10 FEET	2 - 4 FEET																																																																																										
WIDE	3 TO 10 FEET	1.5 - 4 FEET																																																																																										
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED																																																																																										
CLOSE	8/16 TO 1 FEET	VERY THINLY BEDDED																																																																																										
VERY CLOSE	LESS THAN 8/16 FEET	THICKLY LAMINATED																																																																																										
		< 0.000 FEET																																																																																										
<p style="text-align: center;">PLASTICITY</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>NON-PLASTIC</th> <th>VERY LOW PLASTICITY</th> <th>LOW PLASTICITY</th> <th>MEDIUM PLASTICITY</th> <th>HIGH PLASTICITY</th> </tr> <tr> <td>0-5</td> <td>6-15</td> <td>16-25</td> <td>26 OR MORE</td> <td></td> </tr> </table>		NON-PLASTIC	VERY LOW PLASTICITY	LOW PLASTICITY	MEDIUM PLASTICITY	HIGH PLASTICITY	0-5	6-15	16-25	26 OR MORE		<p style="text-align: center;">COLOR</p> <p>DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW, BROWN, BLUE, GRAY). NUMBERS SUCH AS LIGHT, MEDIUM, DARK, ETC. ARE USED TO DESCRIBE APPEARANCE.</p>		<p style="text-align: right;">REVISION 09/23/09</p>																																																																														
NON-PLASTIC	VERY LOW PLASTICITY	LOW PLASTICITY	MEDIUM PLASTICITY	HIGH PLASTICITY																																																																																								
0-5	6-15	16-25	26 OR MORE																																																																																									


SKIEW = 90°

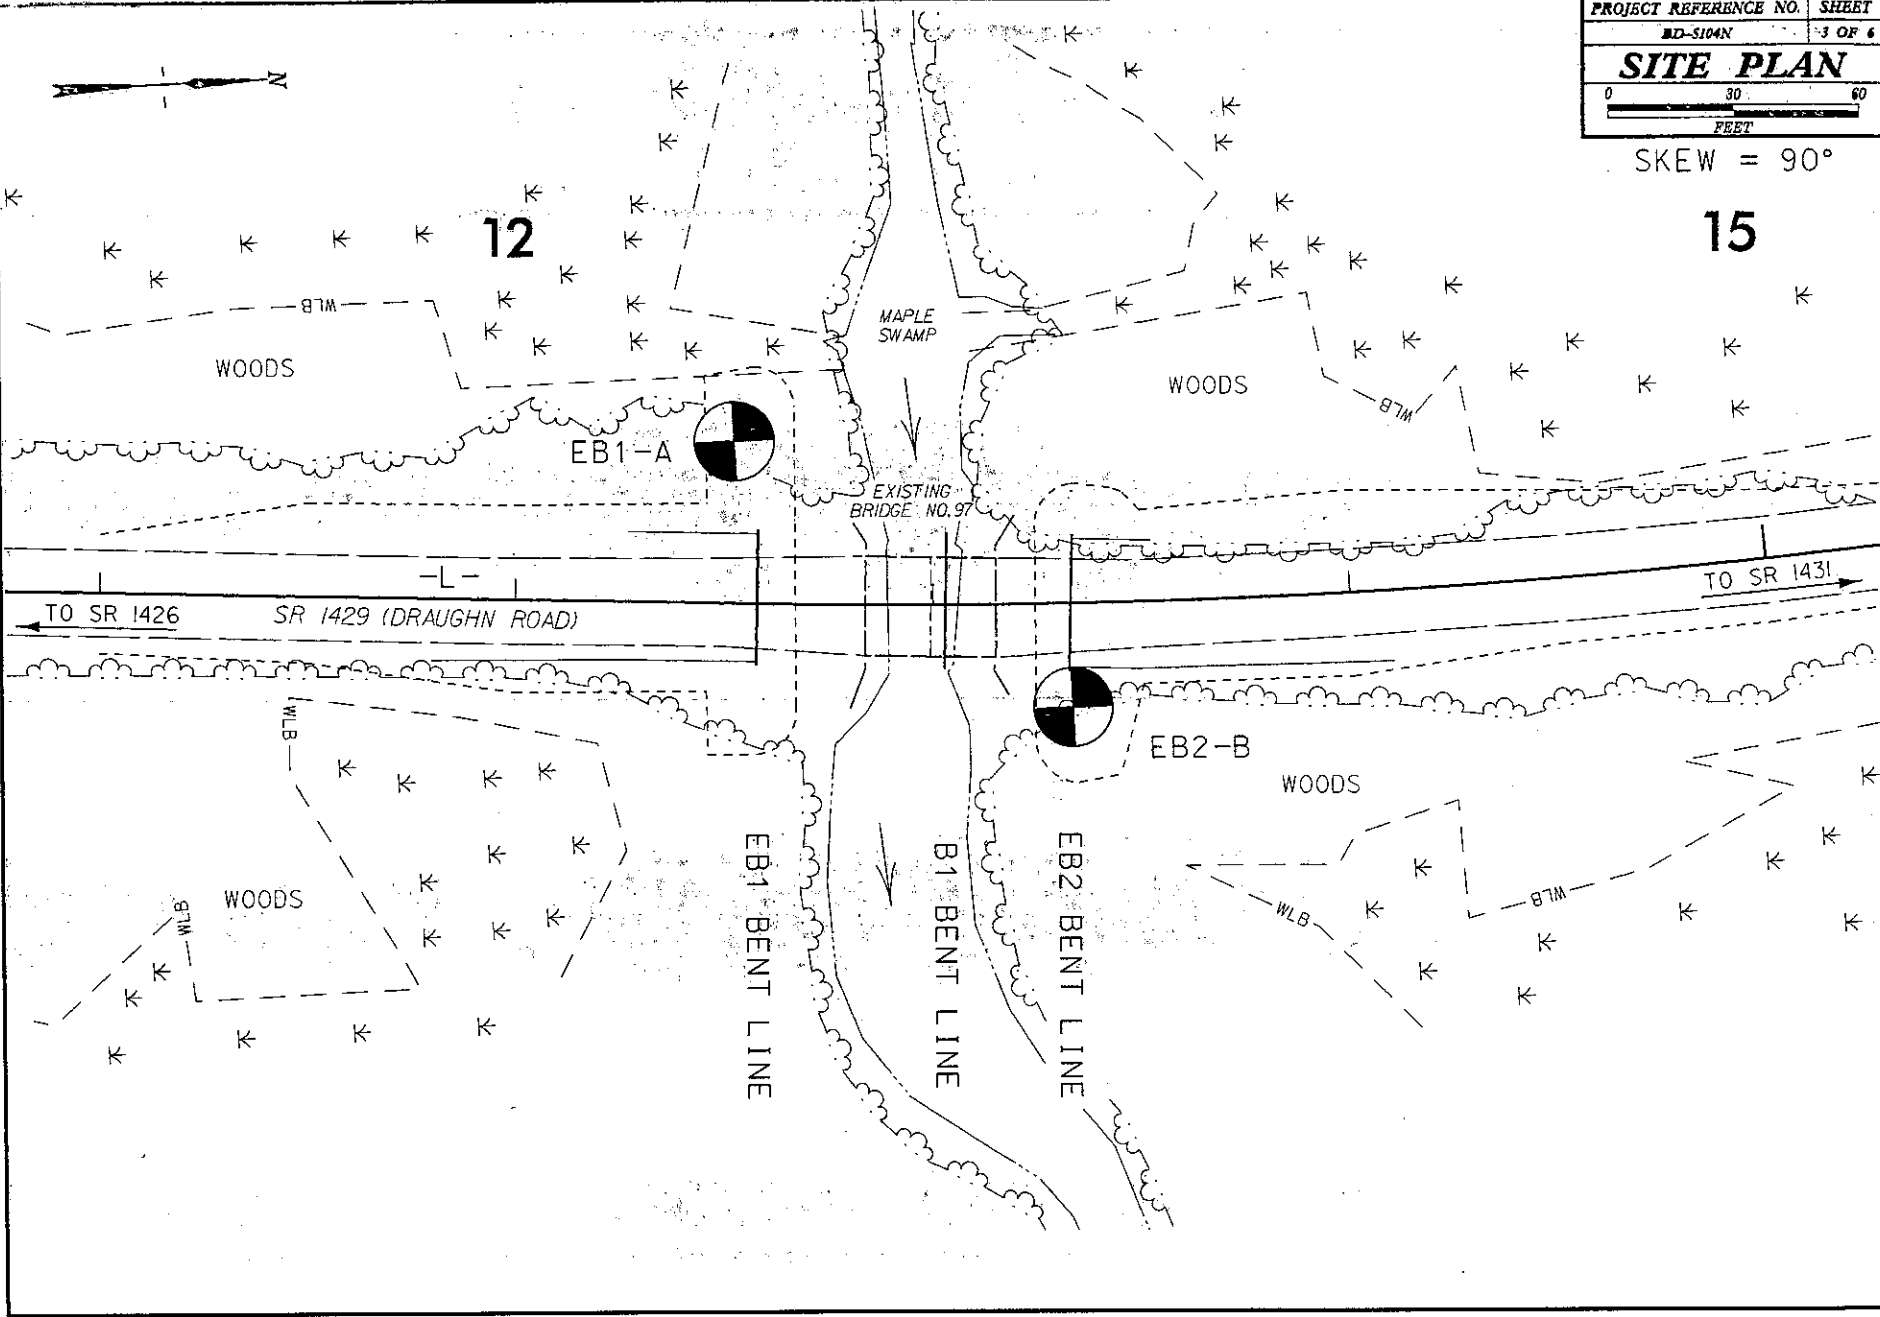

5.04483

PROFILE THROUGH BORINGS PROJECTED ALONG -L-

PROJECT REFERENCE NO. BD-5104N	SHEET NO. 4 OF 6
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
INCOMPLETE PLANS DO NOT USE FOR CONSTRUCTION	

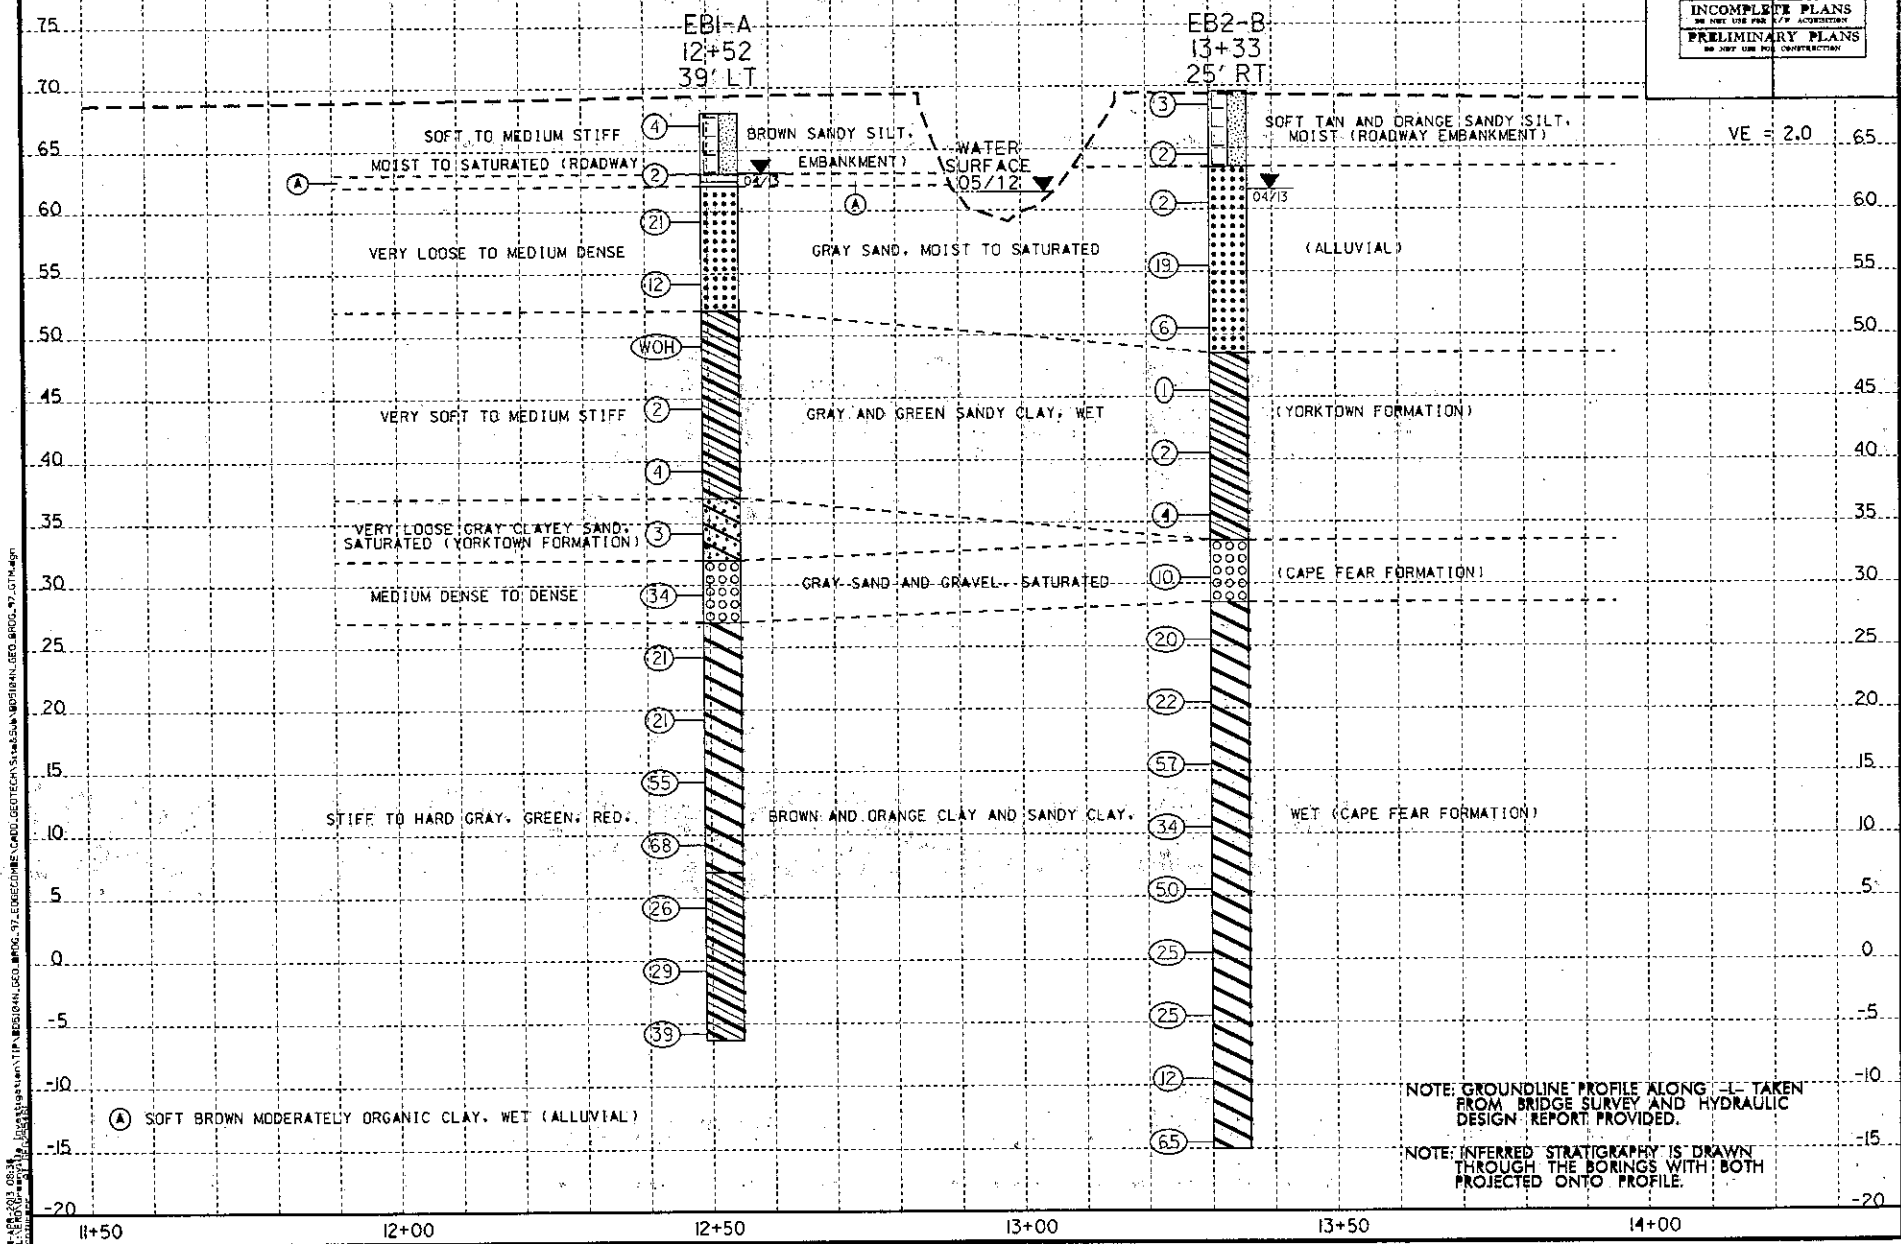

PROJECT NO. 08334
DATE: 01/20/11
DRAWN BY: JMM
CHECKED BY: JMM
SCALE: AS SHOWN
TYPICAL SECTION THROUGH BRIDGE PILES
GENERAL NOTES: ALL SOILS TO BE CLASSIFIED AND TESTED IN ACCORDANCE WITH AASHTO T 99 AND AASHTO M 293
DESIGNED BY: JMM
DATE: 01/20/11

VE = 2.0 65

NOTE: GROUNDLINE PROFILE ALONG -L- TAKEN FROM BRIDGE SURVEY AND HYDRAULIC DESIGN REPORT PROVIDED.

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO PROFILE.



NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

WBS 45350.1.15		TIP BD-5104N		COUNTY EDGECOMBE		GEOLOGIST Battems, T. C.							
SITE DESCRIPTION BRIDGE NO. 97 ON -L- (SR 1429) OVER MAPLE SWAMP							GROUND WTR (ft)						
BORING NO. EB1-A		STATION 12+52		OFFSET 39 R LT		ALIGNMENT -L-							
COLLAR ELEV. 68.0 ft		TOTAL DEPTH 74.3 ft		NORTHING 837,092		EASTING 2,423,493							
DRILL RIG/HAMMER EFF./DATE RFO0057 CME-550X 73% 01/22/2013		DRILL METHOD Mud Rotary		HAMMER TYPE Automatic									
DRILLER Smith, R. E.		START DATE 04/09/13		COMP. DATE 04/09/13		SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT				SAMP NO.	L O G	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75				
78	68.0	0.0	1	2	2							GROUND SURFACE	0.0
65	64.0	4.0	2	1	1							ROADWAY EMBANKMENT BROWN SANDY SILT, MOIST TO SATURATED	5.0
60	60.2	7.8	7	11	10							ALLUVIAL BROWN MODERATELY ORGANIC CLAY, WET	8.0
55	55.2	12.8	4	7	5							ALLUVIAL GRAY SAND, SATURATED	13.0
45	52.2	17.8	WOH	WOH	WOH							COASTAL PLAIN GRAY SANDY CLAY, WET (YORKTOWN FORMATION)	16.0
40	48.2	22.8	WOH	2	2							COASTAL PLAIN GRAY CLAYEY SAND, SATURATED (YORKTOWN FORMATION)	21.0
35	44.2	27.8	WOH	2	2							COASTAL PLAIN GRAY SAND AND GRAVEL, SATURATED (CAPE FEAR FORMATION)	26.0
30	40.2	32.8	11	17	17							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	31.0
25	36.2	37.8	6	10	11							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	36.0
20	32.2	42.8	6	10	11							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	41.0
15	28.2	47.8	6	10	11							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	46.0
10	24.2	52.8	15	21	34							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	51.0
5	20.2	57.8	28	32	36							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	56.0
0	16.2	62.8	11	13	13							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	61.0
-5	12.2	67.8	18	14	15							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	66.0
-10	8.2	72.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	71.0
-15	4.2	77.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	76.0
-20	0.2	82.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	81.0
-25	-3.8	87.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	86.0
-30	-7.8	92.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	91.0
-35	-11.8	97.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	96.0
-40	-15.8	102.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	101.0
-45	-19.8	107.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	106.0
-50	-23.8	112.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	111.0
-55	-27.8	117.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	116.0
-60	-31.8	122.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	121.0
-65	-35.8	127.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	126.0
-70	-39.8	132.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	131.0
-74.3	-43.8	137.8	18	14	25							COASTAL PLAIN GRAY, GREEN, RED AND BROWN CLAY AND SANDY CLAY, WET (CAPE FEAR FORMATION)	136.0

NCDOT BORE LOG FILE: BD-5104N_GED_BROG.GPJ NC DOT.GDT 4/11/13

Boring Terminated at Elevation -8.3 ft in Hard Clay

NC DOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

WBS 45350.115	TIP BD-5104N	COUNTY EDGECOMBE	GEOLOGIST Wyke, C. M.	GROUND WTR (ft)									
SITE DESCRIPTION BRIDGE NO. 97 ON L-L (SR 1429) OVER MAPLE SWAMP													
BORING NO. EB2-B	STATION 13+33	OFFSET - 25 FT	ALIGNMENT - L	HR. N/A									
COLLAR ELEV. 69.5 ft	TOTAL DEPTH 54.5 ft	NORTHING 837,170	EASTING 2,423,561	24 HR. 7.9									
DRILL RIGHAMMER EFF./DATE RFO0057 CME-550X 73% 01/22/2013		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic										
DRILLER Smith, R. E.	START DATE 04/08/13	COMP. DATE 04/08/13	SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT				SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75				
70	69.5	0.0	WOH	1	2								69.5
65	65.5	4.0		1	1	1							63.5
60	61.5	8.0	WOH	WOH	2								
55	58.5	13.0		8	10	9							
50	51.5	18.0		3	2	4							
45	46.5	23.0	WOH	WOH	1								
40	41.5	28.0	WOH	WOH	2								
35	36.5	33.0		1	2	2							
30	31.5	38.0		3	6	4							
25	28.5	43.0		4	5	15							
20	21.5	48.0		8	9	13							
15	16.5	53.0		17	31	26							
10	11.5	58.0		8	12	22							
5	6.5	63.0		12	21	28							
0	1.5	68.0		7	18	15							
-5	-3.5	73.0		4	12	13							
-10	-8.5	78.0		5	6	6							

WBS 45350.115	TIP BD-5104N	COUNTY EDGECOMBE	GEOLOGIST Wyke, C. M.	GROUND WTR (ft)									
SITE DESCRIPTION BRIDGE NO. 97 ON L-L (SR 1429) OVER MAPLE SWAMP													
BORING NO. EB2-B	STATION 13+33	OFFSET - 25 FT	ALIGNMENT - L	HR. N/A									
COLLAR ELEV. 69.5 ft	TOTAL DEPTH 54.5 ft	NORTHING 837,170	EASTING 2,423,561	24 HR. 7.9									
DRILL RIGHAMMER EFF./DATE RFO0057 CME-550X 73% 01/22/2013		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic										
DRILLER Smith, R. E.	START DATE 04/08/13	COMP. DATE 04/08/13	SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT				SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)
			0.5ft	0.5ft	0.5ft	0	25	50	75				
-18													
-16	-13.5	83.0		25	42	23							84.5

NC DOT MORE DOUBLE, 80-SUMN, GEO, BRDG, GP, INC, DOT, GOT, 4/11/13