NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

NOTE:
PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE – B AND TEMPORARY ROCK SILT CHECKS TYPE – A AT DRAINAGE OUTLETS.

DETAIL 1
SPECIAL CUT DITCH
(Not to Scale)



FROM STA. 28+00 TO STA. 34+00 –Y– LT
FROM STA. 28+28 TO STA. 34+50 –Y– RT
FROM STA. 14+00 TO STA. 19+00 –Y1– LT
FROM STA. 14+50 TO STA. 18+00 –Y1– RT
FROM STA. 36+00 TO STA. 45+50 –Y– RT

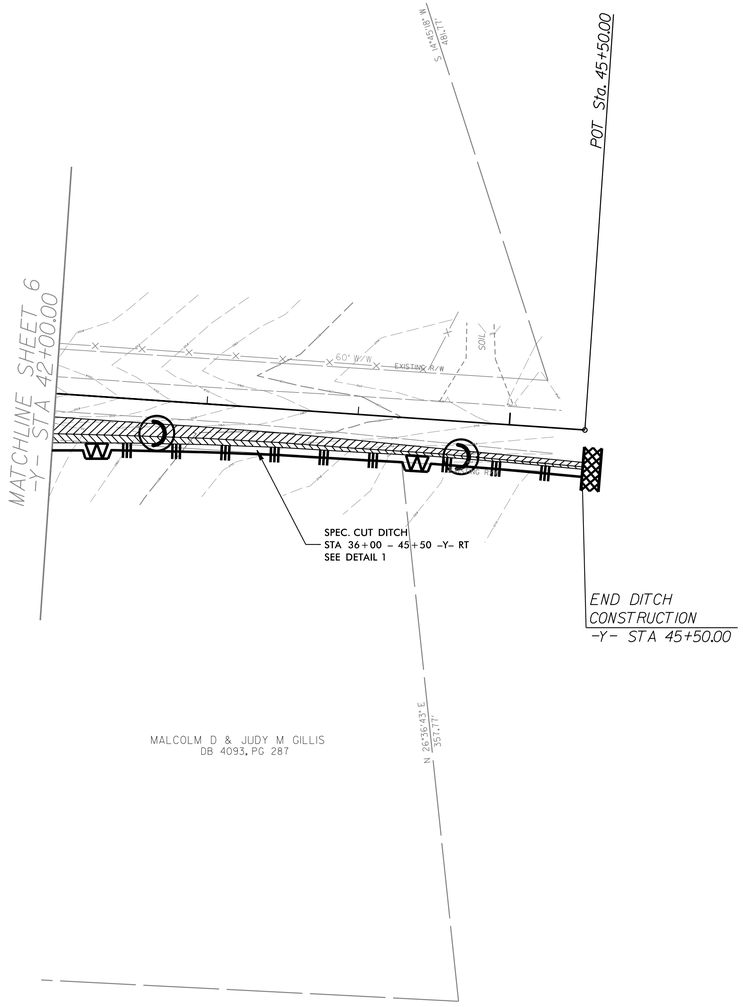

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 08

PROJECT REFERENCE NO.	SHEET NO.
W-5206Z	EC-08/CONST.08
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER