


.....


.....


.....

.....

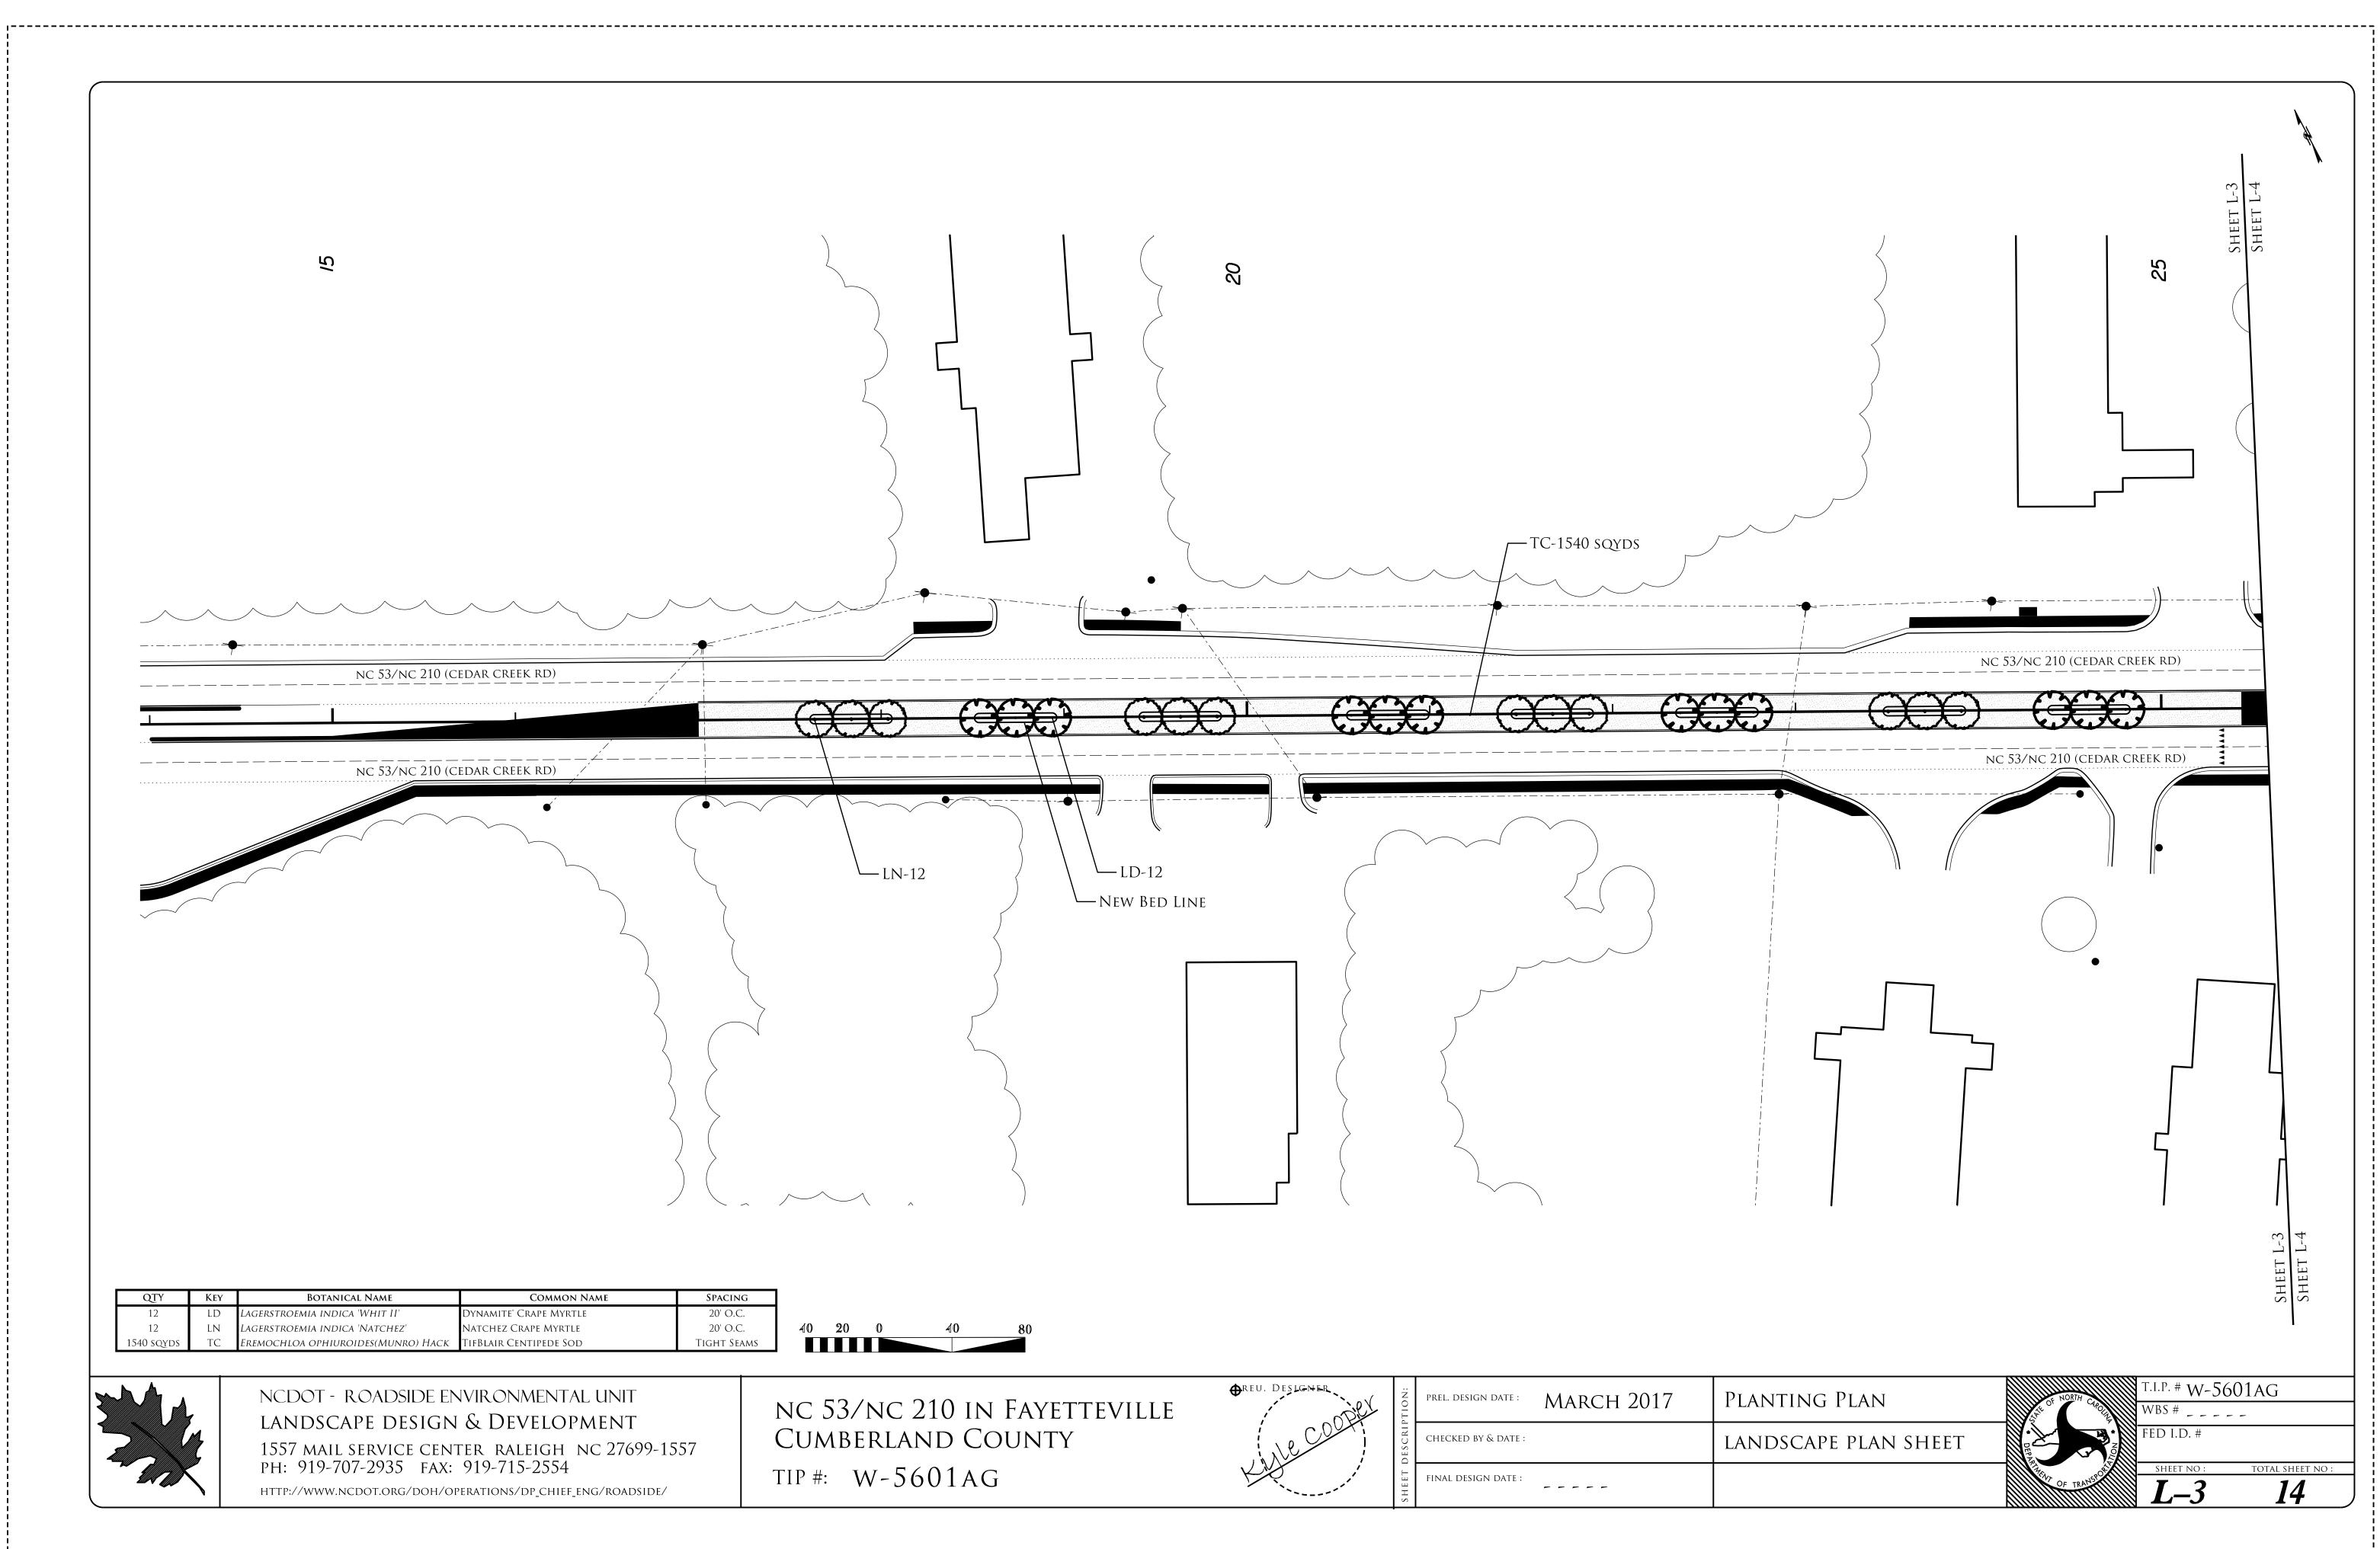


	2	TC-1540 SQYDS	
EXAMPLE AND ADDRESS AND ADDRES			
53/nc 210 in Fayetteville Aberland County	ODDESLGNER	PREL. DESIGN DATE : MARCH 2017 CHECKED BY & DATE :	PI LA
W-5601AG			

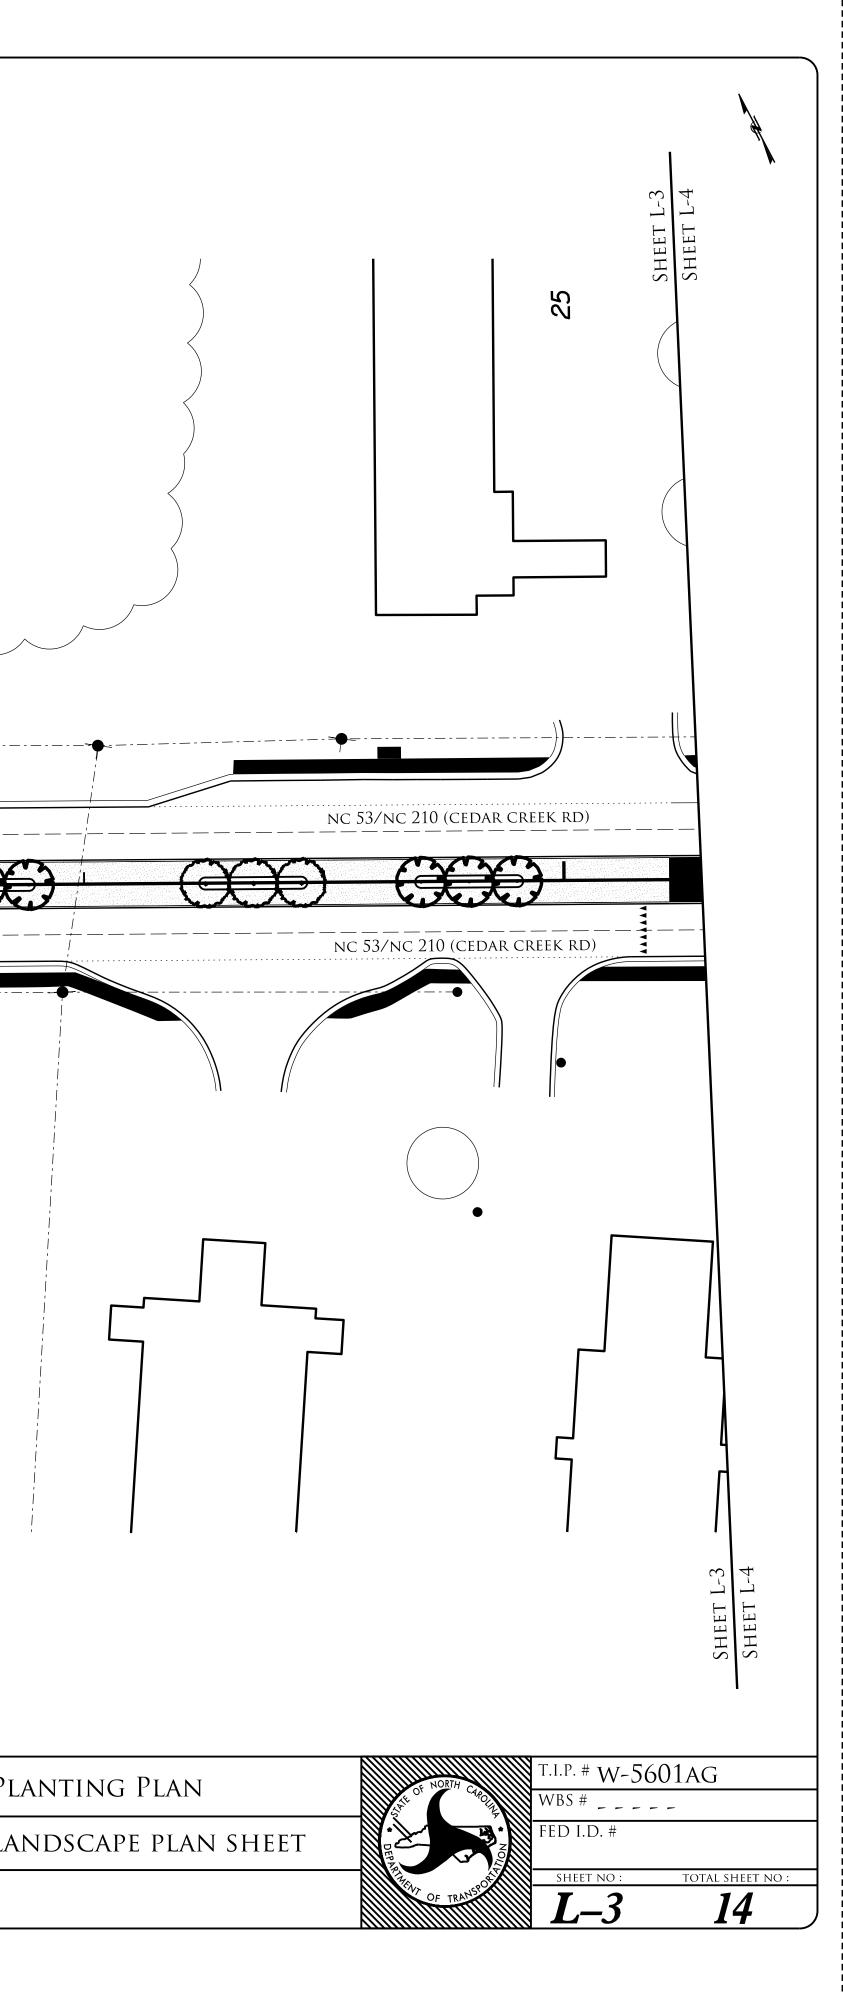


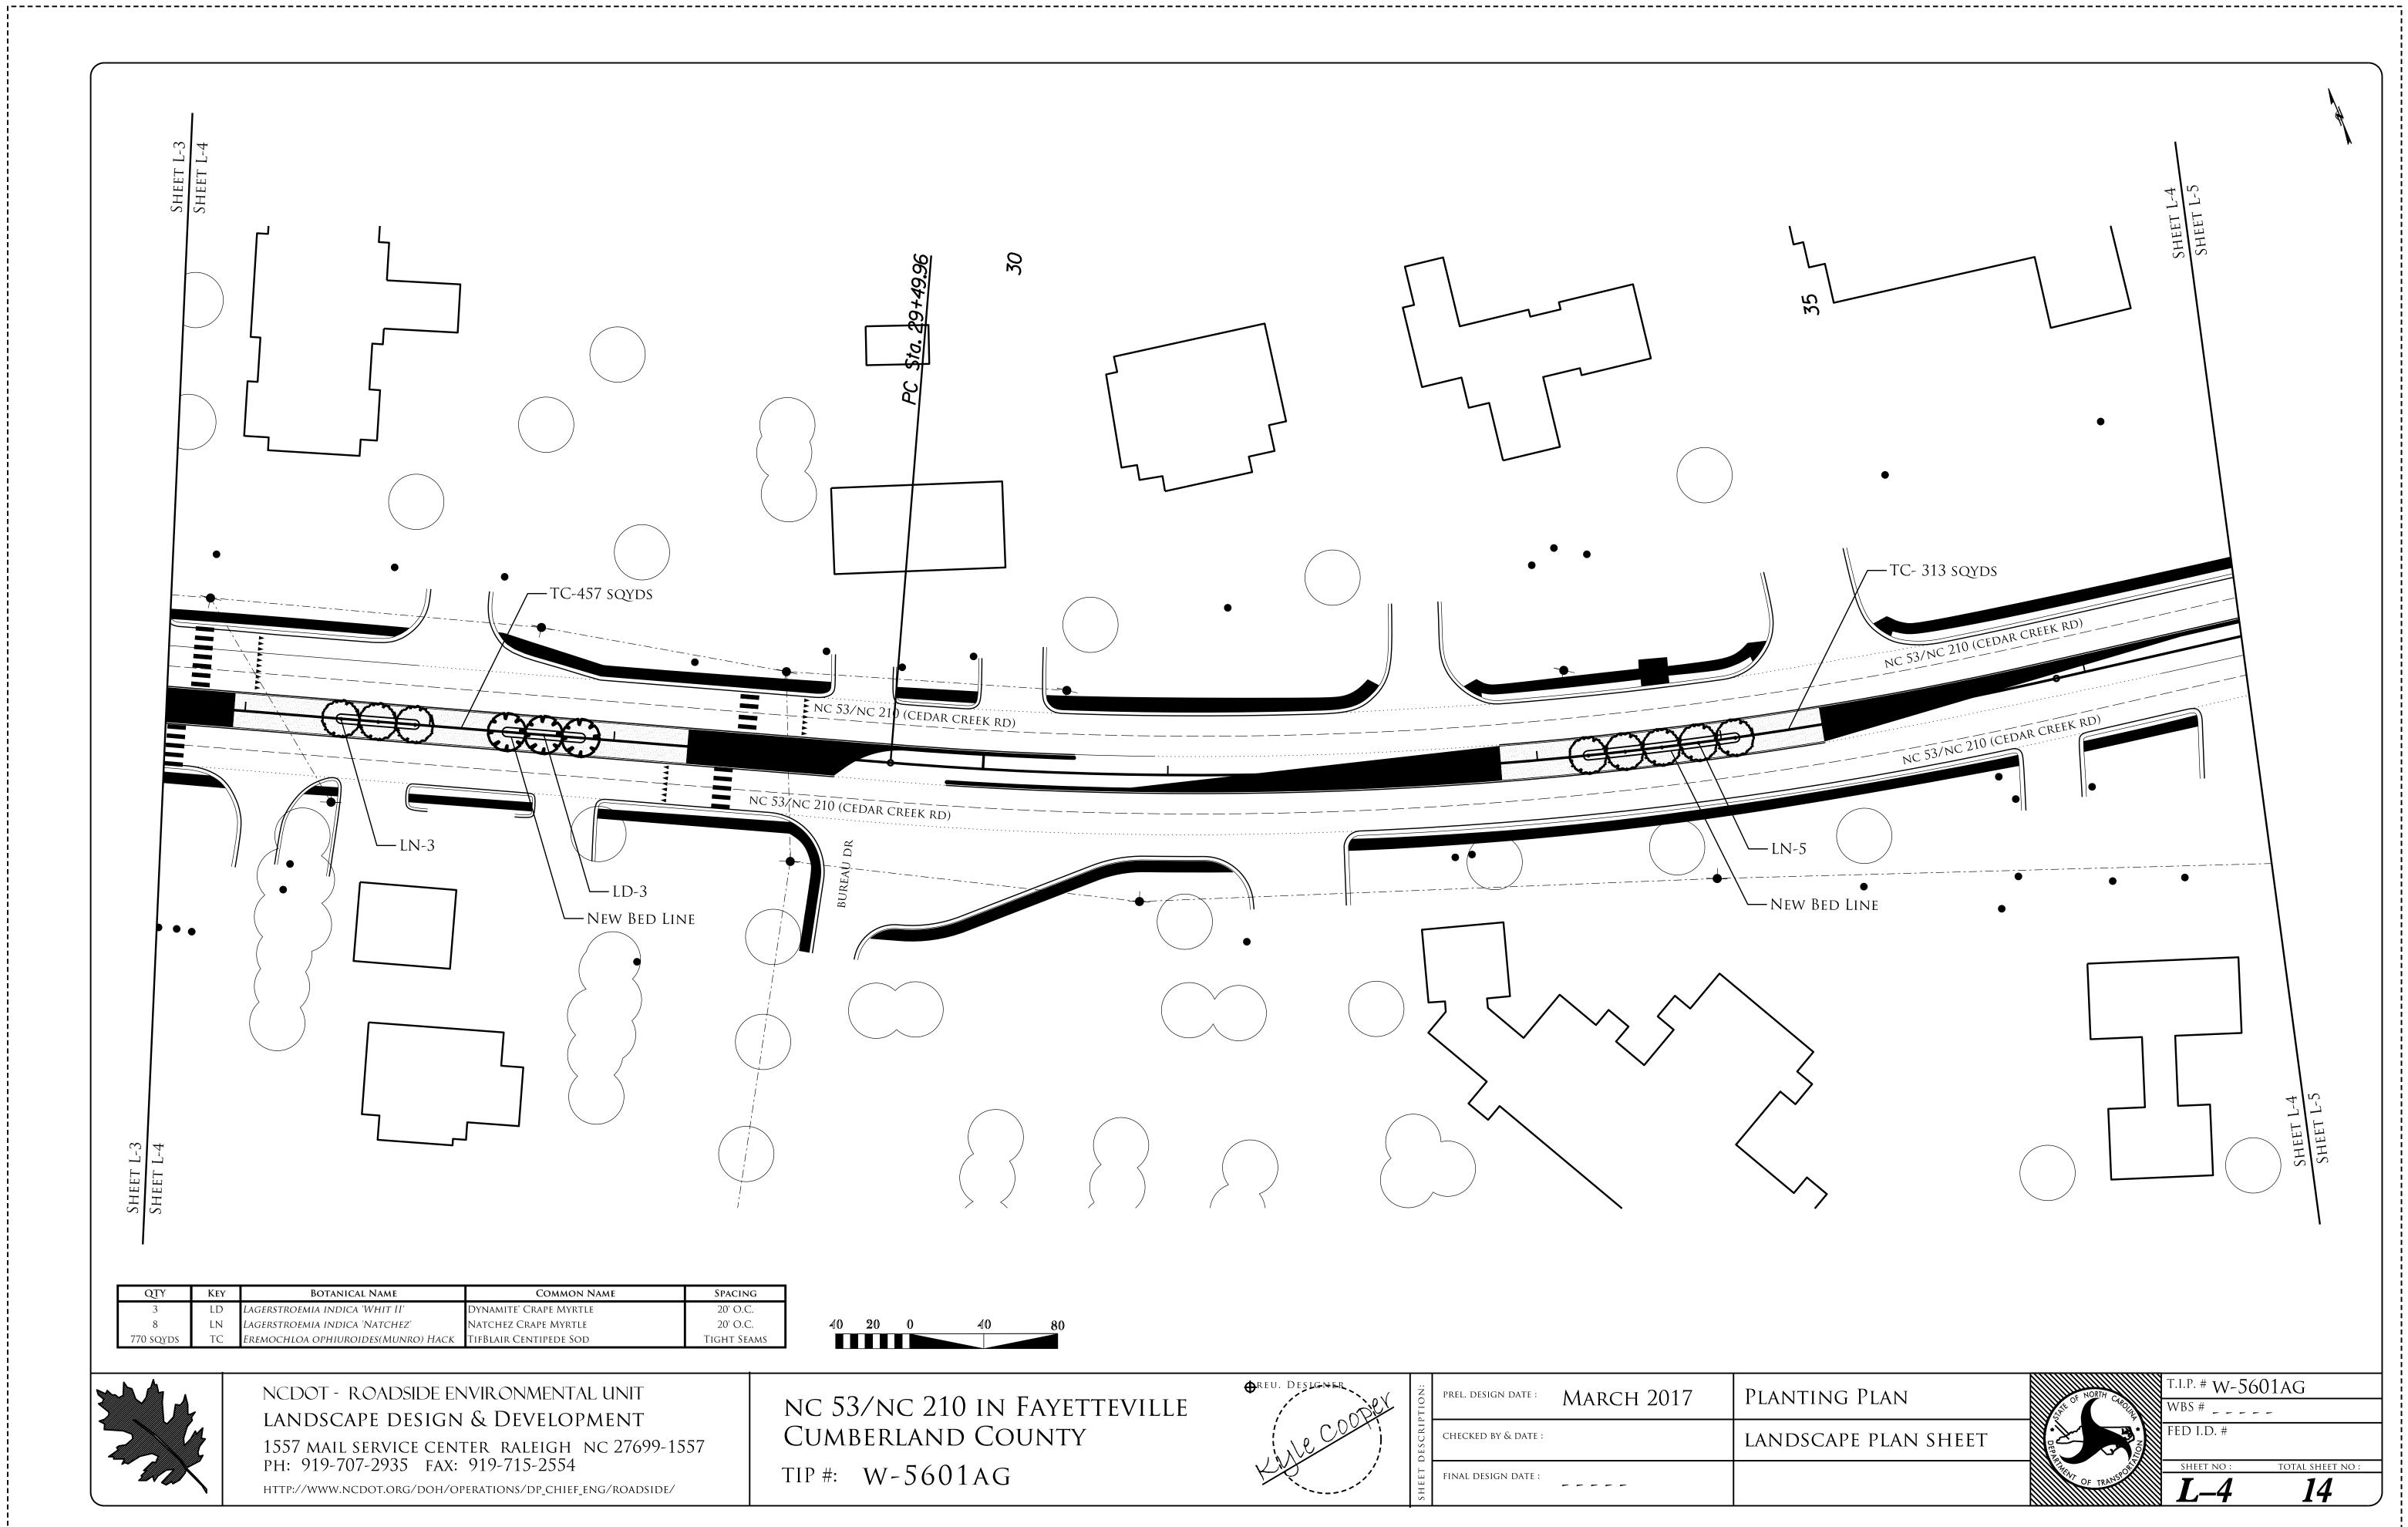


PC \$10. 29+49.96		
53/NC 21) (CEDAR CREEK RD)		

HREU. DESLGNER March 2017 PREL. DESIGN DATE : NC 53/NC 210 IN FAYETTEVILLE CUMBERLAND COUNTY CHECKED BY & DATE : TIP #: W-5601AG FINAL DESIGN DATE : - - - - -

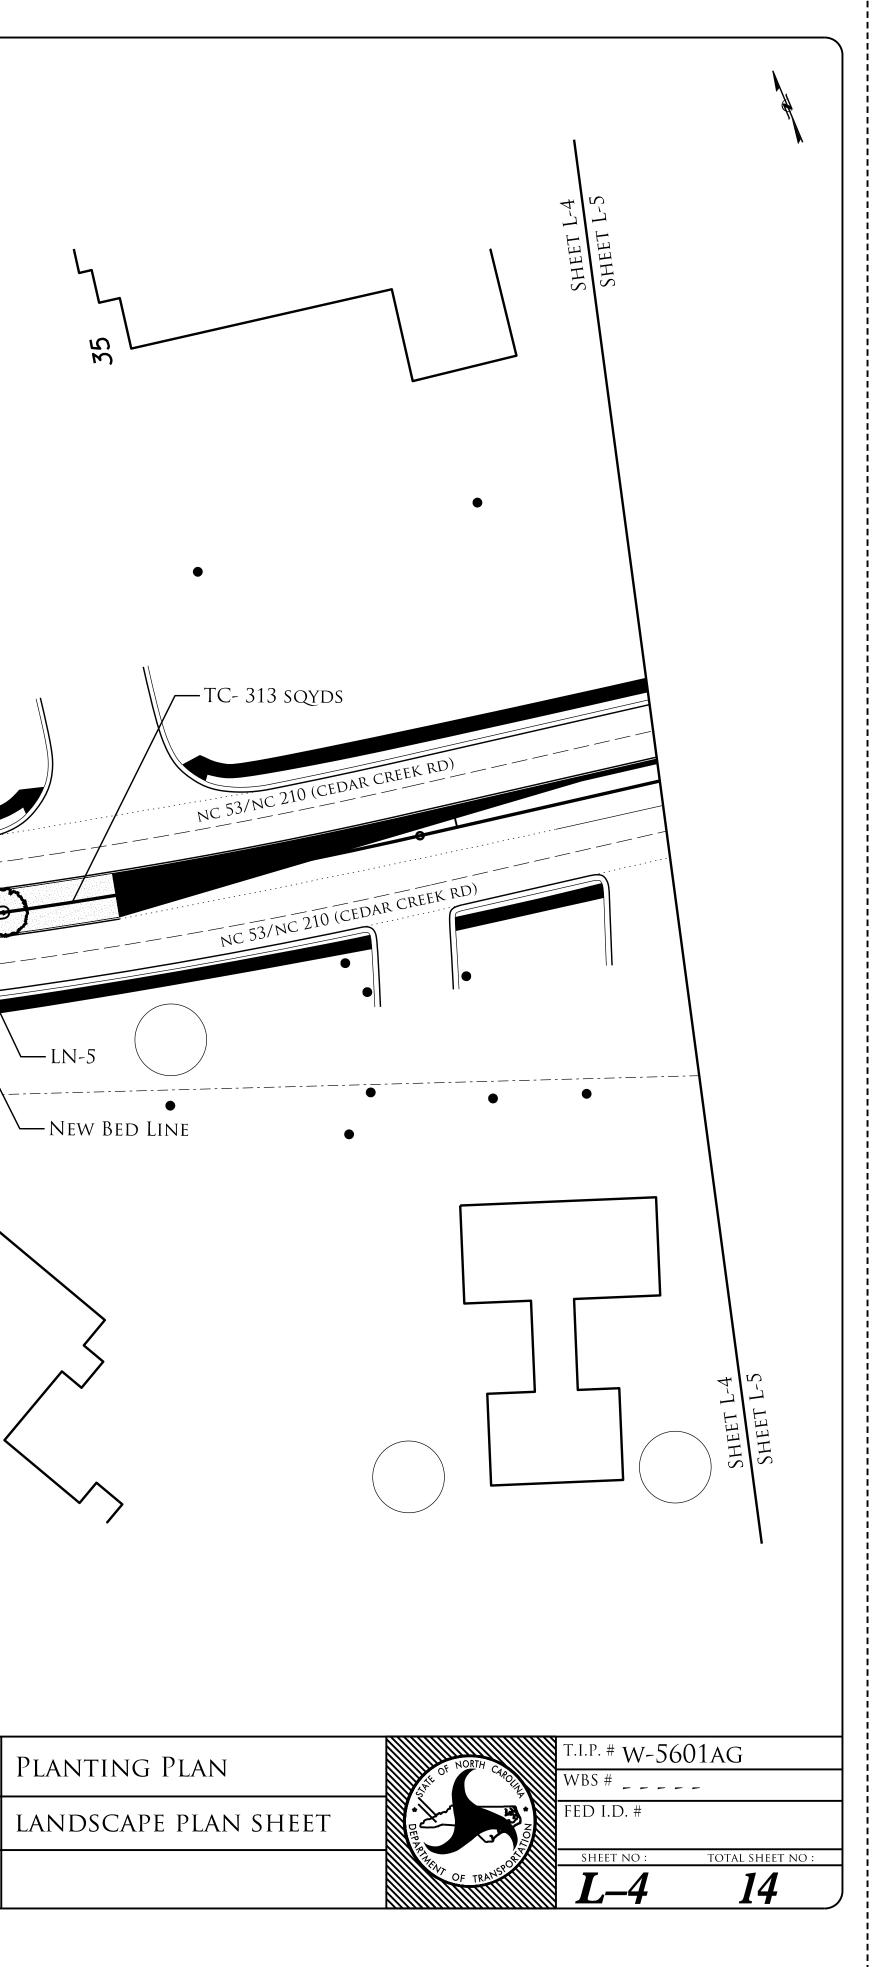

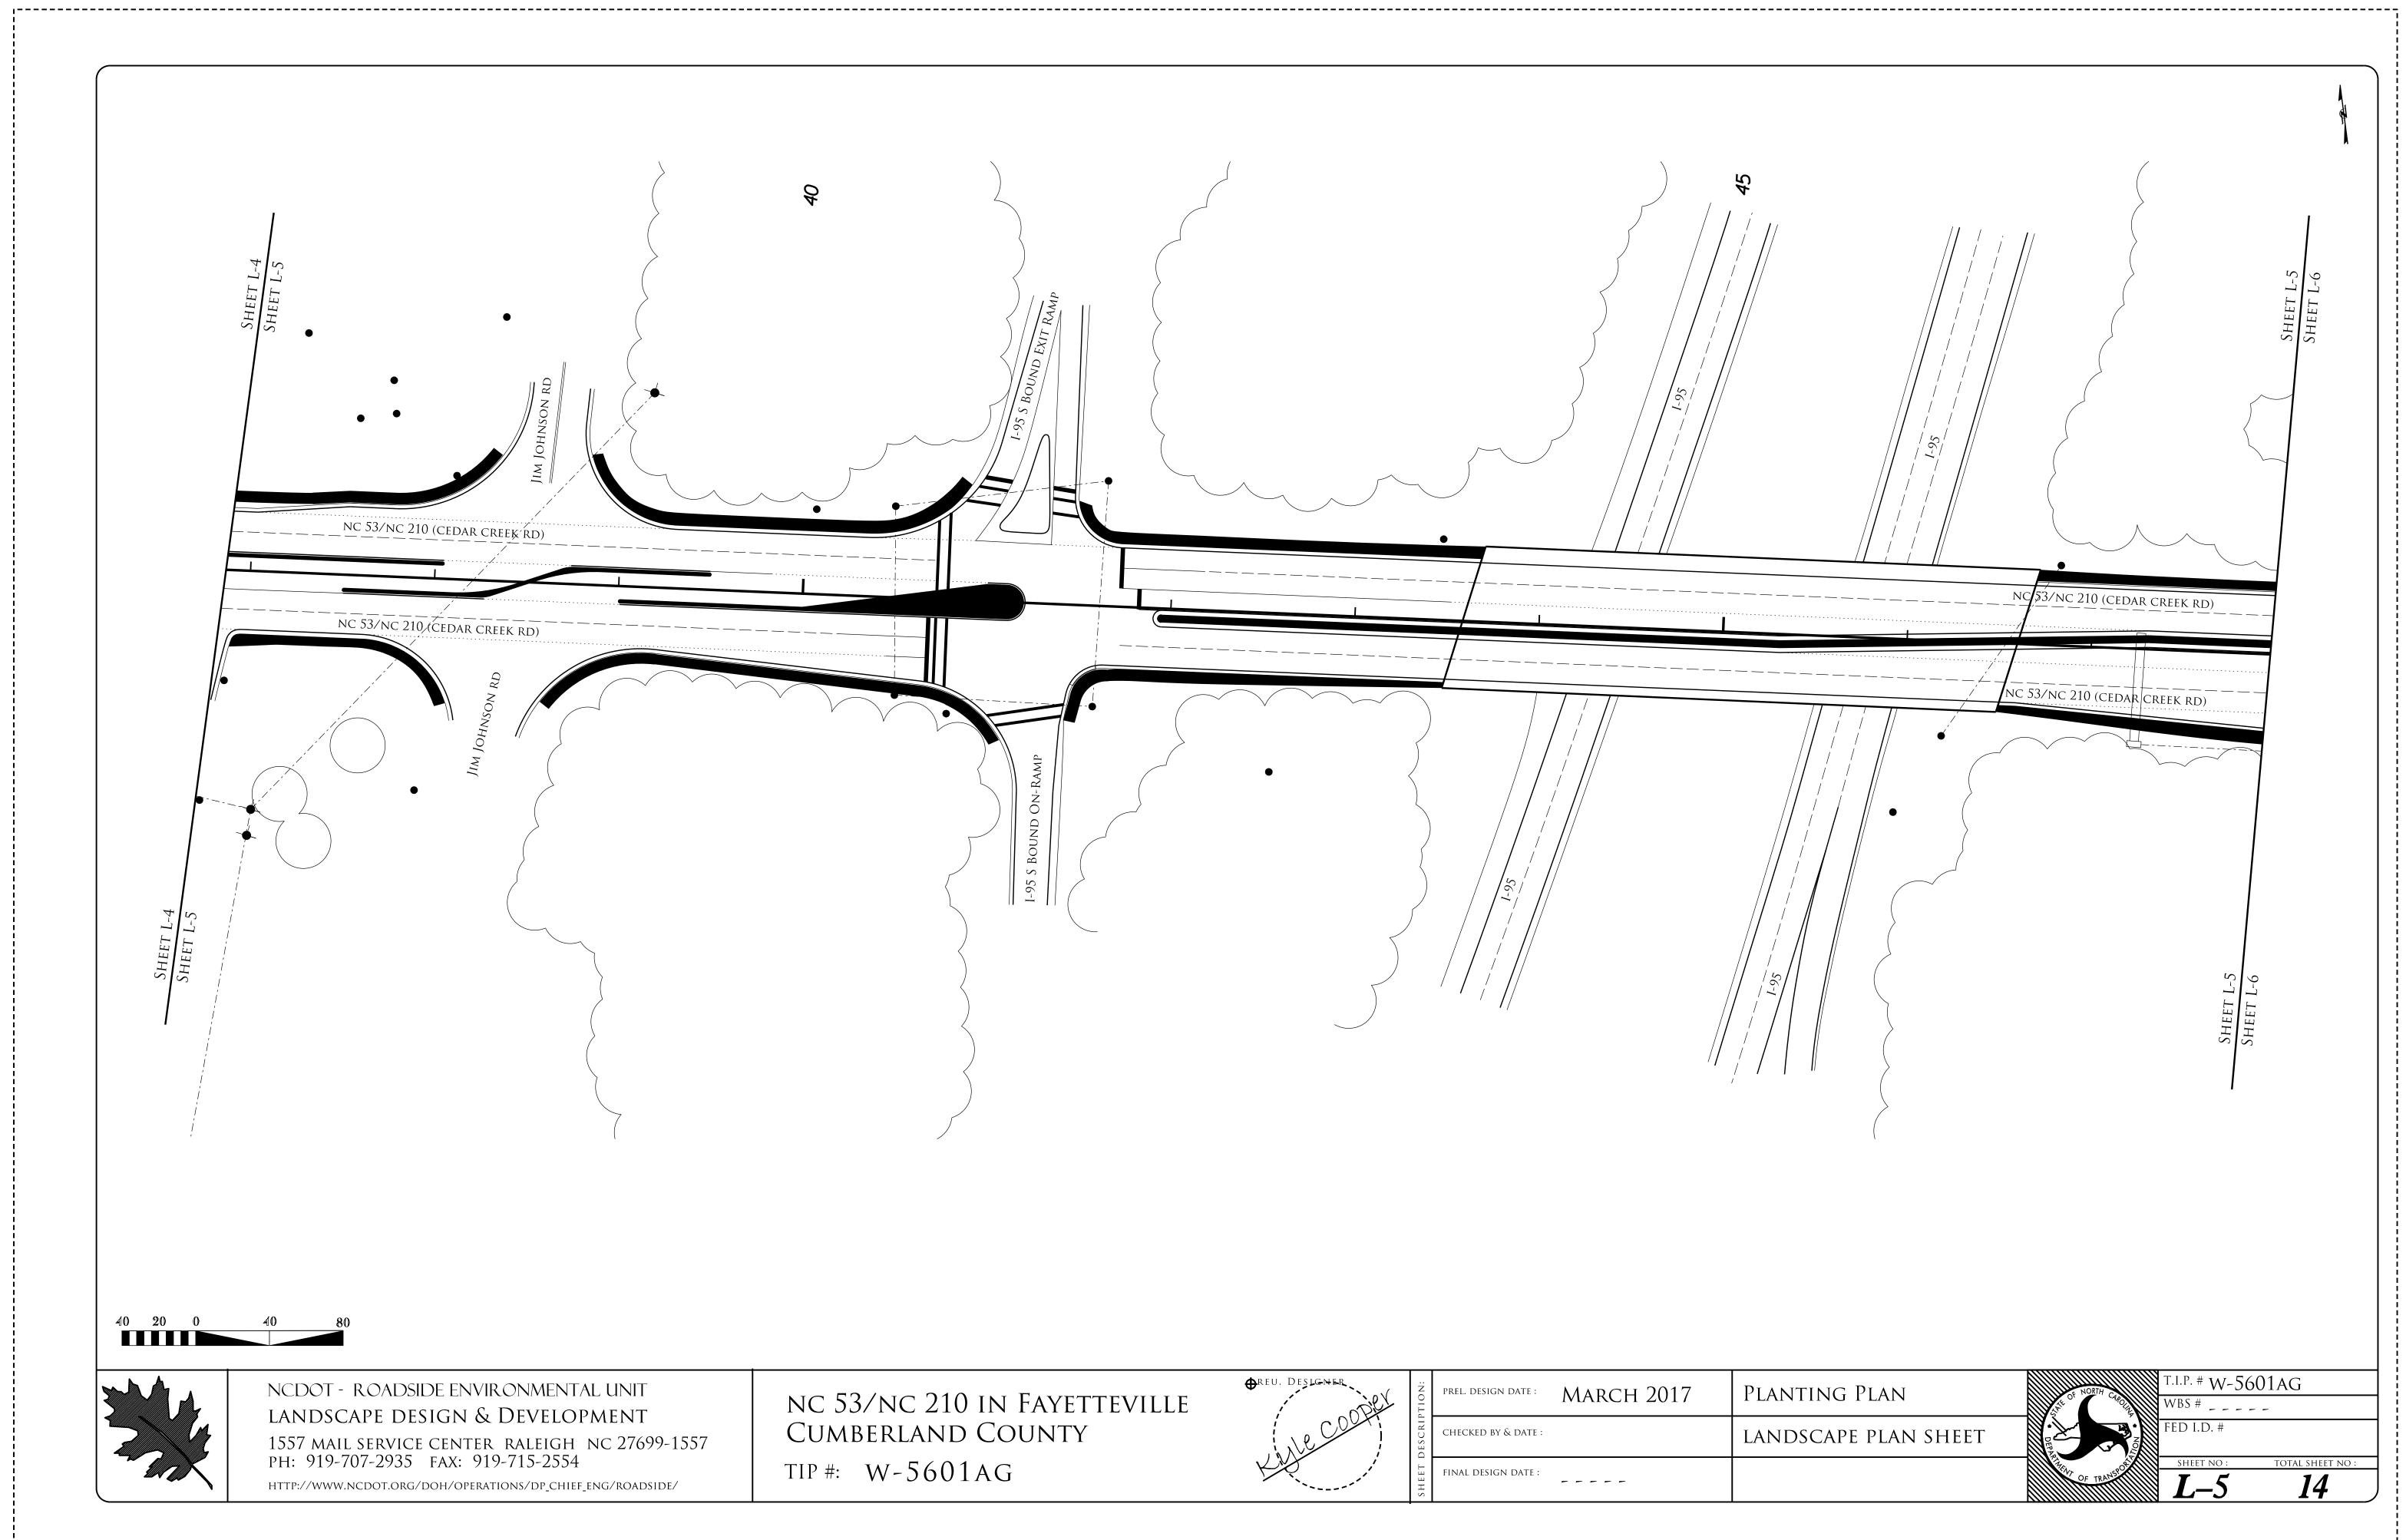


'nc 210 in Fayetteville	OPENER	PTION:	prel. design date : MARCH 2017	P P
erland County	L'ACOUT	DESCRI	CHECKED BY & DATE :	LA
W-5601AG		SHEET I	FINAL DESIGN DATE :	
		-		

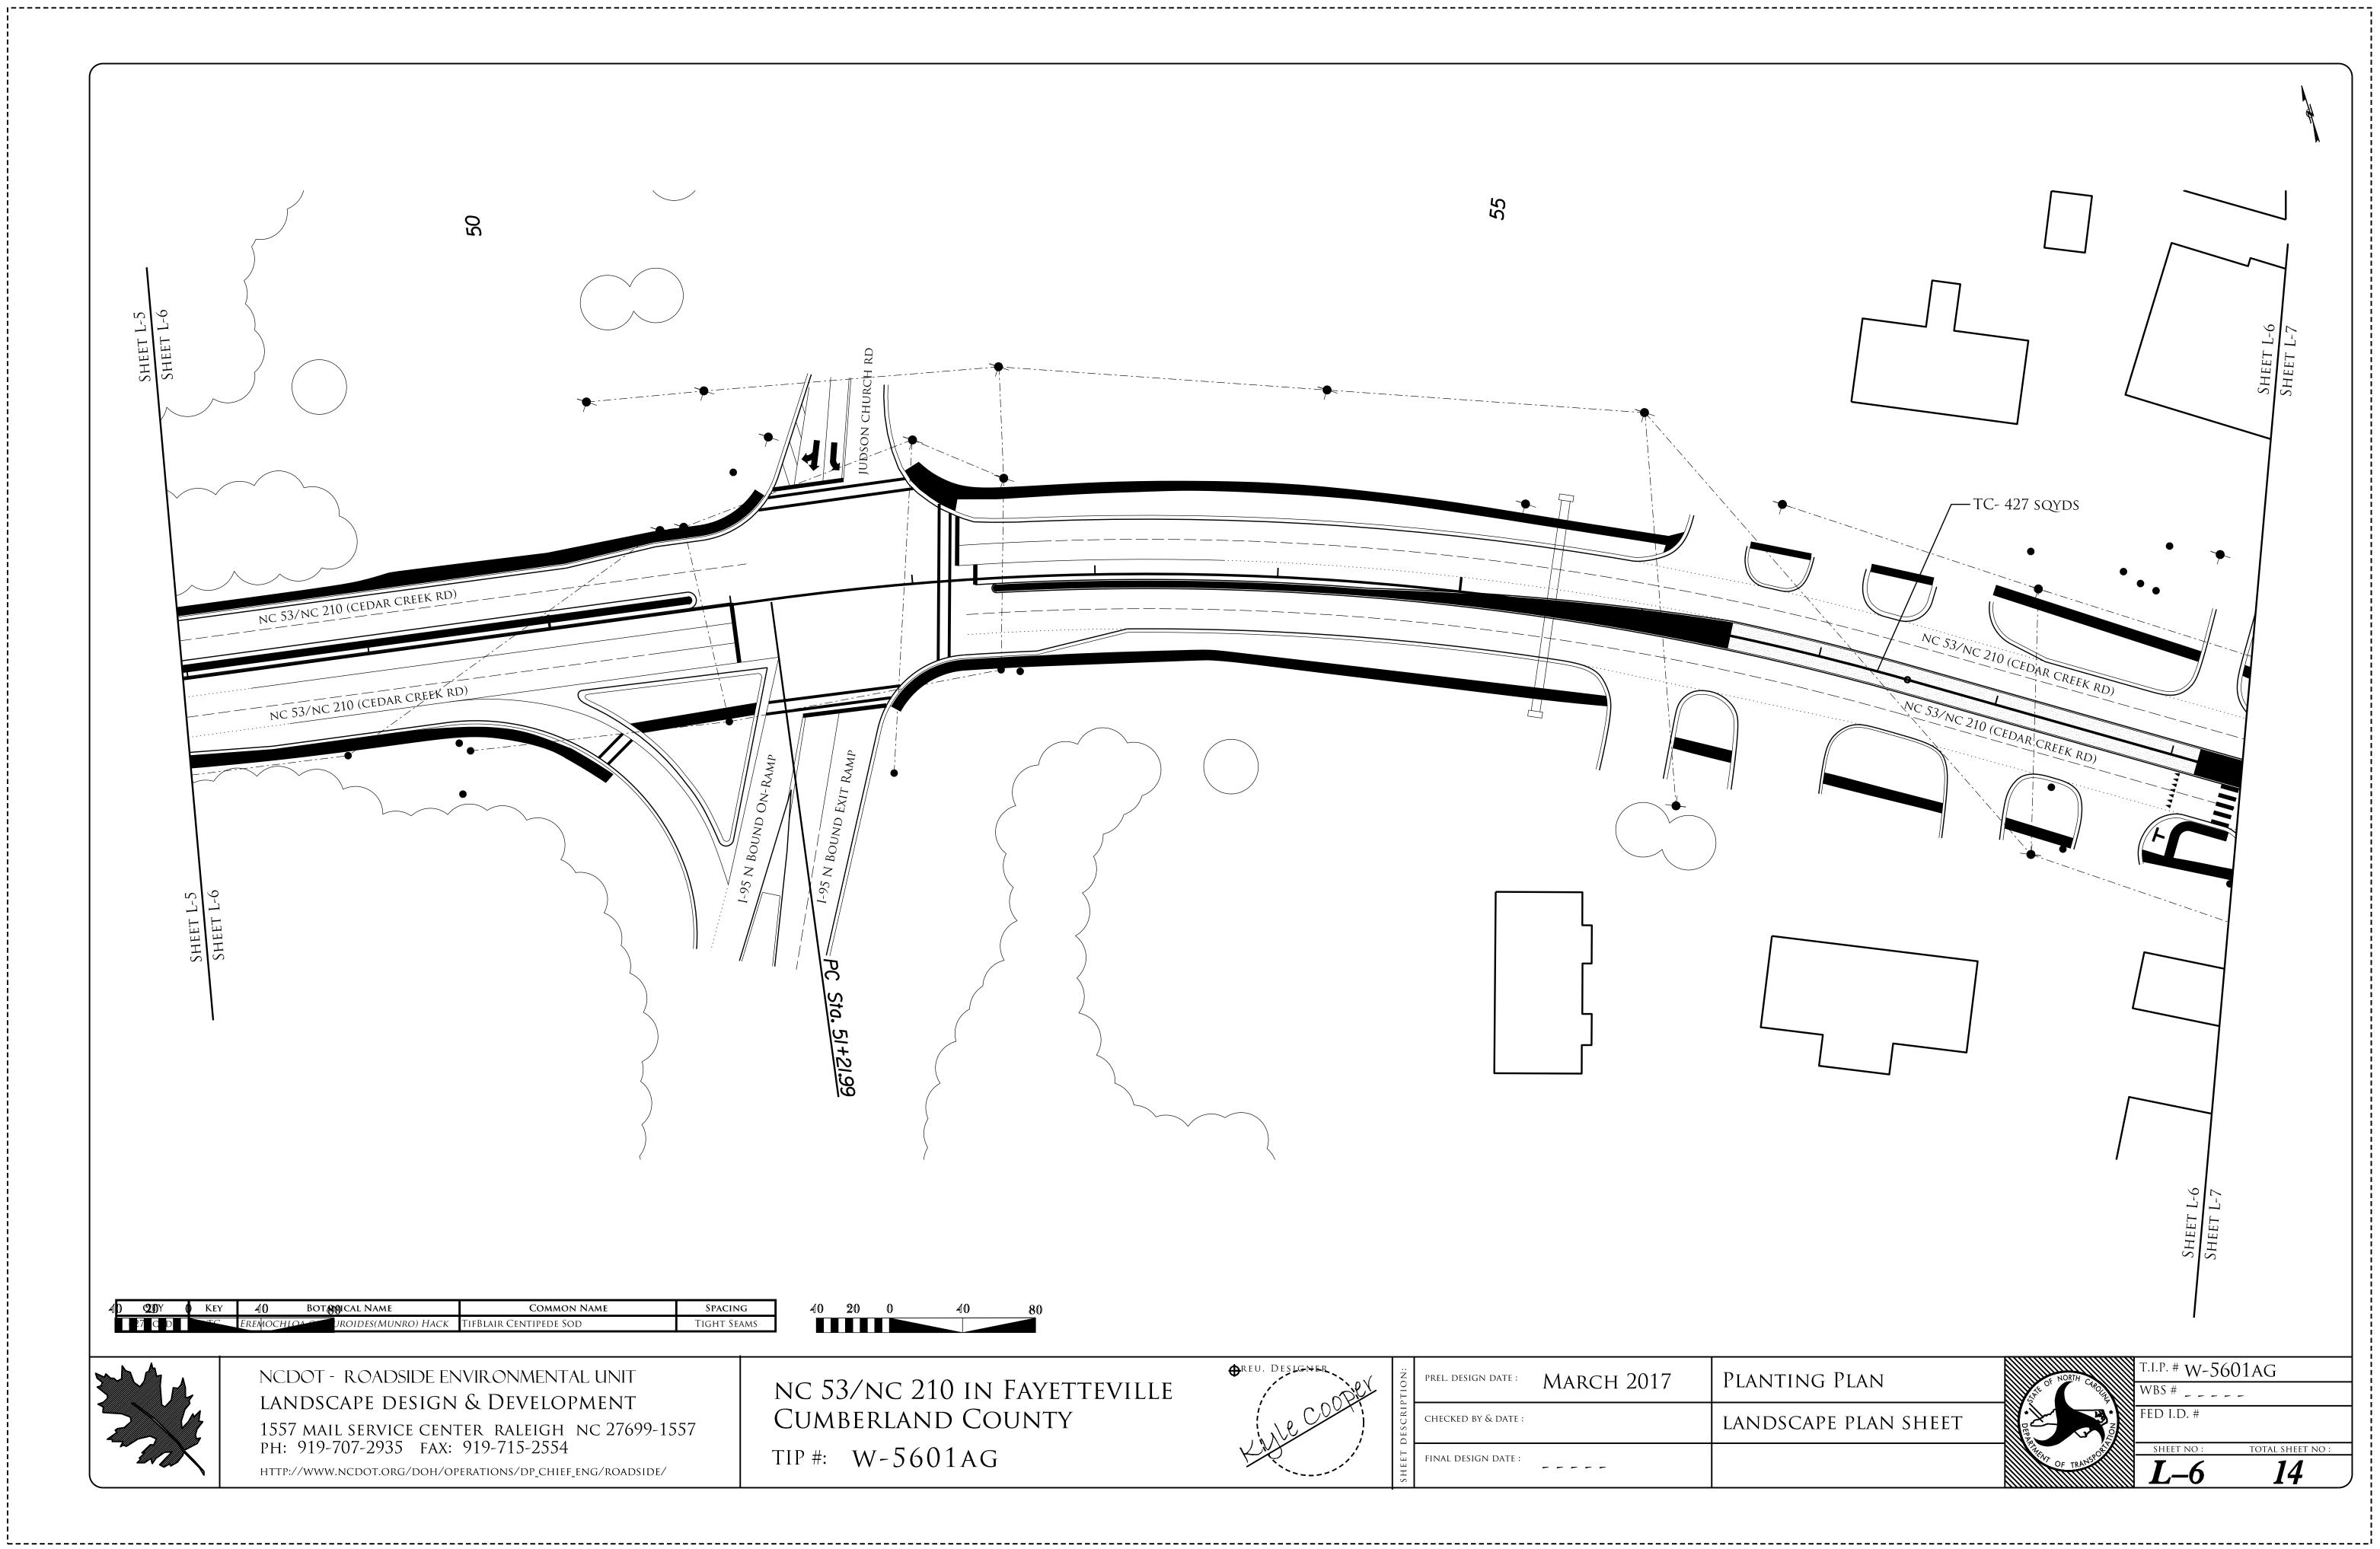


MBERLAND COUNTY Image: W-5601AG <td< th=""><th>53/nc 210 in Fayetteville</th><th>in old</th><th>PTION:</th><th>PREL. DESIGN DATE :</th><th>March 202</th></td<>	53/nc 210 in Fayetteville	in old	PTION:	PREL. DESIGN DATE :	March 202
	MBERLAND COUNTY		SCRI	CHECKED BY & DATE :	
	: W-5601AG		ΗE	FINAL DESIGN DATE :	

53/NG	C 210	IN	Fayettevill




prel. design date : MARCH 2017	PI
CHECKED BY & DATE :	LA
FINAL DESIGN DATE :	

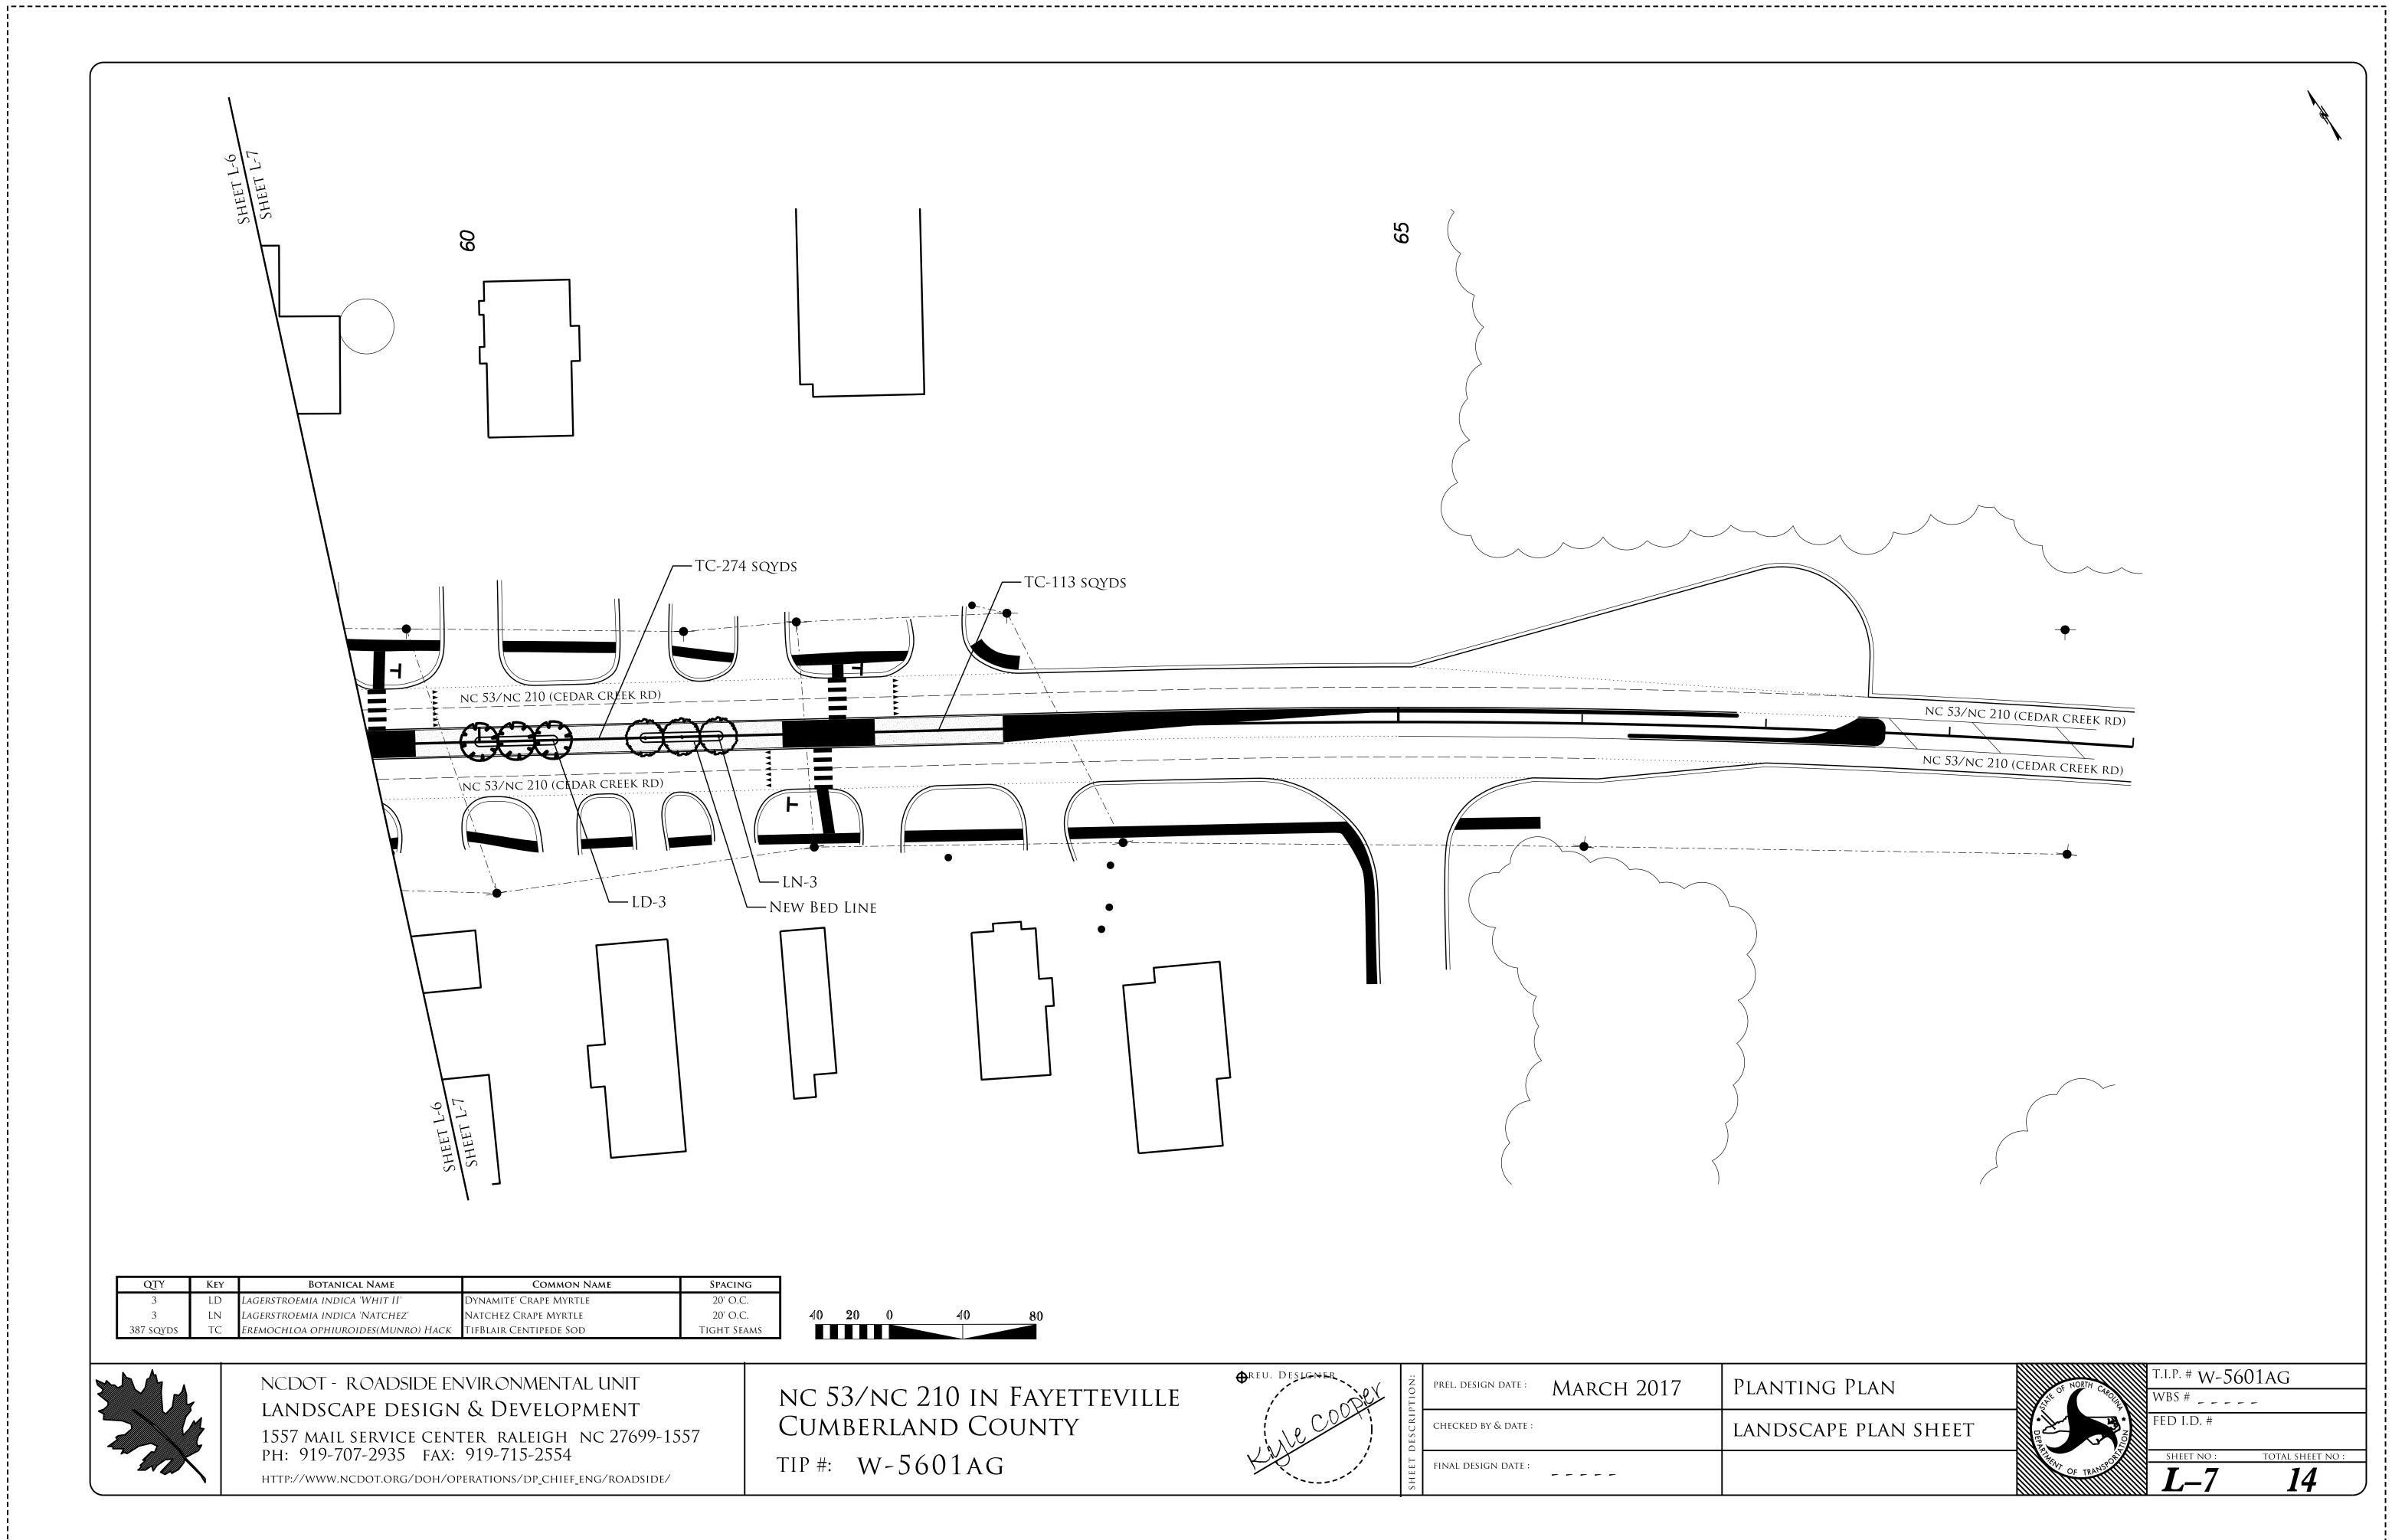




prel. design date : MARCH 2017	Pl
CHECKED BY & DATE :	LA
FINAL DESIGN DATE :	



lanting Plan	T.I.P. # W-5601AG
ANDSCAPE PLAN SHEET	WBS # FED I.D. #
AINDOCAFE FLAIN OFFEET	SHEET NO : TOTAL SHEET NO :
	$L-7 \qquad 14$



GENERAL NOTES

- THE IRRIGATION DESIGN PROVIDED IN THE PLANS IS SCHEMATIC IN NATURE, AND THE IRRIGATION CONTRACTOR MAY BE REQUIRED TO MAKE MINOR ADJUSTMENTS IN THE FIELD AS NECESSARY. THESE ADJUSTMENTS SHALL BE MADE AT NO ADDITIONAL COST TO THE OWNER AND SHALL BE MADE ONLY AFTER NOTIFICATION IS MADE TO THE OWNER (NCDOT).

- THE CONTRACTOR(S) SHALL FAMILIARIZE THEMSELVES WITH THE SITE SO THAT THEY ARE AWARE OF ANY SPECIAL CONDITIONS THAT MAY EXIST THAT COULD AFFECT THEIR BID PROPOSAL AND SHALL HEREAFTER BE RESPONSIBLE FOR ALL COST INCURRED BY THEMSELVES IN RELATION TO THE INSTALLATION.

- Place valves & boxes in plant beds where-ever possible.

- The contractor is to minimize disturbance in sod areas (cut AND REPLACE SOD WHEN NECESSARY).

- PLACE PRESSURE REDUCING VALVES IN DISCREET LOCATIONS.

- All Irrigation products are to be hunter or comparable brand (AS APPROVED BY THE DIVISION ROADSIDE ENVIRONMENTAL ENGINEER).


- IF THERE IS AN EXISTING SYSTEM IN PLACE, BE SURE TO USE IRRIGATION HEADS THAT ARE CONSISTENT WITH THE EXISTING SYSTEM.

- THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING 'AS BUILT' PLANS TO THE OWNER (NCDOT) AT THE TIME OF PROJECT APPROVAL. THE PLANS SHALL BE CLEAR, CONCISE, AND SHOW ALL ELEMENTS OF THE IRRIGATION SYSTEM, THE LOCATION OF ALL EQUIPMENT, IRRIGATION LINES, NUMBERED ZONES, CONTROLLER(S), HEADS AND VALVES.

ESTIMATED IRRIGATION QUANTITIES

Meter Locations - 4 BACKFLOW PREVENTERS - 4 BATTERY POWERED CONTROLLERS - 4 Zones Valves - 12 Main Line Pipe - 1004 lf LATERAL PIPE - 3669 LF Spray heads - 226 15' r - 74 17' R - 152


QUANTITIES ARE ESTIMATED BASED ON DESIGN DRAWINGS. REFER TO PLANS FOR ANY DISCREPANCIES. PLANS TAKE priority over these estimated quantities. Estimated QUANTITIES DO NOT COVER ALL MATERIALS NECESSARY FOR INSTALLATION. QUANTITIES MAY BE ADJUSTED SLIGHTLY DUE TO SITE CONDITIONS, SPECIFIC IRRIGATION EQUIPMENT, AND IMPLEMENTATION, OR AS DIRECTED BY THE NCDOT Engineer.



NCDOT - ROADSIDE ENVIRONMENTAL UNIT LANDSCAPE DESIGN & DEVELOPMENT 1557 MAIL SERVICE CENTER RALEIGH NC 27699-1557 PH: 919-707-2935 FAX: 919-715-2554

HTTP://WWW.NCDOT.ORG/DOH/OPERATIONS/DP_CHIEF_ENG/ROADSIDE/

BACKFLOW PREVENTION

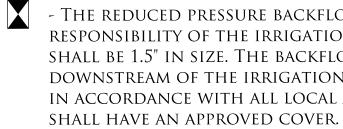

CONTROLLER W/ BATTERY POWERED TIMER

- $\langle C \rangle$ TO THE BRAND NAMED.

 - TO BLEND INTO THE LANDSCAPE.


DRIP IRRIGATION



INSTALLED.)



- A minimum of 2 emitters per shrub and 3 emitters per tree SHALL BE INSTALLED.



IRRIGATION NOTES & LEGEND

*IRRIGATION CONTRACTOR MUST BE LICENSED BY THE NCICLB UNDER CHAPTER (2008-177, S.1; 2013-383, S.3) *ALL MATERIALS MAY BE OF COMPARABLE MANUFACTURE AND PERFORMANCE TO THE BRAND LISTED

- THE REDUCED PRESSURE BACKFLOW PREVENTER ASSEMBLY SHALL BE THE RESPONSIBILITY OF THE IRRIGATION CONTRACTOR. THE BACKFLOW SHALL BE 1.5" IN SIZE. THE BACKFLOW ASSEMBLY SHALL BE INSTALLED DOWNSTREAM OF THE IRRIGATION METER. THE UNIT MUST BE INSTALLED IN ACCORDANCE WITH ALL LOCAL AND STATE CODE REQUIREMENTS AND

- Controller may be of comparable manufacture and performance

-THE CONTROLLER SHALL BE A HUNTER I-CORE MODULAR UNIT. THE CONTROLLER SHALL INCORPORATE A 24 VAC WITH THE APPROXIMATE LOCATION SHOWN ON THE PLANS. LOCATION MUST BE APPROVED BY THE NCDOT ENVIRONMENTAL ROADSIDE ENGINEER.

- THE BATTERY OPERATED CONTROLLER IS TO BE PLACED IN CARSON VALVE BOXES MODEL #910-1 WITH #910-2 COVERS.

- All 120 VAC wiring shall be installed in accordance with all APPLICABLE ELECTRICAL CODE REQUIREMENTS.

- THE CONTRACTOR SHALL INSTALL A WIRED HUNTER RAIN SENSOR THAT IS COMPATIBLE WITH THE MAKE AND MODEL OF THE CONTROLLER. THE RAIN SENSOR MOUNT IS TO BE PAINTED A DARK HUNTER GREEN IN ORDER

- DRIP IRRIGATION IS TO BE 1/2" NETAFIM TECHLINE DL TUBING (OR COMPARABLE MANUFACTURE AND PERFORMANCE) WITH EMITTERS SPACED AT 18" INTERVALS AT 1 GPM. AN APPROVED INLINE EMITTER DRIP LINE IS TO BE INSTALLED UNDER MULCH IN LANDSCAPE AREAS AS SHOWN ON THE IRRIGATION PLAN. (INSTALL DRIP LINE BEFORE MULCH IS

- Drip Valve Assembly, which includes a hunter pcz-101 remote CONTROL VALVE WITH FLOW CONTROL FEATURE, A MESH FILTER, AND A PRESSURE REGULATOR. THE FLOW CONTROL VALVES SHALL BE NOTED ON BOXES WITH LIDS MOUNTED AT GRADE LEVEL.

<u>HEADS</u>

- HUNTER PRO-SPRAY POP-UP SPRAY HEAD FITTED WITH PRO ADJUSTABLE Nozzles or 90°, 180°, 270°, and 360° Pro-spray fixed arc nozzles WITH THE FOLLOWING RADII: 15' AND 17'.
- All heads with a 6"-12" pop-up stroke, if installed with less THAN 1/3 OF THE SPRINKLER BODY EXPOSED ABOVE GRADE, SHALL BE INSTALLED ON POLYETHYLENE FLEX SWING JOINT POLY PIPE FITTED WITH ELBOWS (3/8" INSERT BY 1/2" M.P.T. AND/OR 3/8" INSERT BY 3/4" M.P.T.)

-IF GREATER THAN 1/3 of the sprinkler body is exposed, then the 6"-12" pop-up head shall be mounted on a schedule 40 PVC pipe RISER AS DESCRIBED BELOW IN RELATION TO MOUNTING SHRUB HEAD models. In mounting 6"-12" pop-up heads on shrub type risers, CARE SHALL BE TAKEN TO INSTALL THE HEAD IN SUCH A MANNER THAT THE SURROUNDING PLANT MATERIAL (PLANNED OR EXISTING) WILL HIDE THE BODY OF THE SPRINKLER.

- All pop-up irrigation heads designed adjacent to curbs or PAVEMENT SHALL BE INSTALLED WITH A CLEARANCE OF 1 1/2" FROM THE EDGES OF ALL PAVED AREAS TO PROVIDE FOR EDGING AND MAINTENANCE OPERATIONS. HEADS INSTALLED ON SHRUB RISERS OR WITH THE TOP OF The head more than $1 \frac{1}{2}$ " above the grade shall be installed WITH A MINIMUM 6" CLEARANCE FROM PAVED AREAS.

- All threaded pipe connections shall be assembled using Teflon THREAD SEALING TAPE.

<u>PIPE</u>

- PR 200 PVC LATERAL PIPING

-MINIMUM DEPTH OF COVER OVER LATERAL PIPING TO BE 12". LATERAL PIPE SIZING SCHEDULE AND SUMMATION OF GALLONAGE DEMAND ON A PARTICULAR BRANCH OF PIPE WITHIN A CONTROL SECTION SHALL BE determined by using the GPM for a nozzle based on a 50 psi base OF HEAD PRESSURE AND FULL RADIUS AT THE PRESSURE AS REPORTED IN THE HUNTER IRRIGATION PRODUCTS' CATALOG. PIPE SIZES FOR THE LATERAL LINES SHALL BE AS FOLLOWS:

- FOR 0 TO 15 GPM ACCUMULATED FLOW USE 3/4" PR 200 PVC PIPE.
- For 15 up to 35 gpm use 1" PVC pipe.
- ALLOW FOR FRICTION LOSS.
- PR 200 MAIN LINE PIPING.
 - Size of pipe to be a minimum of $1 \frac{1}{2}$ "
 - Depth of cover of mainline piping to be 18"

- PIPING SHALL BE PR 200 SOLVENT WELD PVC PIPE WITH SCHEDULE 40 PVC SOLVENT WELD FITTINGS UNLESS OTHERWISE NOTED.

- THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS NECESSARY TO AVOID DAMAGING EXISTING PLANTINGS AND THEIR ROOTS DURING THE INSTALLATION OF THE IRRIGATION SYSTEM AND SHALL COORDINATE THEIR EFFORTS WITH THE LANDSCAPE CONTRACTOR TO OPTIMIZE THE EFFICIENCY AND THE AESTHETIC QUALITY OF THE INSTALLATION.

53/nc 210 in Fayetteville	OPPU. DESLONER	PTION:	PREL. DESIGN DATE :	March 2017	IRRIGATION SPECS	STE OF NORTH CAROLE	T.I.P. # W-56 WBS #	
IBERLAND COUNTY	Le COURT	DESCRII	CHECKED BY & DATE :		LANDSCAPE PLAN SHEET		FED I.D. #	
W-5601AG		SHEET I	FINAL DESIGN DATE :			Children Calibority	sheet no : L-8	TOTAL SHEET NO :

SLEEVES

HARDSCAPE.

ELECTRIC CONTROL VALVE

- Valves may be of comparable manufacture and performance to THE BRAND NAMED.

- SLEEVES SHALL BE 4" PVC. THE IRRIGATION CONTRACTOR SHALL

COORDINATE WITH THE LANDSCAPE CONTRACTOR TO INSURE PROPER

INSTALLATION OF THE IRRIGATION SYSTEM WITH THE LANDSCAPE AND

- LOCATION OF ELECTRIC 24 VAC REMOTE CONTROL VALVE WITH FLOW CONTROL FEATURE (HUNTER PGV-ASV VALVES)

- All remote control valves shall be installed in Carson valve

INSTALLED IN A CARSON MODEL #910-1 VALVE BOX WITH COVER, WHILE

boxes with lids mounted at grade level. Single valves may be

M WATER SUPPLY/METER

- THE METER SHALL BE THE OWNER'S/TOWN'S RESPONSIBILITY.

MULTIPLE VALVES (UP TO, 2 - 1" valves or $1 - 1 \frac{1}{2}$ ") shall be

INSTALLED IN CARSON MODEL #1419-1 BOX WITH #1419-2 COVER.

- The meter is 1.5" in size. Since the water supply for the SYSTEM WILL BE POTABLE WATER, THE CONTRACTOR WILL BE REQUIRED TO INSTALL A BACKFLOW PREVENTION DEVICE WHICH WILL BE LOCATED DOWNSTREAM OF THE IRRIGATION METER.

- This irrigation system shall be capable of delivering 33 GPM MINIMUM WITH ONE CONTROL STATION OPERATING AT A TIME AT 60 PSI AT THE BASE OF THE HEAD FOR OPTIMUM PERFORMANCE OF THE IRRIGATION SYSTEM.


24 VAC CONTROLLER WIRING


- All 24 VAC CONTROL WIRING SHALL BE SINGLE STRAND COPPER WIRE with Polyethylene PE direct burial insulation rated for 300 VAC VALVE "COMMON" WIRES SHALL HAVE WHITE INSULATION WHILE VALVE "HOT" WIRES SHALL HAVE RED INSULATION. BOTH THE "COMMON" AND "HOT" WIRES SHALL BE #14 AWG. VALVE WIRING SHALL FOLLOW MAINLINE PIPING WHERE FEASIBLE AND SHALL BE LAID IN THE BOTTOM OF THE TRENCH LINE WITH THE MAINLINE PIPING. WIRING SHALL BE "BUNDLED" AND TAPED AT INTERVALS OF APPROXIMATELY TEN FEET. ALL WIRING SHALL BE INSTALLED IN ACCORDANCE WITH LOCAL CODE REQUIREMENTS.

- WIRE SPLICES SHALL BE KEPT TO AN ABSOLUTE MINIMUM. WHERE MAJOR CONCENTRATIONS OF SPLICES ARE NECESSARY, THEY SHALL BE PLACED IN A APPROVED VALVE BOX, WITH #910-2 COVER INSTALLED AT GRADE LEVEL. SPLICES AT VALVE LOCATIONS SHALL BE MADE INSIDE OF THE VALVE BOX. ALL SPLICE LOCATIONS SHALL BE NOTED ON THE AS BUILT PLAN.

- WIRE RUNS SHALL BE INSTALLED WITH ENOUGH SLACK AND/OR EXPANSION LOOPS TO PREVENT EXCESSIVE STRAIN DUE TO THERMAL CONTRACTION.


- All wire splices shall be made using UL approved direct burial CONNECTORS AND WATERPROOF MATERIALS. ALL ELECTRICAL WORK SHALL BE INSTALLED ACCORDING TO CODE.

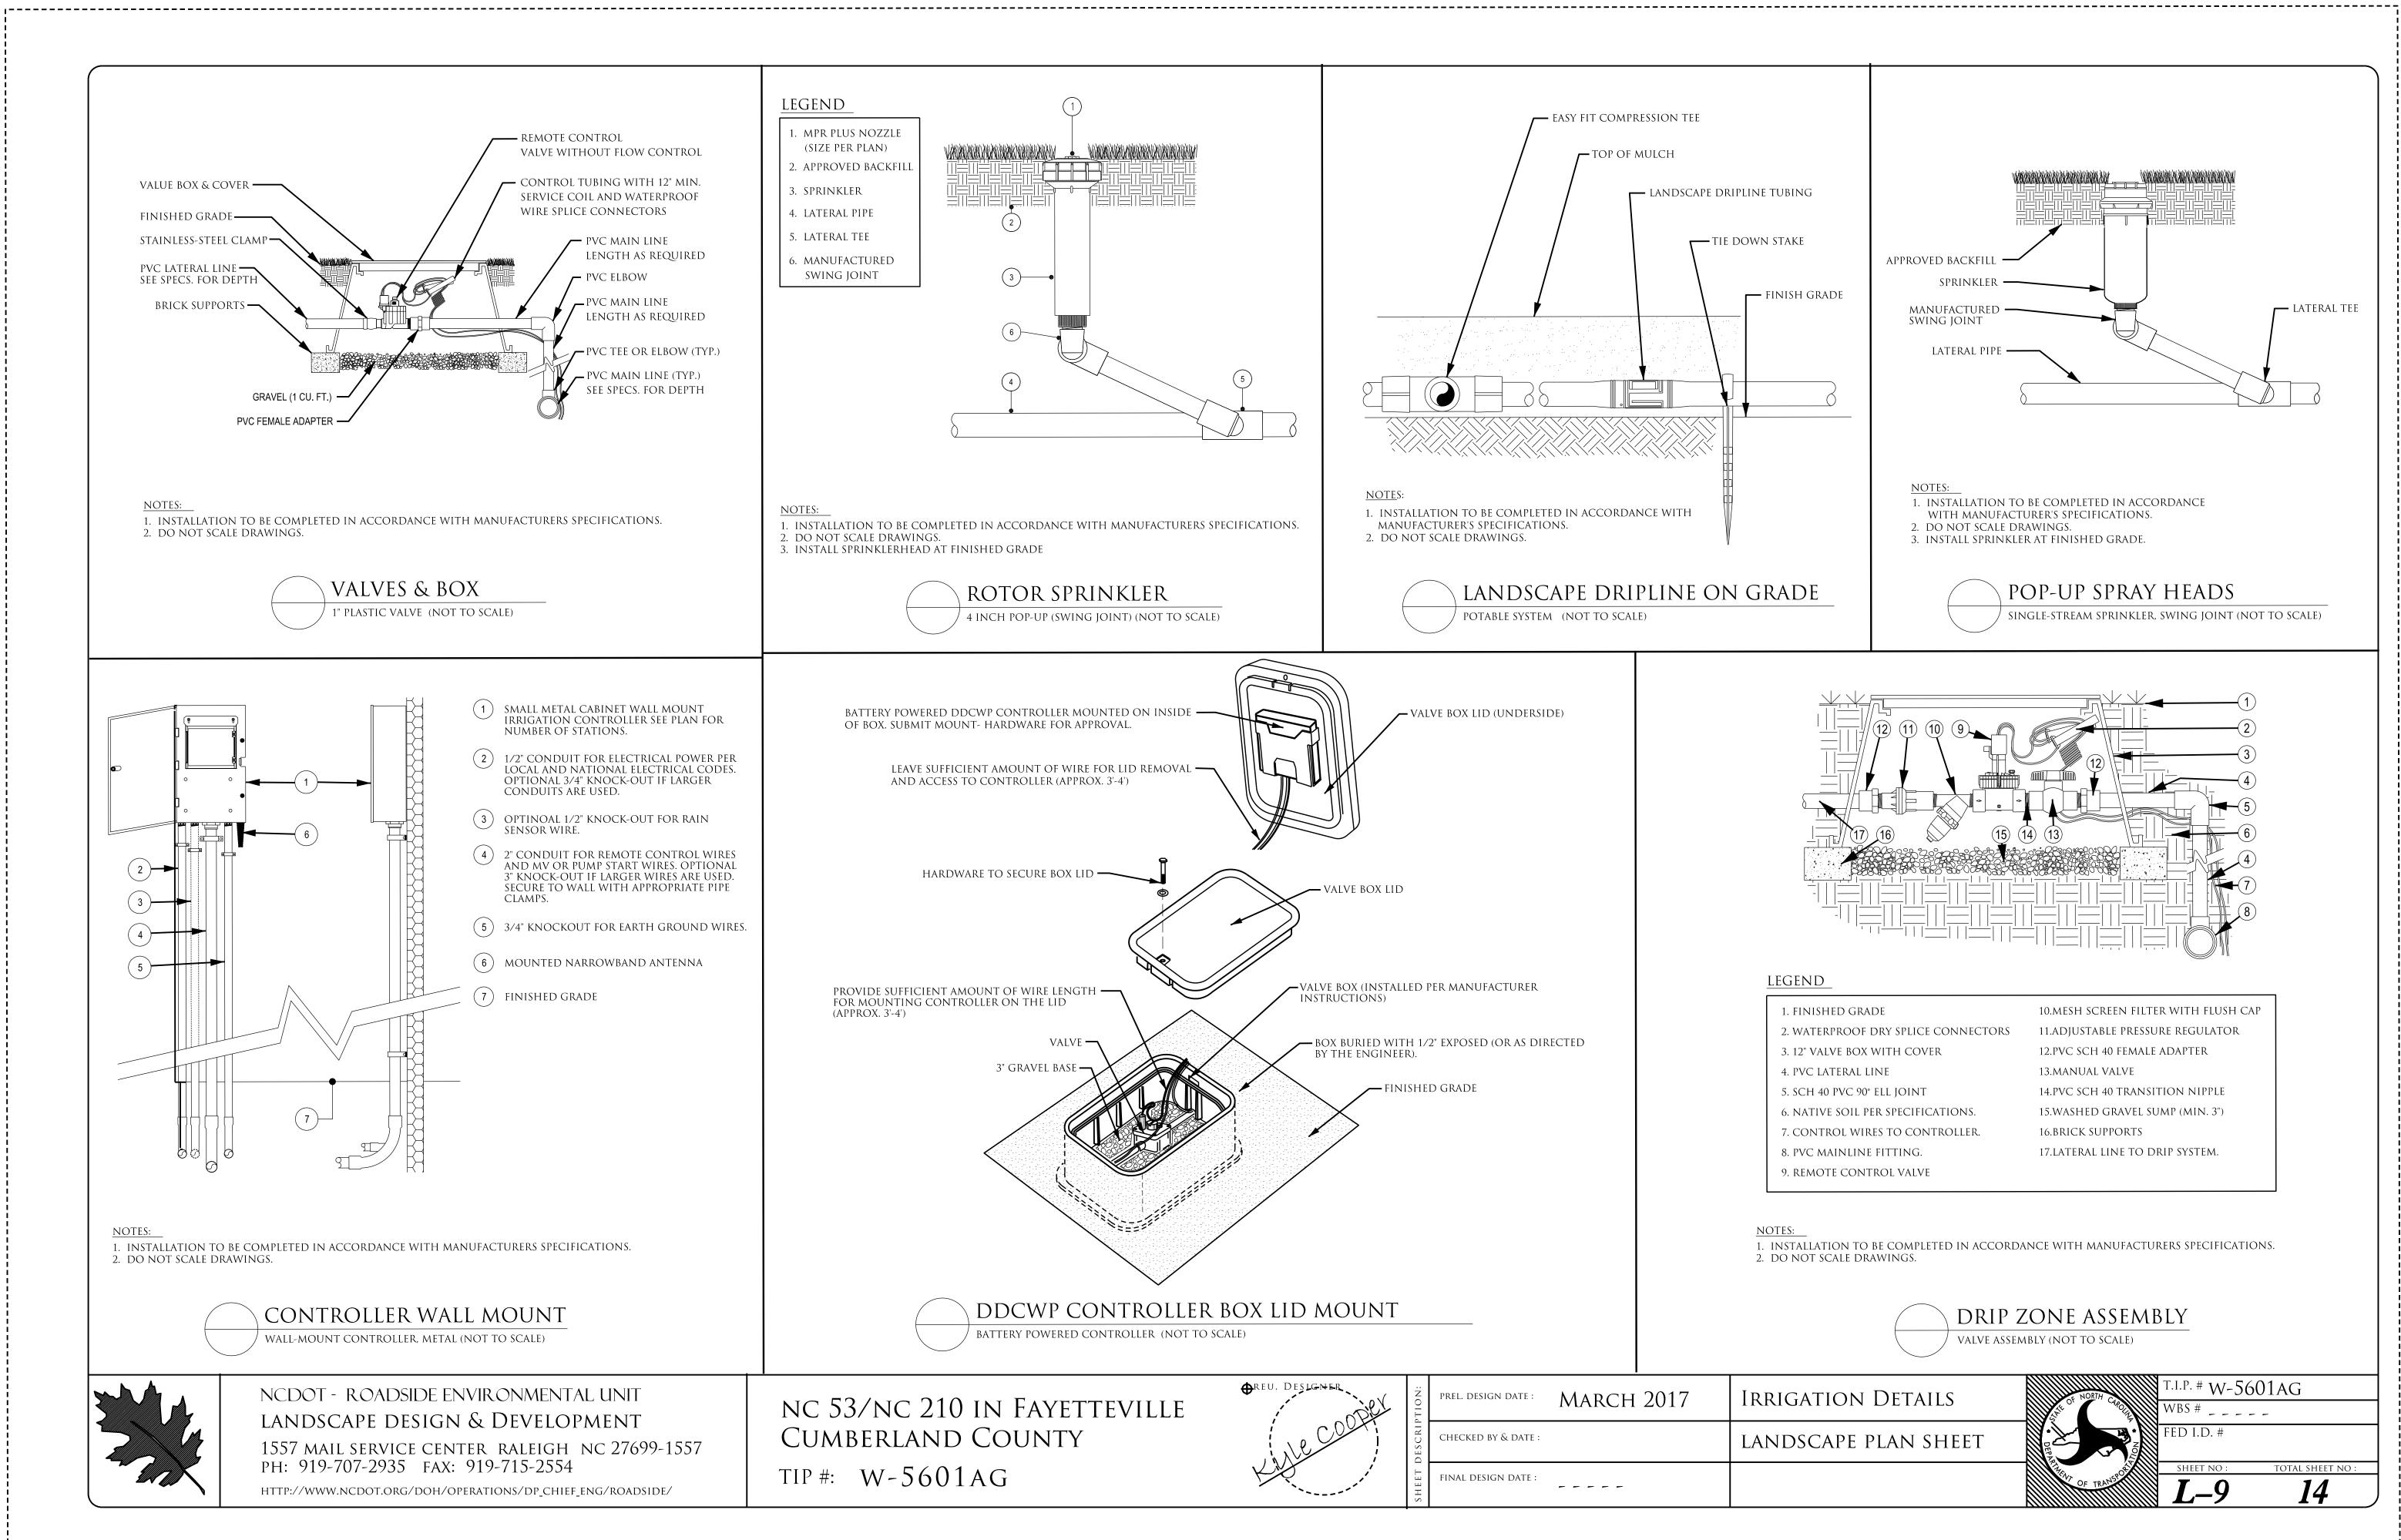


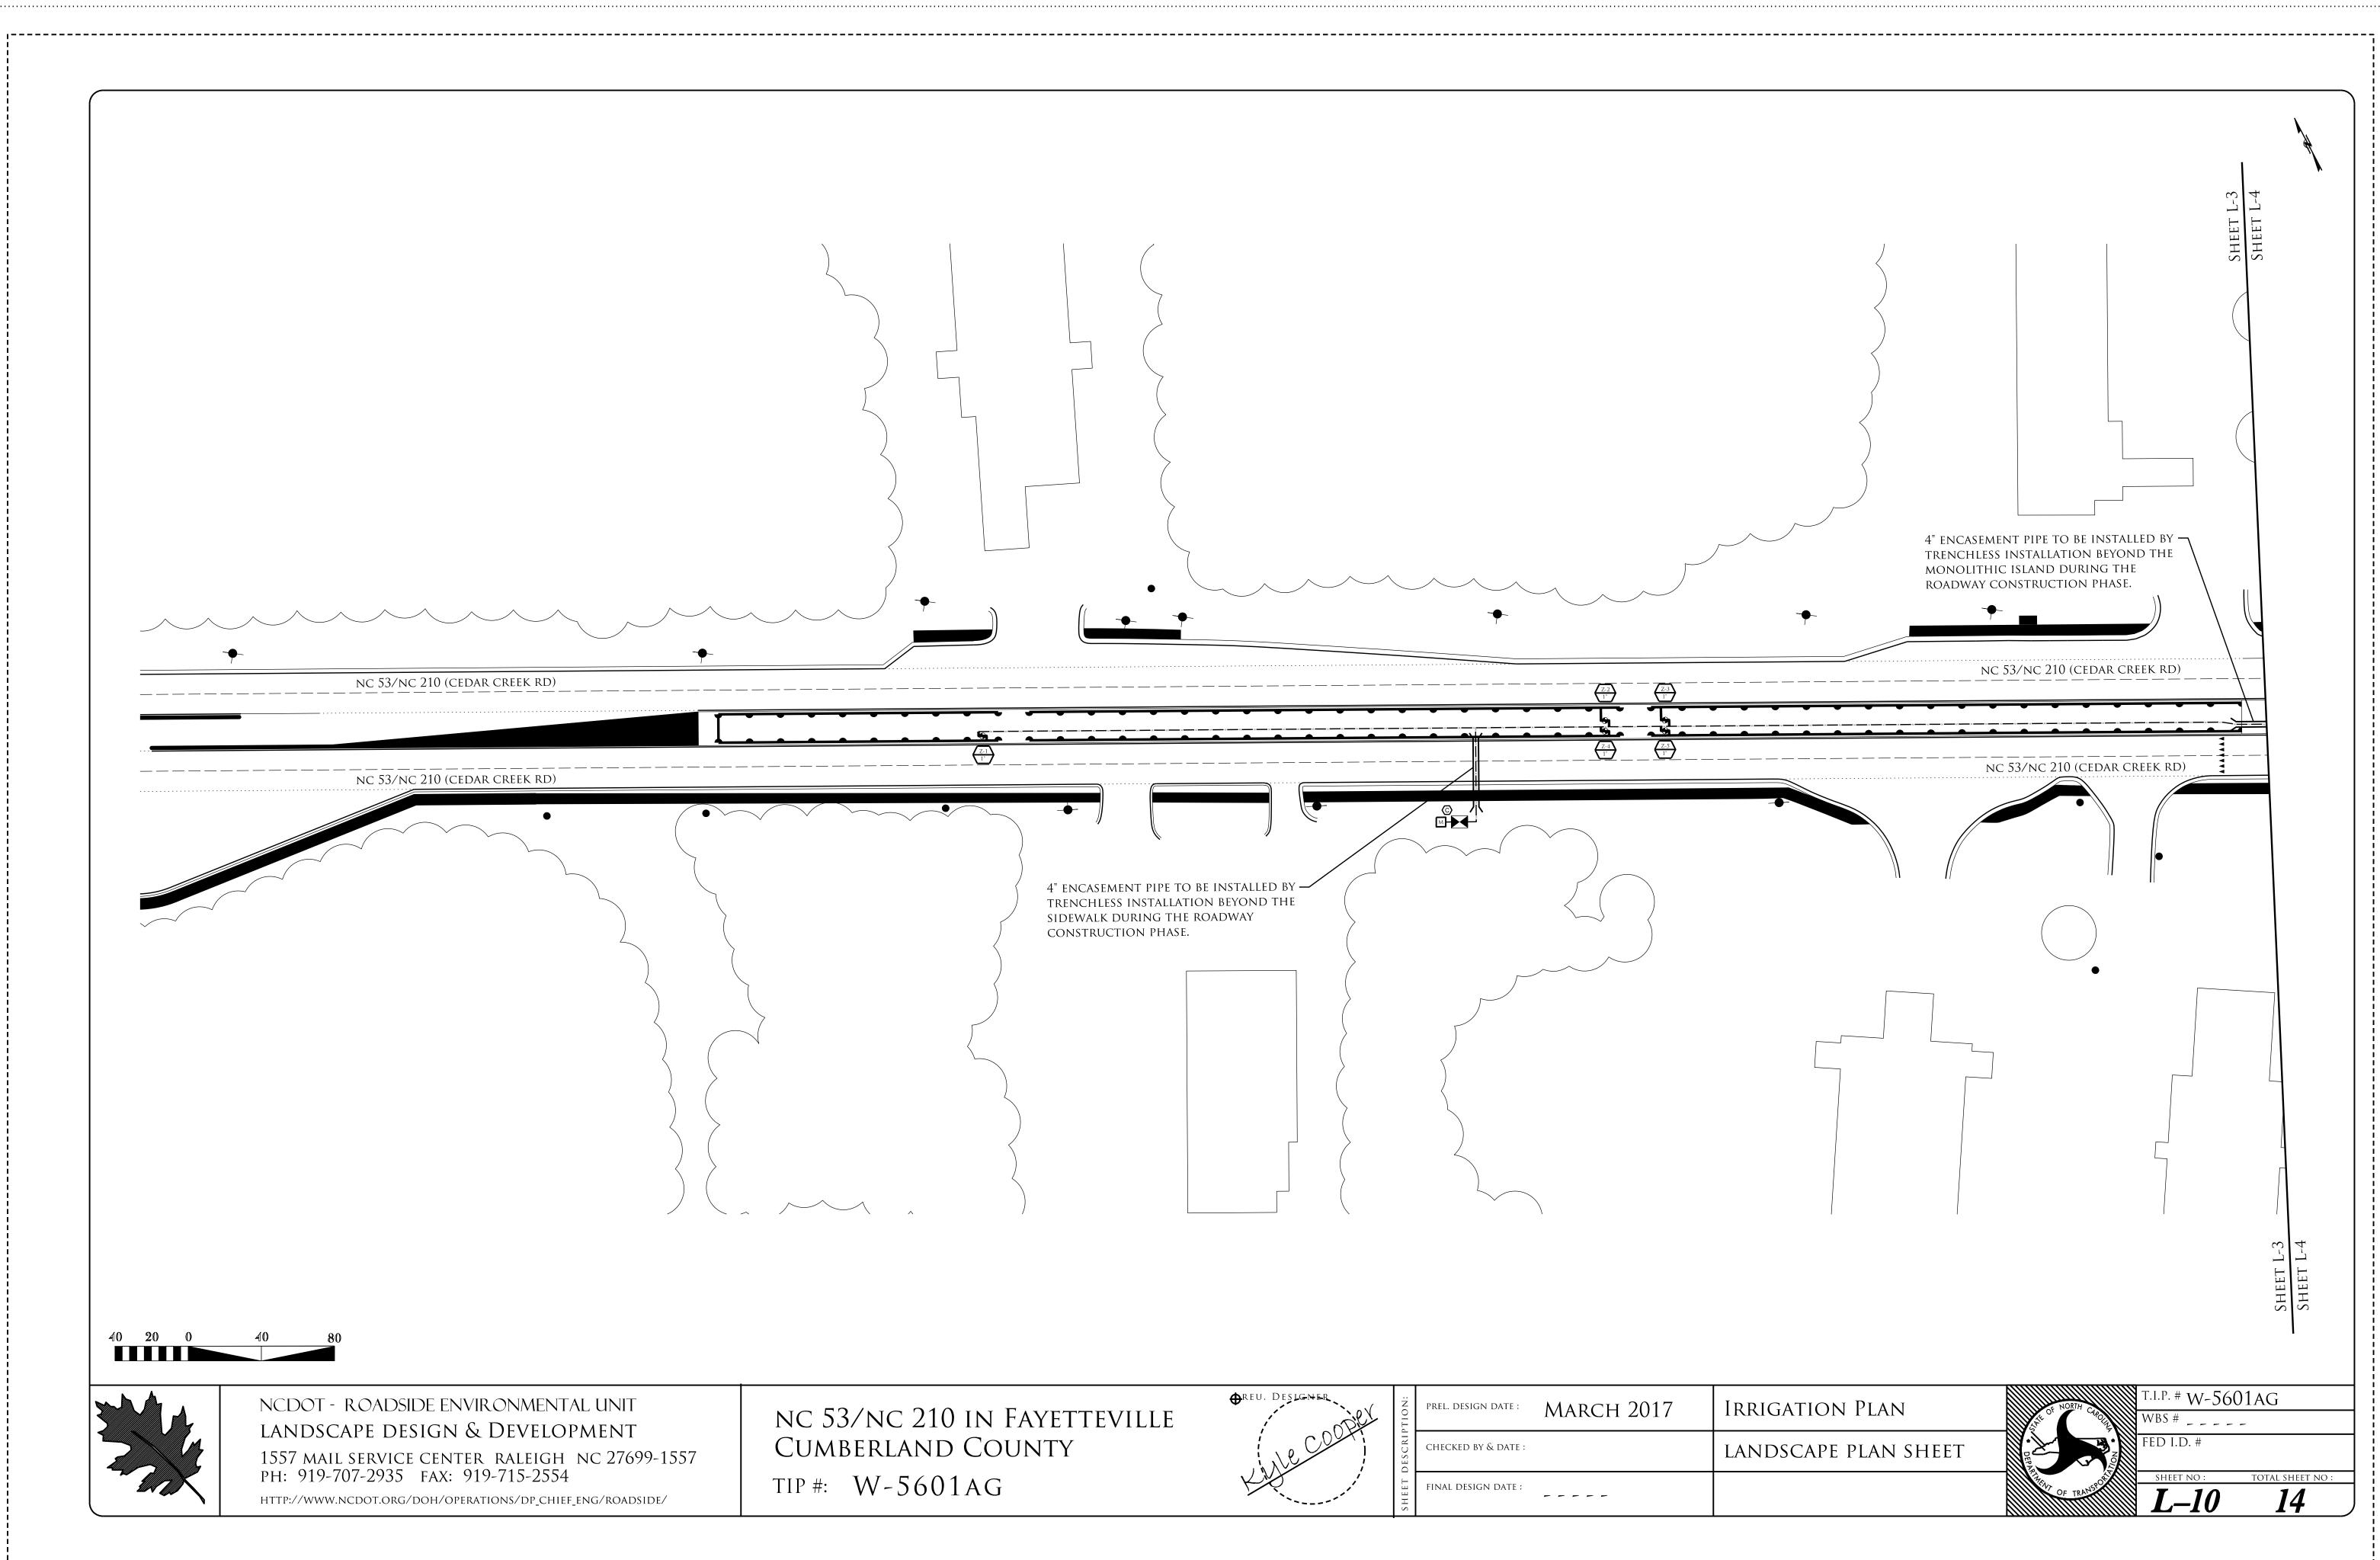

4" ENCASEMENT PIPE TO BE INSTALLI TRENCHLESS INSTALLATION BEYOND SIDEWALK DURING THE ROADWAY CONSTRUCTION PHASE.	ED BY D THE	


3/nc 210 in Fayetteville	OREU. DESLGNER	TION:	prel. design date : MARCH 2017	II
berland County	Le COUT	DESCRII	CHECKED BY & DATE :	L
W-5601AG		SHEET I	FINAL DESIGN DATE :	

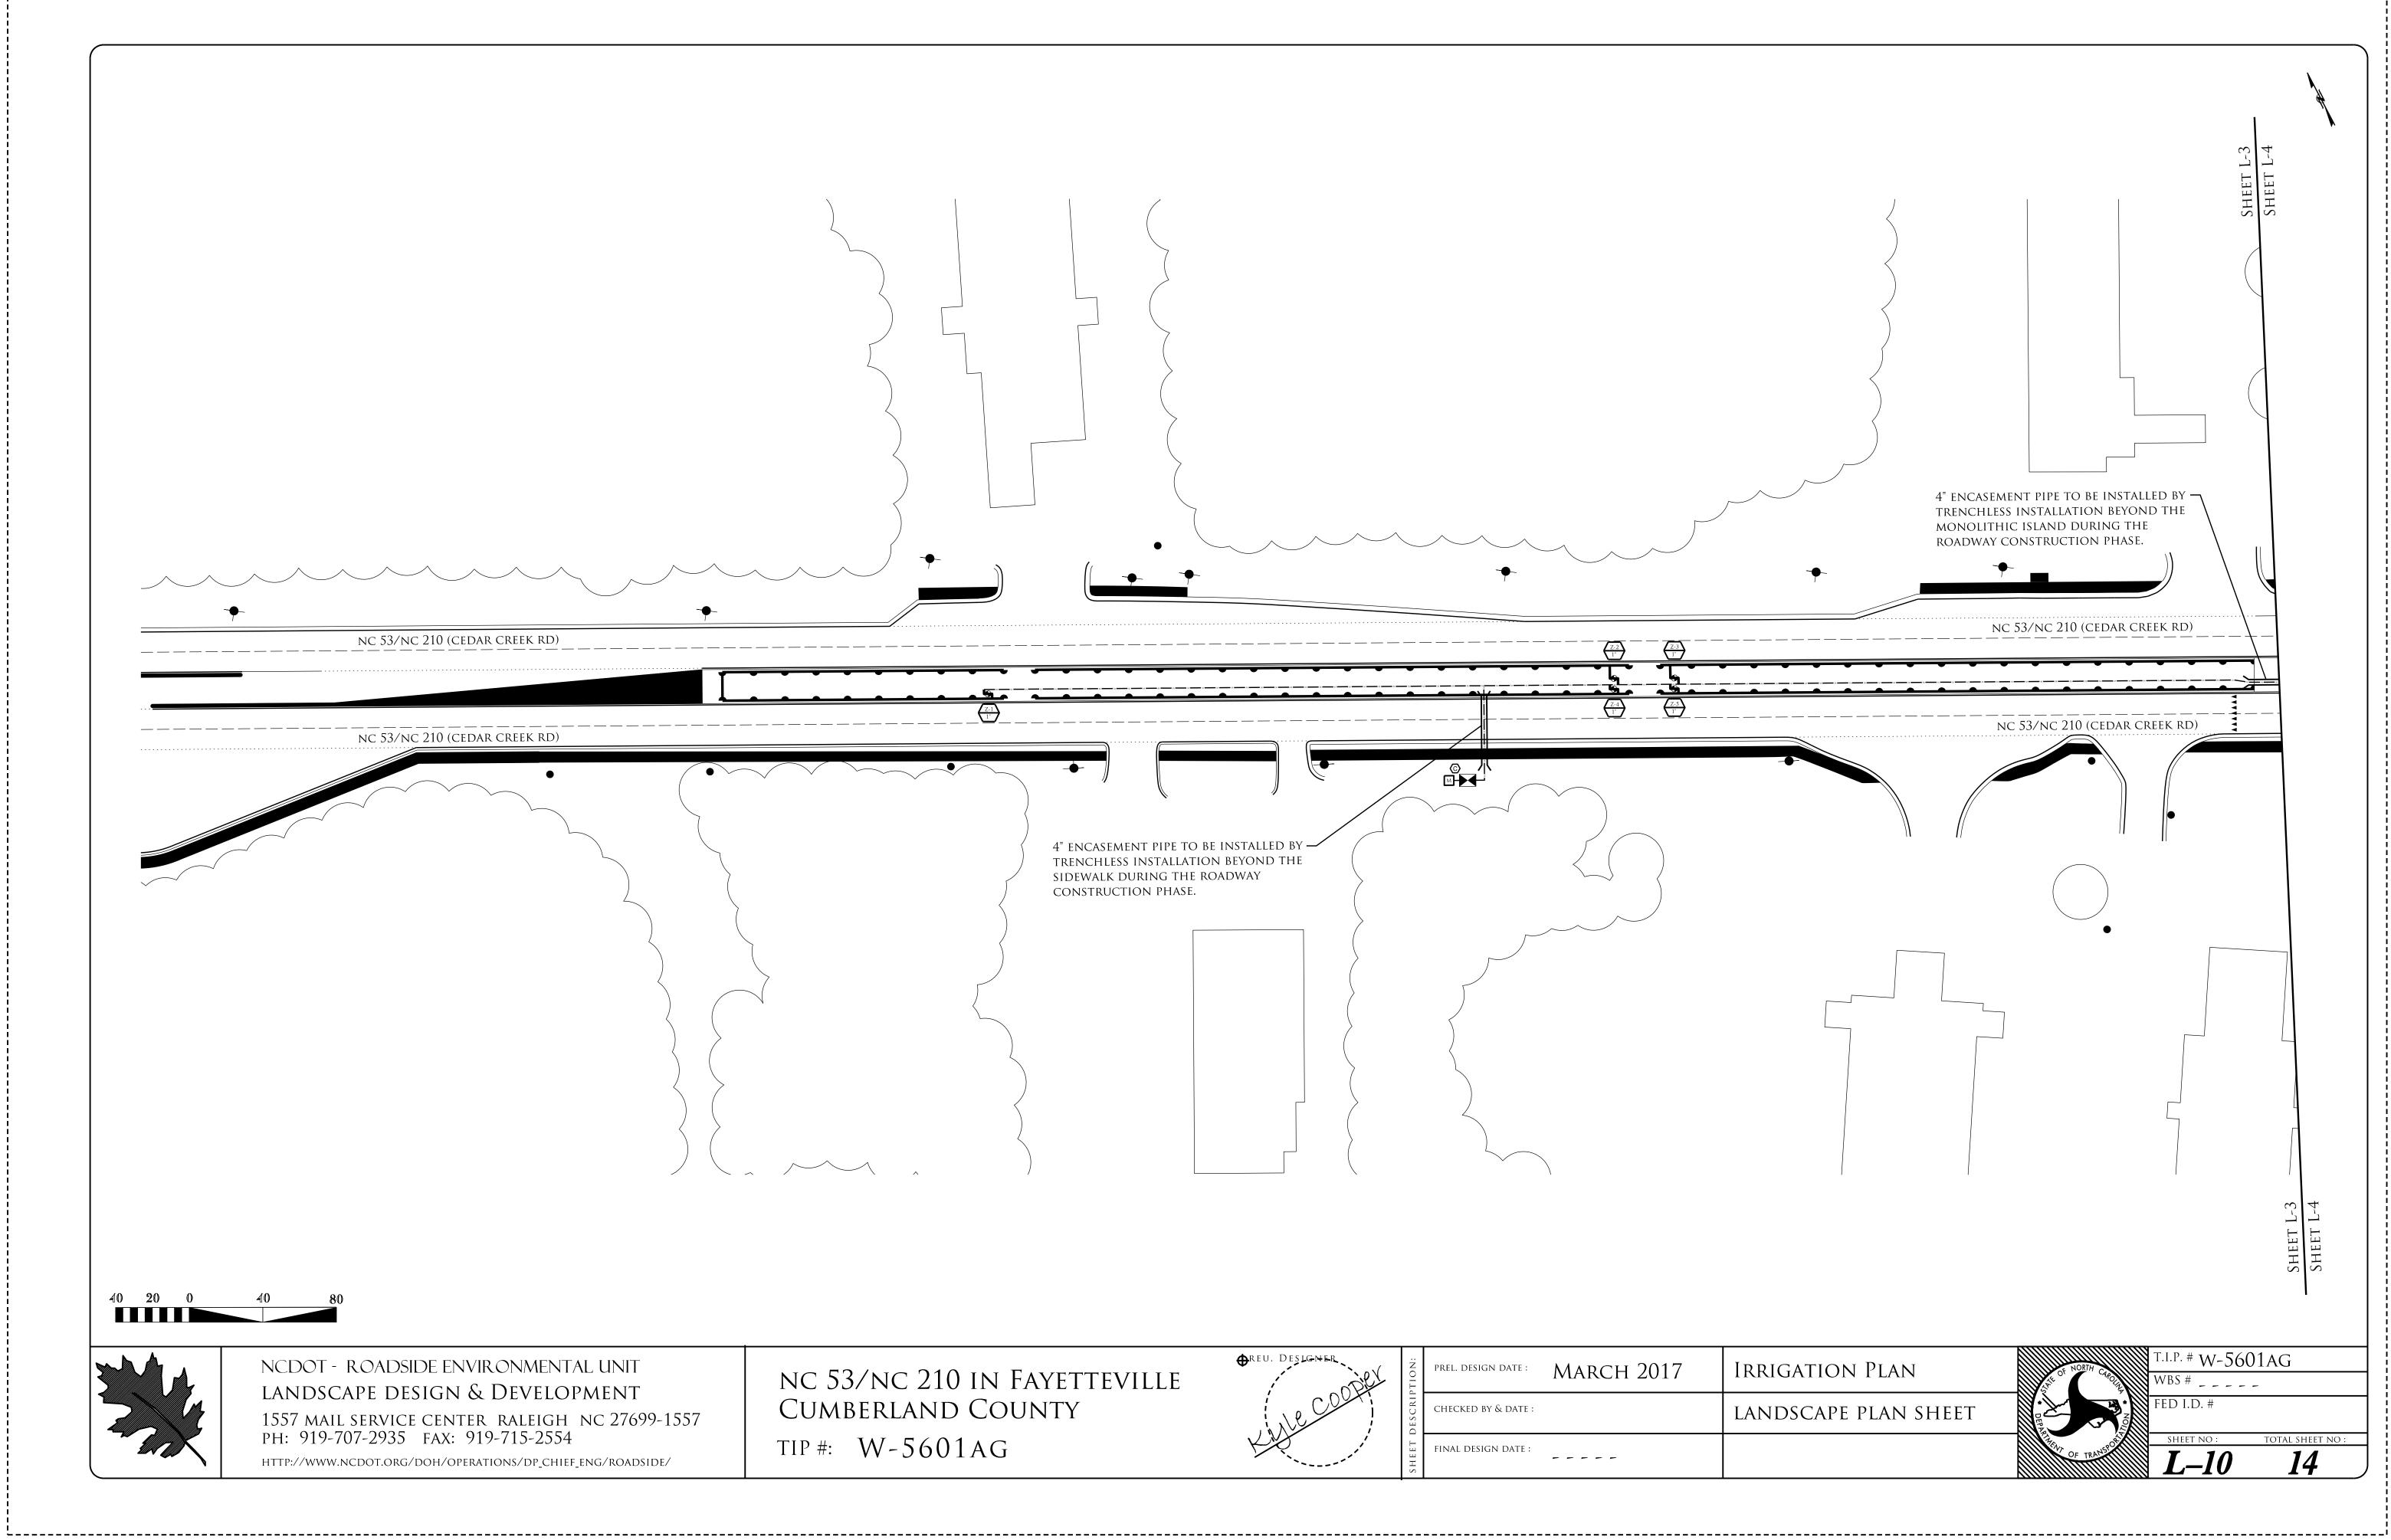


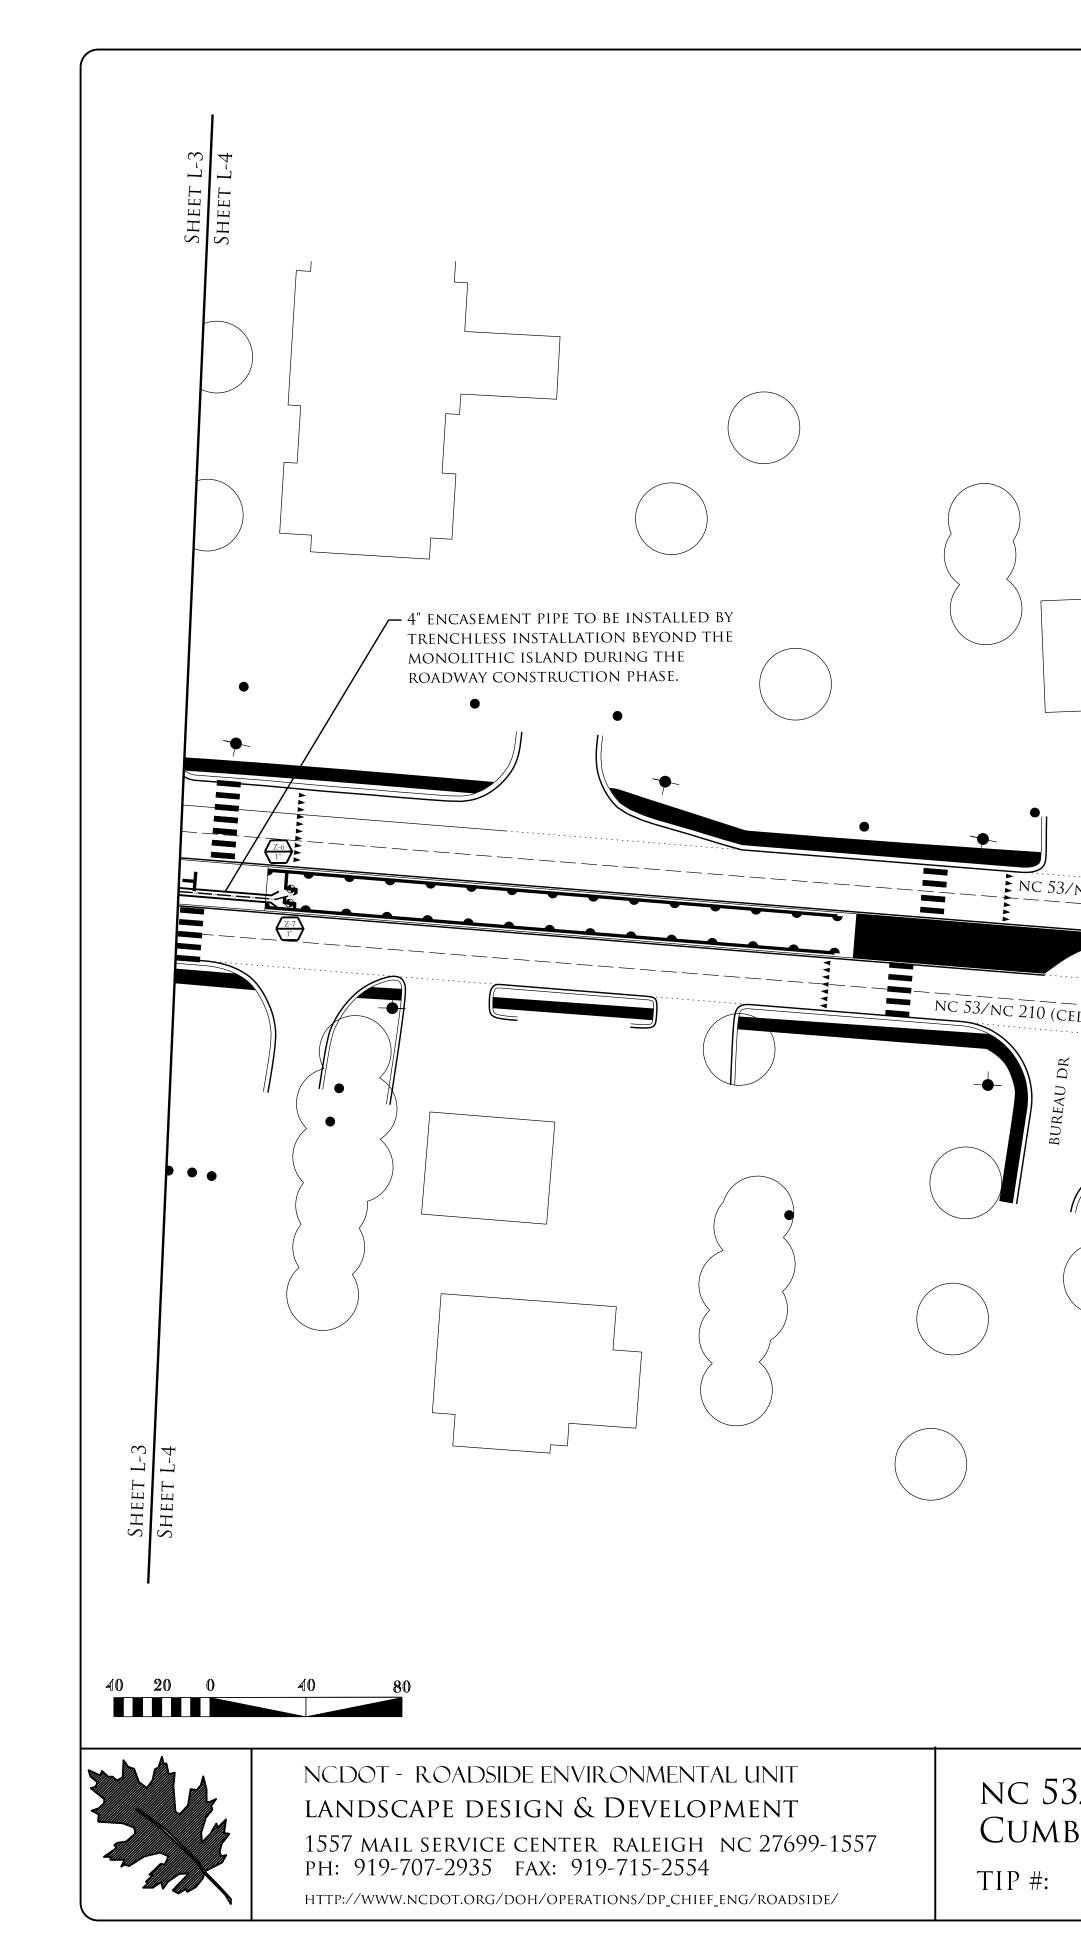

53/NC 210 (CEDAR CREEK RD)		
D (CEDAR CREEK RD)		


3/NC 210 IN FAYETTEVILLE	OREU. DESLGNER	TION:	prel. design date : MARCH 2017	IF
BERLAND COUNTY	Le COUP)	DESCRIF	CHECKED BY & DATE :	LA
W-5601AG		SHEET I	FINAL DESIGN DATE :	
		•		•

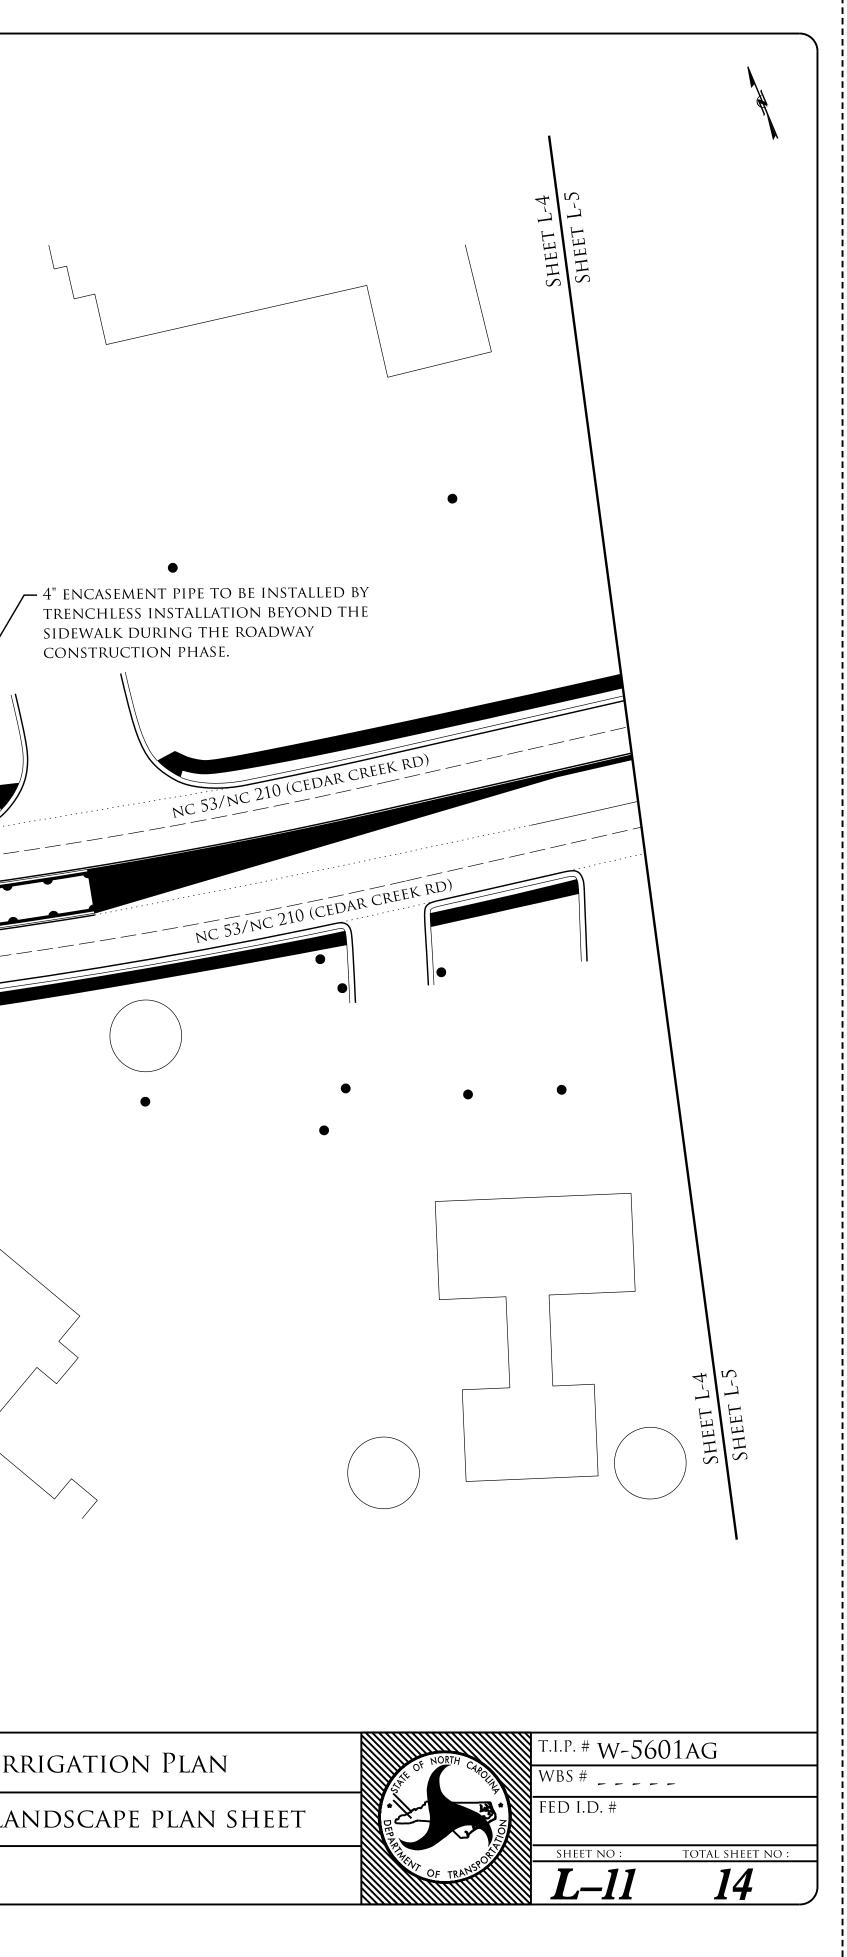


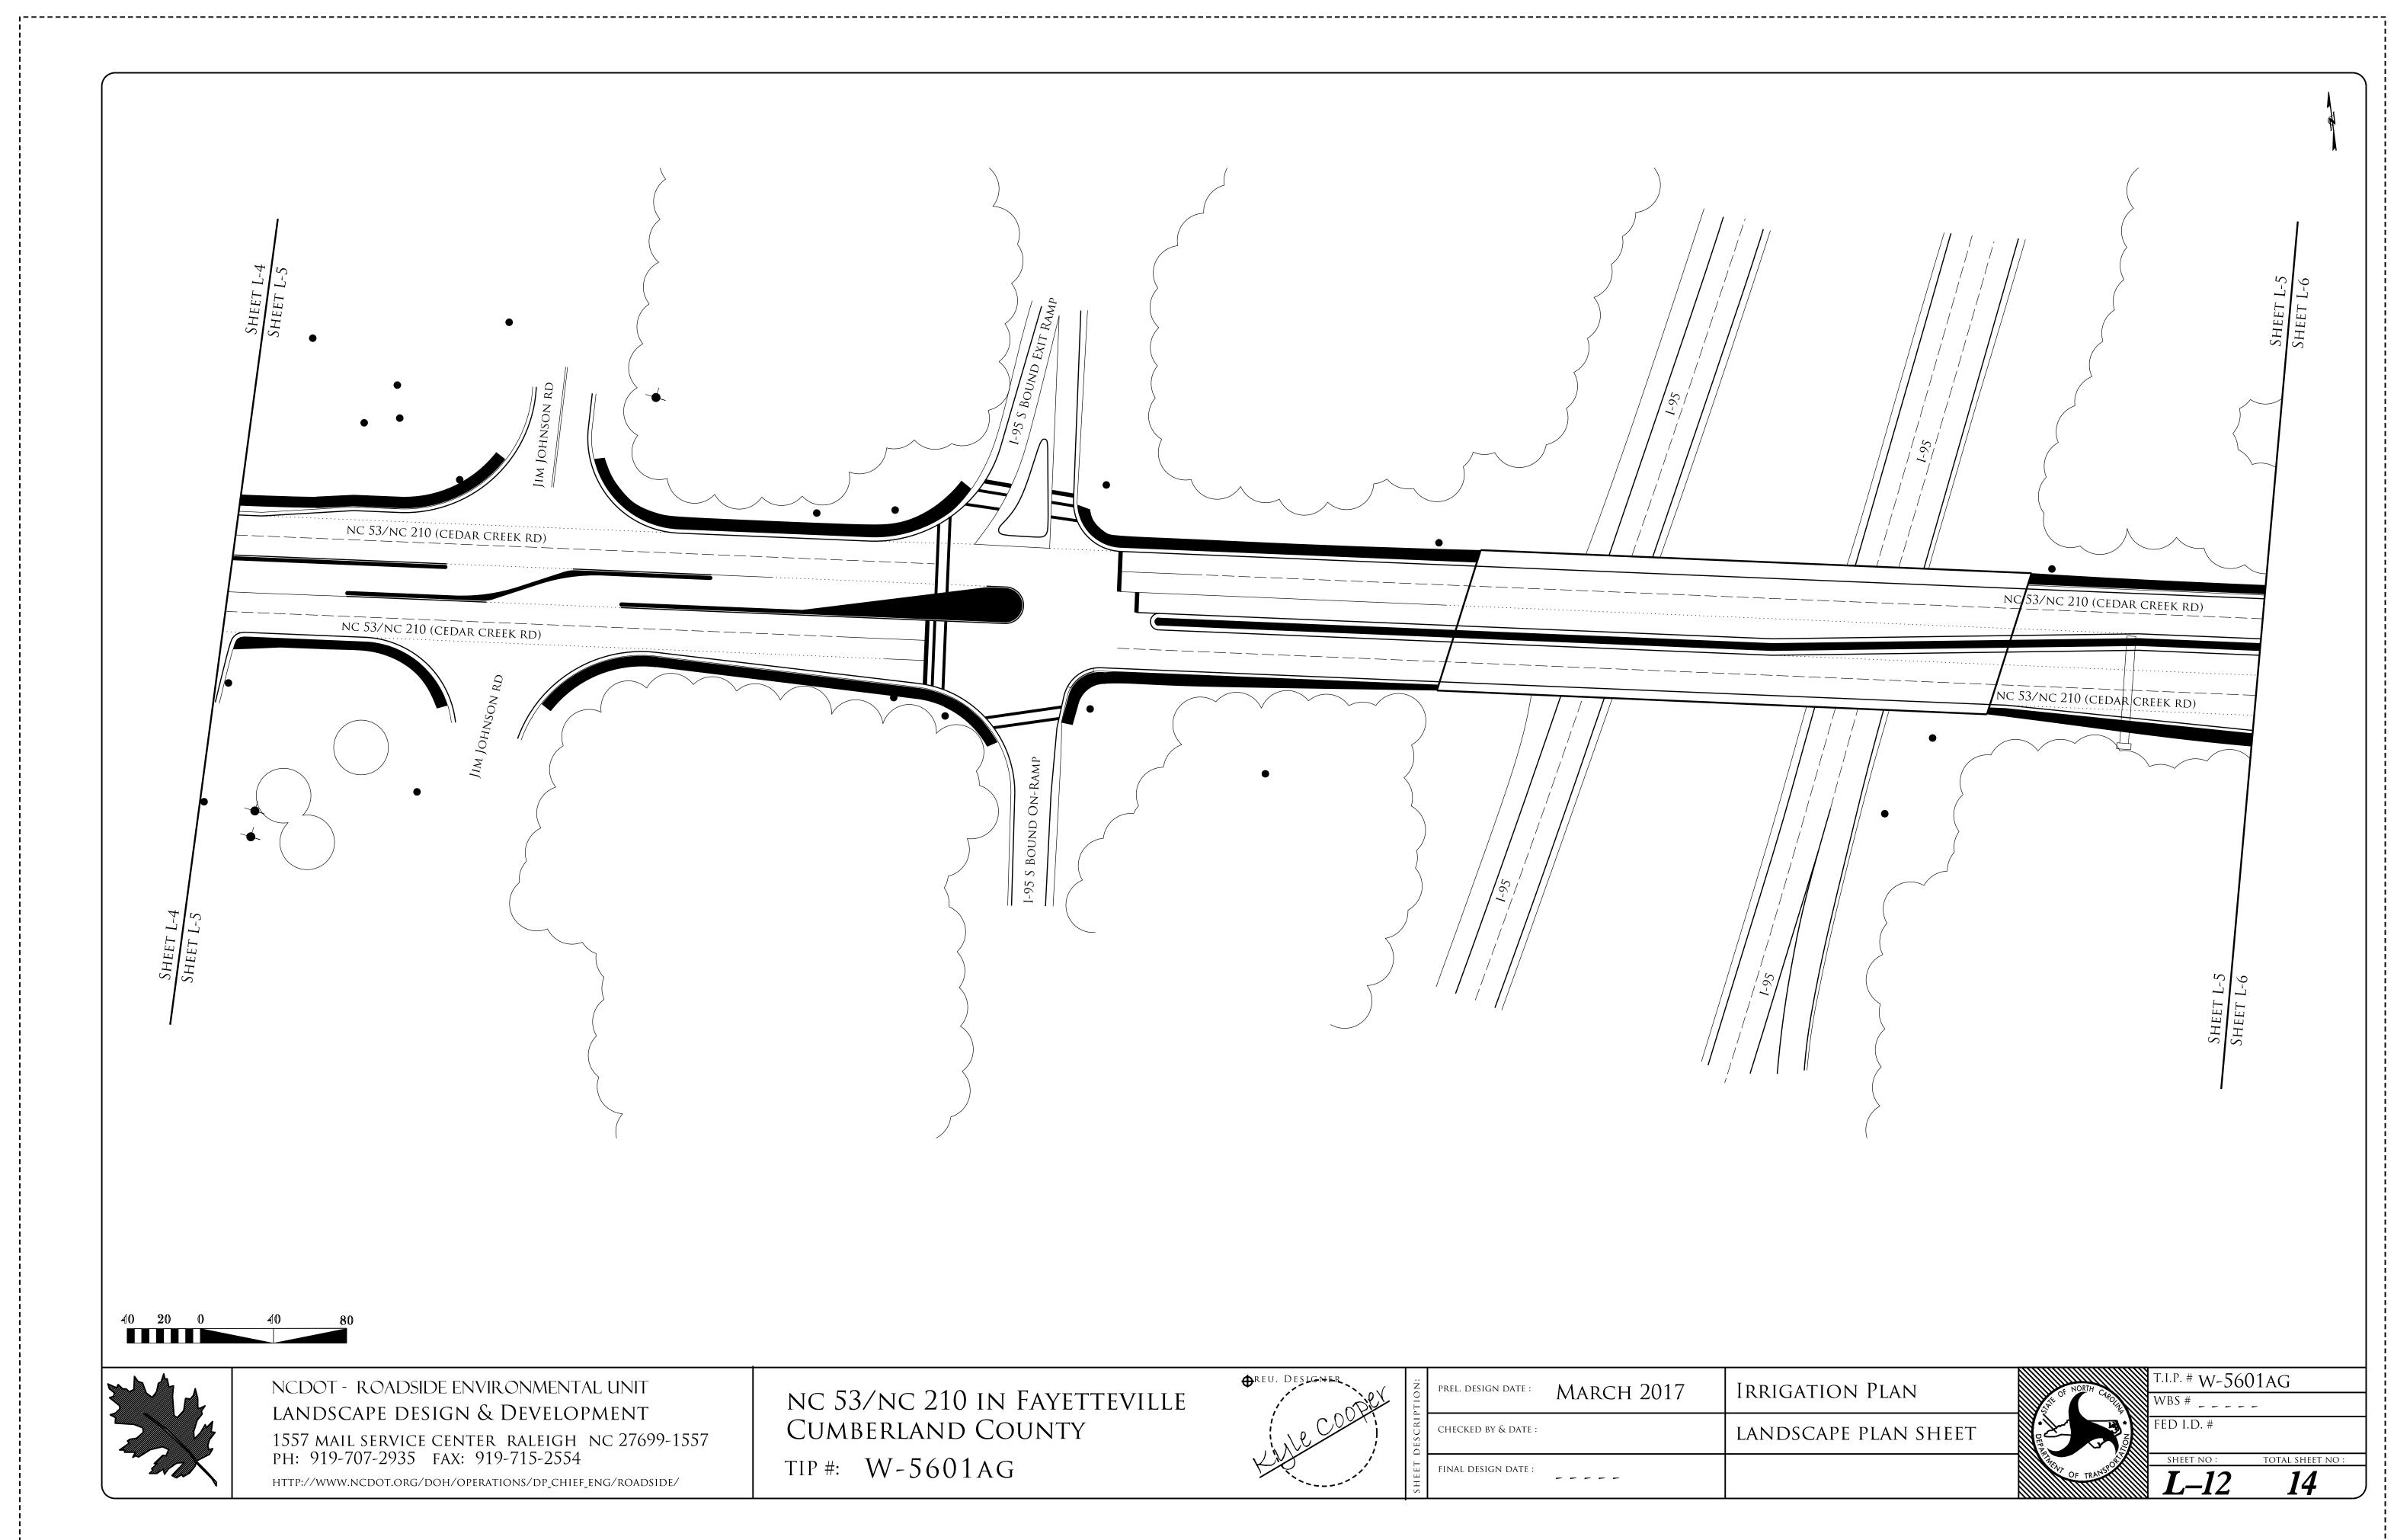

		<i>S6</i> -1
I-95 S BOUND ON-RAMP		

NC 210 IN FAYETTEVILLE	OREU. DESLGNER	PTION:	PREL. DESIGN DATE :	March 2017	Ir
rland County	in the COURT	DESCRII	CHECKED BY & DATE :		LA
V-5601AG		SHEET	FINAL DESIGN DATE :		
			•		

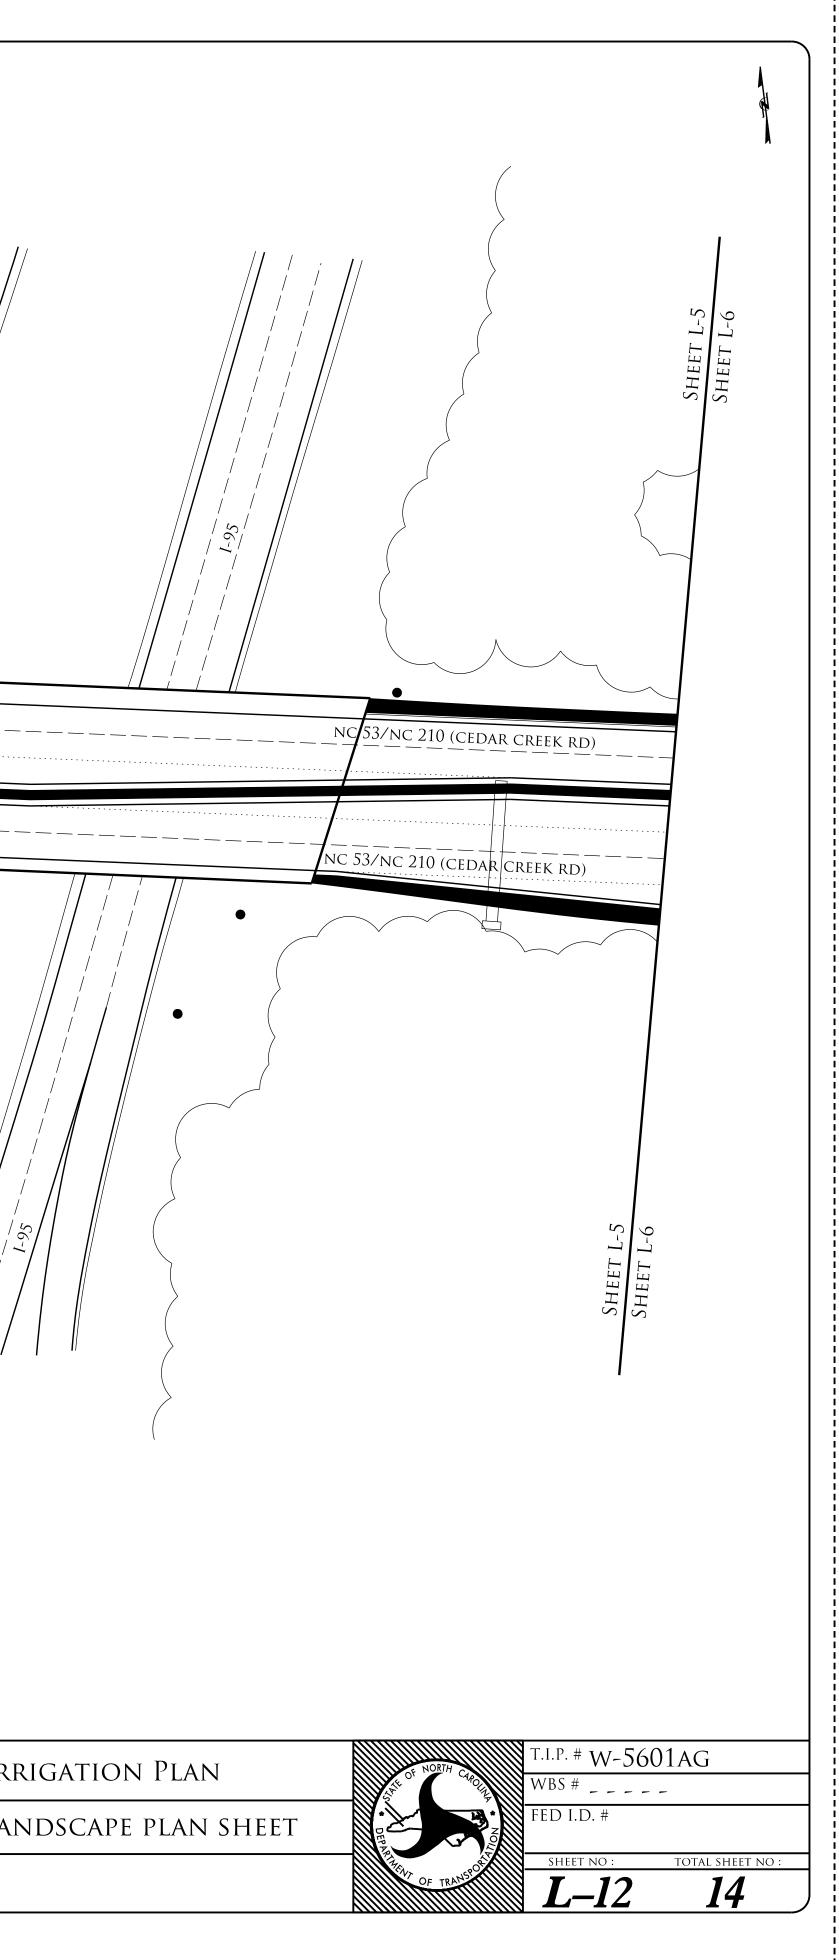


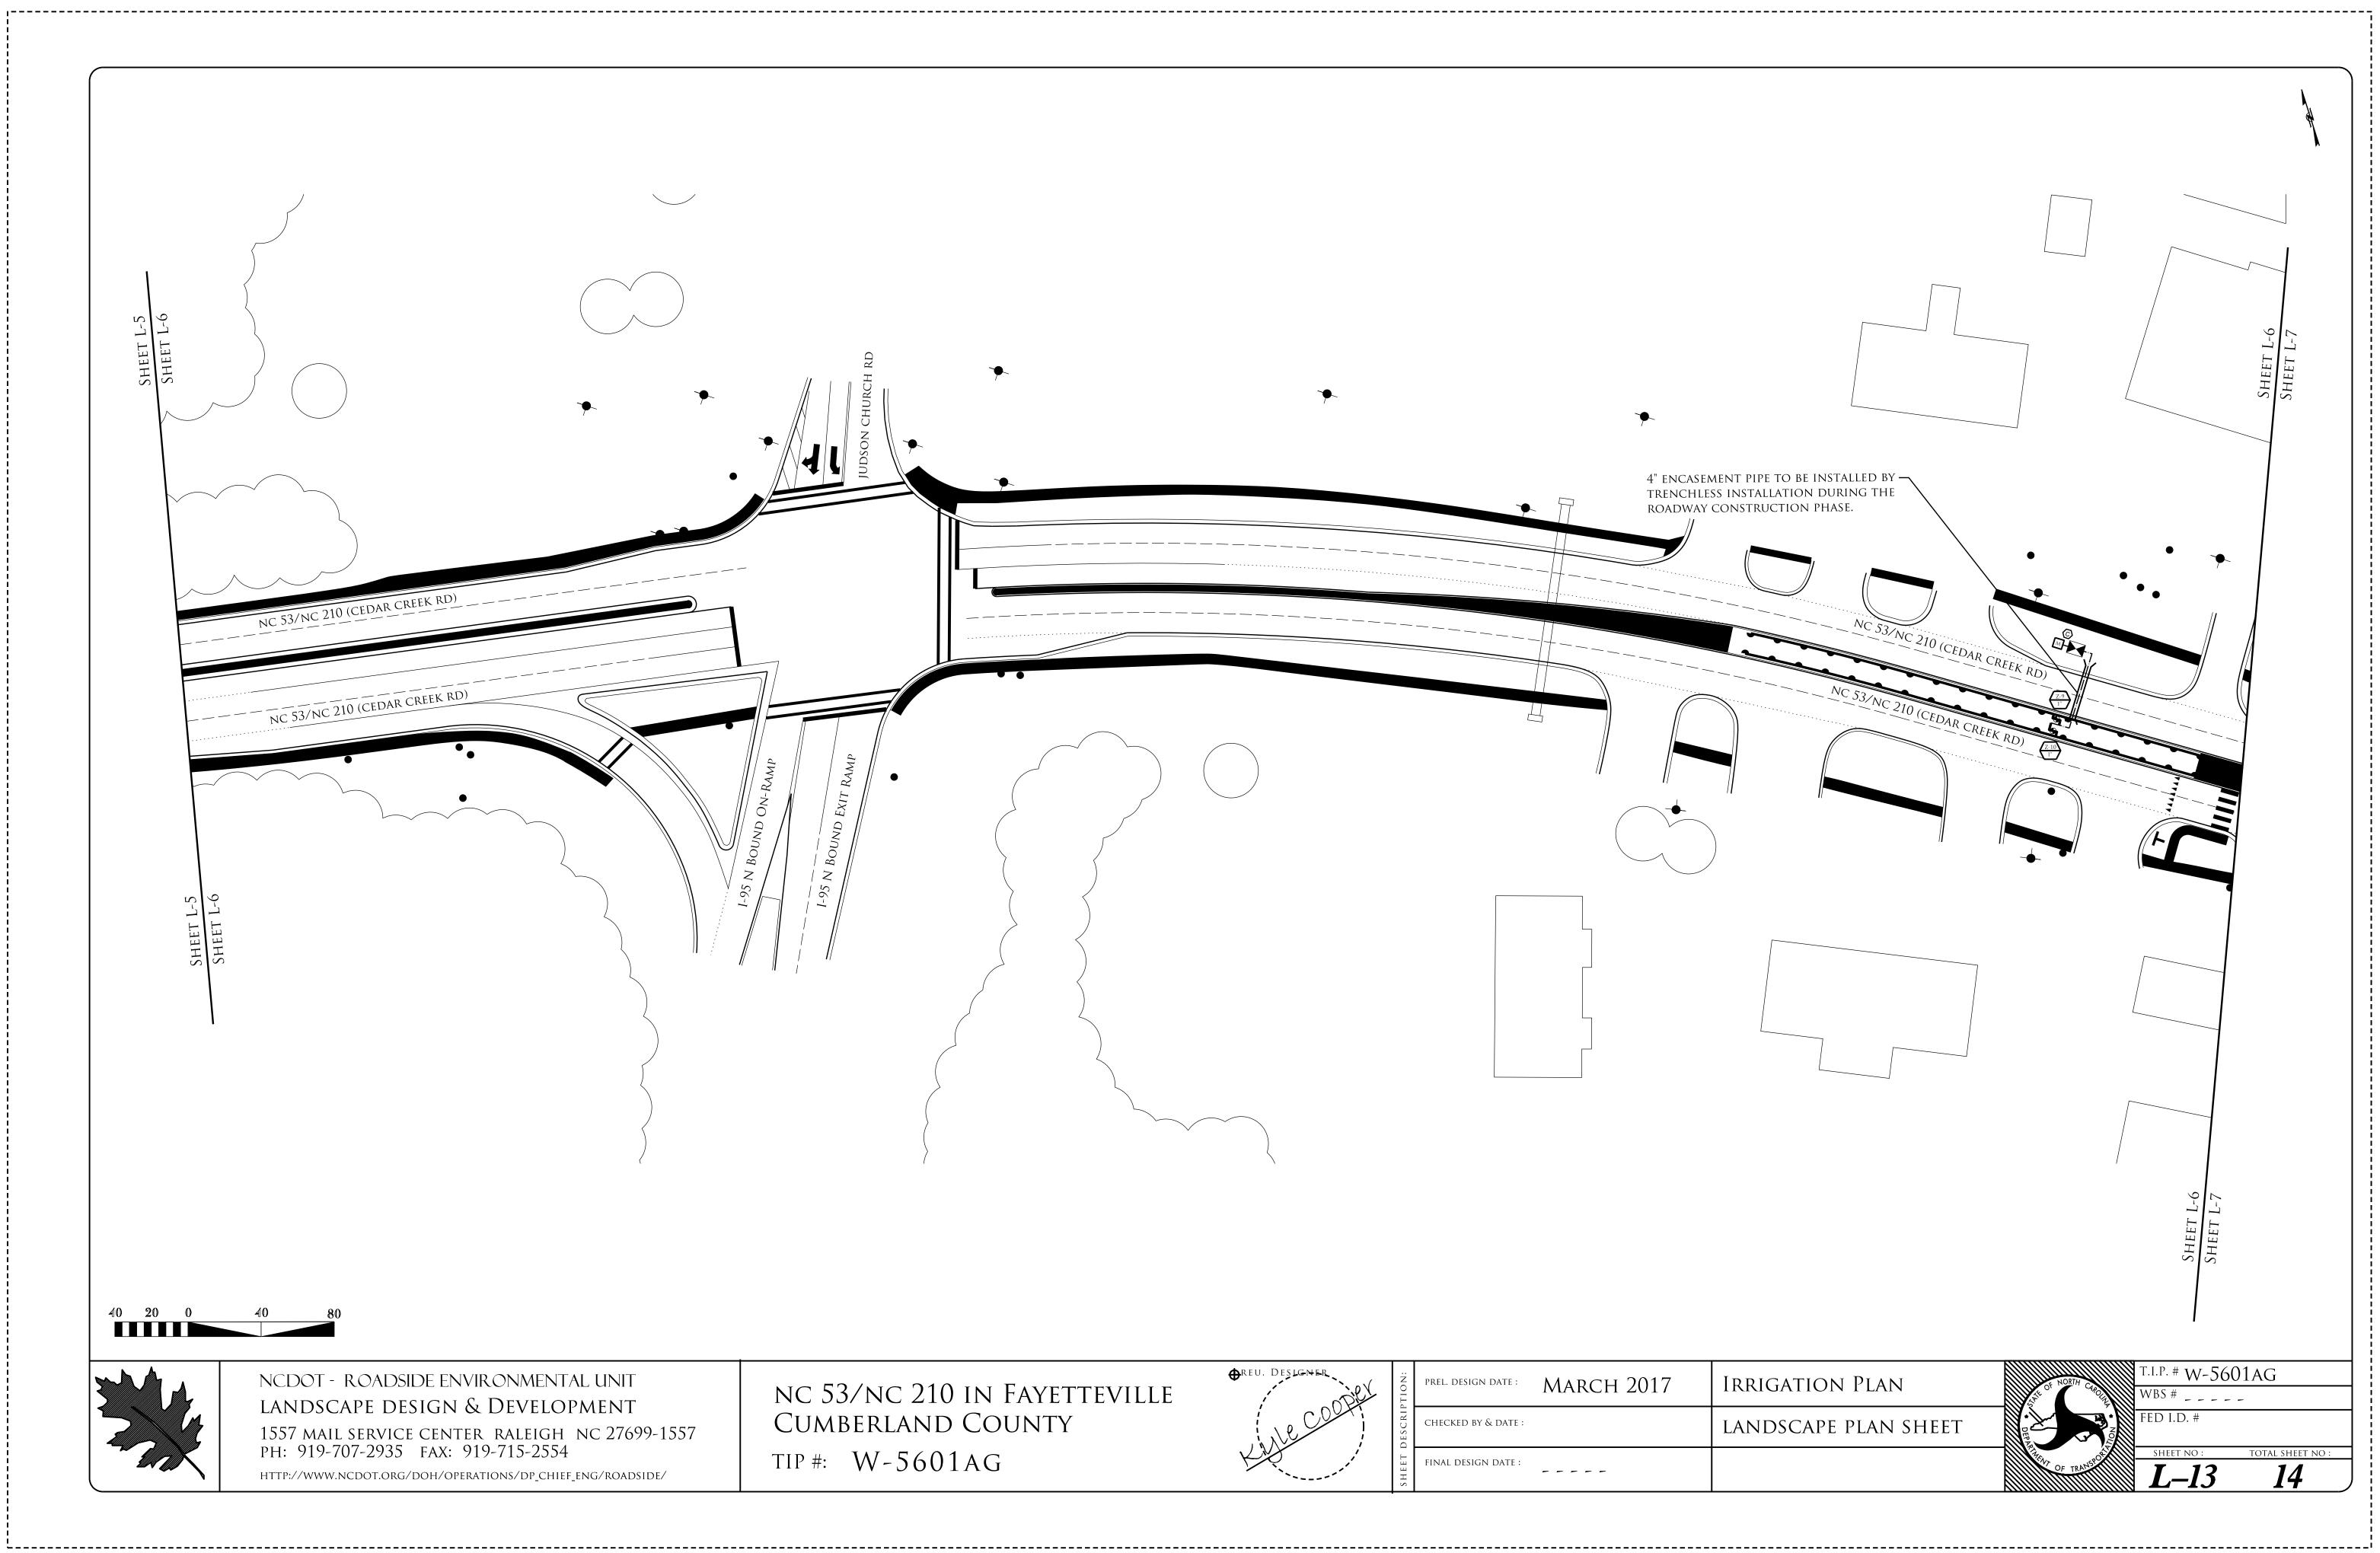

53/nc 210 in Fayetteville	H REU. DE
ABERLAND COUNTY	
: W-5601AG	K

REU. DESIGNER
it is
· · · · · · ·

PREL. DESIGN DATE :	March 2017	Ir
CHECKED BY & DATE :		LA
FINAL DESIGN DATE :		

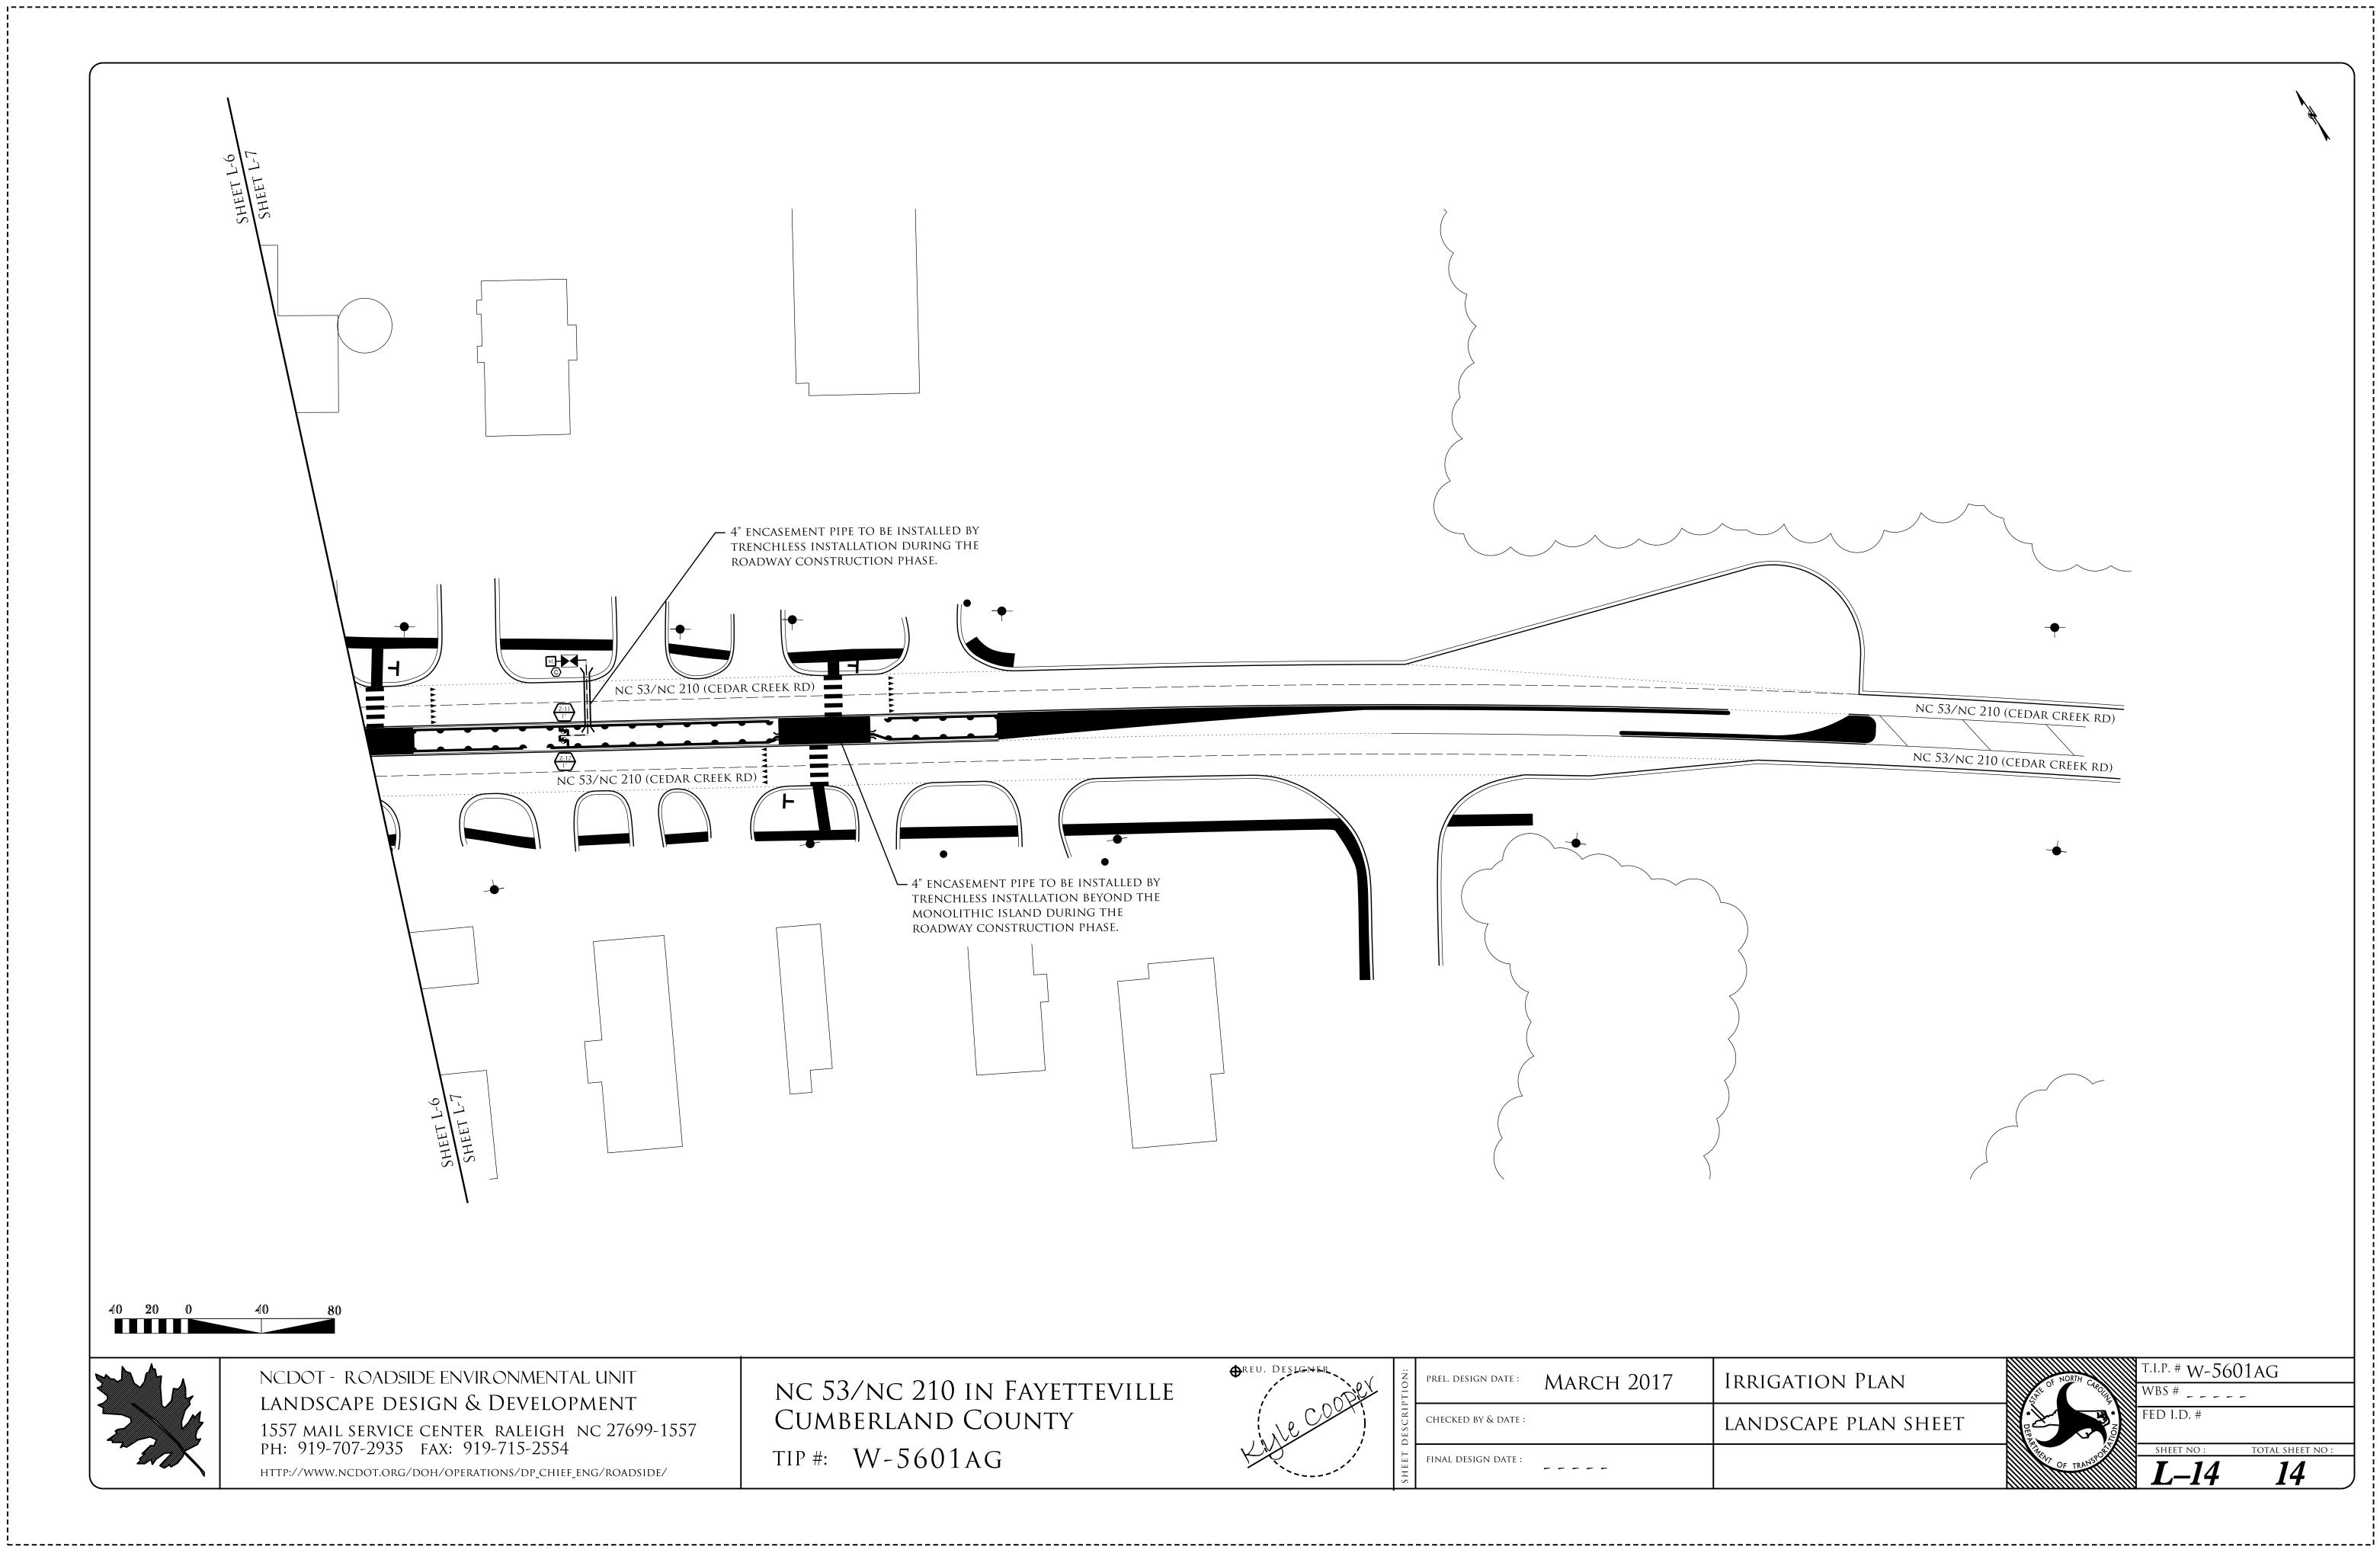

PIPE TO BE INSTALLED BY STALLATION DURING THE Struction Phase.	
4' ENCASEMENT PIPE TO BE INSTALLED BY TRENCHLESS INSTALLATION BEYOND THE MONOLITHIC ISLAND DURING THE ROADWAY CONSTRUCTION PHASE.	
53/NC 210 IN FAYETTEVILLE ABERLAND COUNTY W-5601AG	PREL. DESIGN DATE : MARCH 2017 IF CHECKED BY & DATE : LA FINAL DESIGN DATE :

^{t.i.p. #} W-5601AG rrigation Plan WBS # _ _ _ _ _ FED I.D. # ANDSCAPE PLAN SHEET SHEET NO : TOTAL SHEET NO : *L–14 14*

