

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	17BP.8.R.79 (SF-750084)	1	10

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

**STRUCTURE
SUBSURFACE INVESTIGATION**

PROJ. REFERENCE NO. 17BP.8.R.79 (SF-750084) F.A. PROJ. N/A
 COUNTY RANDOLPH
 PROJECT DESCRIPTION BRIDGE NO. 84 ON SR 1603 (SCHOOL RD)
OVER MUDDY CREEK

CONTENTS

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2-2A	NCDOT DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT SOIL AND ROCK LEGEND, TERMS, SYMBOLS AND ABBREVIATIONS
3	SITE PLAN
4-8	BORING AND ROD SOUNDING LOGS
9	SITE PHOTOGRAPH

PERSONNEL

NORVILLE, C. V.

HAMM, J. R.

PAUL, A.

TRIGON

INVESTIGATED BY PAUL, A.

CHECKED BY HAMM, J. R.

SUBMITTED BY FALCON

DATE MARCH 2014

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.


GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

DRAWN BY: PAUL, A.

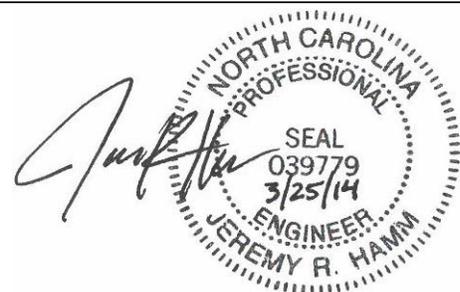

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION										GRADATION																																																																																																		
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>										WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.																																																																																																		
										ANGULARITY OF GRAINS										THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.																																																																																								
SOIL LEGEND AND AASHTO CLASSIFICATION										MINERALOGICAL COMPOSITION																																																																																																		
GENERAL CLASS. GRANULAR MATERIALS (<= 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS										MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.																																																																																																		
GROUP CLASS. A-1, A-3, A-2, A-4, A-5, A-6, A-7, A-1-a, A-1-b, A-2-4, A-2-5, A-2-6, A-2-7, A-7-5, A-7-6, A-3, A-4, A-5, A-6, A-7										COMPRESSIBILITY																																																																																																		
SYMBOL										SLIGHTLY COMPRESSIBLE LIQUID LIMIT LESS THAN 31 MODERATELY COMPRESSIBLE LIQUID LIMIT EQUAL TO 31-50 HIGHLY COMPRESSIBLE LIQUID LIMIT GREATER THAN 50																																																																																																		
% PASSING #10, #40, #200										PERCENTAGE OF MATERIAL																																																																																																		
LIQUID LIMIT PLASTIC INDEX GROUP INDEX USUAL TYPES OF MAJOR MATERIALS GEN. RATING AS A SUBGRADE										<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> </thead> <tbody> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>>10%</td> <td>>20%</td> <td>HIGHLY</td> </tr> </tbody> </table>										ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME	HIGHLY ORGANIC	>10%	>20%	HIGHLY																																																																					
ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																									
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE																																																																																																									
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE																																																																																																									
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME																																																																																																									
HIGHLY ORGANIC	>10%	>20%	HIGHLY																																																																																																									
CONSISTENCY OR DENSENESS										GROUND WATER																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT²)</th> </tr> </thead> <tbody> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td><4 4 TO 10 10 TO 30 30 TO 50 >50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td><2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30</td> <td><0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4</td> </tr> </tbody> </table>										PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)	GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SYMBOL</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td></td> <td>WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING</td> </tr> <tr> <td></td> <td>STATIC WATER LEVEL AFTER 24 HOURS</td> </tr> <tr> <td></td> <td>PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA</td> </tr> <tr> <td></td> <td>SPRING OR SEEP</td> </tr> </tbody> </table>										SYMBOL	DESCRIPTION		WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING		STATIC WATER LEVEL AFTER 24 HOURS		PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA		SPRING OR SEEP																																																																			
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)																																																																																																									
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A																																																																																																									
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4																																																																																																									
SYMBOL	DESCRIPTION																																																																																																											
	WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING																																																																																																											
	STATIC WATER LEVEL AFTER 24 HOURS																																																																																																											
	PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA																																																																																																											
	SPRING OR SEEP																																																																																																											
TEXTURE OR GRAIN SIZE										MISCELLANEOUS SYMBOLS																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> </thead> <tbody> <tr> <td></td> <td>4.76</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> </tbody> </table>										U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.76	2.00	0.42	0.25	0.075	0.053	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SYMBOL</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td></td> <td>ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION</td> </tr> <tr> <td></td> <td>SOIL SYMBOL</td> </tr> <tr> <td></td> <td>ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT</td> </tr> <tr> <td></td> <td>INFERRED SOIL BOUNDARY</td> </tr> <tr> <td></td> <td>INFERRED ROCK LINE</td> </tr> <tr> <td></td> <td>ALLUVIAL SOIL BOUNDARY</td> </tr> <tr> <td></td> <td>DIP & DIP DIRECTION OF ROCK STRUCTURES</td> </tr> <tr> <td></td> <td>SPT TEST BORING</td> </tr> <tr> <td></td> <td>AUGER BORING</td> </tr> <tr> <td></td> <td>CORE BORING</td> </tr> <tr> <td></td> <td>MONITORING WELL</td> </tr> <tr> <td></td> <td>PIEZOMETER INSTALLATION</td> </tr> <tr> <td></td> <td>SLOPE INDICATOR INSTALLATION</td> </tr> <tr> <td></td> <td>CONE PENETROMETER TEST</td> </tr> <tr> <td></td> <td>SOUNDING ROD</td> </tr> </tbody> </table>										SYMBOL	DESCRIPTION		ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION		SOIL SYMBOL		ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT		INFERRED SOIL BOUNDARY		INFERRED ROCK LINE		ALLUVIAL SOIL BOUNDARY		DIP & DIP DIRECTION OF ROCK STRUCTURES		SPT TEST BORING		AUGER BORING		CORE BORING		MONITORING WELL		PIEZOMETER INSTALLATION		SLOPE INDICATOR INSTALLATION		CONE PENETROMETER TEST		SOUNDING ROD																																											
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																						
	4.76	2.00	0.42	0.25	0.075	0.053																																																																																																						
SYMBOL	DESCRIPTION																																																																																																											
	ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION																																																																																																											
	SOIL SYMBOL																																																																																																											
	ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT																																																																																																											
	INFERRED SOIL BOUNDARY																																																																																																											
	INFERRED ROCK LINE																																																																																																											
	ALLUVIAL SOIL BOUNDARY																																																																																																											
	DIP & DIP DIRECTION OF ROCK STRUCTURES																																																																																																											
	SPT TEST BORING																																																																																																											
	AUGER BORING																																																																																																											
	CORE BORING																																																																																																											
	MONITORING WELL																																																																																																											
	PIEZOMETER INSTALLATION																																																																																																											
	SLOPE INDICATOR INSTALLATION																																																																																																											
	CONE PENETROMETER TEST																																																																																																											
	SOUNDING ROD																																																																																																											
SOIL MOISTURE - CORRELATION OF TERMS										ABBREVIATIONS																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td>LL - LIQUID LIMIT</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>PL - PLASTIC LIMIT</td> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td>OM - OPTIMUM MOISTURE SHRINKAGE LIMIT</td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td></td> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </tbody> </table>										SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	PL - PLASTIC LIMIT	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	OM - OPTIMUM MOISTURE SHRINKAGE LIMIT	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE		- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>ABBREVIATION</th> <th>MEANING</th> </tr> </thead> <tbody> <tr> <td>AR</td> <td>AUGER REFUSAL</td> </tr> <tr> <td>BT</td> <td>BORING TERMINATED</td> </tr> <tr> <td>CL</td> <td>CLAY</td> </tr> <tr> <td>CPT</td> <td>CONE PENETRATION TEST</td> </tr> <tr> <td>CSE</td> <td>COARSE</td> </tr> <tr> <td>DMT</td> <td>DILATOMETER TEST</td> </tr> <tr> <td>DPT</td> <td>DYNAMIC PENETRATION TEST</td> </tr> <tr> <td>e</td> <td>VOID RATIO</td> </tr> <tr> <td>F</td> <td>FINE</td> </tr> <tr> <td>FOSS</td> <td>FOSSILIFEROUS</td> </tr> <tr> <td>FRAC</td> <td>FRACTURED, FRACTURES</td> </tr> <tr> <td>FRAGS</td> <td>FRAGMENTS</td> </tr> <tr> <td>HI</td> <td>HIGHLY</td> </tr> <tr> <td>MED</td> <td>MEDIUM</td> </tr> <tr> <td>MICA</td> <td>MICACEOUS</td> </tr> <tr> <td>MOD</td> <td>MODERATELY</td> </tr> <tr> <td>NP</td> <td>NON PLASTIC</td> </tr> <tr> <td>ORG</td> <td>ORGANIC</td> </tr> <tr> <td>PMT</td> <td>PRESSUREMETER TEST</td> </tr> <tr> <td>SAP</td> <td>SAPROLITIC</td> </tr> <tr> <td>SD</td> <td>SAND, SANDY</td> </tr> <tr> <td>SL</td> <td>SILT, SILTY</td> </tr> <tr> <td>SLL</td> <td>SLIGHTLY</td> </tr> <tr> <td>TCR</td> <td>TRICONE REFUSAL</td> </tr> <tr> <td>w</td> <td>MOISTURE CONTENT</td> </tr> <tr> <td>V</td> <td>VERY</td> </tr> <tr> <td>VST</td> <td>VANE SHEAR TEST</td> </tr> <tr> <td>WEA</td> <td>WEATHERED</td> </tr> <tr> <td>γ_u</td> <td>UNIT WEIGHT</td> </tr> <tr> <td>γ_d</td> <td>DRY UNIT WEIGHT</td> </tr> <tr> <td>S</td> <td>BULK</td> </tr> <tr> <td>SS</td> <td>SPLIT SPOON</td> </tr> <tr> <td>ST</td> <td>SHELBY TUBE</td> </tr> <tr> <td>RS</td> <td>ROCK</td> </tr> <tr> <td>RT</td> <td>RECOMPACTED TRIAXIAL</td> </tr> <tr> <td>CBR</td> <td>CALIFORNIA BEARING RATIO</td> </tr> </tbody> </table>										ABBREVIATION	MEANING	AR	AUGER REFUSAL	BT	BORING TERMINATED	CL	CLAY	CPT	CONE PENETRATION TEST	CSE	COARSE	DMT	DILATOMETER TEST	DPT	DYNAMIC PENETRATION TEST	e	VOID RATIO	F	FINE	FOSS	FOSSILIFEROUS	FRAC	FRACTURED, FRACTURES	FRAGS	FRAGMENTS	HI	HIGHLY	MED	MEDIUM	MICA	MICACEOUS	MOD	MODERATELY	NP	NON PLASTIC	ORG	ORGANIC	PMT	PRESSUREMETER TEST	SAP	SAPROLITIC	SD	SAND, SANDY	SL	SILT, SILTY	SLL	SLIGHTLY	TCR	TRICONE REFUSAL	w	MOISTURE CONTENT	V	VERY	VST	VANE SHEAR TEST	WEA	WEATHERED	γ _u	UNIT WEIGHT	γ _d	DRY UNIT WEIGHT	S	BULK	SS	SPLIT SPOON	ST	SHELBY TUBE	RS	ROCK	RT	RECOMPACTED TRIAXIAL	CBR	CALIFORNIA BEARING RATIO
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																										
LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																										
PL - PLASTIC LIMIT	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																										
OM - OPTIMUM MOISTURE SHRINKAGE LIMIT	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																										
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																										
ABBREVIATION	MEANING																																																																																																											
AR	AUGER REFUSAL																																																																																																											
BT	BORING TERMINATED																																																																																																											
CL	CLAY																																																																																																											
CPT	CONE PENETRATION TEST																																																																																																											
CSE	COARSE																																																																																																											
DMT	DILATOMETER TEST																																																																																																											
DPT	DYNAMIC PENETRATION TEST																																																																																																											
e	VOID RATIO																																																																																																											
F	FINE																																																																																																											
FOSS	FOSSILIFEROUS																																																																																																											
FRAC	FRACTURED, FRACTURES																																																																																																											
FRAGS	FRAGMENTS																																																																																																											
HI	HIGHLY																																																																																																											
MED	MEDIUM																																																																																																											
MICA	MICACEOUS																																																																																																											
MOD	MODERATELY																																																																																																											
NP	NON PLASTIC																																																																																																											
ORG	ORGANIC																																																																																																											
PMT	PRESSUREMETER TEST																																																																																																											
SAP	SAPROLITIC																																																																																																											
SD	SAND, SANDY																																																																																																											
SL	SILT, SILTY																																																																																																											
SLL	SLIGHTLY																																																																																																											
TCR	TRICONE REFUSAL																																																																																																											
w	MOISTURE CONTENT																																																																																																											
V	VERY																																																																																																											
VST	VANE SHEAR TEST																																																																																																											
WEA	WEATHERED																																																																																																											
γ _u	UNIT WEIGHT																																																																																																											
γ _d	DRY UNIT WEIGHT																																																																																																											
S	BULK																																																																																																											
SS	SPLIT SPOON																																																																																																											
ST	SHELBY TUBE																																																																																																											
RS	ROCK																																																																																																											
RT	RECOMPACTED TRIAXIAL																																																																																																											
CBR	CALIFORNIA BEARING RATIO																																																																																																											
PLASTICITY										EQUIPMENT USED ON SUBJECT PROJECT																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>NONPLASTIC</th> <th>PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> </thead> <tbody> <tr> <td>LOW PLASTICITY</td> <td>0-5</td> <td>VERY LOW</td> </tr> <tr> <td>MED. PLASTICITY</td> <td>6-15</td> <td>SLIGHT</td> </tr> <tr> <td>HIGH PLASTICITY</td> <td>16-25</td> <td>MEDIUM</td> </tr> <tr> <td></td> <td>26 OR MORE</td> <td>HIGH</td> </tr> </tbody> </table>										NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH	LOW PLASTICITY	0-5	VERY LOW	MED. PLASTICITY	6-15	SLIGHT	HIGH PLASTICITY	16-25	MEDIUM		26 OR MORE	HIGH	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>DRILL UNITS:</th> <th>ADVANCING TOOLS:</th> <th>HAMMER TYPE:</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/> MOBILE B-_____</td> <td><input type="checkbox"/> CLAY BITS</td> <td><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</td> </tr> <tr> <td><input type="checkbox"/> BK-51</td> <td><input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER</td> <td rowspan="2">CORE SIZE:</td> </tr> <tr> <td><input type="checkbox"/> CME-45C</td> <td><input checked="" type="checkbox"/> 8" HOLLOW AUGERS</td> <td><input type="checkbox"/> -B_____</td> </tr> <tr> <td><input type="checkbox"/> CME-550</td> <td><input type="checkbox"/> HARD FACED FINGER BITS</td> <td><input type="checkbox"/> -N_____</td> </tr> <tr> <td><input type="checkbox"/> PORTABLE HOIST</td> <td><input type="checkbox"/> TUNG-CARBIDE INSERTS</td> <td><input type="checkbox"/> -H_____</td> </tr> <tr> <td><input checked="" type="checkbox"/> CME-55</td> <td><input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER</td> <td rowspan="2">HAND TOOLS:</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> TRICONE _____ STEEL TEETH</td> <td><input type="checkbox"/> POST HOLE DIGGER</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> TRICONE _____ TUNG-CARB.</td> <td><input type="checkbox"/> HAND AUGER</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> CORE BIT</td> <td><input checked="" type="checkbox"/> SOUNDING ROD</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> VANE SHEAR TEST</td> </tr> </tbody> </table>										DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	<input type="checkbox"/> MOBILE B-_____	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input type="checkbox"/> BK-51	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER	CORE SIZE:	<input type="checkbox"/> CME-45C	<input checked="" type="checkbox"/> 8" HOLLOW AUGERS	<input type="checkbox"/> -B_____	<input type="checkbox"/> CME-550	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -N_____	<input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> -H_____	<input checked="" type="checkbox"/> CME-55	<input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER	HAND TOOLS:	<input type="checkbox"/> _____	<input type="checkbox"/> TRICONE _____ STEEL TEETH	<input type="checkbox"/> POST HOLE DIGGER	<input type="checkbox"/> _____	<input type="checkbox"/> TRICONE _____ TUNG-CARB.	<input type="checkbox"/> HAND AUGER	<input type="checkbox"/> _____	<input type="checkbox"/> CORE BIT	<input checked="" type="checkbox"/> SOUNDING ROD	<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> VANE SHEAR TEST																																									
NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																																																										
LOW PLASTICITY	0-5	VERY LOW																																																																																																										
MED. PLASTICITY	6-15	SLIGHT																																																																																																										
HIGH PLASTICITY	16-25	MEDIUM																																																																																																										
	26 OR MORE	HIGH																																																																																																										
DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:																																																																																																										
<input type="checkbox"/> MOBILE B-_____	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL																																																																																																										
<input type="checkbox"/> BK-51	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER	CORE SIZE:																																																																																																										
<input type="checkbox"/> CME-45C	<input checked="" type="checkbox"/> 8" HOLLOW AUGERS		<input type="checkbox"/> -B_____																																																																																																									
<input type="checkbox"/> CME-550	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -N_____																																																																																																										
<input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> -H_____																																																																																																										
<input checked="" type="checkbox"/> CME-55	<input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER	HAND TOOLS:																																																																																																										
<input type="checkbox"/> _____	<input type="checkbox"/> TRICONE _____ STEEL TEETH		<input type="checkbox"/> POST HOLE DIGGER																																																																																																									
<input type="checkbox"/> _____	<input type="checkbox"/> TRICONE _____ TUNG-CARB.	<input type="checkbox"/> HAND AUGER																																																																																																										
<input type="checkbox"/> _____	<input type="checkbox"/> CORE BIT	<input checked="" type="checkbox"/> SOUNDING ROD																																																																																																										
<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> VANE SHEAR TEST																																																																																																										
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.																																																																																																												

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

ROCK DESCRIPTION	
HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:	
WEATHERED ROCK (WR)	 NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.
CRYSTALLINE ROCK (CR)	 FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.
NON-CRYSTALLINE ROCK (NCR)	 FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLITE, SLATE, SANDSTONE, ETC.
COASTAL PLAIN SEDIMENTARY ROCK (CP)	 COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.

TERMS AND DEFINITIONS
ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER.
AQUIFER - A WATER BEARING FORMATION OR STRATA.
ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND.
ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC.
ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE.
CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE.
COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE.
CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.
DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK.
DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL.
DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH.
FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE.
FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES.
FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL.
FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM.
FORMATION (FM.) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD.
JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED.
LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT.
LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS.
MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE.
PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM.
RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK.
ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.
SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK.
SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS.
SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE.
STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS.
STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE.
STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE.
TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.

WEATHERING	
FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <i>IF TESTED, WOULD YIELD SPT REFUSAL</i>
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <i>IF TESTED, YIELDS SPT N VALUES > 100 BPF</i>
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. <i>IF TESTED, YIELDS SPT N VALUES < 100 BPF</i>
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.


ROCK HARDNESS	
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.
MEDIUM HARD	CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.
SOFT	CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.

FRACTURE SPACING		BEDDING	
TERM	SPACING	TERM	THICKNESS
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	> 4 FEET
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET
CLOSE	0.16 TO 1 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET
		THINLY LAMINATED	< 0.008 FEET


INDURATION	
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.	
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.

BENCH MARK: BMI: RR SPIKE IN BASE OF 12' SYCAMORE TREE
 N 783686 E 172509
 ELEVATION: 779.92 FT.

NOTES:
 F.I.A.D. - FILLED IMMEDIATELY AFTER DRILLING

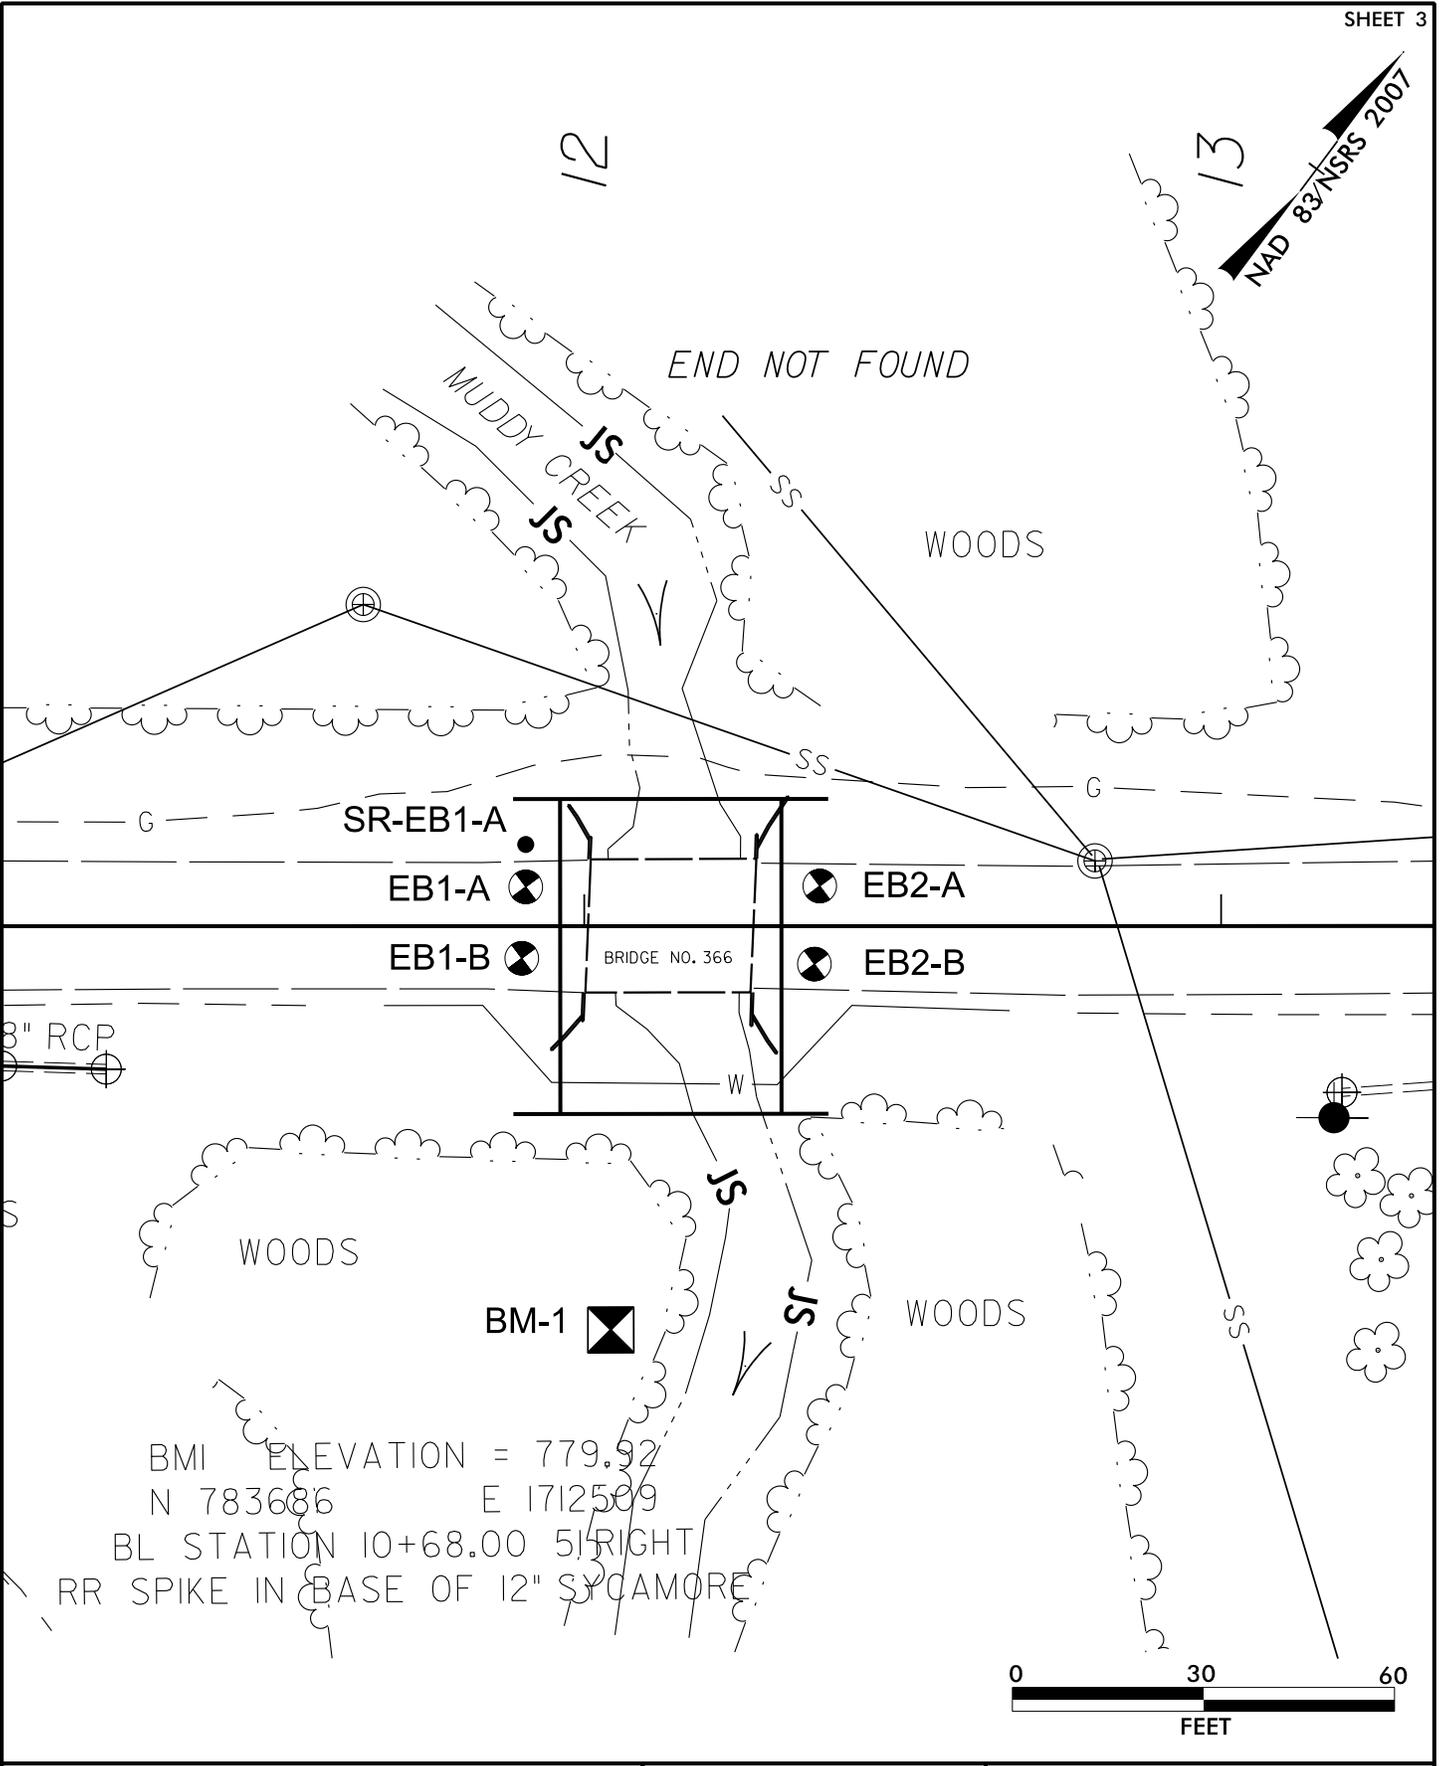

BMI ELEVATION = 779.92
 N 783686 E 1712509
 BL STATION 10+68.00 5' RIGHT
 RR SPIKE IN BASE OF 12" SYCAMORE



NOTES:

- PLANS ADOPTED FROM ELECTRONIC FILES RECEIVED FROM NCDOT GEOTECHNICAL ENGINEERING UNIT IN FEBRUARY 2014
- APPROXIMATE CULVERT SKEW: 90 DEGREES



FALCON ENGINEERING, INC.
 1210 TRINITY ROAD, SUITE 110
 RALEIGH, NC 27607
 PHONE: 919.871.0800
 FAX: 919.871.0803

SITE PLAN

BRIDGE NO. 84 ON SR 1603 (SCHOOL RD)
 OVER MUDDY CREEK
 RANDOLPH COUNTY, NC
 WBS: 17BP.8.R.79; TIP: SF-750084



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

WBS 17BP.8.R.79	TIP SF-750084	COUNTY RANDOLPH	GEOLOGIST PAUL, A.
SITE DESCRIPTION BRIDGE NO. 84 ON SR 1603 (SCHOOL RD) OVER MUDDY CREEK			GROUND WTR (ft)
BORING NO. EB1-A	STATION 11+91	OFFSET 6 ft LT	ALIGNMENT -L-
COLLAR ELEV. 783.8 ft	TOTAL DEPTH 13.0 ft	NORTHING 783,740	EASTING 1,712,459
DRILL RIG/HAMMER EFF./DATE TRI0055 CME-55 73% 02/07/2014		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER TOOTHMAN, R. E.	START DATE 03/11/14	COMP. DATE 03/11/14	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
785															
	782.8	1.0	6	4	3								M	EXISTING PAVEMENT	0.0
														0.75' BITUMINOUS CONCRETE	
														0.45' AGGREGATE BASE COURSE	1.2
780	780.3	3.5	2	1	1									ROADWAY EMBANKMENT	
														TAN AND WHITE, SILTY SAND (A-2-4)	3.0
														BROWN, SILTY SAND (A-2-4)	
	777.8	6.0	2	1	2								Sat.		5.5
														ALLUVIAL	
														GRAY, F. SANDY CLAY (A-7)	
775	775.3	8.5	4	3	4								Sat.		11.0
														WEATHERED ROCK	
														GRANITE	
														NO SAMPLE: IMPLIED BY HARD DRILLING	13.0
														Boring Terminated by Auger Refusal at Elevation 770.8 ft on CR: GRANITE NOTE: Hard drilling encountered at 11.0', auger sheared off in hole at 13.0' near refusal. Rod sounding performed adjacent to boring in order to verify presence of weathered rock. See rod sounding log for data.	

NCDOT BORE SINGLE_SF750084_GEO_BRD0084_GINT.GPJ_NC_DOT.GDT_3/28/14



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

WBS 17BP.8.R.79	TIP SF-750084	COUNTY RANDOLPH	GEOLOGIST PAUL, A.
SITE DESCRIPTION BRIDGE NO. 84 ON SR 1603 (SCHOOL RD) OVER MUDDY CREEK			GROUND WTR (ft)
BORING NO. SR-EB1-A	STATION 11+97	OFFSET 13 ft LT	ALIGNMENT -L-
COLLAR ELEV. 783.8 ft	TOTAL DEPTH 11.5 ft	NORTHING 783,739	EASTING 1,712,453
DRILL RIG/HAMMER EFF./DATE N/A		DRILL METHOD Rod Sounding	HAMMER TYPE Automatic
DRILLER PAUL, A.	START DATE 03/13/14	COMP. DATE 03/13/14	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100							
785																	
	783.8	0.0	N/A	6	7										783.8	EXISTING SHOULDER	0.0
	782.8	1.0	N/A	7	7											ROD SOUNDING ONLY, NO SAMPLES COLLECTED. SEE SPT BORING LOG EB1-A FOR SUBSURFACE INFORMATION	
	781.8	2.0	N/A	7	7												
	780.8	3.0	N/A	10	10												
780	779.8	4.0	N/A	9	9												
	778.8	5.0	N/A	11	12												
	777.8	6.0	N/A	5	5												
	776.8	7.0	N/A	2	2												
	775.8	8.0	N/A	2	2												
775	774.8	9.0	N/A	2	3												
	773.8	10.0	N/A	7	8												
	772.8	11.0	N/A	40	40												
			N/A	148/5	N/A										772.3	Boring Terminated at Elevation 772.3 ft	11.5

NCDOT BORE SINGLE SF750084_GEO_BRD0084_GINT.GPJ NC_DOT.GDT 3/28/14



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

WBS 17BP.8.R.79	TIP SF-750084	COUNTY RANDOLPH	GEOLOGIST PAUL, A.
SITE DESCRIPTION BRIDGE NO. 84 ON SR 1603 (SCHOOL RD) OVER MUDDY CREEK			GROUND WTR (ft)
BORING NO. EB1-B	STATION 11+90	OFFSET 5 ft RT	ALIGNMENT -L-
COLLAR ELEV. 783.9 ft	TOTAL DEPTH 15.7 ft	NORTHING 783,729	EASTING 1,712,458
DRILL RIG/HAMMER EFF./DATE TRI0055 CME-55 73% 02/07/2014		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER TOOTHMAN, R. E.	START DATE 03/11/14	COMP. DATE 03/11/14	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100							
785														783.9	EXISTING PAVEMENT	0.0	
	782.9	1.0	14	13	9								M	782.7	0.6' BITUMINOUS CONCRETE 0.6' AGGREGATE BASE COURSE	1.2	
780	780.4	3.5	2	1	3								M	780.4	ROADWAY EMBANKMENT TAN AND BROWN, SILTY SAND (A-2-4)	3.5	
	777.9	6.0	1	1	1								M	778.4	TAN, CLAYEY SAND W/ GRAVEL (A-2-6)	5.5	
775	775.4	8.5	WOH	WOH	2								M		ALLUVIAL GRAY, SANDY CLAY (A-7)		
													Sat.				
770	770.4	13.5	34	66/0.4										771.9	WEATHERED ROCK GRANITE	12.0	
	768.2	15.7	60/0.0											768.2	Boring Terminated by Auger Refusal at Elevation 768.2 ft on CR: GRANITE	15.7	

NCDOT BORE SINGLE SF750084_GEO_BRD0084_GINT.GPJ NC_DOT.GDT 3/28/14



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

WBS 17BP.8.R.79	TIP SF-750084	COUNTY RANDOLPH	GEOLOGIST PAUL, A.
SITE DESCRIPTION BRIDGE NO. 84 ON SR 1603 (SCHOOL RD) OVER MUDDY CREEK			GROUND WTR (ft)
BORING NO. EB2-A	STATION 12+37	OFFSET 6 ft LT	ALIGNMENT -L-
COLLAR ELEV. 783.5 ft	TOTAL DEPTH 13.0 ft	NORTHING 783,741	EASTING 1,712,505
DRILL RIG/HAMMER EFF./DATE TRI0055 CME-55 73% 02/07/2014		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER TOOTHMAN, R. E.	START DATE 03/11/14	COMP. DATE 03/11/14	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
785															
	782.5	1.0	3	2	4									EXISTING PAVEMENT	0.0
	780.5	3.0	2	1	3									0.65' BITUMINOUS CONCRETE 0.55' AGGREGATE BASE COURSE	1.2
	777.5	6.0	1	1	1									ROADWAY EMBANKMENT TAN, SILTY SAND W/ CLAY LENSES (A-2-4)	
	775.0	8.5	WOH	1	1									ALLUVIAL GRAY, F. SANDY CLAY (A-7)	8.0
	770.5	13.0												GRAY, SILTY F. TO CSE. SAND (A-2-4)	11.5
														WEATHERED ROCK GRANITE	13.0
														Boring Terminated by Auger Refusal at Elevation 770.5 ft on CR: GRANITE	

NCDOT BORE SINGLE SF750084_GEO_BRD0084_GINT.GPJ NC_DOT.GDT 3/28/14



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

WBS 17BP.8.R.79	TIP SF-750084	COUNTY RANDOLPH	GEOLOGIST PAUL, A.
SITE DESCRIPTION BRIDGE NO. 84 ON SR 1603 (SCHOOL RD) OVER MUDDY CREEK			GROUND WTR (ft)
BORING NO. EB2-B	STATION 12+36	OFFSET 6 ft RT	ALIGNMENT -L-
COLLAR ELEV. 783.6 ft	TOTAL DEPTH 11.9 ft	NORTHING 783,728	EASTING 1,712,504
DRILL RIG/HAMMER EFF./DATE TRI0055 CME-55 73% 02/07/2014		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER TOOTHMAN, R. E.	START DATE 03/11/14	COMP. DATE 03/11/14	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
785																
	782.6	1.0	10	7	13									783.6	0.0	EXISTING PAVEMENT
														782.4	1.2	0.65' BITUMINOUS CONCRETE 0.55' AGGREGATE BASE COURSE
780	780.1	3.5	9	5	2									779.6	4.0	ROADWAY EMBANKMENT TAN, SILTY SAND (A-2-4)
	777.6	6.0	2	1	1											ALLUVIAL GRAY TAN AND ORANGE, SILTY SAND (A-2-4)
775	775.1	8.5	1	1	2									775.6	8.0	GRAY, SAND (A-3)
	771.7	11.9	60/0.0											771.7	11.9	WEATHERED ROCK GRANITE Boring Terminated by Auger Refusal at Elevation 771.7 ft on CR: GRANITE

NCDOT BORE SINGLE SF750084_GEO_BRD0084_GINT.GPJ_NC_DOT.GDT 3/28/14



FALCON ENGINEERING, INC.
1210 TRINITY ROAD, SUITE 110
RALEIGH, NC 27607
PHONE: 919.871.0800
FAX: 919.871.0803

SITE PHOTOGRAPH

BRIDGE NO. 84 ON SR 1603 (SCHOOL RD)
OVER MUDDY CREEK
RANDOLPH COUNTY, NC
WBS: 17BP.8.R.79, TIP: SF-750084