

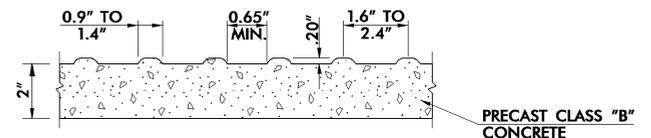



- NOTES:
1. DETECTABLE WARNING DOMES SHALL COVER 2'-0" LENGTH AND FULL WIDTH OF THE RAMP FLOOR AS SHOWN ON THE DETAILS.
  2. OBTAIN 70% CONTRAST VISIBILITY WITH ADJOINING SURFACE, EITHER LIGHT-ON-DARK, OR DARK-ON-LIGHT SEQUENCE COVERING THE ENTIRE RAMP.

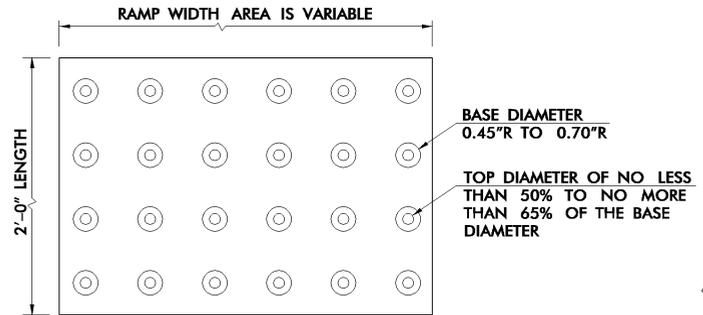

**DETECTABLE WARNING DOMES**

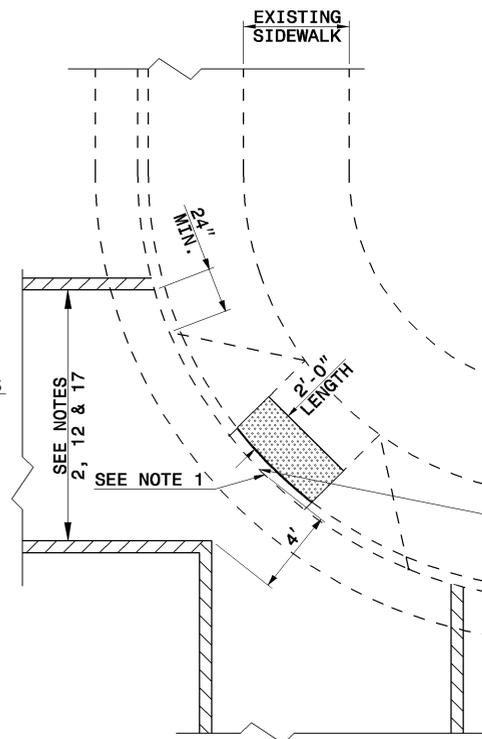

**PLAN VIEW**  
DIAGONAL RAMP  
MAX. 25' RADII  
(60" MIN. FLOOR WIDTH)

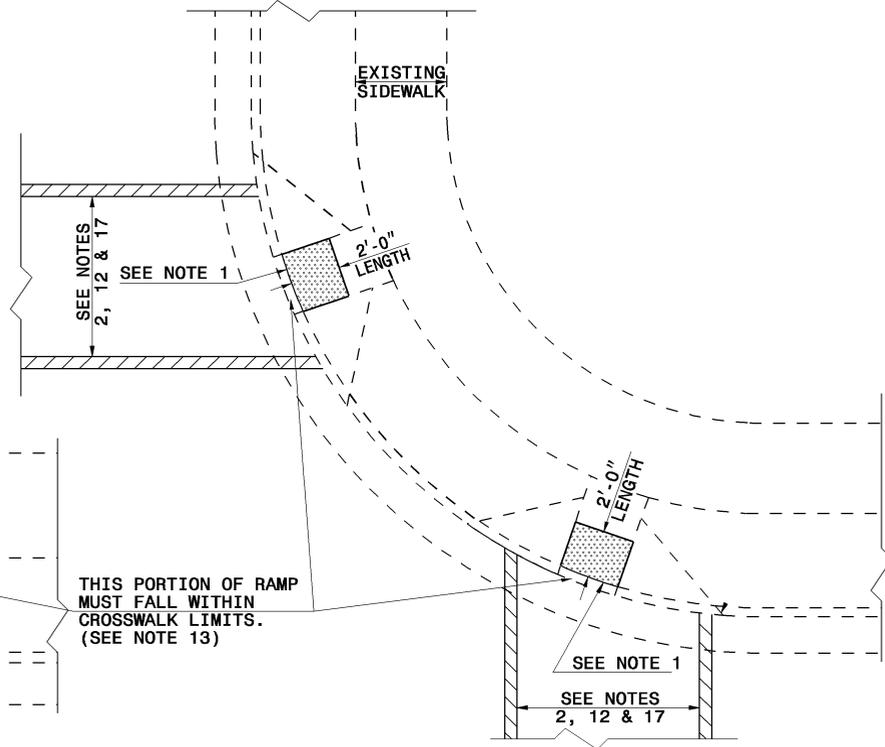

**PLAN VIEW**  
DUAL RAMP  
ANY RADII  
(40" MIN. FLOOR WIDTH)