
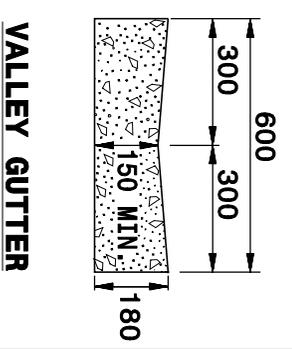
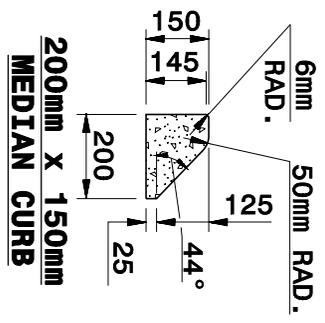
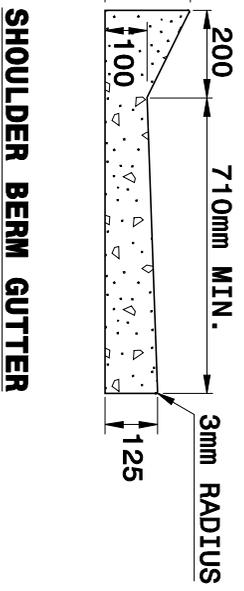
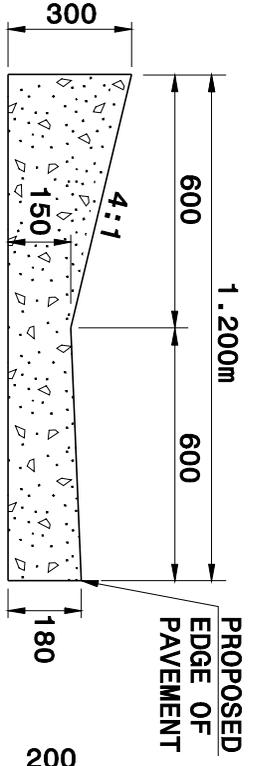
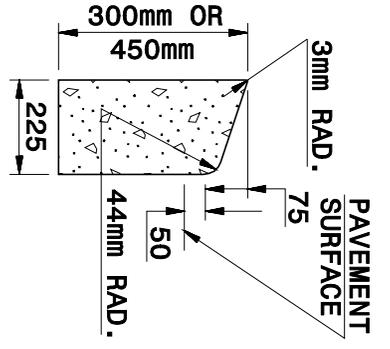
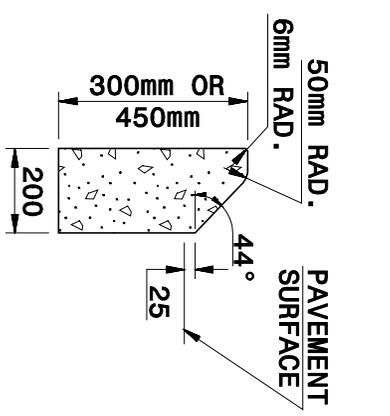
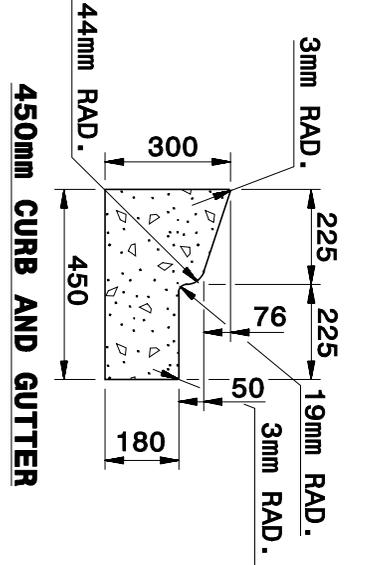




7-06

METRIC STANDARD DRAWING FOR
**CONCRETE CURB, GUTTER
AND CURB & GUTTER**

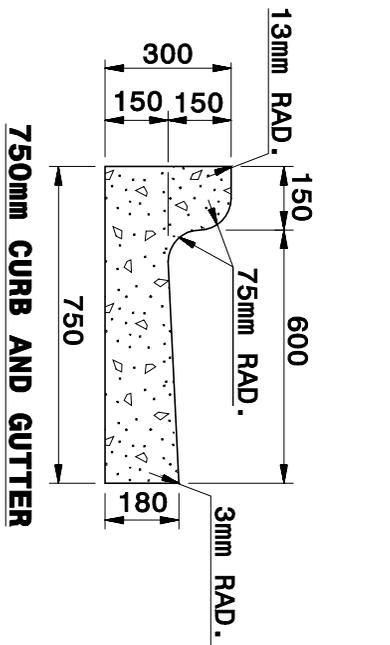

SECTION VIEW OF CURBS OR CURBS AND GUTTERS

- GENERAL NOTES:**
- PLACE CONTRACTION JOINTS AT 3.0m INTERVALS, EXCEPT THAT A 4.5m SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 3.0m INTERVALS.
 - JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER.
 - CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OR FORMED BY OTHER APPROVED METHODS.
 - MAKE NON-TEMPLATE FORMED JOINTS A MIN. OF 40mm DEEP.
 - FILL ALL CONSTRUCTION JOINTS, EXCEPT IN 200mm x 150mm MEDIAN CURB, WITH JOINT FILLER AND SEALER.
 - SPACE EXPANSION JOINTS AT 27.0m INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.

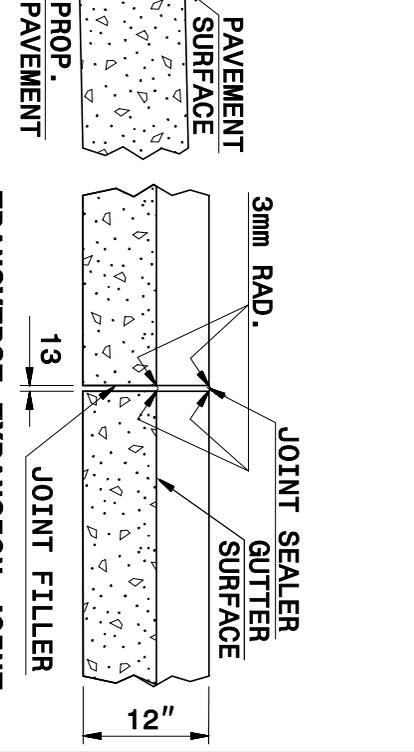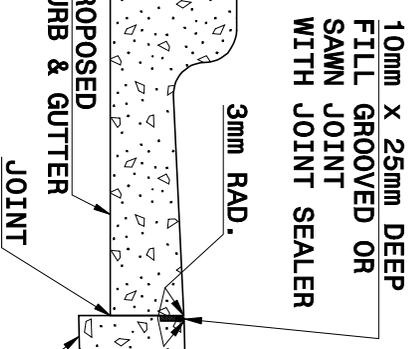

SECTION VIEW OF JOINTS

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.

7-06

METRIC STANDARD DRAWING FOR
**CONCRETE CURB, GUTTER
AND CURB & GUTTER**