



METRIC STANDARD DRAWING FOR
RETROFITTING DETECTABLE WARNING DOMES
ONTO EXISTING WHEELCHAIR RAMP
CURB CUT

- NOTES:
1. DETECTABLE WARNING DOMES SHALL COVER 600mm LENGTH AND FULL WIDTH OF THE RAMP FLOOR AS SHOWN ON THE DETAILS.
 2. OBTAIN 70% CONTRAST VISIBILITY WITH ADJOINING SURFACE, EITHER LIGHT-ON-DARK, OR DARK-ON-LIGHT SEQUENCE COVERING THE ENTIRE RAMP.

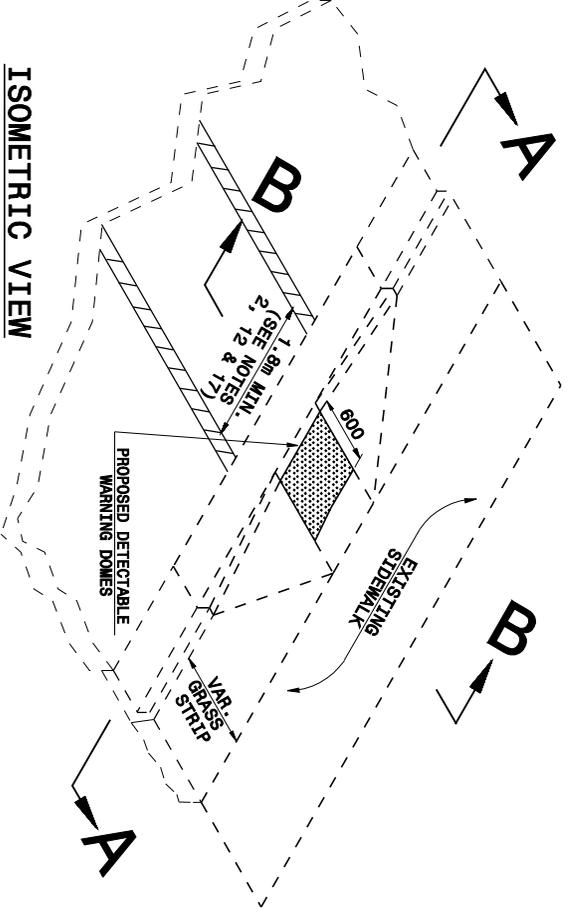


ISOMETRIC VIEW

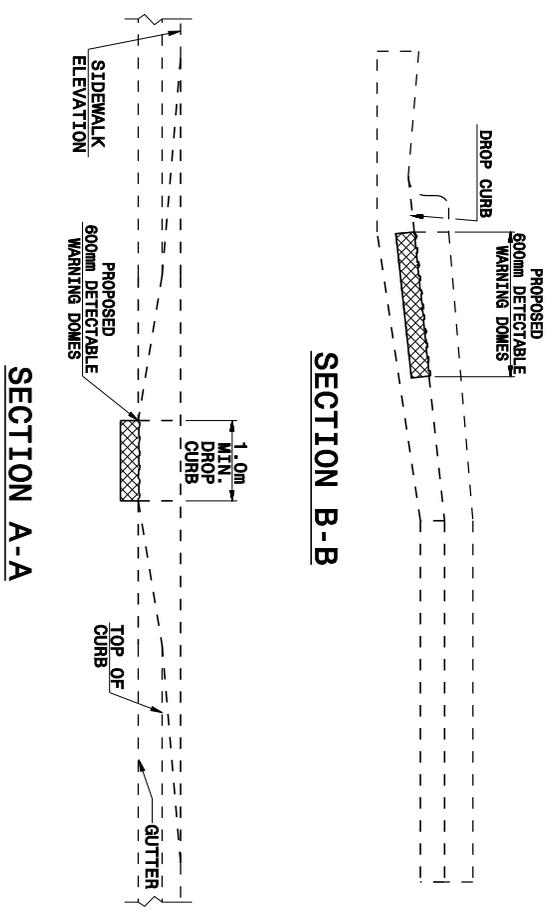


SECTION A-A

SECTION B-B

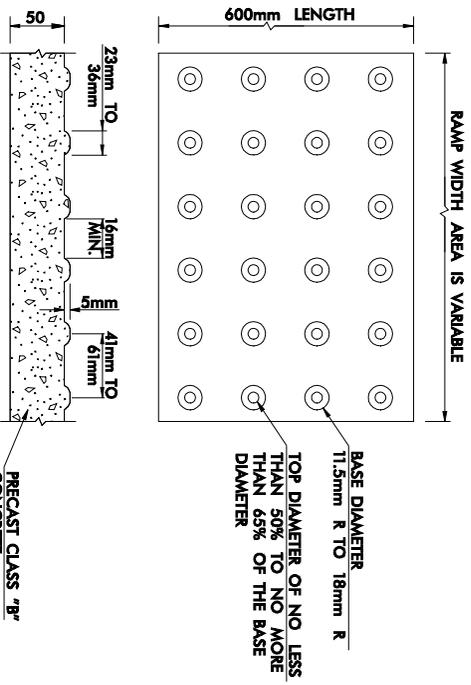


DETECTABLE WARNING DOMES

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.

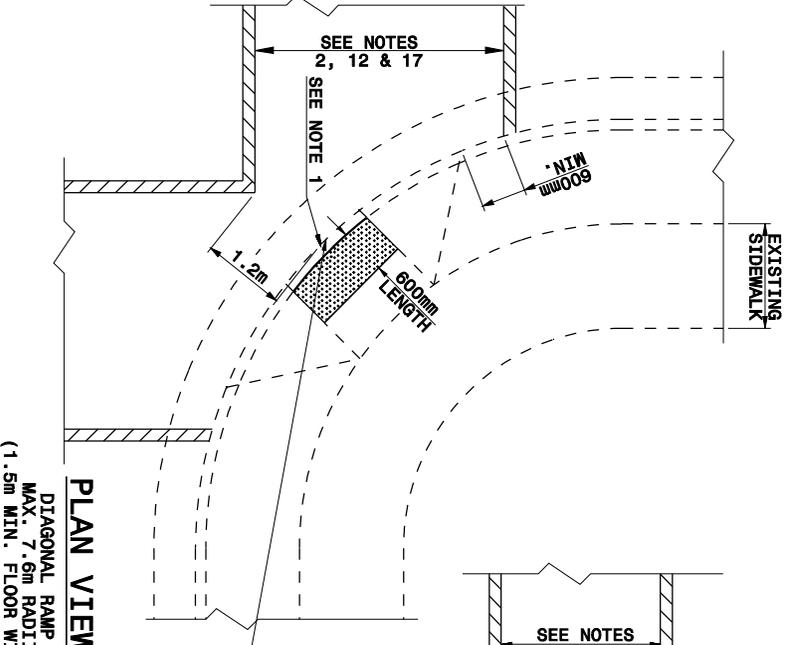

PLAN VIEW

DIAGONAL RAMP
MAX. 7.6m RADI
(1.5m MIN. FLOOR WIDTH)

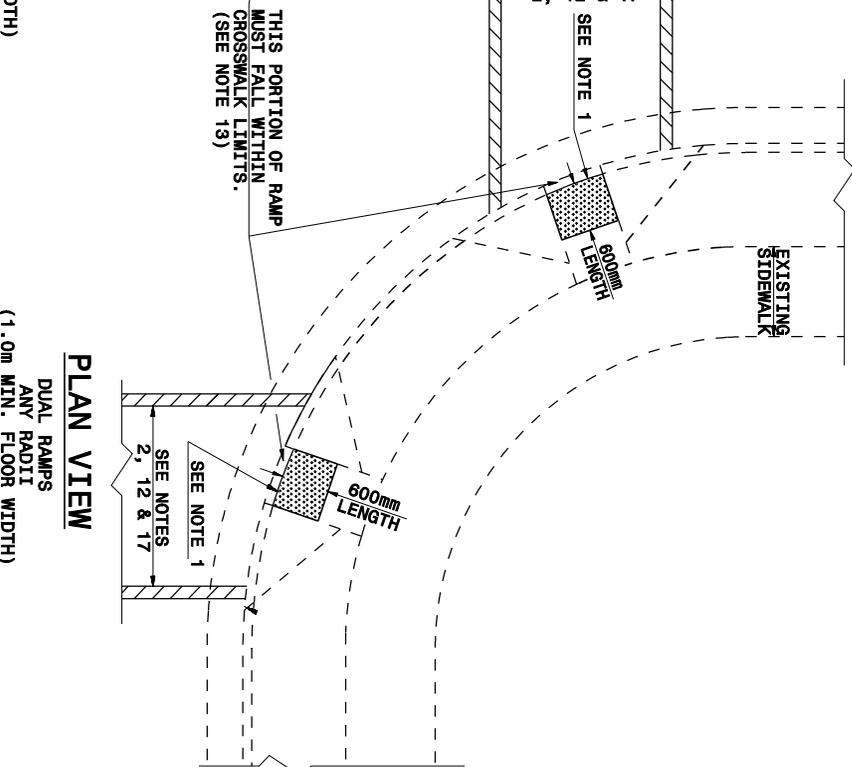

PLAN VIEW

DUAL RAMP
ANY RADI
(1.0m MIN. FLOOR WIDTH)