



METRIC STANDARD DRAWING FOR
DOUBLE FACED CONCRETE BARRIER
TYPES I, II, III & IV

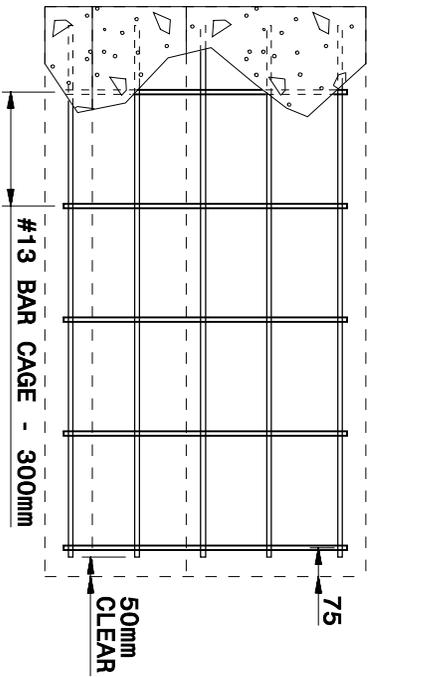


ELEVATION VIEW

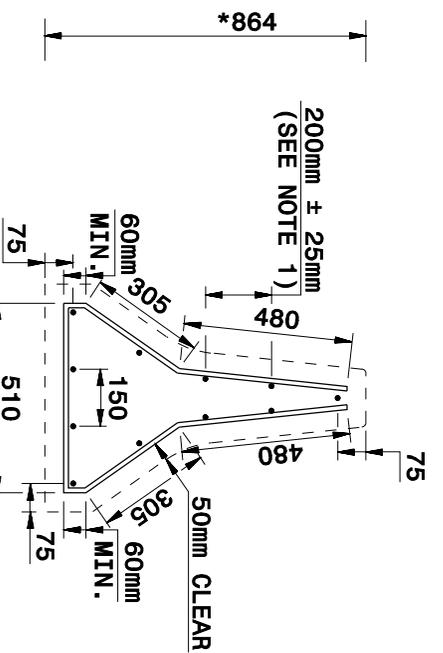


SECTION VIEW

TYPE IV
610mm BASE

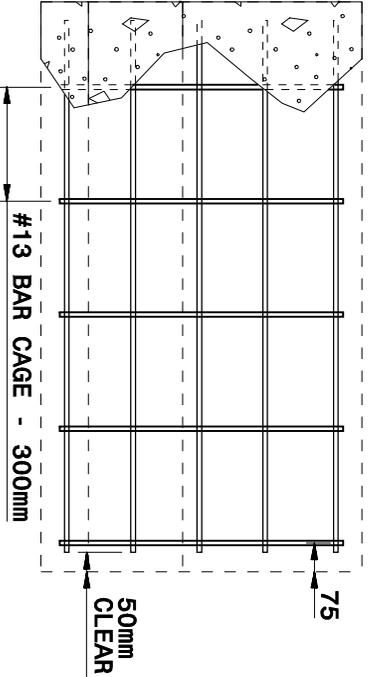

ELEVATION VIEW

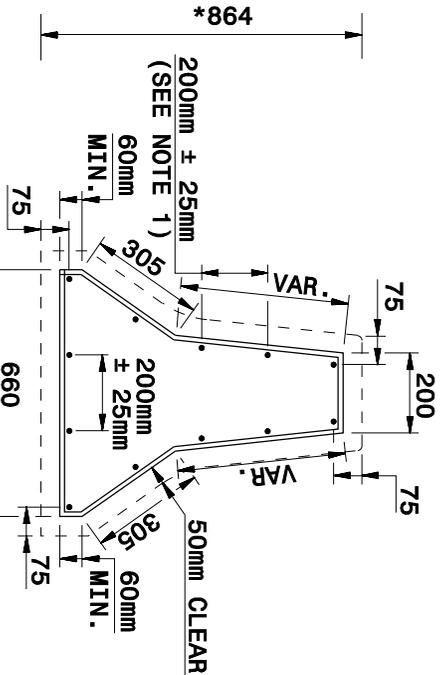

SECTION VIEW

TYPE I
760mm BASE

NOTES:

1. EVENLY SPACE HORIZONTAL REBAR 200mm ± 25mm UNLESS OTHERWISE NOTED.
 2. USE #13 BAR FOR HORIZONTAL AND VERTICAL STEEL.
 3. SUBMIT CHANGES IN STEEL PLACEMENT OR SIZE FOR APPROVAL.
 4. MAKE SPLICE LENGTHS EQUAL 20 TIMES THE DIAMETER OF THE BAR.
- * REFER TO PLAN TYPICAL SECTIONS AND PAVEMENT SCHEDULE TO DETERMINE KEY-IN DEPTH. DIMENSIONS SHOWN ARE BASED ON A 50mm MIN. KEY-IN DEPTH.

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.

STEEL PLACEMENT FOR CAST-IN-PLACE OR SLIP-FORM CONCRETE BARRIER