


METRIC STANDARD DRAWING FOR
BARRIER SIGN SUPPORT ASSEMBLY


METRIC STANDARD DRAWING FOR

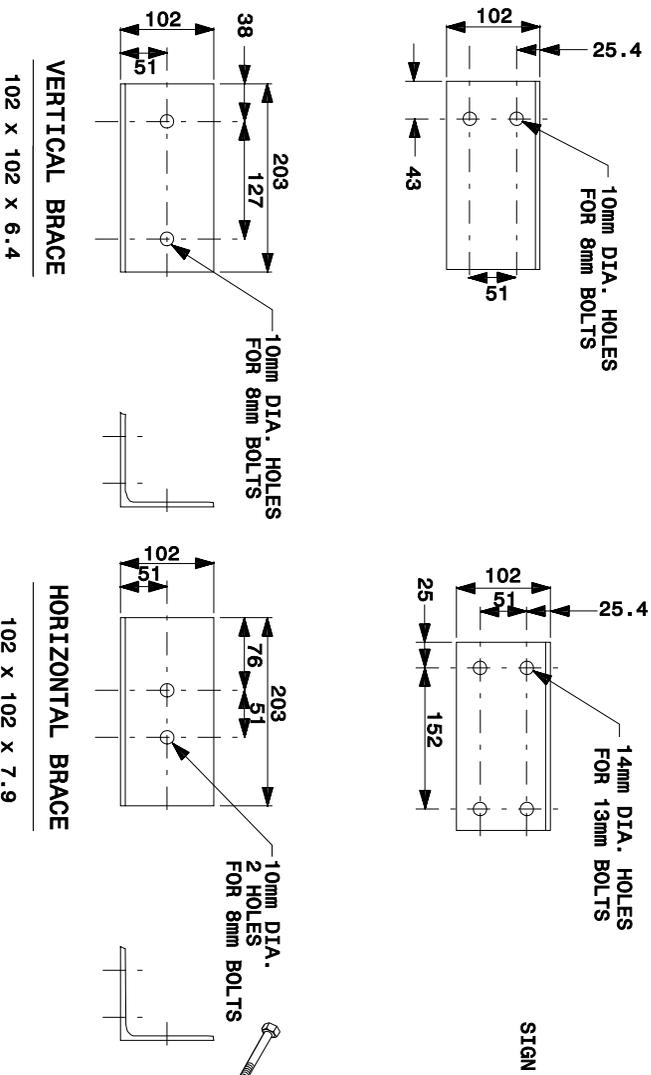

NOTES

1. MAXIMUM SIGN SIZE IS .836 SQUARE METERS IN MAXIMUM WIND VELOCITY OF 129 KPH.
2. ERECT TYPE "E" AND "F" SIGNS WITH THE SAME SPECIFICATIONS AS "TYPICAL INSTALLATION OF SIGNS MOUNTED ON "U" CHANNEL POSTS.
3. ERECT MILE MARKERS WITH THE SAME SPECIFICATIONS AS "MILEPOST DETAILS AND PLACEMENT". SEE ROADWAY STANDARD NUMBER 904.40.
4. USE APPLICABLE SECTIONS OF THE NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES.
5. ATTACH THE BRACE TO THE BARRIER BY MEANS OF 13mm DIAMETER, 51mm LONG CONCRETE ANCHORS WITH LOCKWASHERS. USE CONCRETE ANCHORS THAT ARE STAINLESS STEEL OR GALVANIZED IN ACCORDANCE WITH ASTM A-152. INSTALL IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.

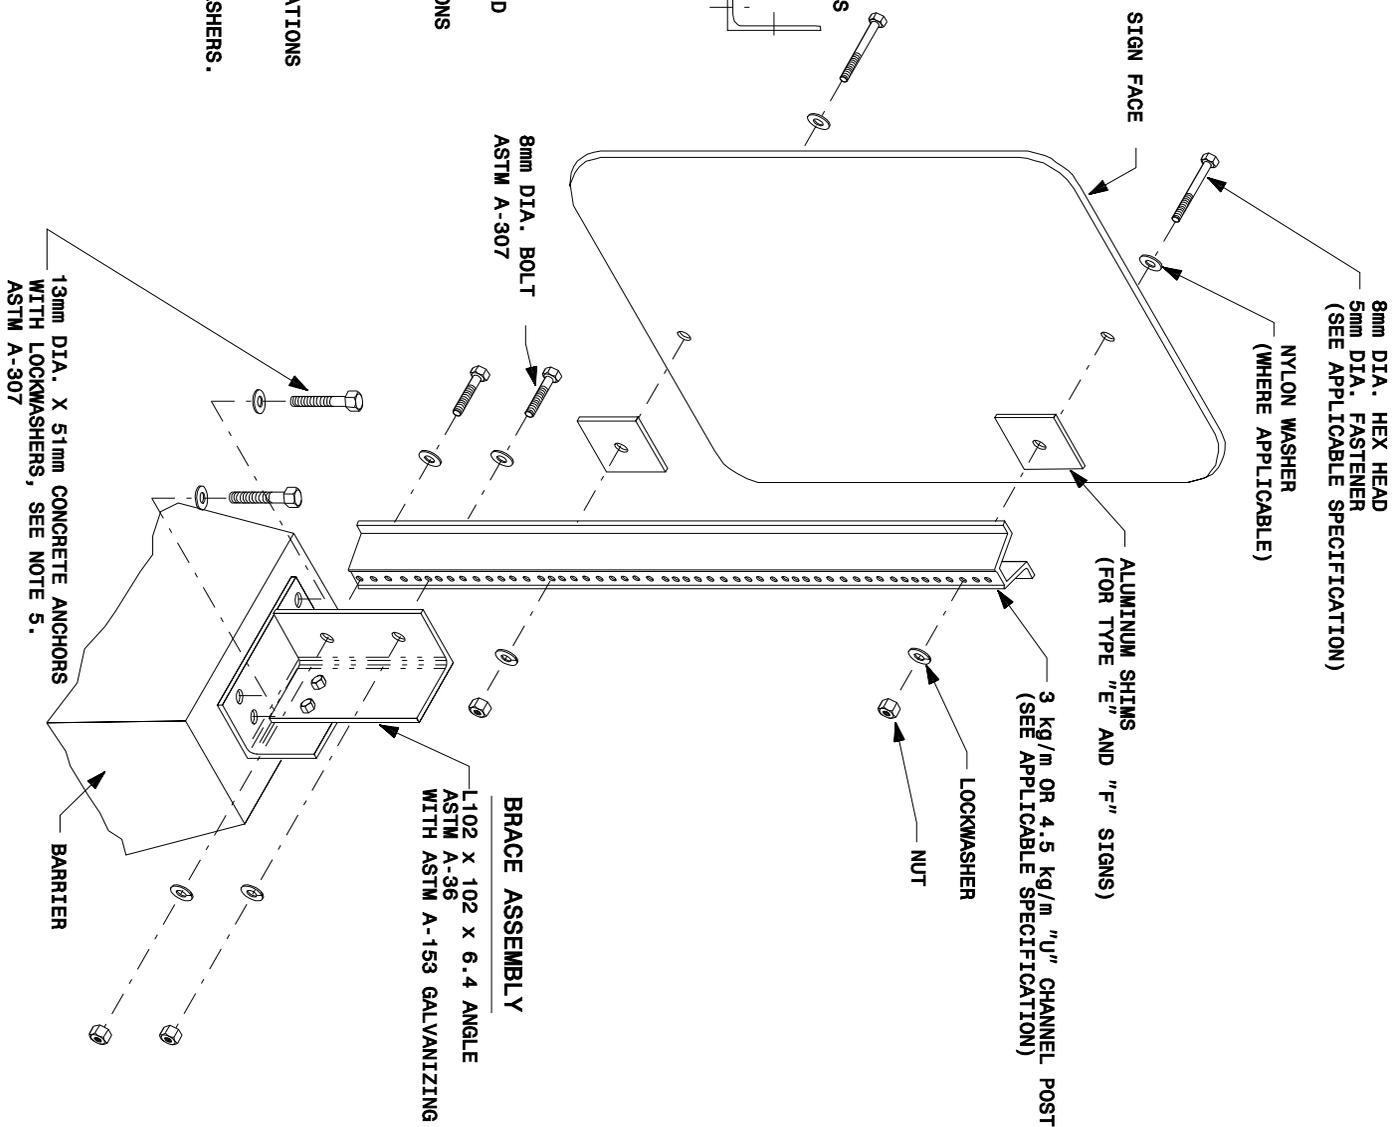

METRIC STANDARD DRAWING FOR
BARRIER SIGN SUPPORT ASSEMBLY

METRIC STANDARD DRAWING FOR