


FLASHING ARROW PANEL TYPES


PANEL TYPE	MINIMUM SIZE (W X H millimeters)	MINIMUM LEGIBILITY DISTANCE (METERS)	MINIMUM NUMBER OF ELEMENTS
A	1219 X 610	800	12
B	1524 X 762	1200	13
C	2438 X 1219	1600	15

TYPICAL FLASHING ARROW PANEL

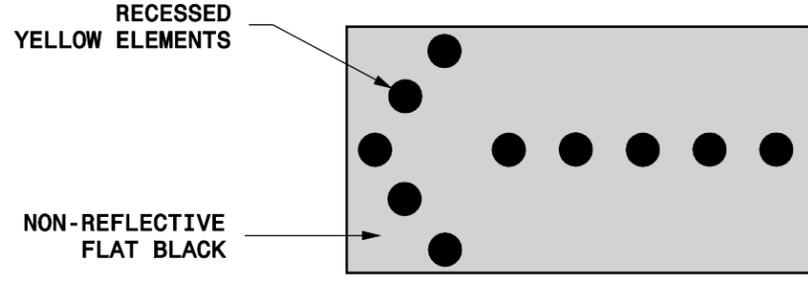


FLASHING ARROW PANEL MODES


FLASHING ARROW RIGHT LANE CLOSURE

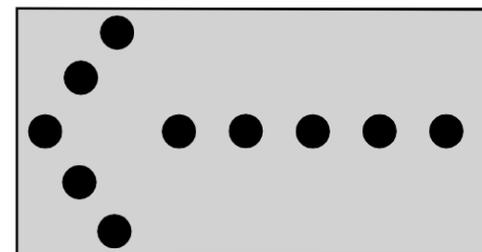


FLASHING ARROW LEFT LANE CLOSURE

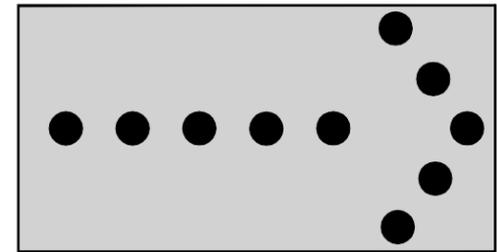

FLASHING DOUBLE ARROW CENTER LANE CLOSURE

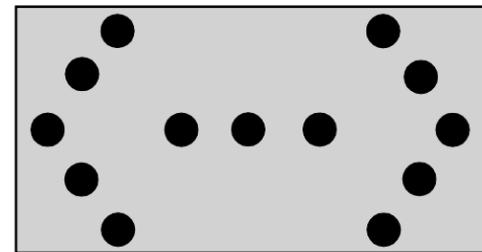

FLASHING CAUTION MODE

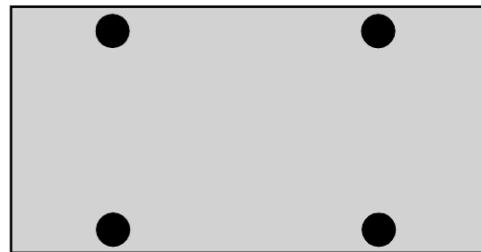

GENERAL NOTES

- 1- DO NOT USE STRAIGHT LINE CAUTION DISPLAYS.
- 2- TYPE "A" ARROW PANELS ARE FOR USE ON LOW SPEED URBAN STREETS (35 MPH OR LESS). TYPE "B" ARROW PANELS ARE TO BE USED ON 35-50 MPH, AND FOR MAINTENANCE OR MOBILE OPERATIONS ON HIGH SPEED ROADWAYS. TYPE "C" ARROW PANELS ARE TO BE USED ON HIGH SPEED (55 MPH AND GREATER), OR HIGH VOLUME ROADWAYS.
- 3- USE A MINIMUM MOUNTING HEIGHT OF 2.1 METERS FROM GROUND LEVEL TO THE BOTTOM OF THE PANEL FOR TRAILER-MOUNTED ARROW PANELS, EXCEPT ON VEHICLE-MOUNTED PANELS WHICH SHOULD BE AS HIGH AS PRACTICAL.
- 4- USE ARROW PANEL ELEMENTS CAPABLE OF A MINIMUM 50 PERCENT DIMMING FROM THEIR FULL RATED LAMP VOLTAGE. USE FULL LAMP VOLTAGE DURING THE DAY, AND USE THE DIMMED MODE AT NIGHT.
- 5- DO NOT USE ARROW PANELS IN FLASHING ARROW MODE ON A TWO-LANE, TWO-WAY ROADWAY DURING A ONE LANE OPERATION, OR ON MULTILANE ROADWAYS WHEN SHIFTING ALL TRAFFIC LANES Laterally.

NOTE:
THIS DRAWING IS DIMENSIONED IN
MILLIMETERS UNLESS OTHERWISE
DEPICTED WITHIN THE DRAWING.