


TIRE BALLAST

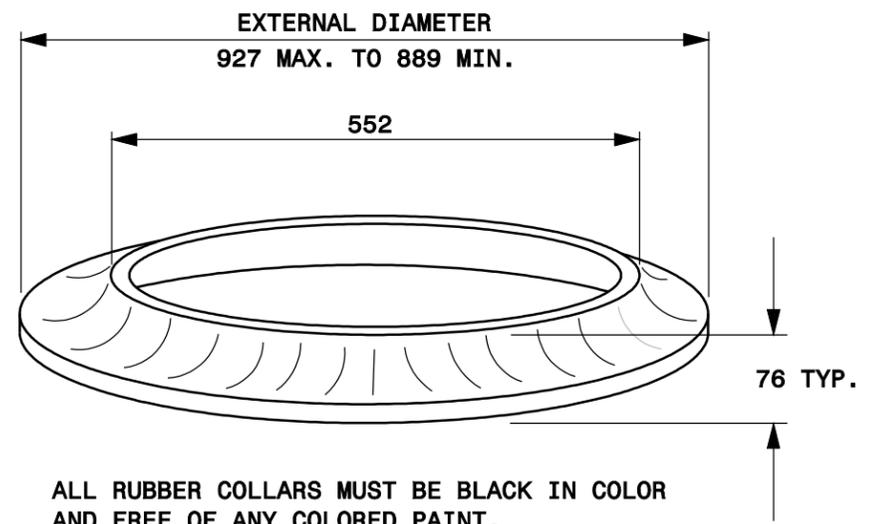

ALL RUBBER COLLARS MUST BE BLACK IN COLOR
AND FREE OF ANY COLORED PAINT.

BALLAST COLLAR SHOULD HAVE GOOD CONTACT
WITH THE BARREL FLANGE AND BALLAST OUTER
EDGE MUST LAY FLAT WITH ROAD SURFACE.

GENERAL NOTES

- 1- BALLASTING SHALL BE ACHIEVED BY THE SAND BAG, TIRE-SIDEWALL BALLAST, OR PREFORMED WEIGHTED BASE BALLASTING METHODS. DO NOT PLACE BALLAST ON TOP OF THE DRUM. USE THE TIRE BALLAST AS SPECIFIED BY THE MANUFACTURER.
- 2- IF NECESSARY PLACE THE NAME OF THE AGENCY, CONTRACTOR, OR SUPPLIER ON NON-RETROREFLECTIVE DRUM SURFACES. SHOW THE LETTERS AND NUMBERS USING A NON-RETROREFLECTIVE COLOR AND NOT OVER 50mm IN HEIGHT.

NOTE:
THIS DRAWING IS DIMENSIONED IN
MILLIMETERS UNLESS OTHERWISE
DEPICTED WITHIN THE DRAWING.