



**710mm CONE**

(MINIMUM SIZE CONE FOR ALL CLASSES OF ROADS EXCEPT FREEWAYS AND EXPRESSWAYS)

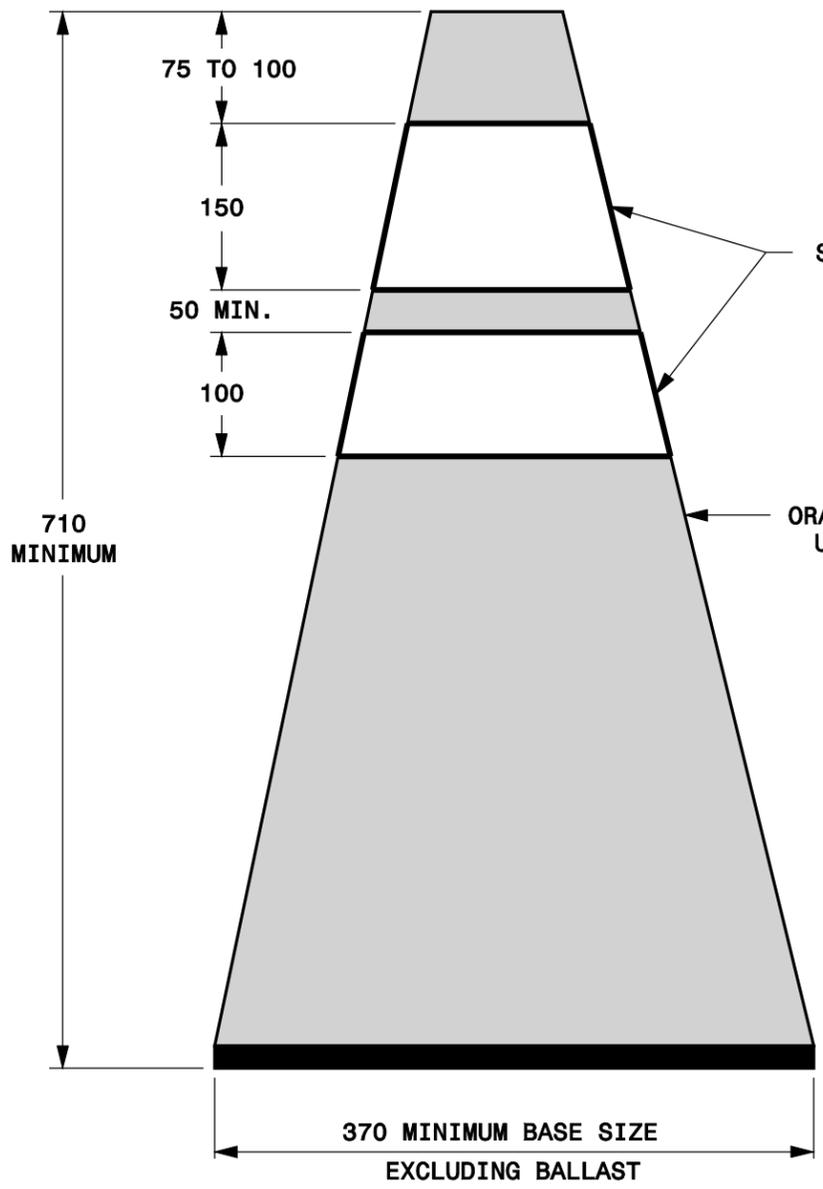

**915mm CONE**

(REQUIRED FOR FREEWAYS AND EXPRESSWAYS)

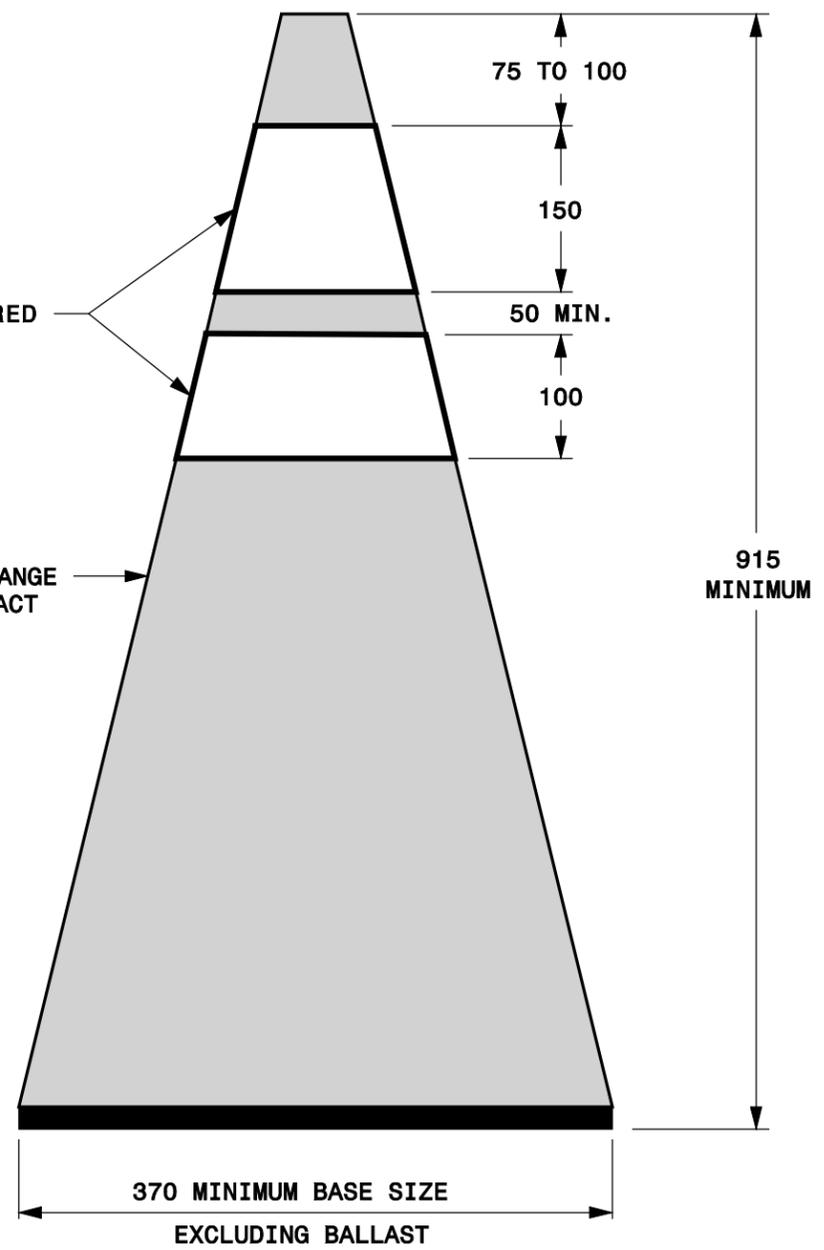

WHITE RETROREFLECTIVE SHEETING OR COLLARS REQUIRED FOR NIGHT USE

ORANGE, OR FLUORESCENT RED-ORANGE ULTRA VIOLET STABILIZED IMPACT RESISTANT PLASTIC

**GENERAL NOTES**

- 1- ACHIEVE BALLASTING BY USING SPECIAL WEIGHTED BASES SUCH AS SAND BAG RINGS, DOUBLING CONES, OR BASES THAT CAN BE FILLED WITH BALLAST. SEVENTY PERCENT OF THE WEIGHT OF THE CONE MUST BE IN THE BASE. USE BALLASTS THAT DO NOT PRESENT A HAZARD WHEN STRUCK.

**NOTE:**  
 THIS DRAWING IS DIMENSIONED IN MILLIMETERS UNLESS OTHERWISE DEPICTED WITHIN THE DRAWING.