


7-06

LIGHT SYSTEM OPTIONS


- 2 FLASHING LIGHTS
- 2 FLASHING LIGHTS & ROTATING LIGHT
- LIGHT BAR

NOTE: WHITE LIGHT IS NOT PERMITTED

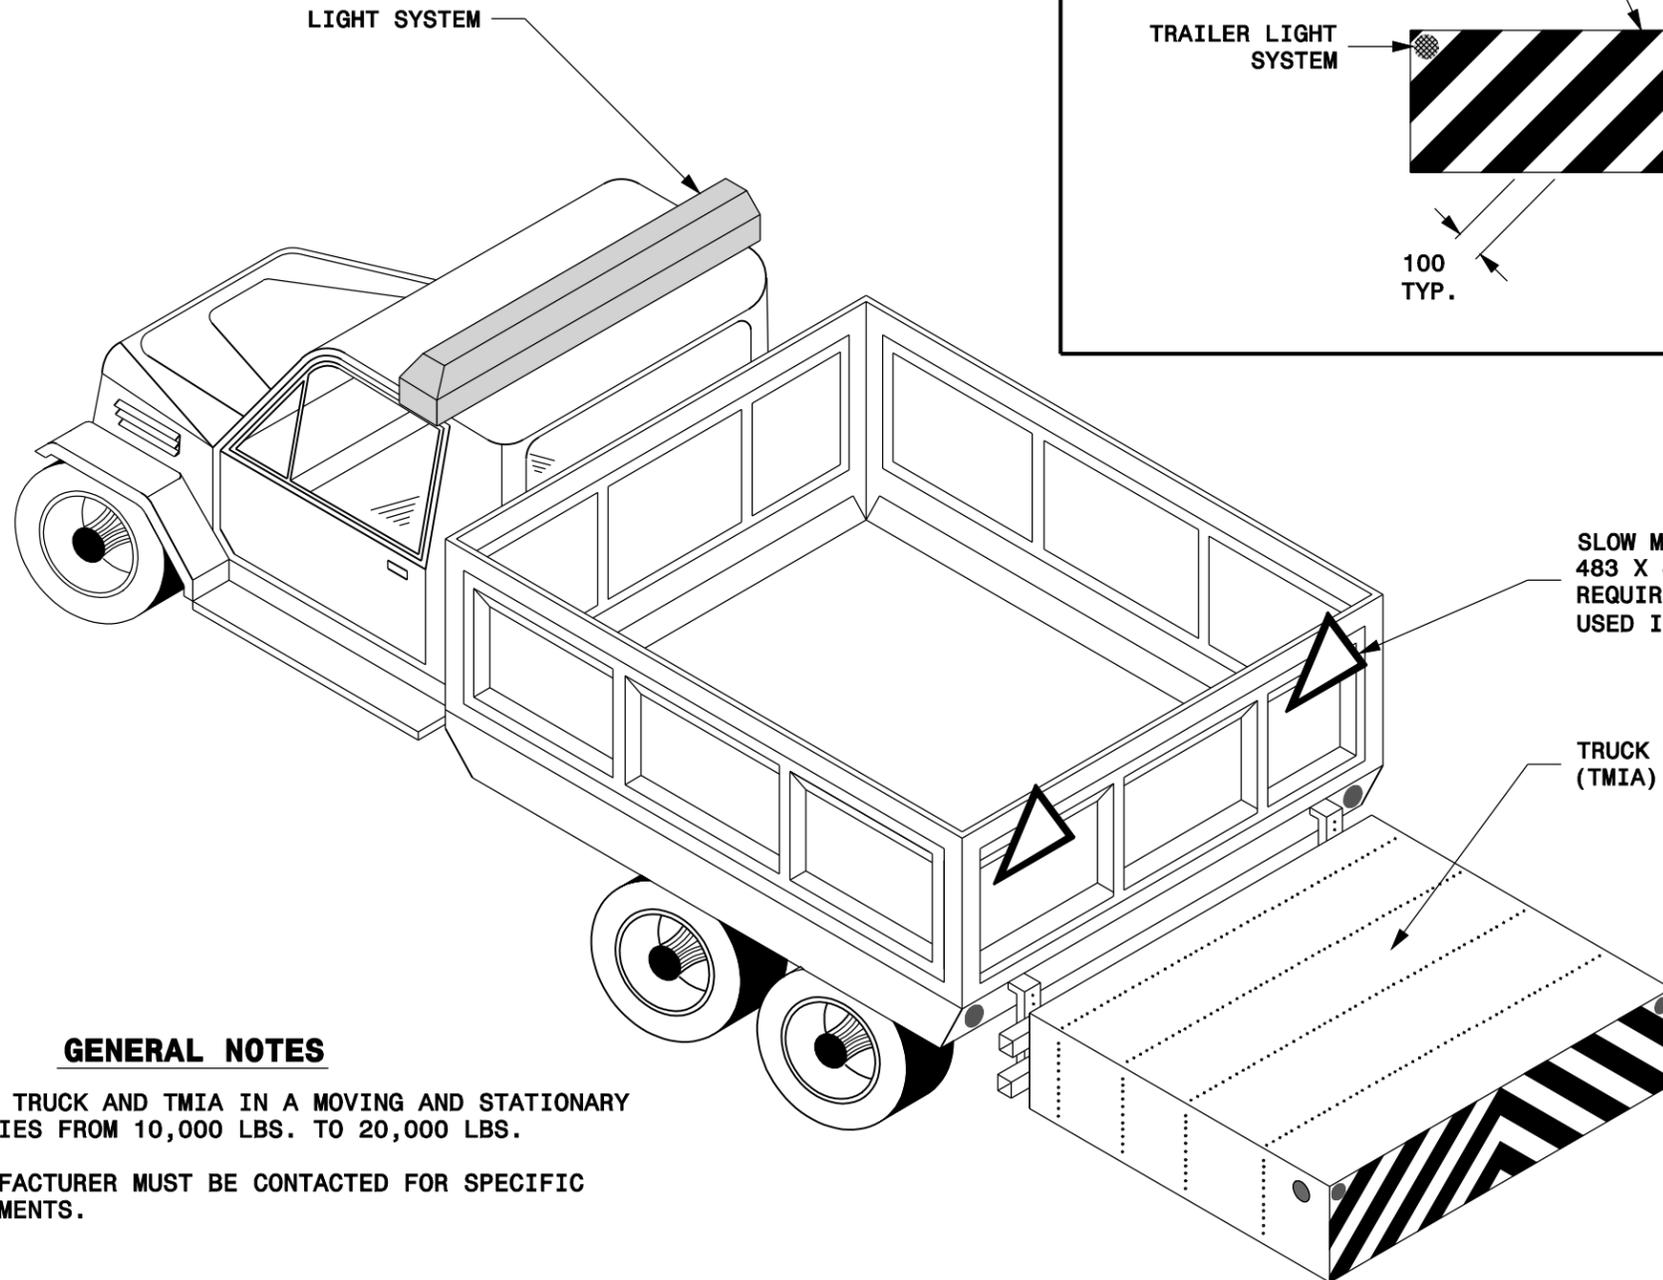

DETAIL OF ATTENUATOR DELINEATION

ENTIRE END OF ATTENUATOR SHALL BE DELINEATED

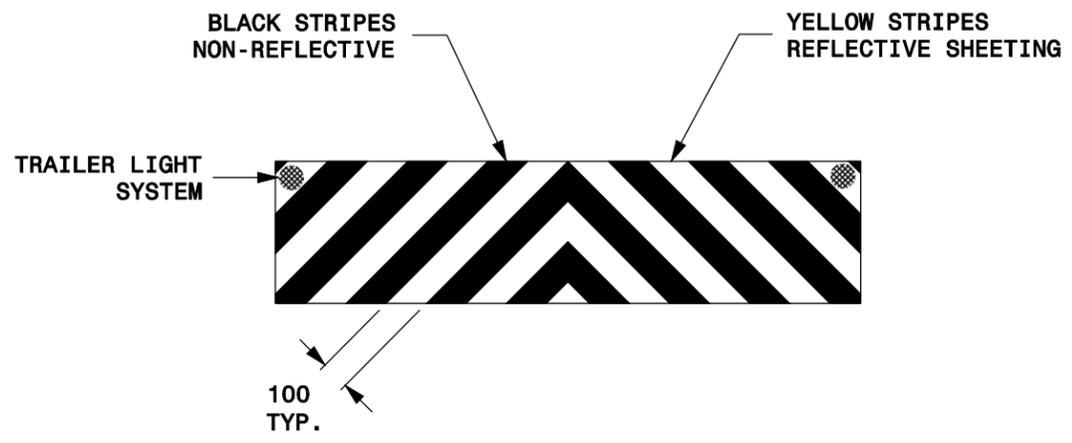

GENERAL NOTES

- 1-THE WEIGHT OF TRUCK AND TMIA IN A MOVING AND STATIONARY OPERATION VARIES FROM 10,000 LBS. TO 20,000 LBS.
- 2-THE TMIA MANUFACTURER MUST BE CONTACTED FOR SPECIFIC TRUCK REQUIREMENTS.

SLOW MOVING VEHICLE SIGN W25-1
483 X 483 X 483
REQUIRED WHEN ATTENUATOR IS
USED IN MOVING OPERATIONS

TRUCK MOUNTED IMPACT ATTENUATOR
(TMIA)

NOTE:
THIS DRAWING IS DIMENSIONED IN
MILLIMETERS UNLESS OTHERWISE
DEPICTED WITHIN THE DRAWING.

* NC APPROVED NCHRP 230 TRUCK MOUNTED IMPACT ATTENUATOR CAN
BE USED ON ANY PROJECT UNTIL JANUARY 1, 2008. AT THAT TIME,
IT MUST BE REPLACED BY A NC APPROVED NCHRP 350 TMIA.

7-06