


**GENERAL NOTES**

1. GUY EACH SPAN SEPARATELY.
2. USE EYE HARDWARE (EYE BOLTS, EYE NUTS, ANGLE EYES, EYES, TRIPLE-EYE BOLT ANCHOR RODS) WITH ROUNDED GROOVES IN THE EYES. PROVIDE A SEPARATE GROOVE FOR EACH CABLE TO BE TERMINATED.
3. SEE ROADWAY STANDARD DRAWING 1720 FOR METHODS OF ATTACHMENT AND GROUNDING.

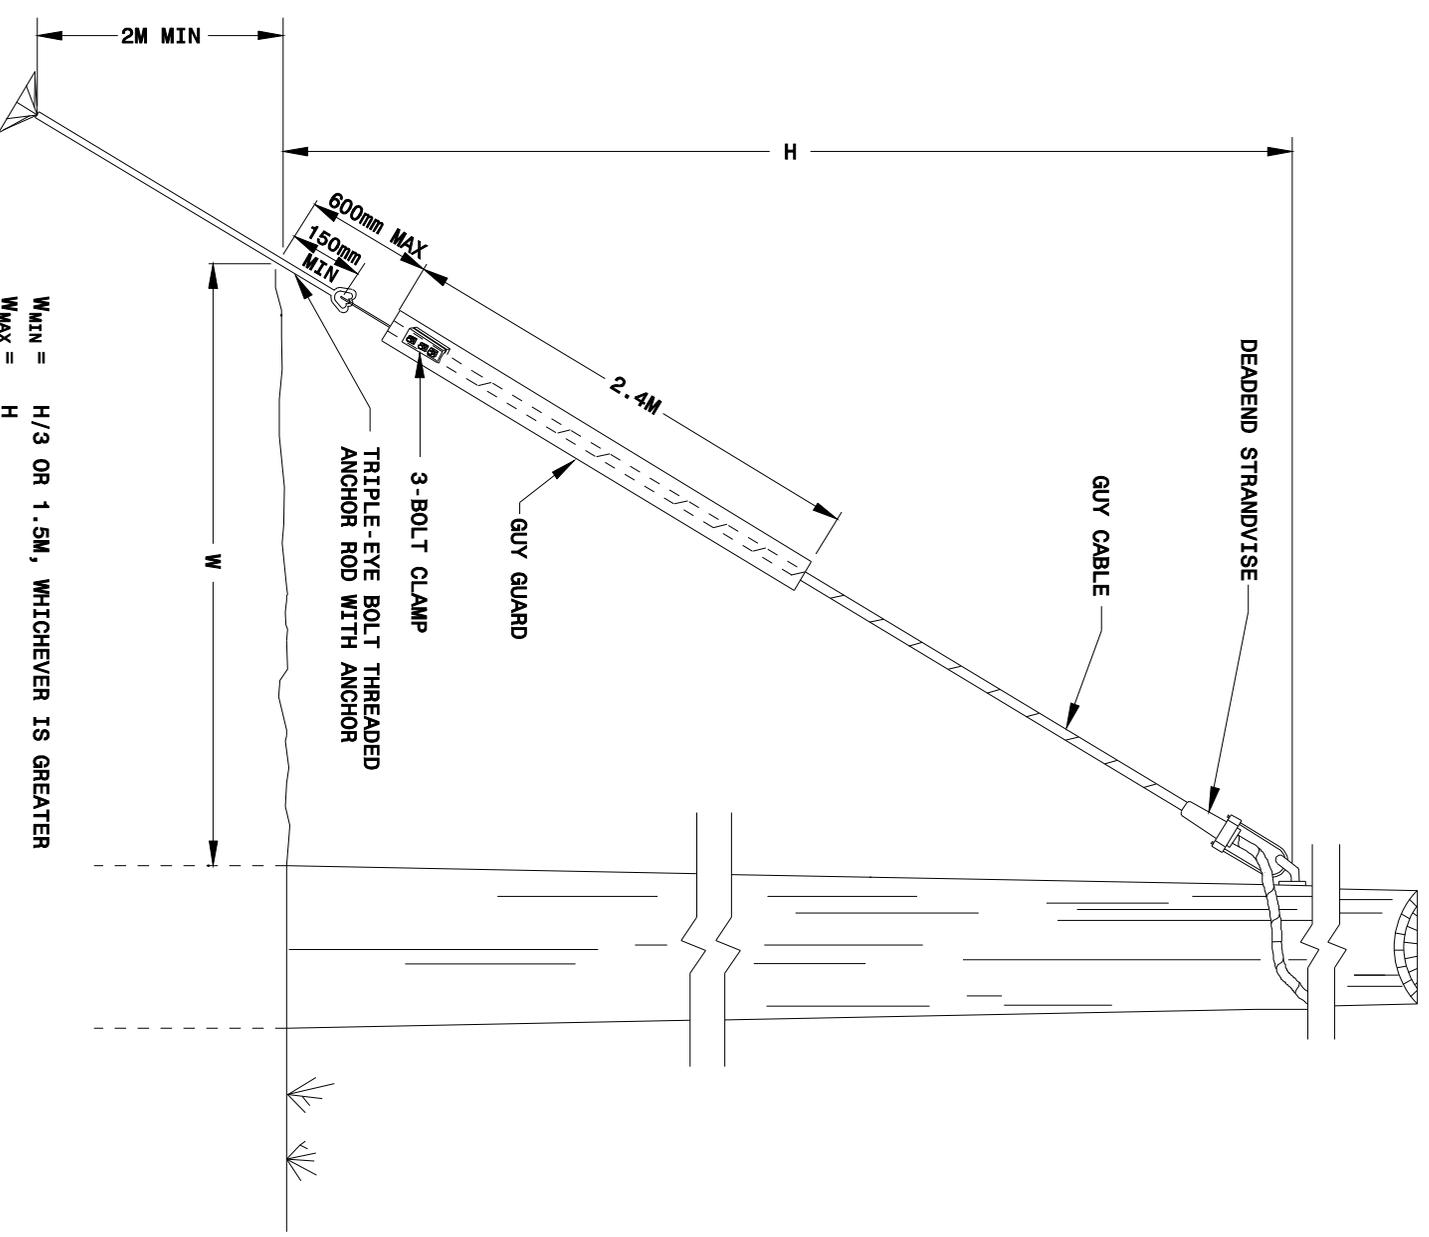

W<sub>MIN</sub> = H/3 OR 1.5M, WHICHEVER IS GREATER  
W<sub>MAX</sub> = H